



Internal Use Only

website:<http://biz.LGservice.com>

PLASMA TV SERVICE MANUAL


CHASSIS : PD73A

MODEL : 42PC56

42PC56-ZD

CAUTION

BEFORE SERVICING THE CHASSIS,
READ THE SAFETY PRECAUTIONS IN THIS MANUAL.



CONTENTS

SAFETY PRECAUTIONS	3
SPECIFICATIONS	4
ADJUSTMENT INSTRUCTIONS	6
TROUBLE SHOOTING GUIDE	19
BLOCK DIAGRAM	29
EXPLODED VIEW	30
EXPLODED VIEW PARTS LIST	31
REPLACEMENT PARTS LIST	32
SCHEMATIC DIAGRAM	
PRINTED CIRCUIT DIAGRAM	

SAFETY PRECAUTIONS

IMPORTANT SAFETY NOTICE

Many electrical and mechanical parts in this chassis have special safety-related characteristics. These parts are identified by $\triangle$ in the Schematic Diagram and Replacement Parts List.
It is essential that these special safety parts should be replaced with the same components as recommended in this manual to prevent X-RADIATION, Shock, Fire, or other Hazards.
Do not modify the original design without permission of manufacturer.

General Guidance

An **isolation Transformer should always be used** during the servicing of a receiver whose chassis is not isolated from the AC power line. Use a transformer of adequate power rating as this protects the technician from accidents resulting in personal injury from electrical shocks.

It will also protect the receiver and its components from being damaged by accidental shorts of the circuitry that may be inadvertently introduced during the service operation.

If any fuse (or Fusible Resistor) in this monitor is blown, replace it with the specified.

When replacing a high wattage resistor (Oxide Metal Film Resistor, over 1W), keep the resistor 10mm away from PCB.

Keep wires away from high voltage or high temperature parts.

Due to high vacuum and large surface area of picture tube, extreme care should be used in **handling the Picture Tube**.
Do not lift the Picture tube by its Neck.

Leakage Current Cold Check(Antenna Cold Check)

With the instrument AC plug removed from AC source, connect an electrical jumper across the two AC plug prongs. Place the AC switch in the on position, connect one lead of ohm-meter to the AC plug prongs tied together and touch other ohm-meter lead in turn to each exposed metallic parts such as antenna terminals, phone jacks, etc.

If the exposed metallic part has a return path to the chassis, the measured resistance should be between $1M\Omega$ and $5.2M\Omega$.

When the exposed metal has no return path to the chassis the reading must be infinite.

An other abnormality exists that must be corrected before the receiver is returned to the customer.

Leakage Current Hot Check (See below Figure)

Plug the AC cord directly into the AC outlet.

Do not use a line Isolation Transformer during this check.


Connect 1.5K/10watt resistor in parallel with a 0.15uF capacitor between a known good earth ground (Water Pipe, Conduit, etc.) and the exposed metallic parts.

Measure the AC voltage across the resistor using AC voltmeter with 1000 ohms/volt or more sensitivity.

Reverse plug the AC cord into the AC outlet and repeat AC voltage measurements for each exposed metallic part. Any voltage measured must not exceed 0.75 volt RMS which corresponds to 0.5mA.

In case any measurement is out of the limits specified, there is possibility of shock hazard and the set must be checked and repaired before it is returned to the customer.

Leakage Current Hot Check circuit

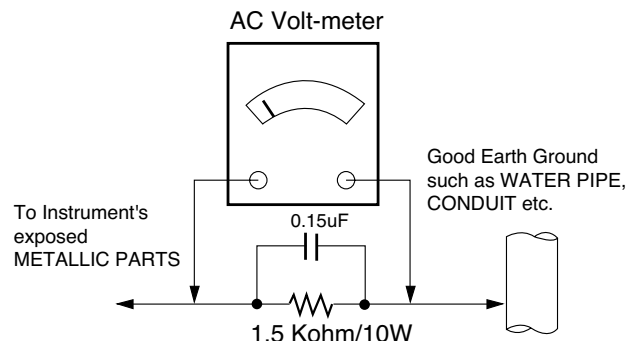

SPECIFICATIONS

NOTE : Specifications and others are subject to change without notice for improvement.

■ Application Range

This spec is applied to the 42" PLASMA TV used PD73A Chassis.

Chassis	Model Name	Market	Brand	Remark
PD73A	42PC56-ZD	UK, German, Italy, France, Sweden, Finland, Spain	LG	

■ Specification

Each part is tested as below without special appointment.

- 1) Temperature : $25\pm5^{\circ}\text{C}$ ($77\pm9^{\circ}\text{F}$), CST : 40 ± 5
- 2) Relative Humidity: $65\pm10\%$
- 3) Power Voltage: Standard Input voltage (100-240V~, 50/60Hz)
* Standard Voltage of each product is marked by models.
- 4) Specification and performance of each parts are followed each drawing and specification by part number in accordance with SBOM.
- 5) The receiver must be operated for about 20 minutes prior to the adjustment.

■ Test Method

- 1) Performance : LGE TV test method followed.
- 2) Demanded other specification
Safety : CE, IEC specification
EMC : CE, IEC

Model	Market	Appliance	Remark
42PC56-ZD	UK, German, Italy, France, Sweden, Finland, Spain	Safety : IEC/EN60065 EMI : EN55013 EMS : EN55020	TEST

■ General Specification

1. Module Specification (42" XGA MODULE)

No	Item	Specification	Remark
1	Display Screen Device	42" Wide Color Display Module	Plasma Display Panel
2	Aspect Ratio	16:9	
3	PDP Module	PDP42X4A, RGB Closed Type, Film Filter	
4	Operating Environment	1)Temp. : $0\sim40^{\circ}\text{deg}$ 2)Humidity : $20\sim80\%$	LGE SPEC.
5	Storage Environment	3)Temp. : $-20\sim60^{\circ}\text{deg}$ 4)Humidity : $10\sim90\%$	
6	Input Voltage	100-240V~, 50/60Hz	Maker LG

2. Model General Specification

No	Item	Specification	Remark
1	Market	UK, German, Italy, France, Sweden, Finland, Spain	
2	Broadcasting system	1) PAL-BG 2) PAL-DK 3) PAL-I,I' 4) DVB-T(ID TV) 5) SECAM-L/L'	
3	Receiving system	Analog : Upper Heterodyne Digital : COFDM	
4	Scart Jack (2EA)	PAL, SECAM	
5	Video Input (1EA)	PAL, SECAM, NTSC	4 System : PAL, SECAM, NTSC, PAL60
6	S-Video Input (1EA)	PAL, SECAM, NTSC	4 System : PAL, SECAM, NTSC, PAL60
7	Component Input (1EA)	Y/Cb/Cr, Y/Pb/Pr	
8	RGB Input(1EA)	RGB-PC	
9	HDMI Input(2EA)	HDMI-DTV & SOUND	
10	Audio Input (3EA)	PC Audio, Component, AV	L/R Input

ADJUSTMENT INSTRUCTIONS

1. Application Object

These instructions are applied to all of the 42" PLASMA TV, PD73A Chassis.

2. Note

- (1) Because this is not a hot chassis, it is not necessary to use an isolation transformer. However, the use of isolation transformer will help protect test instrument.
 - (2) Adjustment must be done in the correct order.
 - (3) The adjustment must be performed in the circumstance of $25 \pm 5^\circ\text{C}$ of temperature and $65 \pm 10\%$ of relative humidity if there is no specific designation.
 - (4) The input voltage of the receiver must keep 100-240V~, 50/60Hz.
 - (5) The receiver must be operated for about 15 minutes prior to the adjustment.
- After RGB Full white HEAT-RUN Mode, the receiver must be operated prior to adjustment.
 - Enter into HEAT-RUN MODE
 - 1) Press the POWER ON KEY on R/C for adjustment.
 - 2) OSD display and screen display PATTERN MODE.
 - * Set is activated HEAT-RUN without signal generator in this mode.
 - * Single color pattern(RED/BLUE/GREEN) of HEAT-RUN mode uses to check PANEL.

If you turn on a still screen more than 20 minutes (Especially Digital pattern, Cross Hatch Pattern), an afterimage may occur in the black level part of the screen.

3. Channel memory Setting Method

: You can set channel memory by R/C for adjustment.

- 1) Press ADJ key on R/C for adjustment.
- 2) Press ENTER key on "System Control3".
- 3) Press VOL + key on "Channel Recover".

4. PCMCIA CARD Checking Method

: You must adjust DTV 29 Channel and insert PCMCIA CARD to socket.

- 1) If PCMCIA CARD works normally, normal signals display on screen. But it works abnormally, "No CA module" words display on screen.

Each PCB assembly must be checked by check JIG set.
(Because power PCB Assembly damages to PDP Module, especially be careful)

5. POWER PCB Assy Voltage Adjustments (Va, Vs Voltage adjustments)

5-1. Test Equipment : D.M.M. 1EA

5-2. Connection Diagram for Measuring : refer to Fig.1


5-3. Adjustment Method

(1) Va Adjustment


- 1) After receiving 100% Full White Pattern, HEAT RUN.
- 2) Connect + terminal of D.M.M to Va pin of P812, connect - terminal to GND pin of P812.
- 3) After turning VR901, voltage of D.M.M adjustment as same as Va voltage which on label of panel right/top. (Deviation; $\pm 0.5\text{V}$)

(2) Vs Adjustment

- 1) Connect + terminal of D.M.M to Vs pin of P812, connect - terminal to GND pin of P812.
- 2) After turning VR951, voltage of D.M.M adjustment as same as Vs voltage which on label of panel right/top. (Deviation; $\pm 0.5\text{V}$)

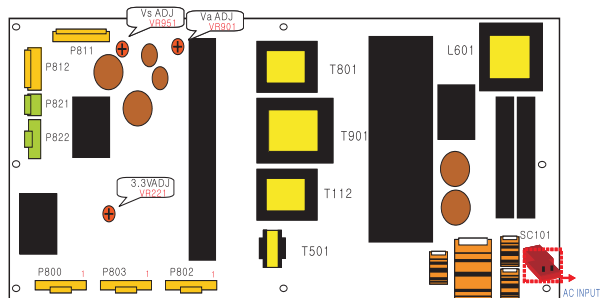

<42" 6709900019A>

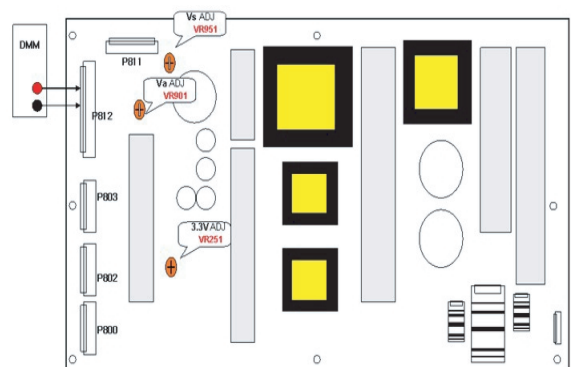

<42" EAY32808901>


(Fig. 1) Connection diagram of power adjustment for measuring

6. EDID (The Extended Display Identification Data)/ DDC (Display Data Channel) download

6-1. Required Test Equipment

- 1) Adjusting PC with S/W for writing EDID Data.(S/W : EDID TESTER Ver.2.5)
- 2) A Jig for EDID Download
- 3) Cable : Serial(9Pin or USB) to D-sub 15Pin cable, D-sub 15Pin cable, DVI to HDMI cable

6-2. Setting of device

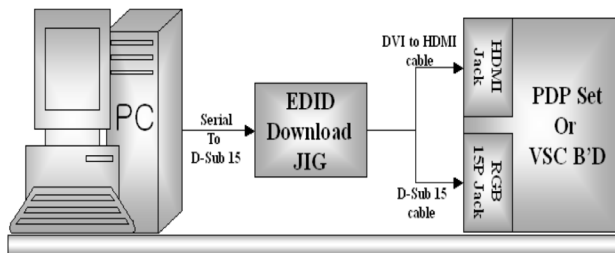

(Fig. 2) Connection Diagram of DDC download

6-3. Preparation for Adjustment

- 1) As above Fig. 2, Connect the Set, EDID Download Jig, PC & Cable.
- 2) Turn on the PC & EDID Download Jig. And Execute the S/W : EDID TESTER Ver,2.5.
- 3) Set up S/W option.
Repeat Number : 5
Device Address : A0
PageByte : 8
- 4) Power on the Set.




6-4. Sequence of Adjustment

- EDID Download

- 1) Init the data.




- 2) Load the EDID data.(Open File).



[Analog file] (for RGB)

[Digital file] (for HDMI)

- 3) Set the S/W as below.
- 4) Push the "Write Data & Verify" button. And confirm "Yes".
- 5) If the writing is finished, you will see the "OK" message.
- 6) If TV has two HDMI, you must download two times for each HDMI.

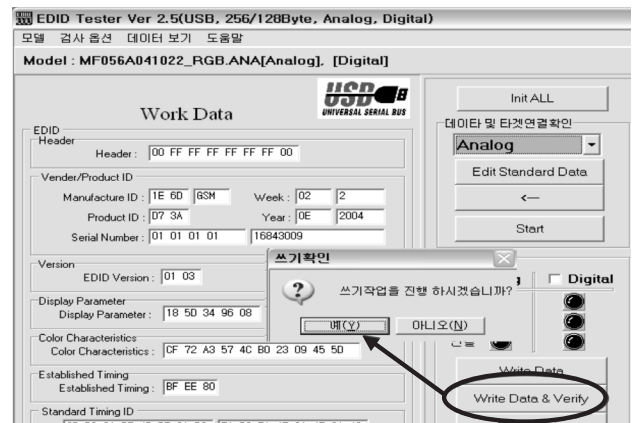

- EDID DATA

1) Analog RGB.

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
00	00	FF	FF	FF	FF	FF	FF	00	1E	6D	1			2		
10		3	01	03	01	46	27	78	EA	D9	B0	A3	57	49	9C	25
20	11	49	4B	A5	6E	00	31	40	45	40	61	40	D1	C0	01	01
30	01	01	01	01	01	01	1B	21	50	A0	51	00	1E	30	48	88
40	35	00	BC	86	21	00	00	1C	26	36	80	A0	70	38	1F	40
50	50	20	85	04	BC	86	21	00	00	18						
60						4							00	00	00	FD
70	00	3C	4B	1D	43	0E	00	0A	20	20	20	20	20	20	00	5

=> Detail EDID Options are below([1], [2], [3],[4], [5])

1. [1]-Product ID

Model Name	Product ID	Product ID	
		Hex	EDID table
42PC55-ZB	40013	9CB1	B19C
42PC56-ZD	40015	9CB3	B39C
50PC55-ZB	50015	C35F	5FC3
50PC56-ZD	50017	C361	61C3
50PB56-ZA	50019	C363	63C3

2. [2]-Serial No : Controlled on production line

3. [3]-Month, Year : Controlled on production line

ex) Week : '03' => '03'

Year : '2006' => '10'

4. [4]-Model Name(Hex):

Model Name	Hex Data
42PC55-ZB	00 00 00 FC 00 34 32 50 43 35 35 2D 5A 42 0A 20 20 20
42PC56-ZD	00 00 00 FC 00 34 32 50 43 35 36 2D 5A 44 0A 20 20 20
50PC55-ZB	00 00 00 FC 00 35 30 50 43 35 35 2D 5A 42 0A 20 20 20
50PC56-ZD	00 00 00 FC 00 35 30 50 43 35 36 2D 5A 44 0A 20 20 20
50PB56-ZA	00 00 00 FC 00 35 30 50 42 36 35 2D 5A 41 0A 20 20 20

5. [5]-Checksum : Changeable by total EDID data

2) HDMI1.

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
00	00	FF	FF	FF	FF	FF	FF	00	1E	6D	1			2		
10		3	01	03	80	46	27	78	EA	D9	B0	A3	57	49	9C	25
20	11	49	4B	A5	6E	00	31	40	45	40	61	40	D1	C0	01	01
30	01	01	01	01	01	01	02	3A	80	18	71	38	2D	40	58	2C
40	45	00	C4	8E	21	00	00	1E	1B	21	50	A0	51	00	1E	30
50	48	88	35	00	BC	86	21	00	00	1C						
60						4							00	00	00	FD
70	00	32	4B	1C	43	0F	00	0A	20	20	20	20	20	20	01	5

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
00	02	03	21	F1	4E	02	11	01	03	12	13	04	14	05	21	1F
10	20	22	10	23	09	07	07	83	01	00	00	65	03	0C	00	10
20	00	01	1D	00	BC	52	D0	1E	20	B8	28	55	40	C4	8E	21
30	00	00	1E	01	1D	00	72	51	D0	1E	20	6E	28	55	00	C4
40	8E	21	00	00	1E	01	1D	80	D0	72	1C	16	20	10	2C	25
50	80	C4	8E	21	00	00	9E	8C	0A	D0	90	20	40	31	20	0C
60	40	55	00	C4	8E	21	00	00	18	4E	1F	00	80	51	00	1E
70	30	40	80	37	00	BC	88	21	00	00	18	00	00	00	00	5

=> Detail EDID Options are below([1], [2], [3],[4], [5])

1. [1]-Product ID

Model Name	Product ID	Product ID	
		Hex	EDID table
42PC55-ZB	40114	9CB2	B29C
42PC56-ZD	40116	9CB4	B49C
50PC55-ZB	50016	C360	60C3
50PC56-ZD	50018	C362	62C3
50PB56-ZA	50020	C364	64C3

2. [2]-Serial No : Controlled on production line

3. [3]-Month, Year : Controlled on production line

ex) Week : '03' => '03'

Year : '2006' => '10'

4. [4]-Model Name(Hex):

Model Name	Hex Data
42PC55-ZB	00 00 00 FC 00 34 32 50 43 35 35 2D 5A 42 0A 20 20 20
42PC56-ZD	00 00 00 FC 00 34 32 50 43 35 36 2D 5A 44 0A 20 20 20
50PC55-ZB	00 00 00 FC 00 35 30 50 43 35 35 2D 5A 42 0A 20 20 20
50PC56-ZD	00 00 00 FC 00 35 30 50 43 35 36 2D 5A 44 0A 20 20 20
50PB56-ZA	00 00 00 FC 00 35 30 50 42 36 35 2D 5A 41 0A 20 20 20

5. [5]-Checksum : Changeable by total EDID data

3) HDMI2.

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
00	00	FF	FF	FF	FF	FF	FF	00	1E	6D	1			2		
10		3	01	03	80	46	27	78	EA	D9	B0	A3	57	49	9C	25
20	11	49	4B	A5	6E	00	31	40	45	40	61	40	D1	C0	01	01
30	01	01	01	01	01	01	02	3A	80	18	71	38	2D	40	58	2C
40	45	00	C4	8E	21	00	00	1E	1B	21	50	A0	51	00	1E	30
50	48	88	35	00	BC	86	21	00	00	1C						
60						4							00	00	00	FD
70	00	32	4B	1C	43	0F	00	0A	20	20	20	20	20	20	01	5

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
00	02	03	21	F1	4E	02	11	01	03	12	13	04	14	05	21	1F
10	20	22	10	23	09	07	07	83	01	00	00	65	03	0C	00	20
20	00	01	1D	00	BC	52	D0	1E	20	B8	28	55	40	C4	8E	21
30	00	00	1E	01	1D	00	72	51	D0	1E	20	6E	28	55	00	C4
40	8E	21	00	00	1E	01	1D	80	D0	72	1C	16	20	10	2C	25
50	80	C4	8E	21	00	00	9E	8C	0A	D0	90	20	40	31	20	0C
60	40	55	00	C4	8E	21	00	00	18	4E	1F	00	80	51	00	1E
70	30	40	80	37	00	BC	88	21	00	00	18	00	00	00	00	5

=> Detail EDID Options are below([1], [2], [3],[4], [5])

* Please refer HDMI1

7. ADC Calibration

ADC	RF/AV/S-VIDEO		Component	RGB-PC
MSPG925FS	PAL		Model:215(720P) Pattern : 65 * 720/50Hz 7 Color Bar	Model : 3
	INPUT SELECT	AV3		(1024*768 60Hz)
	Model : 202 (PAL-BGDHI)			Pattern : 65
	Pattern : 65 * PAL 7 Color Bar			7 Color Bar

- System control RS-232 Host should be "PC" for adjustment.
- Before AV ADC Calibration, execute the "Panel size selection"

8. Auto AV(CVBS) Color Balance

8-1. Requirement

- This AV color balance adjustment should be performed before white Balance Adjustment.

8-2. Required Equipment

- 1) Remote controller for adjustment.
- 2) MSPG-925FS Pattern Generator (Which has Video Signal: 7 Color Bar Pattern shown in Fig. 3).
- Model: 202 / Pattern: 65 EC and FC model use PAL-BGDHI. (composite signal)

8-3. Method of Auto AV(CVBS) Color Balance

- 1) Input the Video signal: 7 color Bar signal into AV3.
- 2) Set the PSM to Dynamic mode in the Picture menu.
- 3) Press IN-STAR key on R/C for adjustment.
- 4) Press the ►(Vol. +) key operate to set, then it becomes automatically.
- 5) Auto-RGB OK means completed adjustment.



(Fig. 3) Color Balance signal

9. Adjustment of Component

9-1. Requirement

- This AV color balance adjustment should be performed before white Balance Adjustment.

9-2. Required Equipment

- 1) Remote controller for adjustment.
- 2) MSPG-925FS Pattern Generator (Which has Video Signal: 7 Color Bar Pattern shown in Fig. 4).
- Model: 215 / Pattern: 65

9-3. Method of Auto Component Color Balance

- 1) Input the Component 720p/50Hz 7 Color Bar(MSPG-925FS model:215, pattern:65) signal into Component.
- 2) Set the PSM to Dynamic mode in the Picture menu.
- 3) Press IN-STAR key on R/C for adjustment.
- 4) Press the ►(Vol. +) key operate to set, then it becomes automatically.
- 5) Auto-RGB OK means completed adjustment.



(Fig. 4) Color bar Test Pattern

10. Adjustment of RGB

10-1. Requirement

- This AV color balance adjustment should be performed before white Balance Adjustment.

10-2. Required Equipment

- 1) Remote controller for adjustment.
- 2) MSPG-925FS Pattern Generator (Which has Video Signal: 7 Color Bar Pattern shown in Fig. 5).
- Model: 215 / Pattern: 65

10-3. Method of Auto RGB Color Balance

- 1) Input the PC 1024x768 @ 60Hz 7 color bar (MSPG-925FS, Model:3, Pattern: 65) into RGB. (using D-sub to D-sub cable)
- 2) Set the PSM to Dynamic mode in the Picture menu.
- 3) Press IN-STAR key on R/C for adjustment.
- 4) Press the ►(Vol. +) key operate to set, then it becomes automatically.
- 5) Auto-RGB OK means completed adjustment.



(Fig. 5) Color bar Test Pattern

11. Adjustment of White Balance

11-1. Requirement

- Before adjusting White-balance, the AV ADC should be done.

11-2. Required Equipment

- Remote controller for adjustment.
- Color Analyzer.(CA-1000,CA-100+,CA-200 or same product) : CH10(PDP)
- * Please adjust CA-210, CA-100+ by CS-1000 before measuring.**
- Auto W/B adjustment instrument.(only for Auto adjustment)
- AV Pattern Generator.

- ◆ Synchronization relation between PSM and CSM.


CSM	PLASMA	Remark
Cool	11000K	
Normal	9300K	
Warm	6500K	

- ◆ CS-1000/CA-100+/CA-210 White balance adjustment coordinate and color temperature.

Mode	Color Coordinate		Temp	Δuv
	x	y		
COOL	0.276±0.002	0.283±0.002	11000K	0.000
MEDIUM	0.285±0.002	0.293±0.002	9300K	0.000
WARM	0.313±0.002	0.329±0.002	6500K	0.003

11-3. Connection Picture of the Measuring Instrument(On Automatic control)

- Inside PATTERN is used when W/B is controlled. Connect to auto controller or push control R/C IN-START -> Enter the mode of White-Balance, the pattern will come out.

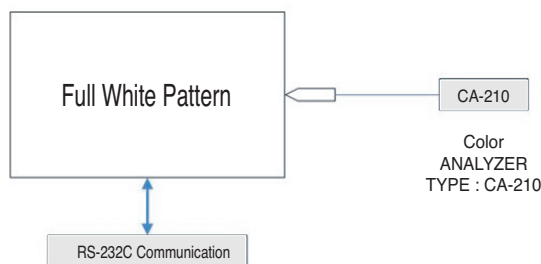

(Fig. 6) Auto AV(CVBS) Color Balance Test Pattern

- Auto-control interface and directions

- Adjust in the place where the influx of light like floodlight around is blocked.(illumination is less than 10ux)
- Measure and adjust after sticking the Color Analyzer(CA-100+, CA210) to the side of the module.
- Aging time : keep white pattern using inside pattern.

- ◆ Auto adjustment Map(RS-232C)

Type		PD73A				
Baud Rate		Data bit		Stop bit	Parity	
115200		8		1	NONE	
Protocol Setting	Index	Cmd1	Cmd2	Data	Min Value	Max Value
	R Gain	j	a		00(00)	128(80)
	G Gain	j	b		00(00)	128(80)
	B Gain	j	c		00(00)	128(80)
	R Offset	j	d		00(00)	128(80)
	G Offset	j	e		00(00)	128(80)
	B Offset	j	f		00(00)	128(80)

12. Adjustment of White Balance

(Manual white Balance)

- One of R Gain/ G Gain/ B Gain should be kept on 80, and others are controlled lowering from 80
- (1) 'power on' of the control R/C, set heat run to white by pressing and heat run over 15 minutes. (Set: RS-232 Host: PC, Baud Rate: 115200bps, Download: Cortez)
- (2) Zero Calibrate CA-100+, and stick the sensor to the center of PDP module surface when you adjust.
- (3) Double click In-start key on Controlling R/C and get in 'white balance'.
- (4) Set test-pattern on and display inside pattern. Control is carried out on three color temperature, COOL, MEDIUM, WARM. (Control is carried out three times.)
- (5) When the R/G/B GAIN is 80 on OSD, it is the FULL DYNAMIC Range of the Module. In order to control white balance without the saturation of FULL DYNAMIC Range and DATA, one of R Gain / G Gain / B Gain should be kept on 80, and other two is controlled lowering from 80.

- * Color Temperature: Cool, Medium, Warm

- When R GAIN is set to 80
 - Control G GAIN and B GAIN by lowering from 80.
 - When B GAIN is set to 80
 - Control R GAIN and G GAIN by lowering from 80.
 - When G GAIN is set to 80
 - Control R GAIN and B GAIN by lowering from 80.
- One of R Gain / G Gain / B Gain should be kept on 80, and adjust other two lower than 80.
(When R/G/B GAIN are all 80, it is the FULL DYNAMIC Range of Module)

13. Default Value in Adjustment mode

13-1. Auto Color Balance

<Component>			<RGB>		
Auto Color Balance (Hex)			Auto Color Balance (Hex)		
Auto-RGB ▶ To Set			Auto-RGB ▶ To Set		
Source		MAIN	Source		MAIN
Red	Offset1	022	Red	Offset1	0F8
Green	Offset1	024	Green	Offset1	0DA
Blue	Offset1	023	Blue	Offset1	0BC
Red	Offset2	45	Red	Offset2	01
Green	Offset2	43	Green	Offset2	01
Blue	Offset2	37	Blue	Offset2	01
Red	Gain	014	Red	Gain	1FE
Green	Gain	031	Green	Gain	1FE
Blue	Gain	011	Blue	Gain	1FE
Reset	▶ To Set		Reset	▶ To Set	

<AV>		
AutoColorBalance(Hex)		
Auto-RGB ▶ To Set		
Source		MAIN
Red	Offset1	022
Green	Offset1	024
Blue	Offset1	023
Red	Offset2	45
Green	Offset2	43
Blue	Offset2	37
Red	Gain	014
Re Set	▶ To Set	

(Fig. 7) Default on OSD

13-2. Write Balance

White Balance (Hex)		
Red	Gain	80
Green	Gain	80
Blue	Gain	80
Red	Offset	80
Green	Offset	80
Blue	Offset	80
Reset	▶ To Set	

(Fig. 8) Default on OSD

14. EEPROM Data Write(Serial No D/L)

14-1. Signal TABLE

CMD	LENGTH	ADH	ADL	DATA_1	...	DATA_n	CS	DELAY
-----	--------	-----	-----	--------	-----	--------	----	-------

CMD : A0h
 LENGTH : 85~94h (1~16 bytes)
 ADH : E²PROM Sub Address high (00~1F)
 ADL : E²PROM Sub Address low (00~FF)
 Data : Write data
 CS : CMD + LENGTH + ADH + ADL + Data_1 + ... + Data_n
 Delay : 20ms

14-2. Command Set

No	Adjust mode	CMD(hex)	LENGTH(hex)	Description
1	EEPROM WRITE	A0h	84h+n	n-byted Write (n=1~16)

* Description

FOS Default write : <7mode data> write

Vtotal, V_Frequency, Sync_Polarity, Htotal, Hstart, Vstart, 0, Phase

Data write : Model Name and Serial Number write in EEPROM,.

14-3. Method & Notice

- (1) Serial number D/L is using of scan equipment.
- (2) Setting of scan equipment operated by Manufacturing Technology Group.
- (3) Serial number D/L must be conformed when it is produced in production line, because serial number D/L is mandatory by D-book 4.0.

15. Set Information(Serial No& Model name)

15-1. Setting up like bottom figure

(After setting white balance, this is set)


(Setting: Press ADJ Key in the Adjust remocon)

- (1) Select "System Control 2" by using ▲ / ▼ (CH+/-) key, and press ■ (ENTER) Using Adjust remocon, RS-232 Host & Baud Rate & Download value change)

Model Name	Tool Option1	Tool Option2	Area Option	Option1	Option2	Option3	Option3
42PC56-ZD	2048	1697	0	14	2	1	192
50PC56-ZD	2052	1953	0	14	2	1	192

15-2. Push the menu button in DTV mode.

- (1) Select the STATION-> Diagno stics -> To set.

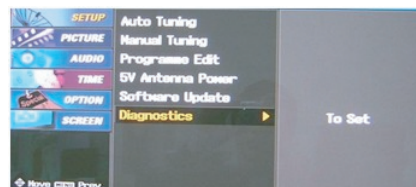




The screenshot shows the 'Engineering Diagnostics' screen. It displays the following information:

- Manufacturer : LG Electronics Inc.
- Model / Type : 26LC3D
- Serial No. : 601NACCAZ001
- Software Version: 0.1.0

Below this information is a large empty table with 5 columns and 4 rows. At the bottom left, there are two buttons: 'More' and 'Prev.'.

1. You can find the ICON on C:\Program Files\LGIDS.

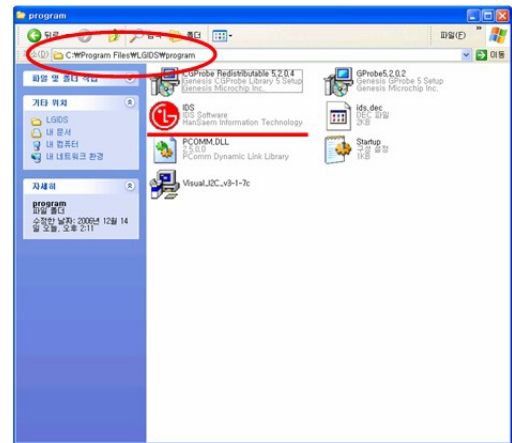


- 1) Push the IN-START key in a Adjust Remocon.
- 2) Input the Option Number that was specified in the BOM, into the Shipping area.
- 3) The work is finished, Push **■** Key.

(1) Installation of the LGIDS

The screenshot shows a Windows XP desktop environment. The active window is a File Explorer showing the contents of the folder 'D:\W업업무관련파일집합\WCD문로드프로그램'. The folder contains several subfolders: GProbe, lqterm, 3.0.0, teraform, 2.5.2.pro, ParadigmC++, Sourceinsite, 3.1, STA333W, Acrobat 7.0 Professional, and IDS_Setup. The 'IDS_Setup' file is selected, and the context menu is open, displaying options such as '열기(O)', '실행으로 보기(V)', 'D:\W업업무관련파일집합\WCD문로드프로그램\IDS_Setup'을 압축하기(S), '압일 E-XE 만들기(M)', 'E-Mail에 첨부하기(A)', 'Select Left Side to Compare', '비밀번호 검사(S)', '연결 프로그램(업)', '보내기(N)', '알려내기(I)', '취소(C)', '불러오기(O)', '바로 가기 만들기(S)', '삭제(D)', '이름 바꾸기(R)', and '속성(P)'. The taskbar at the bottom shows the time as 12:14 PM on 12/14/2009.


1. After Click the 'NEXT' icon, Installation is finished.

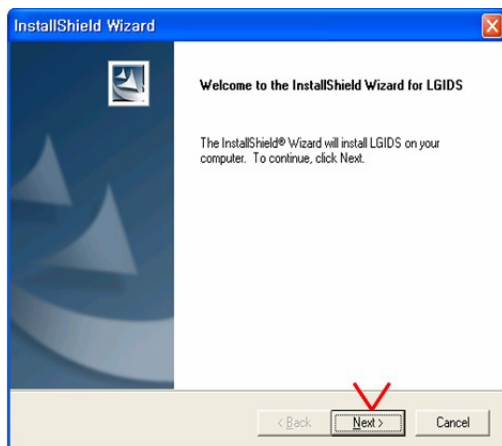

The screenshot shows a Windows Explorer window with the address bar displaying 'C:\WPProgram Files\WLGOS\Wiles'. The left sidebar shows the 'Files' pane with 'WLGOS' selected. The main pane displays a list of files and folders. Several files are circled in red:

- CORTEZ_A** (File icon)
- isp8_flash32** (File icon)
- isp8_flash512** (File icon)
- isp16_ext** (File icon)
- isp16_flashIM** (File icon)
- isp_AT48B160C_ext** (File icon)
- H3_High_R2_nvm** (File icon)
- NvramRead.nvm** (File icon)

The details pane on the right shows the properties of the selected file, 'isp16_ext', which is a 'HEX Document' of 918 bytes.

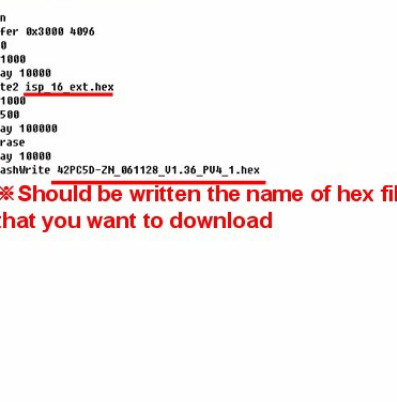


```
파일(F) 편집(E) 서식(O) 보기(V) 도움말(H)
Echo
debugon
SetBuffer 0x3000 4096
Reset 0
delay 1000
setDelay 10000
RAMWrite2 isp 16 ext.hex
delay 1000
run 0x500
setDelay 100000
FlashErase
setDelay 10000
FastFlashWrite 42PC5D-2M_061128_U1.36_PU4_1.hex
```

※ Should be written the name of hex file
that you want to download

2) Connect RS232 cable and turn on the power.
(Use the general RS-232C Serial Cable)

3) Execute the LGIDS Program - 1

1. Check a 'PDP' & 'Hurricane' on the 'Model' MENU

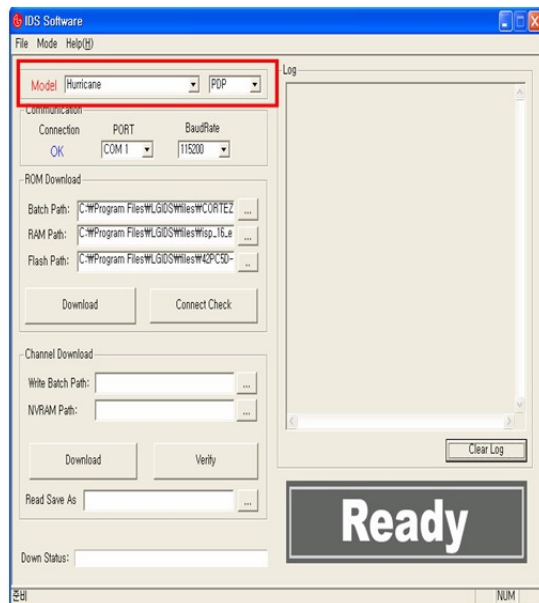

* If your connection is 'NG', then set your PORT(COM1,2,3...) correctly.

4) SVC MENU Setting for CORTEZ DOWNLOAD.


case 1. Press the 'tilt' button on the Adjustment Remote Control.

case 2. Press the 'ADJ' button

- 1) Press the 'System Control 2' menu
- 2) Enter the 'GProbe' on the 'RS-232Host menu'
- 3) Enter '115200bps' on the 'Baud Rate menu'
- 4) Enter the 'Cortez' on the 'Download menu'


* If you don't have a Adjustment Remote Control
'Menu' button on the Remote Control + 'Menu' button on the Local Key during 7~8sec

After Change a mode, you can see 'GPROBE MODE'

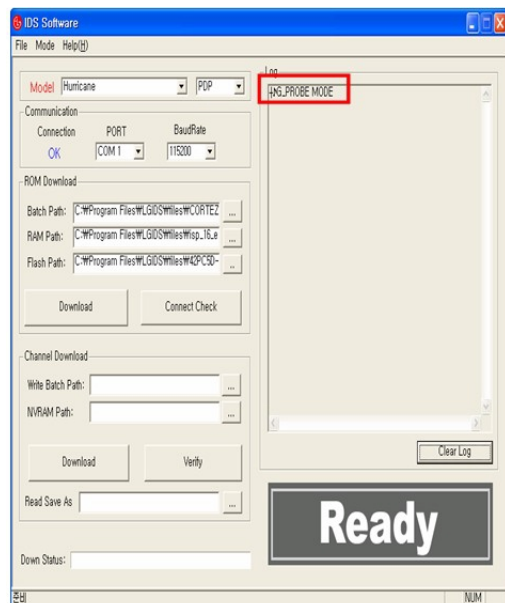


5) Execute the LGIDS Program - 2

1. Open a Batch file, RAM file and Flash file.

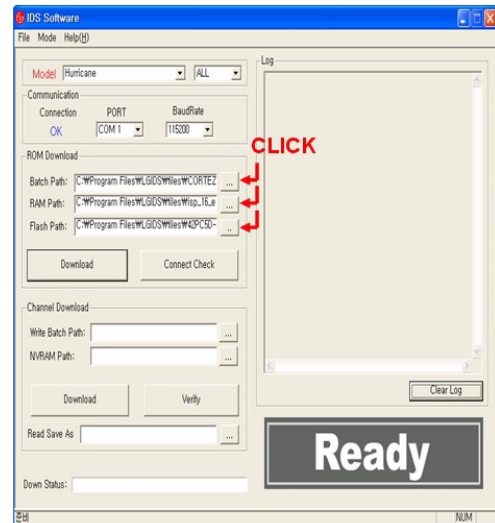


6) Execute the LGIDS Program - 3

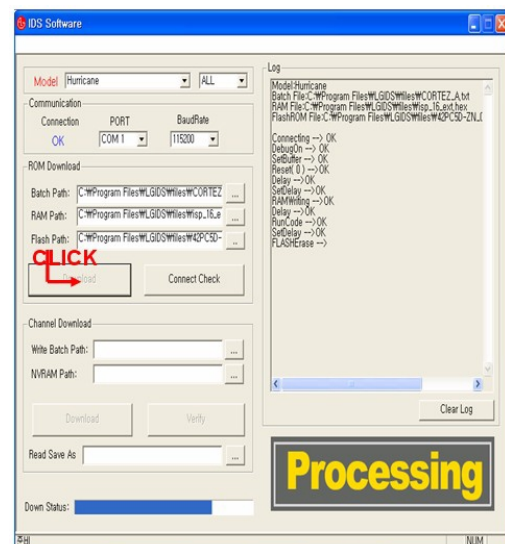

7) Wait the final message.


1. After DOWNLOAD, Turn off the TV after download -> Turn on.

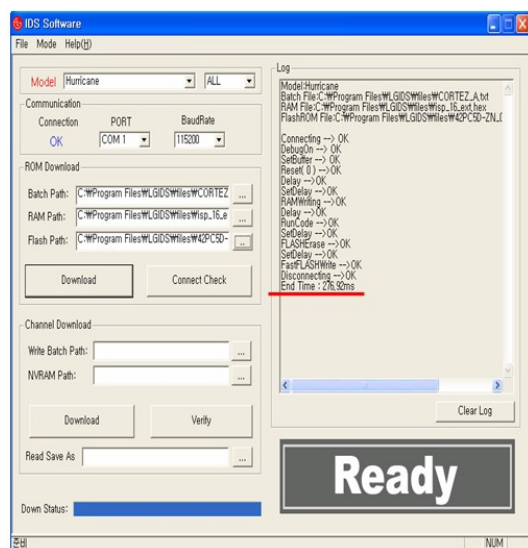



17-2. CORTEZ Download By GProbe 5

(1) Installation of the GProbe 5



1) Extract to folder GProbe5.0.0.15_S0006_EXE_09A.ZIP.

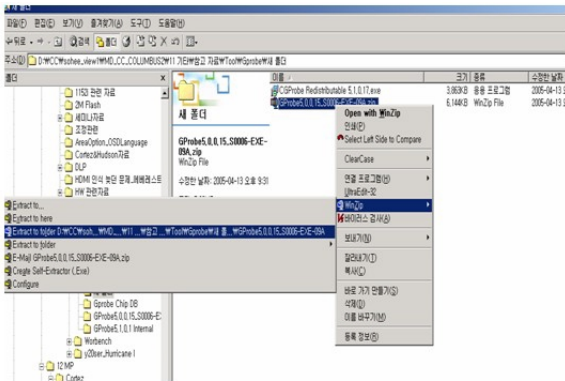



2) Install GProbe5.0.0.15.EXE - 1.

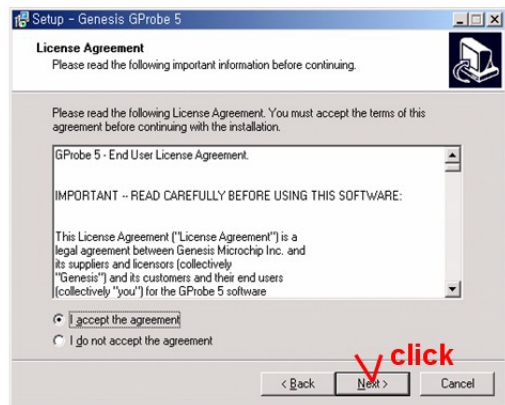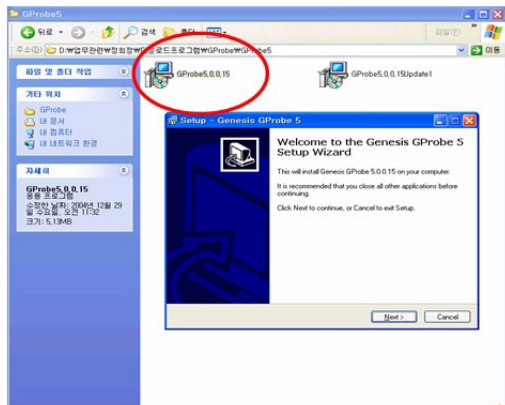



3) Install GProbe5.0.0.15.EXE - 2.

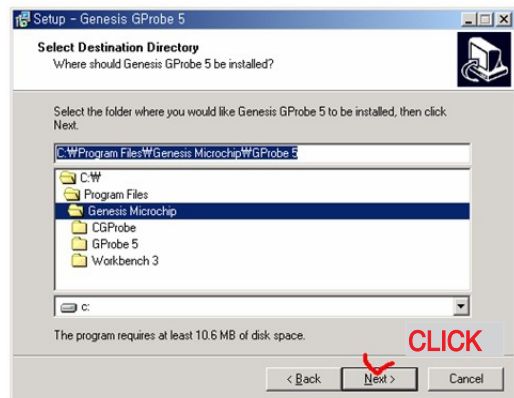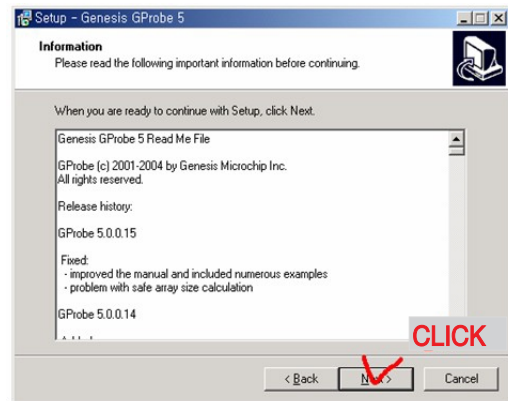

4) Install GProbe5.0.0.15.EXE - 3.

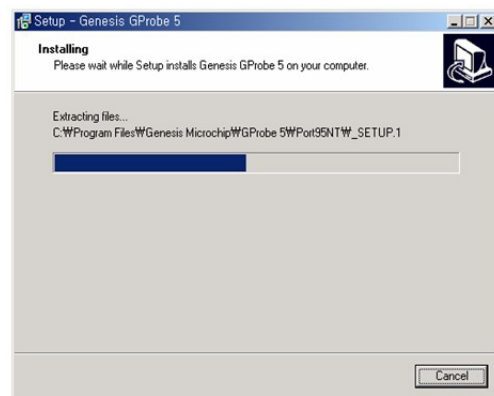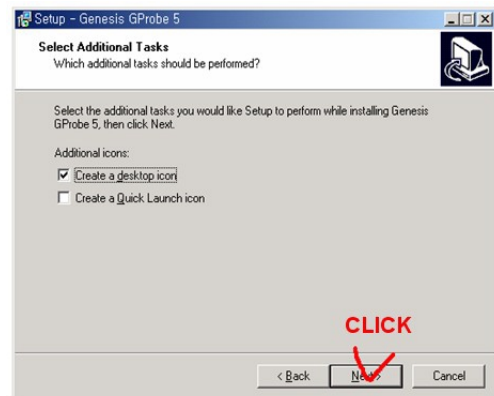


5) Install GProbe5.0.0.15.EXE - 4.

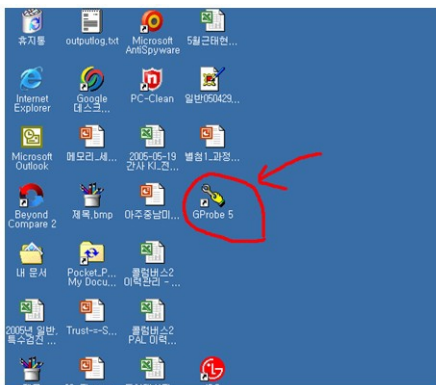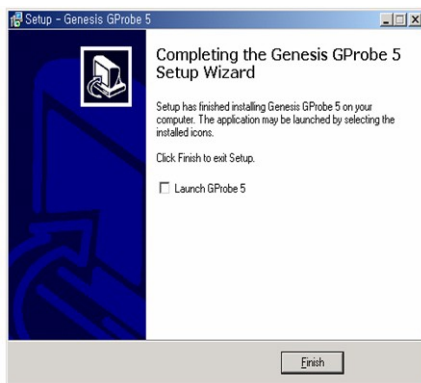


(2) Download hex file using GProbe

- 1) Prepare a '*.hex', 'isp_16_ext.hex', '*.txt' in the same folder.

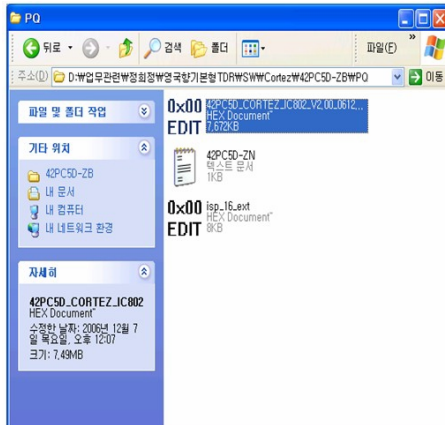

* In the TEXT FILE

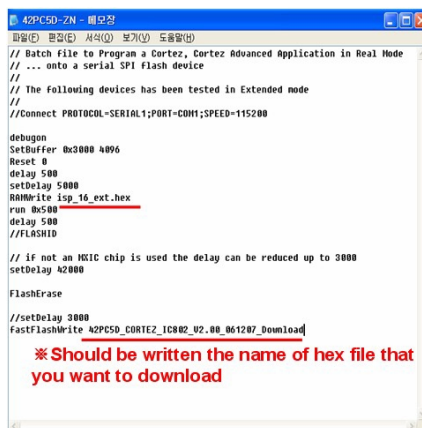


- 2) Connect TV set and PC by using RS232 cable.
- 3) SVC MENU Setting for CORTEZ DOWNLOAD.
 - case 1. Press the 'tilt' button on the Adjustment Remote Control.
 - case 2. Press the 'ADJ' button.

- 1) Press the 'System Control 2' menu
- 2) Enter the 'GProbe' on the 'RS-232Host menu'
- 3) Enter '115200bps' on the 'Baud Rate menu'
- 4) Enter the 'Cortez' on the 'Download menu'


* If you don't have a Adjustment Remote Control 'Menu' button on the Remote Control + 'Menu' button on the Local Key during 7~8sec.

4) Execute the GProbe Program.

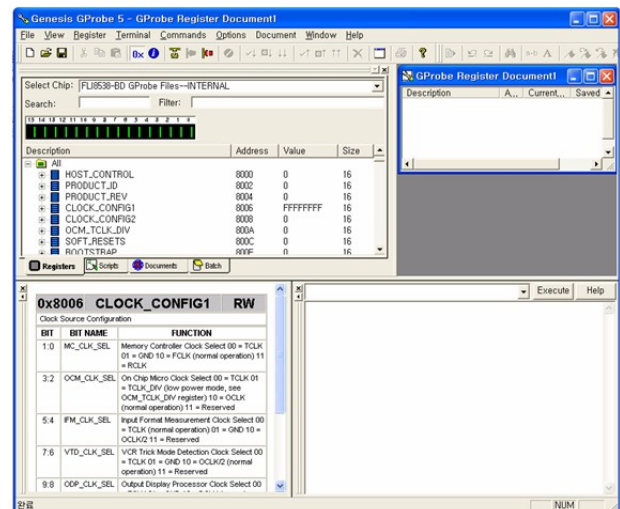


5) Open the batch file - 1.


1. Click the 'Commands'.

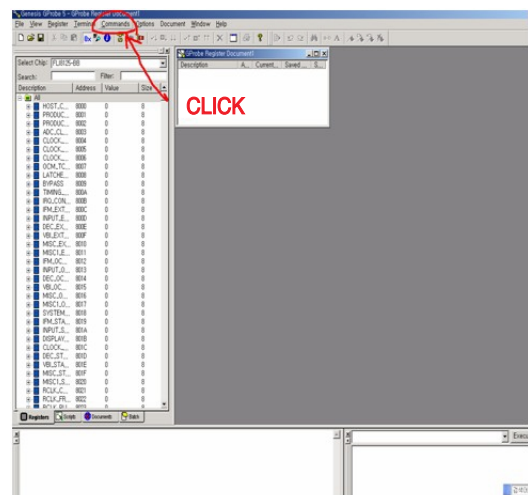


- 6) Open the batch file - 1.
1. Click the 'Commands'.

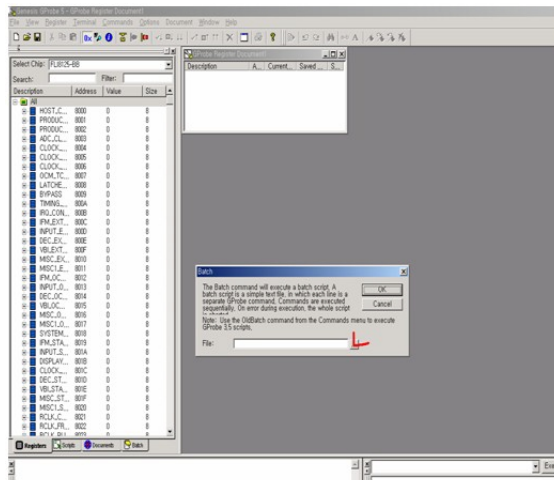


- 7) Open the batch file - 2
1. Click 'Batch' in the 'Commands' menu & express the '...' icon (It's marked by the red check).

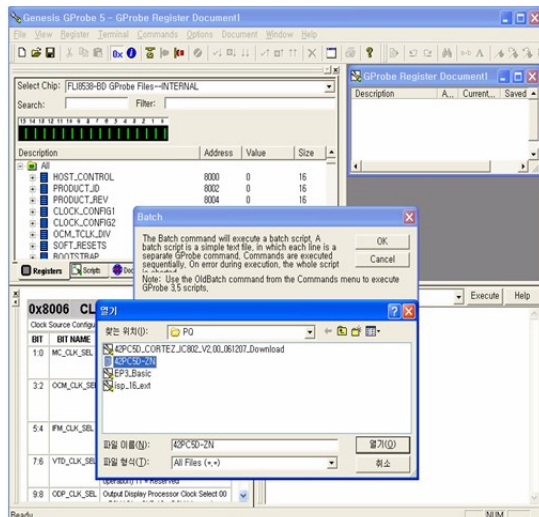

- 8) Open the batch file - 3.
1. Choose the text file.

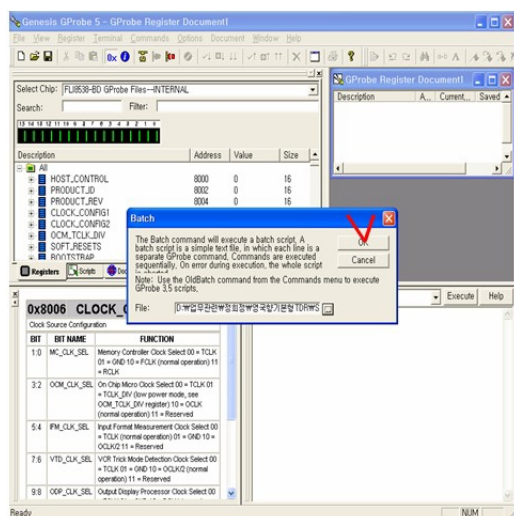

- 9) It takes 300sec ~ 360sec, Wait the final message.
1. Turn off the TV after download -> Turn on.

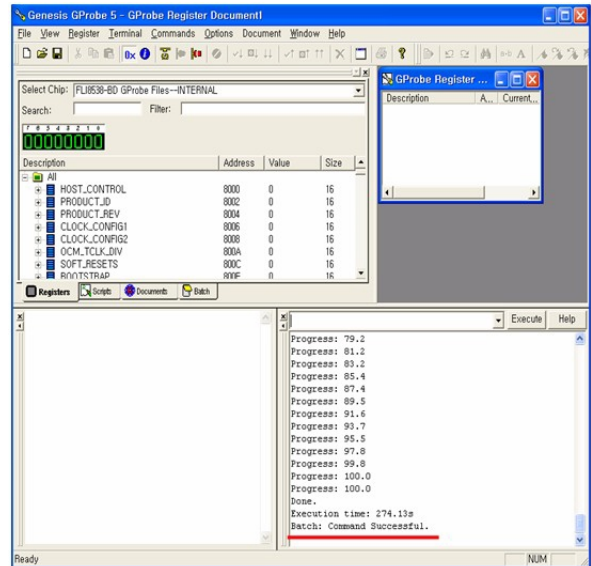


18. Insert the 'TOOL OPTION' & SERIAL NUMBER

- When you change a Main Ass'y, you should insert the TV SET's original Serial Number & MODEL NAME. It is the way how to insert original number.


18-1. Insert the 'Tool Option'

- 1) Insert '2048' on 'Tool Option1', '1697' on 'Tool Option2' for 42PC56-ZD Press the 'ENTER' Button.
- 2) Insert '2052' on 'Tool Option1', '1953' on 'Tool Option2' for 50PC56-ZD Press the 'ENTER' Button.
 1. Before change the 'Tool Option', you should check the White Balance Value.
 2. Because change the 'Tool Option', the White Balance Value is reset.



18-2. Insert the 'SERIAL NUMBER' & 'MODEL NAME'

- 1) Check the original serial number.
(Check the Label on the Back Cover)
 - 2) After change the Main Ass'y, Press the 'ADJ button on the Adjustment Remote control.
 1. Choose the 'OPTION4'
 2. Insert the 'MODEL NAME' by navigation key.
 3. Insert the original serial number on the 'SERIAL NUMBER' MENU by navigation key.
- * After All Setting, Turn Off TV SET-> On




19. ST DOWN LOAD

19-1. ST ROM DOWN LOAD

- (1) Installation the 'LG Term'

- 1) Extract to folder lgterm.zip.

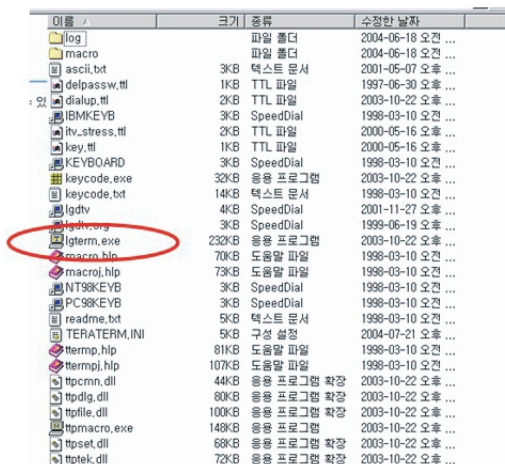


(2) Download biz file using LG Term


- 1) Prepare the '*.biz' that you want to download on ST.
- 2) Connect TV set and PC by using RS232 cable, Turn on the TV.
- 3) SVC MENU Setting.
 - case 1. Press the 'Turbo Sound' button on the Adjustment Remote Control.
 - case 2. Press the 'ADJ' button.
 - 1) Press the 'System Control 2' menu
 - 2) Enter the 'GProbe' on the 'RS-232 Host'
 - 3) Enter '115200bps' on the 'Baud Rate'
 - 4) Enter the 'STi 5100' on the 'Download'

* If you don't have a Adjustment Remote Control.
'Menu' button on the Remote Control + 'Menu' button on the Local Key during 7~8sec.


- 4) Execute 'lgterm.exe'.
 1. Select 'Serial port' on 'Setup' Menu.
 2. Port should be connected with the TV SET by RS232.

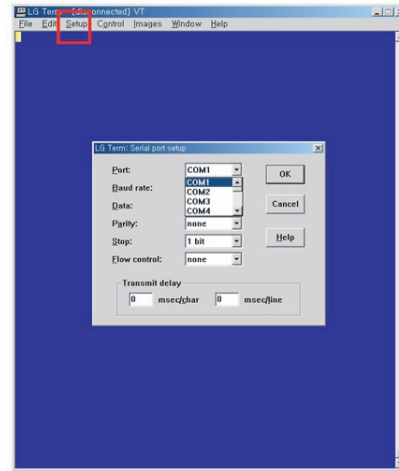


- 5) TV SET DC Power OFF => ON.
 1. Check the message like the Picture.

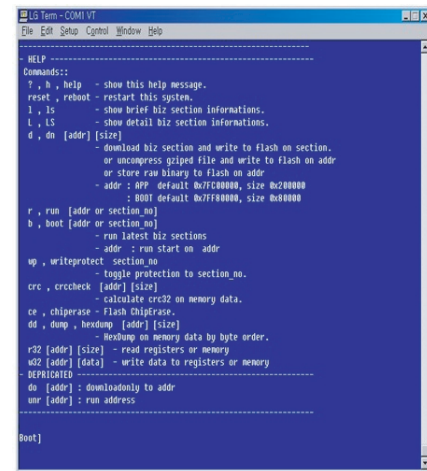


- 6) Insert 'dn' and Enter.

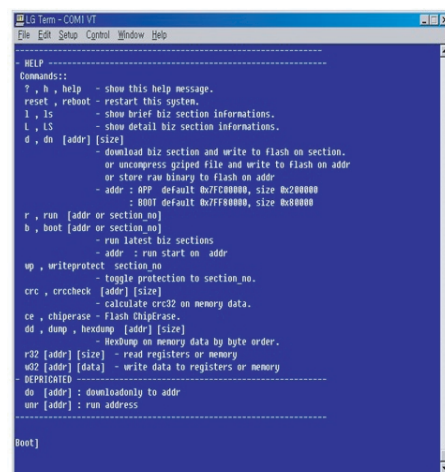


7) When 'Please Send the file' appears, Press 'ctrl' + 's'.

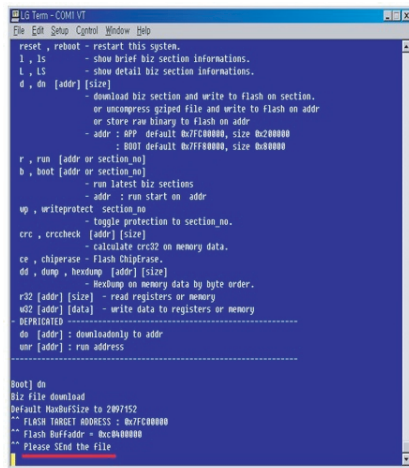

8) When 'Please Send the file' appears, Press 'ctrl' + 's'.

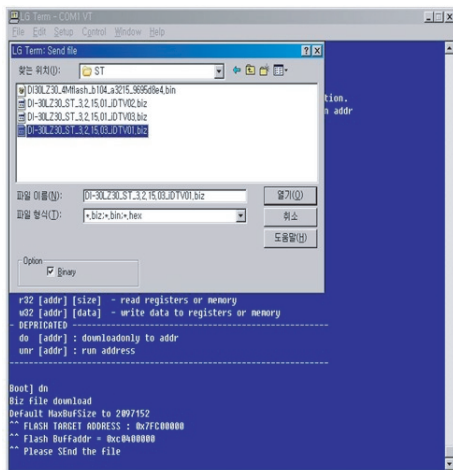


9) Download takes 60sec ~ 120sec.

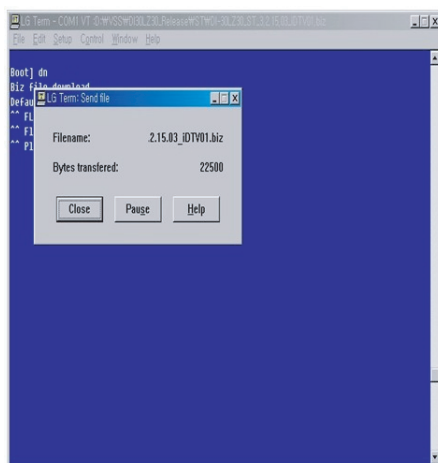


10) The End of DOWNLOAD

1. After Download successfully, you can see 'EW EW EW EW'.
2. You can remove RS232 Cable and TV Power SET OFF => ON

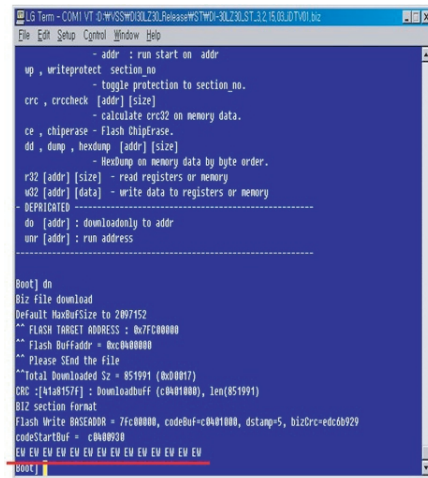

11) Change the mode.


1. Press the 'ADJ' button.
2. Press the 'System Control 2' menu.
3. Enter the 'PC' on the 'RS-232 Host'.
4. Enter '115200bps' on the 'Baud Rate'.
5. Enter the 'Cortez' on the 'Download'.



TROUBLE SHOOTING GUIDE


1. Power Board

1-1. The full flowchart for the voltage output

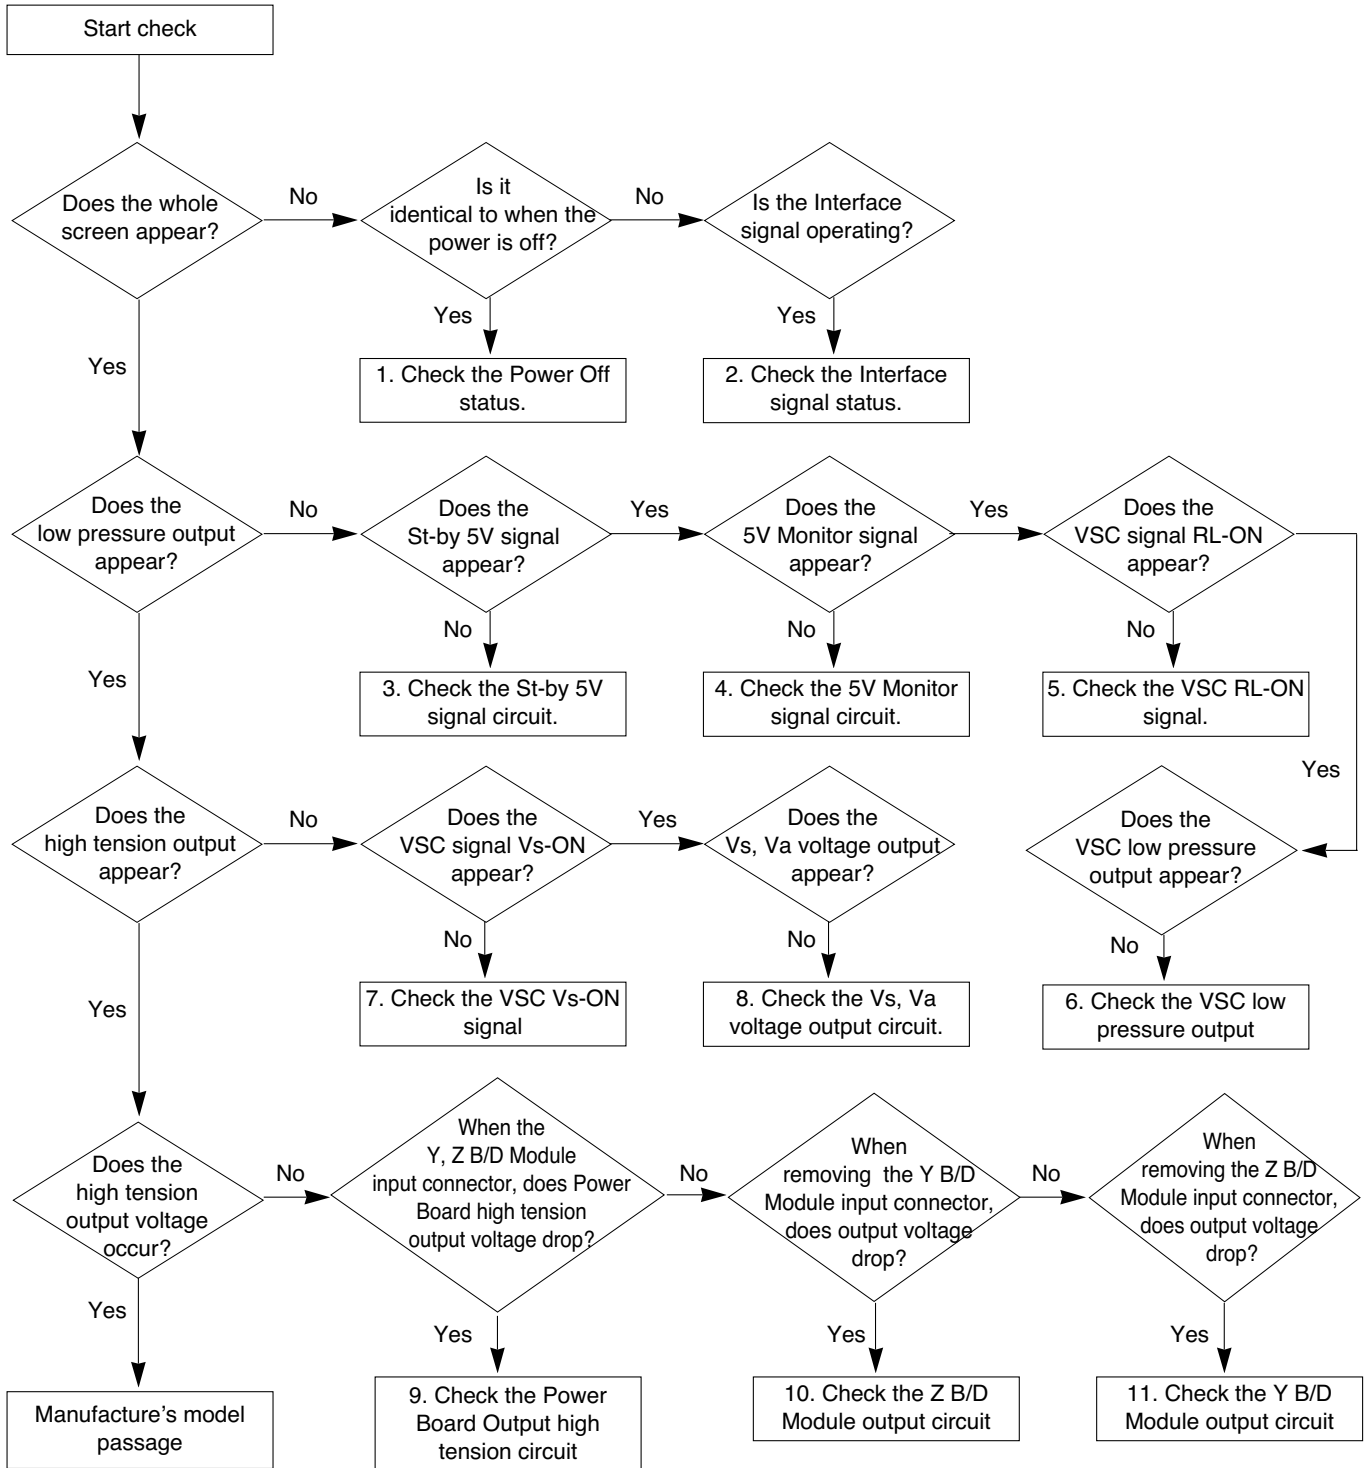

1-2. 42” Power Board Structure(670990001A)

(1) Pin Layout

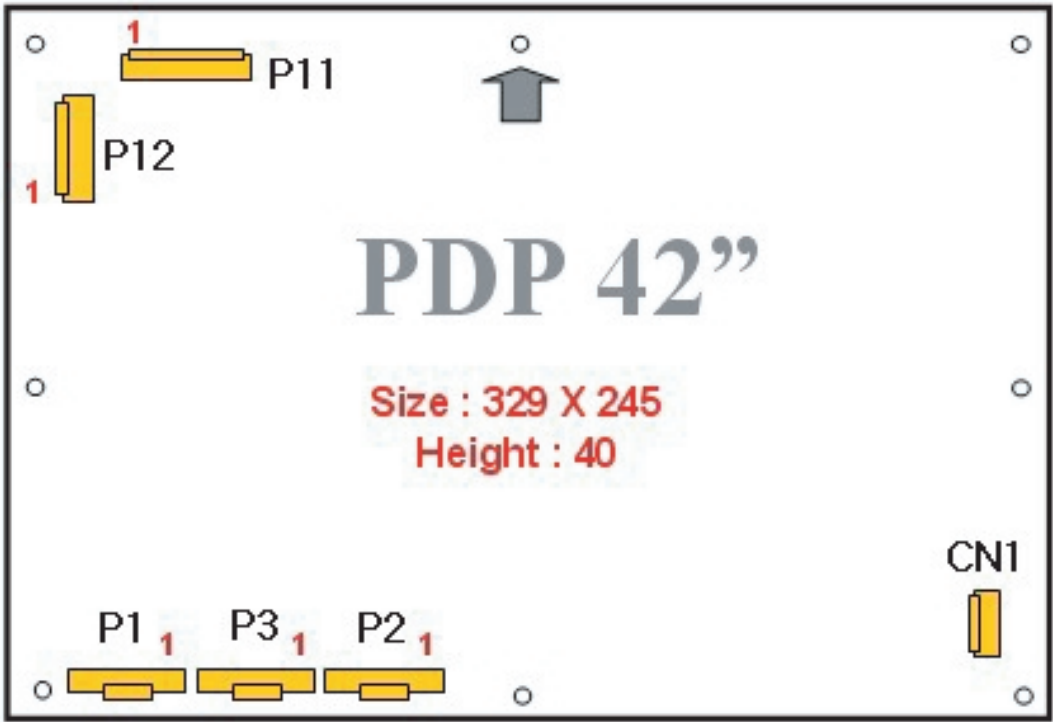


(2) Pin Spec

NO	AC INLET	ANALOG & DIGITAL BOARD			PDP MODULE	
	CN1	P1	P2	P3	P11	P12
1	AC	AC Det	19V	3.4V	Vs	5V
2	NC	RL-ON	19V	3.4V	Vs	GND
3	AC	STBY 5V	GND	GND	NC	Va
4		GND	GND	GND	GND	GND
5		Vs-ON	6V	6V	GND	GND
6		5V Det	GND	6V	Va	GND
7		M5V-ON	3.4V	GND	GND	NC
8		STBY 5V	GND	GND	5V	Vs
9		GND	12V	12V		Vs
10		NC	GND	12V		
11		6V		GND		
12		GND		GND		
13		3.4V-ON				
Wafer P/N	YH396-03V	SMW250-13P	SMW250-10P	SMW250-12P	YH396-08V	YH396-09V

1-3. 42” Power Board Structure(EAY3280890)

(1) Pin Layout

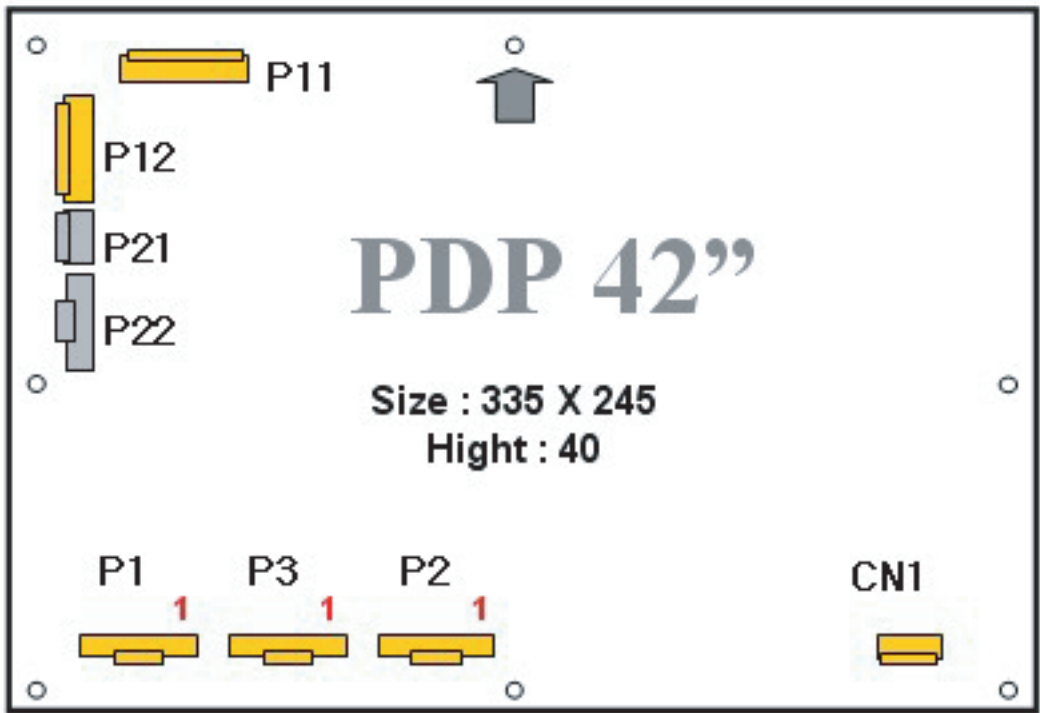

(2) Pin Spec

NO	AC INLET	ANALOG & DIGITAL BOARD			PDP MODULE		READY	
	CN1	P1	P2	P3	P11	P12	P21	P22
1	AC	AC Det	19V	3.4V	Vs	5V	5V	GND
2	NC	RL-ON	19V	3.4V	Vs	GND	5V	GND
3	AC	STB 5V	GND	GND	NC	Va	GND	GND
4		GND	GND	GND	GND	GND	GND	GND
5		Vs-ON	6V	6V	GND	GND		5V
6		5V Det	GND	6V	Va	GND		5V
7		M5V-ON	3.4V	GND	GND	NC		5V
8		STB 5V	GND	GND	5V	Vs		5V
9		GND	12V	12V		Vs		
10		NC	GND	12V				
11		6V		GND				
12		GND		GND				
13		3.4V-ON						
Wafer P/N	SMW250-013P	SMW250-13P	SMW250-10P	SMW250-12P	YH396-08V	YH396-09V	YH396-04V	SMW250-08P


2. No Power

(1) Symptom

- 1) Does not minute discharge at module.
- 2) Non does not come into the front LED.




(2) Procedure check

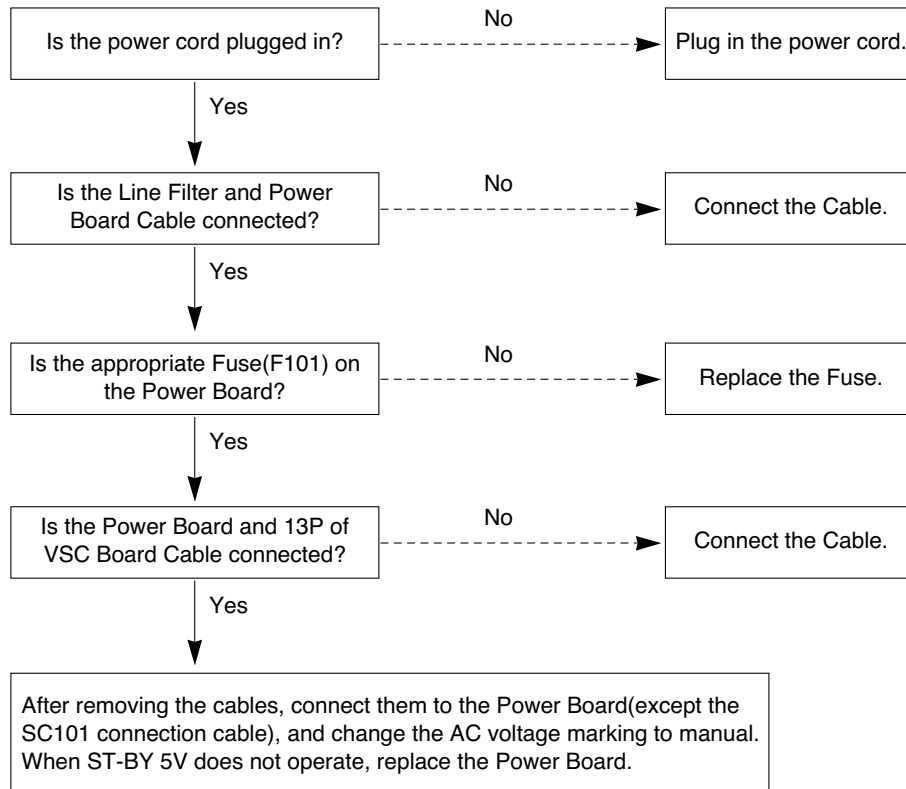


3. Protect Mode

(1) Symptom

- 1) After lighting up once, it does not discharge minutely from module.
- 2) The relay falls.(there is an audible "click")
- 3) The color of the front LED turns from green to red.

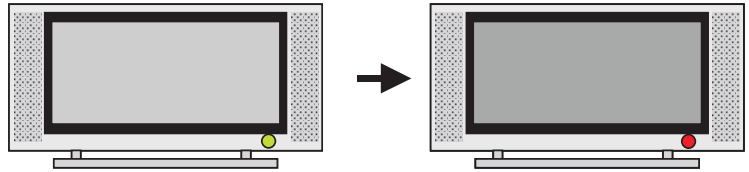


(2) Procedure check

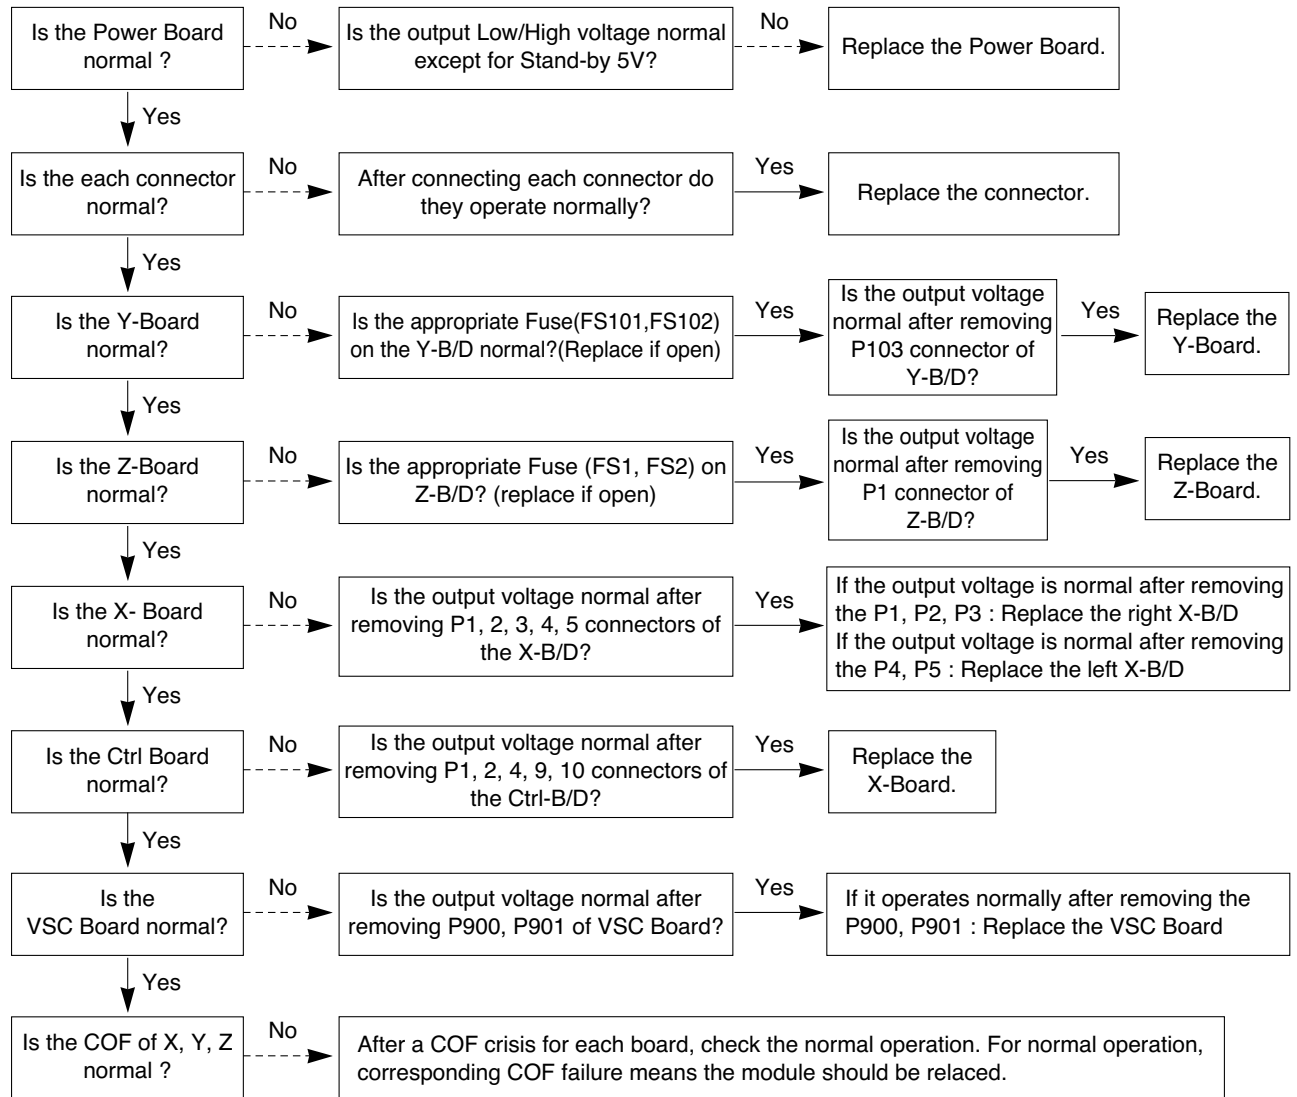


4. No Raster

(1) Symptom

- 1) No OSD and image occur at screen.
- 2) It maintains the condition where the front LED is green.



(2) Procedure check

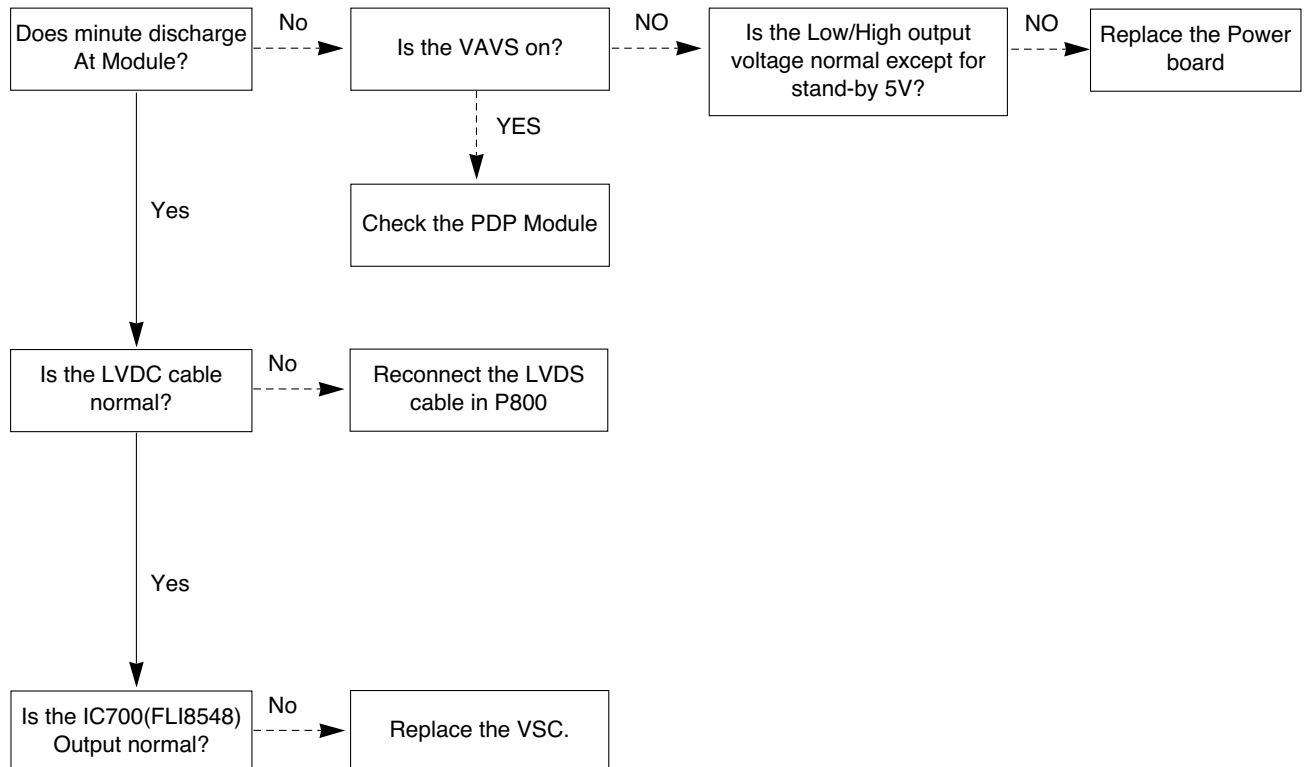

5. In case of strange screen display in specific modes


5-1. In case of no OSD display

(1) Symptom

- 1) LED is green.
- 2) The minute discharge is continuously accomplished from the module.




(2) Procedure check

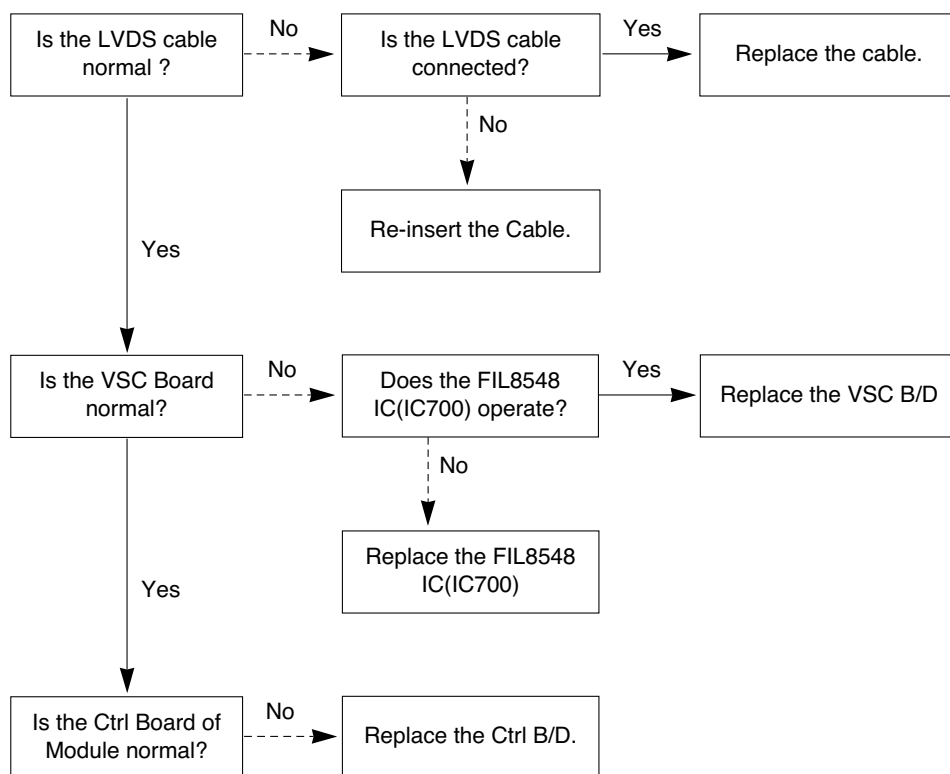

5-2. In case there is no display on the screen in specific modes

(1) Symptom


- 1) There is no screen display from a specific input mode (RF, AV, Component, RGB, DVI).




(2) Procedure check

- 1) Check the all input modes have normal display.
- 2) Check the video(main)/ data(sub), video(main)/ video(sub) have normal displays from the PIP mode or DW mode(re-check it/ swap).


(3) In case of an unusual display in RF mode

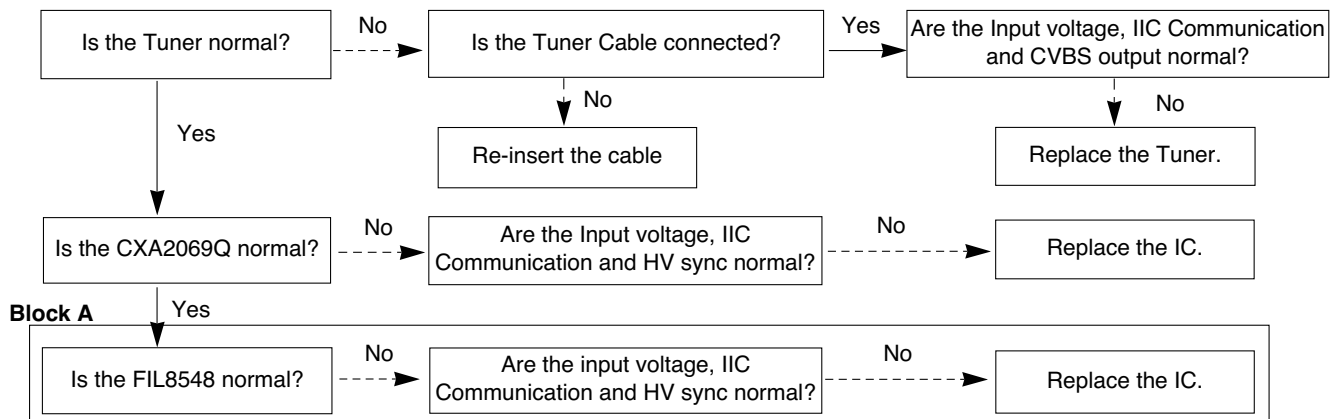


(4) In case of an unusual display in side S-video/ AV mode

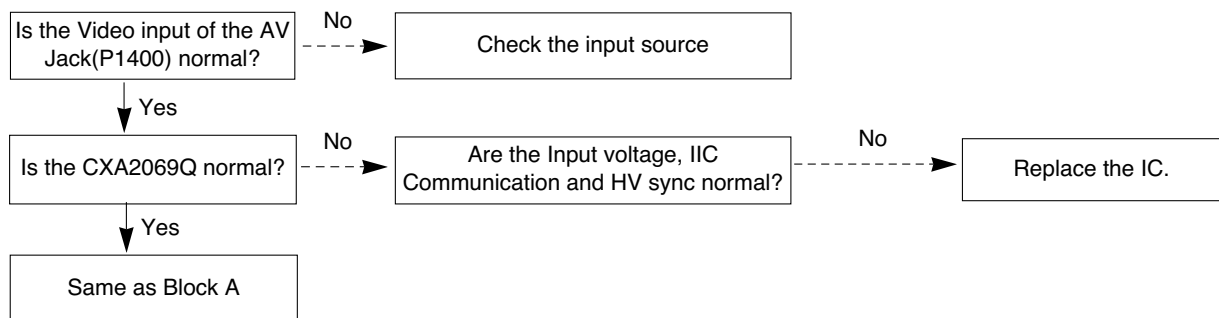


(5) In case of an unusual display in Component, RGB mode

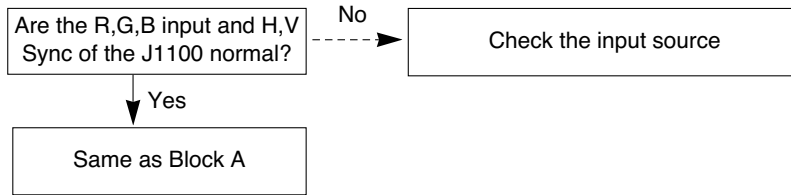


(6) In case of an unusual display in HDMI mode

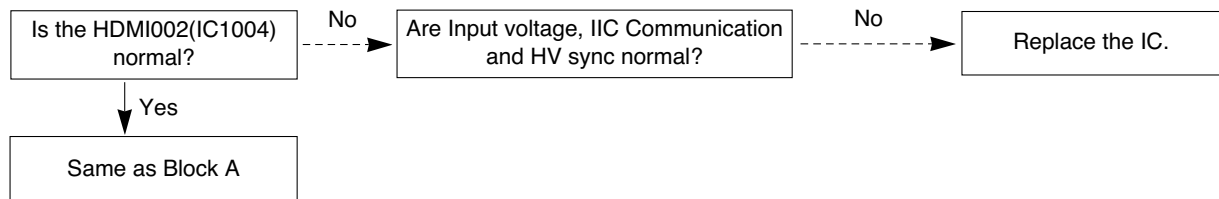

(7) In case of an unusual display in SCART1 mode

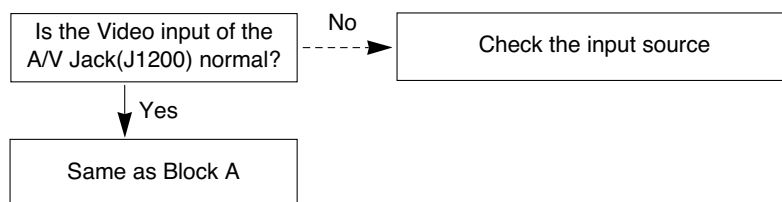


(8) In case of an unusual display in SCART2 mode

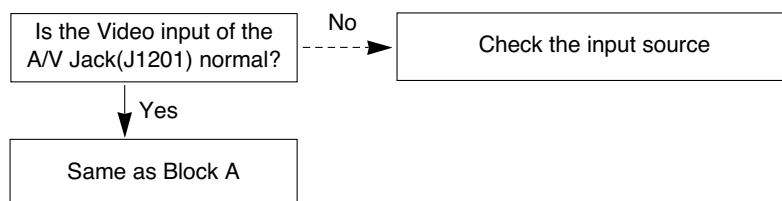


6. In case of no sound

(1) Symptom


- 1) LED is Green.
- 2) Screen display appears but there is no sound.




(2) Procedure check

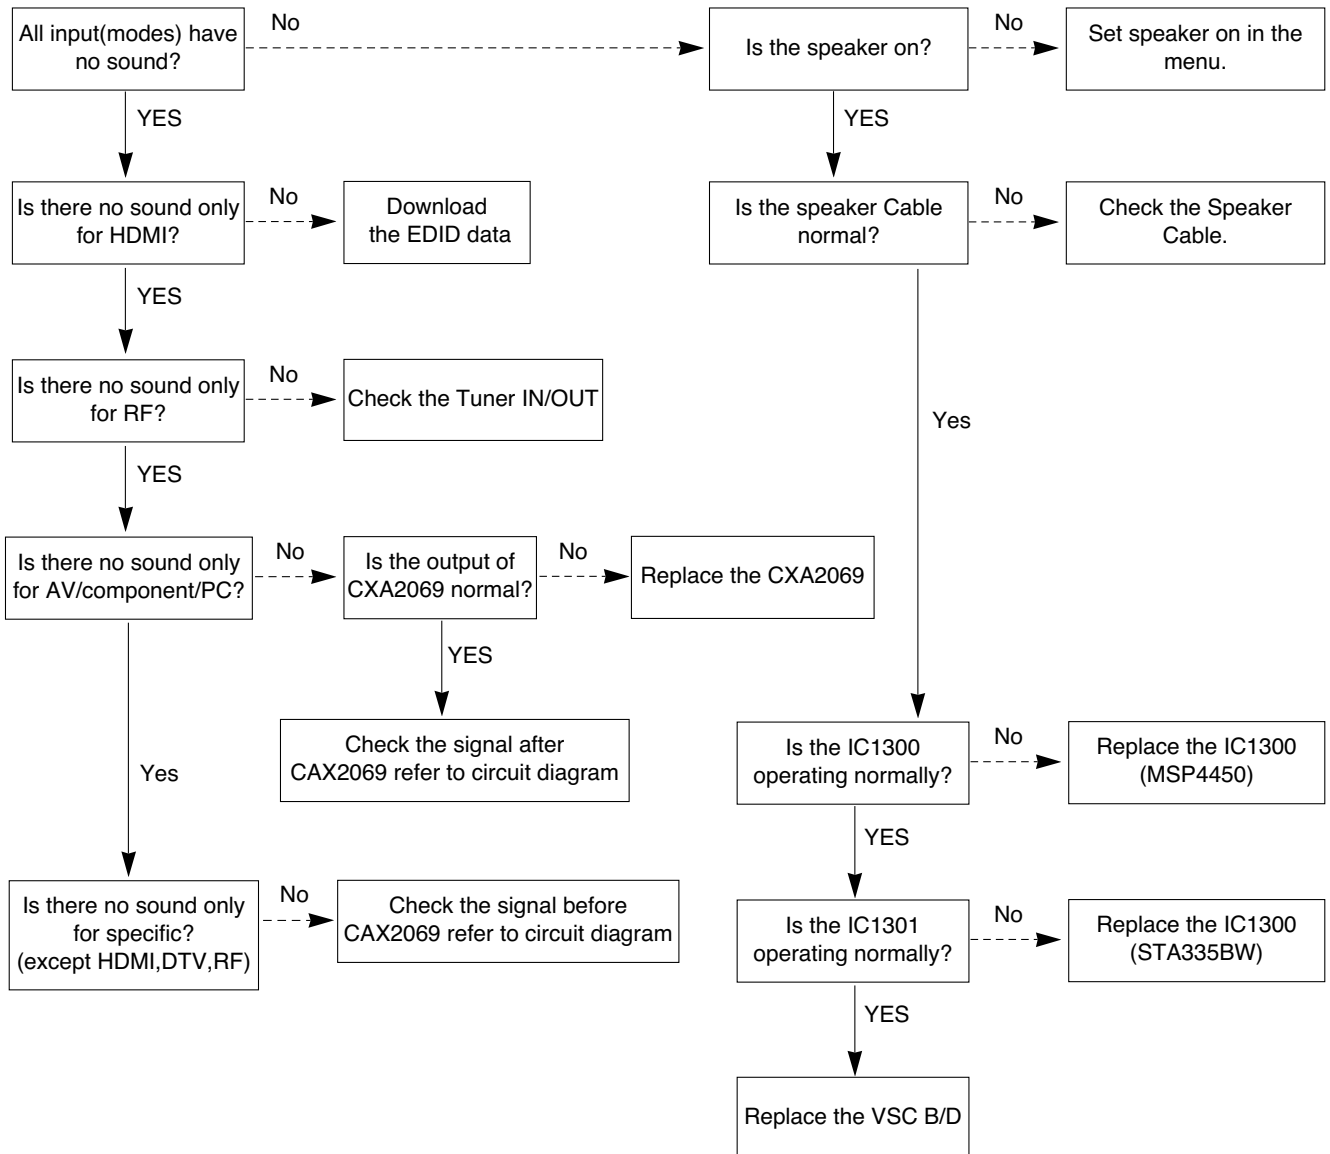

BLOCK DIAGRAM

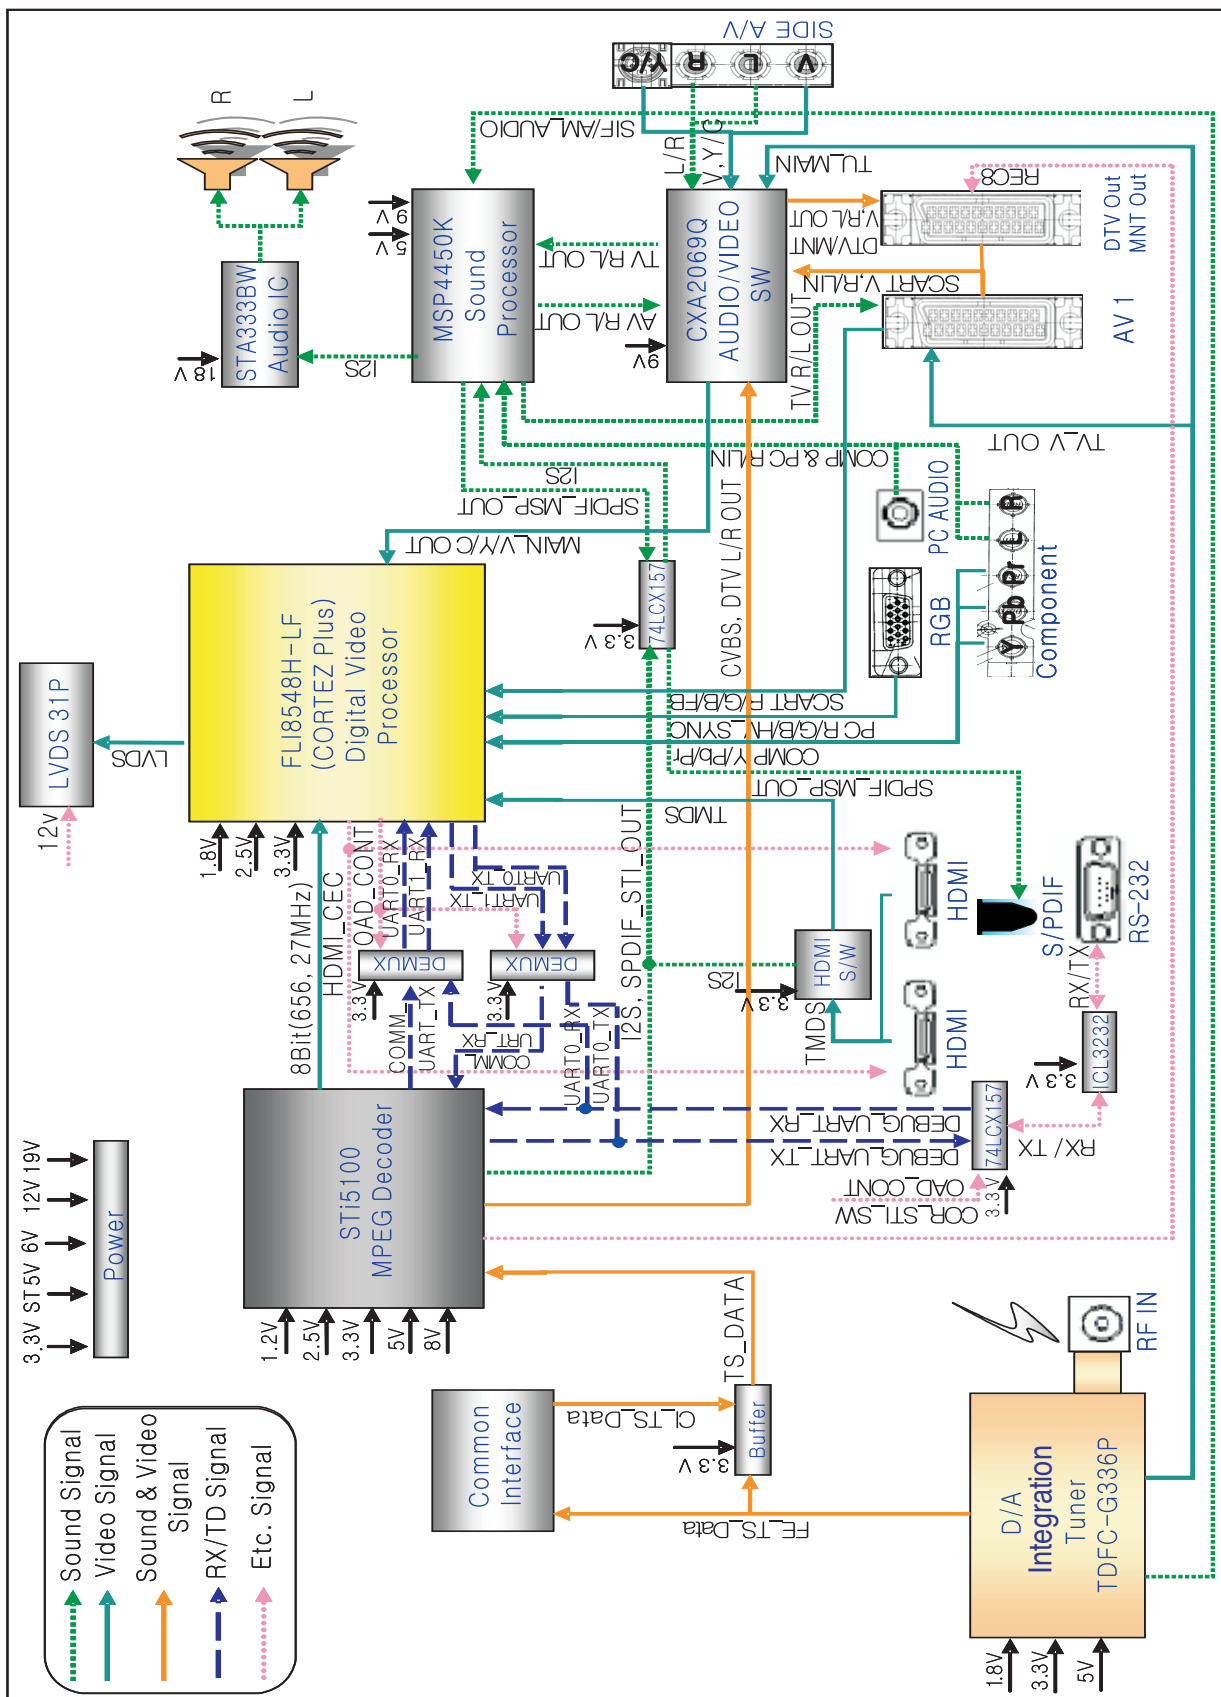

EXPLODED VIEW

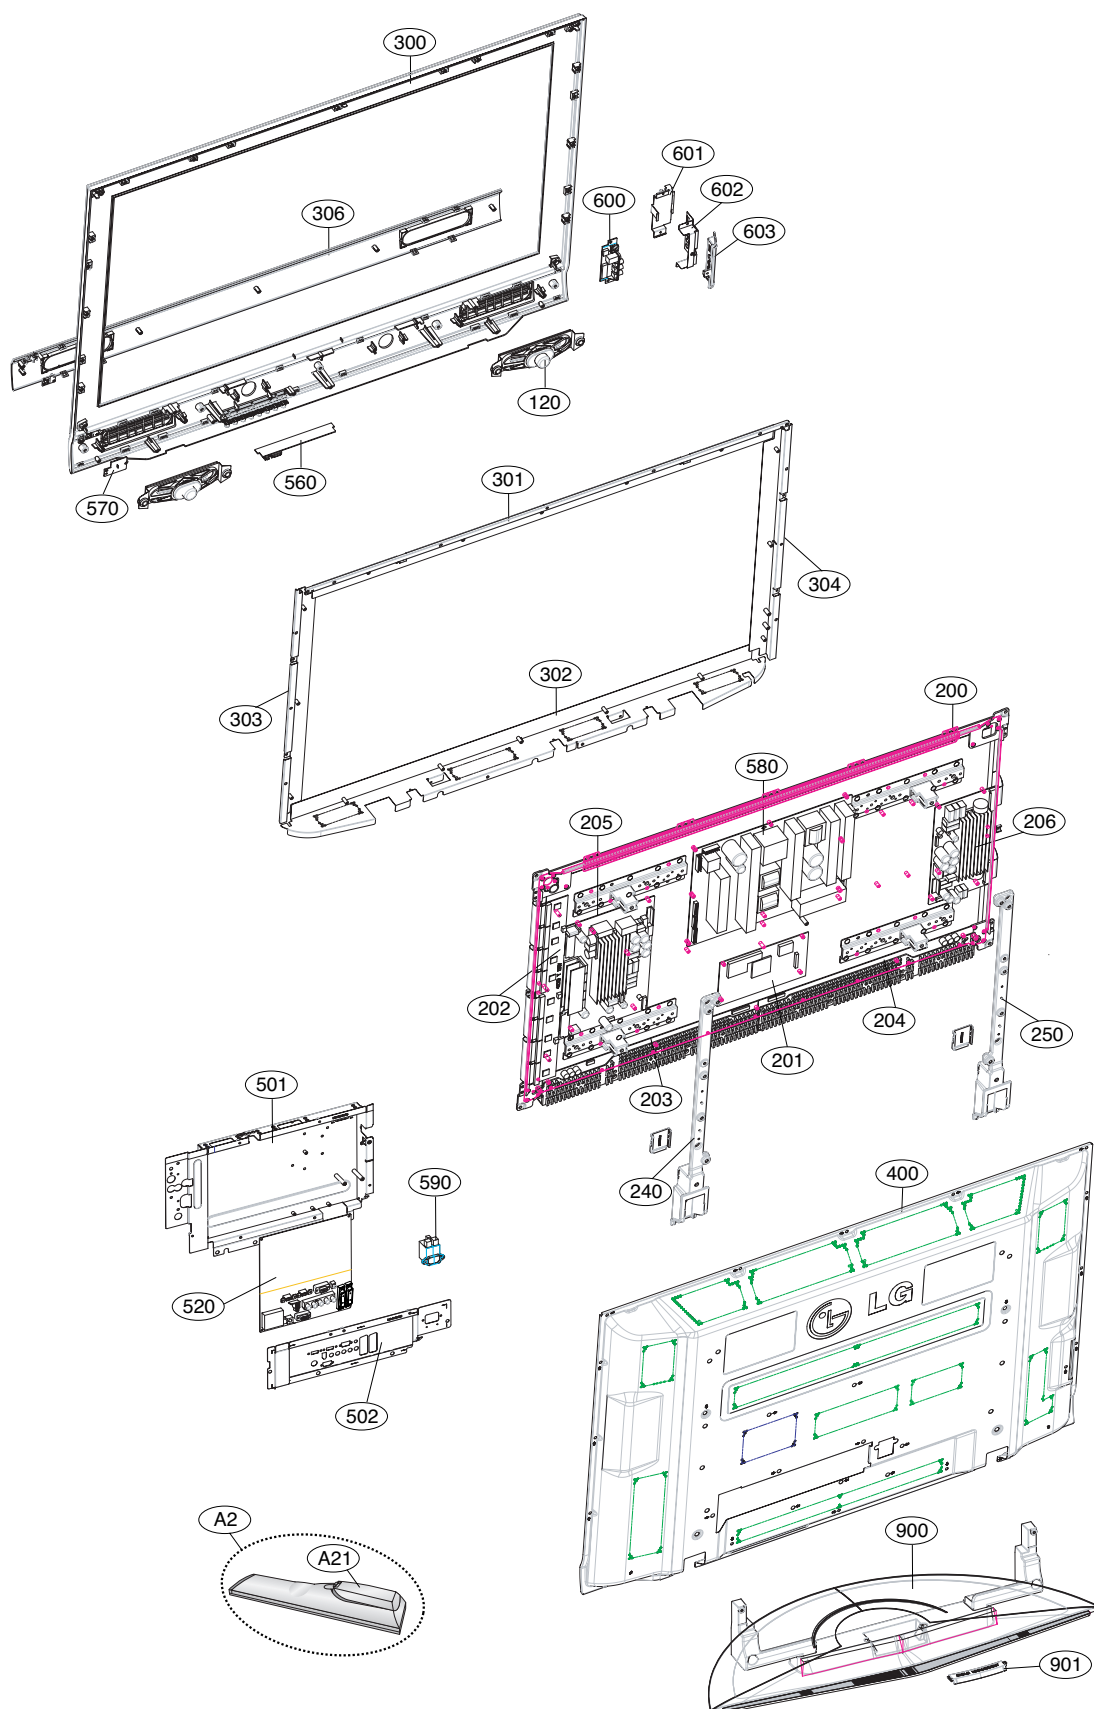

EXPLODED VIEW PARTS LIST

The components identified by mark $\triangle$ is critical for safety.
Replace only with part number specified.

No.	Part No.	Descriptions
120	EAB33775101	Speaker, Full Range EN1562C-6712 ND 10W 8OHM 82DB 100HZ 193.5 X 42 X 39.9 LUG KOREA TOPTONE
$\triangle$ 200	EAJ38199501	PDP, Module-XGA PDP42X40523.ASLGB XGA 42INCH 1024X768 16/9 PDP DIVISION
$\triangle$ 201	EBR36954101	Hand Insert PCB Assembly, CTRL ASS'Y HAND INSERT 42" X4A CTRL PDP DIVISION
$\triangle$ 202	EBR36939101	Hand Insert PCB Assembly, YDRV ASS'Y HAND INSERT 42" X4A AU Layer 4 PDP DIVISION
$\triangle$ 203	EBR36925801	Hand Insert PCB Assembly, XRLT ASS'Y HAND INSERT 42" X4A Layer 4 PDP DIVISION
$\triangle$ 204	EBR36939201	Hand Insert PCB Assembly, XRRT ASS'Y HAND INSERT 42" X4A PDP DIVISION
$\triangle$ 205	EBR36954501	Hand Insert PCB Assembly, YSUS ASS'Y HAND INSERT 42" X4A YSUS PDP DIVISION
$\triangle$ 206	EBR36921701	Hand Insert PCB Assembly, ZSUS ASS'Y HAND INSERT 42" X4A 2 Layer (OSP) PDP DIVISION
240	AJJ31584103	Supporter Assembly, 42PC5 SUPP.VETICAL R ASSY SKD
250	AJJ31584104	Supporter Assembly, 42PC5 SUPP.VETICAL L ASSY SKD
$\triangle$ 300	ABJ31583120	Cabinet Assembly, 42PC52-ZD . 42" LOCAL ALL BLACK
301	AJJ31583603	Supporter Assembly, 42PC5 SUPP.FILTER TOP MA LOCAL
302	AJJ31583703	Supporter Assembly, 42PC5 SUPP.FILTER BOTTOM MA LOCAL
303	AJJ31583803	Supporter Assembly, 42PC5 SUPP.FILTER SIDE R MA LOCAL
304	AJJ31583903	Supporter Assembly, 42PC5 SUPP.FILTER SIDE L MA LOCAL
306	ABA31767904	Bracket Assembly, GRILLE 42PC5 - MA LOCAL ALL BLACK
$\triangle$ 400	ACQ31583504	Cover Assembly, Rear 42" LGEMA PHANTOM
501	AGU31681116	Plate Assembly, ASSY PLATE TUNER BOT SMALL, 42PC5D-ZB ,MA LOCAL
502	AGU31680922	Plate Assembly, ASSY 42PC5D-ZB(WITH SLOT CARD, MA LOCAL)
520	EBR33721722	Hand Insert PCB Assembly, Main MAIN M.I PD73A 42PC5D-ZB KEKLLMP Main M.I PCB Assembly for MA_CKD
560	EBR33718501	Hand Insert PCB Assembly, Sub SUB M.I PD73A 42PC5D - 42PC5D CONTROL MANUAL(Hand Insert PCB)
570	EBR33721001	Hand Insert PCB Assembly, Sub SUB M.I PD73A 42PC5D - 42PC5D IR/LED
$\triangle$ 580	EAY32808901	SMPS, AC/DC YPSUJ014A 100VTO240V 400W 50 TO 60HZ UL/CSA/CE/TUV 42INCH XPOWER DISPLAY PSU LG
590	EAM35012706	Filter, AC Line IF2-N06DEWL2 5.3mH 250VAC 6A 0.33uF 1000pF YH396-03 450/130MM VDE/CSA/K CORE ADDTION
600	EBR33717101	Hand Insert PCB Assembly, Sub SUB M.I PD73A 42PC5D - 42PC5D side AV hand insert PCB Assy
601	MJH32554904	Supporter, PRESS SBHG 1 GUIDE EGI SUPPORTER SIDE, 42X4A MODULE
602	MGJ32369301	Plate, Shield PRESS SPTE 0.3 SHIELD SPTE 42PC5, SHIELD CASE SIDE AV
603	ABA31583301	Bracket Assembly, SIDE AV 42PC5 AB NON
$\triangle$ 900	AAN31626704	Base Assembly, ASSY 42PC5 - FIXED STAND WITH LOGO SKD
901	MCK32604801	Cover, MOLD ABS 42PC5 ABS CABLE MANAGEMENT
A2	MKJ39170804	Remote Controller, COMPLEX LD73A 26LC4 EUROPASS_DVB, Made in China, MKJ32022813
A21	3550V00590A	Cover, MOLD ABS 50PC3DD-UE.AUSRSHR ABS -

REPLACEMENT PARTS LIST

DATE: 2007. 09. 01.

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
CAPACITORS					
C1	0CK104DK56A	0805B104K500CT 100nF 10% 50V X7R	C1135	0CK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 16V Y5V
C100	0CC101CK41A	C1608C0G1H101JT 100pF 5% 50V C0G	C1135	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C100	0CC470CK41A	C1608C0G1H470JT 47pF 5% 50V C0G -	C1136	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C100	0CH5101K416	C2012C0G1H101JT 100pF 5% 50V C0G	C114	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1003	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C115	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1004	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C116	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1005	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C117	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1006	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C118	0CE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16V 16MA
C1007	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C119	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1008	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C120	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1009	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1205	0CK393CK56A	0603B393K500CT 39nF 10% 50V X7R -
C101	0CE4763F618	ESF476M016T1A5E05G 47uF 20% 16V 6	C1206	0CK102CK56A	0603B102K500CT 1nF 10% 50V X7R -5
C101	0CC101CK41A	C1608C0G1H101JT 100pF 5% 50V C0G	C1207	0CK393CK56A	0603B393K500CT 39nF 10% 50V X7R -
C101	0CK103BH56A	C1005X7R1E103KT- 10nF 10% 25V X7R	C1208	0CK102CK56A	0603B102K500CT 1nF 10% 50V X7R -5
C1010	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C121	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C102	0CE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16V 16MA	C1217	0CE106WH6DC	MVK5.0TP25VC10M 10uF 20% 25V 25MA
C102	0CE4763F618	ESF476M016T1A5E05G 47uF 20% 16V 6	C122	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C103	0CE4763F618	ESF476M016T1A5E05G 47uF 20% 16V 6	C1225	0CE106WH6DC	MVK5.0TP25VC10M 10uF 20% 25V 25MA
C103	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C123	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C104	0CK105CD56A	C1608X7R1A105KT 1uF 10% 10V X7R -	C1232	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11
C104	0CH5330K416	C2012C0G1H330JT 33pF 5% 50V C0G -	C1234	0CK102CK56A	0603B102K500CT 1nF 10% 50V X7R -5
C105	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1235	0CK102CK56A	0603B102K500CT 1nF 10% 50V X7R -5
C106	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1236	0CE106WH6DC	MVK5.0TP25VC10M 10uF 20% 25V 25MA
C1068	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	C1237	0CE106WH6DC	MVK5.0TP25VC10M 10uF 20% 25V 25MA
C107	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1239	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C108	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C124	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C109	0CK105CD56A	C1608X7R1A105KT 1uF 10% 10V X7R -	C1244	0CK393CK56A	0603B393K500CT 39nF 10% 50V X7R -
C110	0CE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16V 16MA	C1246	0CK393CK56A	0603B393K500CT 39nF 10% 50V X7R -
C1100	0CC050CK11A	C1608C0G1H050DT 5pF 0.5PF 50V C0G	C1247	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11
C1100	0CC100CK41A	C1608C0G1H100JT 10pF 5% 50V C0G -	C1248	0CC050CK11A	C1608C0G1H050DT 5pF 0.5PF 50V C0G
C1101	0CC050CK11A	C1608C0G1H050DT 5pF 0.5PF 50V C0G	C1249	0CC050CK11A	C1608C0G1H050DT 5pF 0.5PF 50V C0G
C1101	0CC100CK41A	C1608C0G1H100JT 10pF 5% 50V C0G -	C125	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1104	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C1250	0CC050CK11A	C1608C0G1H050DT 5pF 0.5PF 50V C0G
C1105	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C1251	0CC050CK11A	C1608C0G1H050DT 5pF 0.5PF 50V C0G
C1106	0CC120CK41A	C1608C0G1H120JT 12pF 5% 50V C0G -	C1252	0CC050CK11A	C1608C0G1H050DT 5pF 0.5PF 50V C0G
C1108	0CC120CK41A	C1608C0G1H120JT 12pF 5% 50V C0G -	C1253	0CC050CK11A	C1608C0G1H050DT 5pF 0.5PF 50V C0G
C111	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1254	0CC050CK11A	C1608C0G1H050DT 5pF 0.5PF 50V C0G
C1116	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1255	0CC050CK11A	C1608C0G1H050DT 5pF 0.5PF 50V C0G
C1119	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C126	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C112	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C127	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1120	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C128	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1121	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C129	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1123	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C130	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1125	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1300	0CK105DH56A	C2012X7R105KFT 1uF 10% 25V X7R -5
C1128	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1301	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C113	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1302	0CE108EH618	KMG5.0TP25VB1000M 1000uF 20% 25V
C1132	0CC681CK41A	C1608C0G1H681JT 680pF 5% 50V C0G	C1303	0CK105DH56A	C2012X7R105KFT 1uF 10% 25V X7R -5
C1133	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R	C1304	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C1134	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R	C1305	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
			C1306	0CK222CK56A	0603B222K500CT 2.2nF 10% 50V X7R

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
C1307	0CK682CK51A	C1608Y5P1H682KT 6.8nF 10% 50V Y5P	C1366	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C1308	0CK682CK51A	C1608Y5P1H682KT 6.8nF 10% 50V Y5P	C1367	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C1309	0CE475WK6DC	MVK5.0TP50VC4.7M 4.7uF 20% 50V 19	C1368	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C131	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1369	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C1310	0CE475WK6DC	MVK5.0TP50VC4.7M 4.7uF 20% 50V 19	C137	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1311	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1370	0CK474EK66A	C3216X7R1H474MT 470nF 20% 50V X7R
C1312	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C1371	0CK474EK66A	C3216X7R1H474MT 470nF 20% 50V X7R
C1313	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30MA	C1373	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C1314	0CC030CK01A	0603N3R0C500LT 3pF 0.25PF 50V C0G	C138	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1315	0CC030CK01A	0603N3R0C500LT 3pF 0.25PF 50V C0G	C139	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1316	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C140	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1317	0CC560CK41A	C1608C0G1H560JT 56pF 5% 50V C0G -	C1400	0CE475WK6DC	MVK5.0TP50VC4.7M 4.7uF 20% 50V 19
C1318	0CC560CK41A	C1608C0G1H560JT 56pF 5% 50V C0G -	C1401	0CE475WK6DC	MVK5.0TP50VC4.7M 4.7uF 20% 50V 19
C1319	0CE335WK6D8	MVK4.0TP50VC3.3M 3.3uF 20% 50V 14	C1402	0CK682CK51A	C1608Y5P1H682KT 6.8nF 10% 50V Y5P
C132	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1403	0CK682CK51A	C1608Y5P1H682KT 6.8nF 10% 50V Y5P
C1320	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25	C1404	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C1321	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25	C1407	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30MA
C1322	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C1408	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11
C1325	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30MA	C1409	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1326	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25	C141	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1327	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1410	0CE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16V 80MA
C1329	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25	C1411	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C133	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1412	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1330	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C1413	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1332	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25	C1418	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25
C1333	0CC101CK41A	C1608C0G1H101JT 100pF 5% 50V C0G	C1419	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25
C1335	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25	C142	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1338	0CK471CK56A	C1608X7R1H471KT 470pF 10% 50V X7R	C1420	0CK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 16V Y5V
C134	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1421	0CC820CK41A	C1608C0G1H820JT 82pF 5% 50V C0G -
C1340	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C1422	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25
C1341	0CE335WK6D8	MVK4.0TP50VC3.3M 3.3uF 20% 50V 14	C1423	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25
C1342	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1426	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25
C1343	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	C1428	0CK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 16V Y5V
C1344	0CE106WH6DC	MVK5.0TP25VC10M 10uF 20% 25V 25MA	C1429	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25
C1345	0CE106WH6DC	MVK5.0TP25VC10M 10uF 20% 25V 25MA	C143	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1346	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25	C1439	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25
C1347	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25	C144	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C135	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1440	0CK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 16V Y5V
C1350	0CE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16V 16MA	C1441	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25
C1351	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1442	0CK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 16V Y5V
C1352	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1444	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25
C1353	0CK222CK56A	0603B222K500CT 2.2nF 10% 50V X7R	C1445	0CK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 16V Y5V
C1354	0CC102CK41A	C1608C0G1H102JT 1nF 5% 50V C0G -5	C1447	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25
C1355	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1448	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25
C1356	0CC101CK41A	C1608C0G1H101JT 100pF 5% 50V C0G	C1449	0CK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 16V Y5V
C1357	0CC221CK41A	C1608C0G1H221JT 220pF 5% 50V C0G	C145	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1358	0CH2122K516	0805B122K500CT 1.2nF 10% 50V Y5P	C1450	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1359	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C1451	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C136	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C1452	0CC150CK41A	C1608C0G1H150JT 15pF 5% 50V C0G -
C1360	0CC331CK41A	C1608C0G1H331JT 330pF 5% 50V C0G	C1453	0CC150CK41A	C1608C0G1H150JT 15pF 5% 50V C0G -
C1361	0CC331CK41A	C1608C0G1H331JT 330pF 5% 50V C0G	C146	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1362	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C147	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1363	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C148	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1364	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C149	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C1365	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C150	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
C151	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C196	0CC100CK41A	C1608C0G1H100JT 10pF 5% 50V C0G -
C152	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C197	0CK475CC94A	C1608Y5V0J475ZT 4.7uF -20TO+80% 6
C153	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C198	0CK475CC94A	C1608Y5V0J475ZT 4.7uF -20TO+80% 6
C154	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C199	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C155	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C200	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C156	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C201	0CC470CK41A	C1608C0G1H470JT 47pF 5% 50V C0G -
C157	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C202	0CC101CK41A	C1608C0G1H101JT 100pF 5% 50V C0G
C158	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C203	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C159	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C204	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C160	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C206	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C161	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C207	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C162	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C209	EAE32755801	CL31A106K5HNNNE 10uF 10% 16V X5R
C163	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C212	EAE32755801	CL31A106K5HNNNE 10uF 10% 16V X5R
C164	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C213	EAE32755801	CL31A106K5HNNNE 10uF 10% 16V X5R
C165	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C216	EAE32755801	CL31A106K5HNNNE 10uF 10% 16V X5R
C166	EAE32755801	CL31A106K5HNNNE 10uF 10% 16V X5R	C218	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C167	EAE32755801	CL31A106K5HNNNE 10uF 10% 16V X5R	C219	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C168	EAE32755801	CL31A106K5HNNNE 10uF 10% 16V X5R	C220	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C169	0CC100CK41A	C1608C0G1H100JT 10pF 5% 50V C0G -	C221	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C170	0CC220CK41A	C1608C0G1H220JT 22pF 5% 50V C0G -	C222	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C1700	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C224	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C1701	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R	C226	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11
C1702	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C227	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11
C1703	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C228	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C1705	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C229	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C1706	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C230	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C1707	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C231	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C1708	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30MA	C232	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C1709	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C233	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C171	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C234	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C1710	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C235	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C172	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C236	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C173	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C237	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C174	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C238	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C175	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C239	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C176	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C240	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C177	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C241	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C178	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C242	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C179	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C243	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C180	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C301	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C181	0CE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16V 16MA	C302	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C182	0CK105CD56A	C1608X7R1A105KT 1uF 10% 10V X7R -	C303	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C183	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C306	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C184	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C307	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C185	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C308	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C186	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C309	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C187	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C310	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C188	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C311	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C189	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C312	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C190	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C313	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C191	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C314	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C192	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C409	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C193	0CK822CK56A	C1608X7R1H822KT 8.2nF 10% 50V X7R	C410	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C194	0CK822CK56A	C1608X7R1H822KT 8.2nF 10% 50V X7R	C411	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C195	0CC220CK41A	C1608C0G1H220JT 22pF 5% 50V C0G -	C412	0CE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16V 16MA

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
C413	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C624	0CC470CK41A	C1608C0G1H470JT 47pF 5% 50V C0G -
C414	0CE106WFKDC	MVK4.0TP16VC10M 10uF 20% 16V 16MA	C625	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C415	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C626	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C429	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C627	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C430	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C630	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11
C515	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	C633	0CK475CC94A	C1608Y5V0J475ZT 4.7uF -20TO+80% 6
C516	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C635	0CK472CK56A	0603B472K500CT 4.7nF 10% 50V X7R
C517	0CE227WF6DC	MVK8.0TP16VC220M 220uF 20% 16V 80	C636	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C518	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C637	0CK472CK56A	0603B472K500CT 4.7nF 10% 50V X7R
C519	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	C638	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11
C520	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C639	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11
C521	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C640	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11
C522	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	C641	0CC470CK41A	C1608C0G1H470JT 47pF 5% 50V C0G -
C523	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	C642	0CC470CK41A	C1608C0G1H470JT 47pF 5% 50V C0G -
C524	0CE477WF6DC	MVK10TP16VC470M 470uF 20% 16V 80M	C643	0CK475DD56A	C2012X7R1A475KT 4.7uF 10% 10V X7R
C525	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C700	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C526	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C701	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30MA
C527	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	C702	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C528	0CE227WF6DC	MVK8.0TP16VC220M 220uF 20% 16V 80	C703	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C529	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C704	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C530	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C705	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30MA
C531	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C706	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C532	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C707	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C533	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	C708	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C534	0CE227WF6DC	MVK8.0TP16VC220M 220uF 20% 16V 80	C709	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C535	0CK105CD56A	C1608X7R1A105KT 1uF 10% 10V X7R -	C710	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C537	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C711	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C539	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C712	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C540	0CK105CD56A	C1608X7R1A105KT 1uF 10% 10V X7R -	C713	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C541	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	C714	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C542	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C715	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C543	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	C716	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C544	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C717	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C548	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	C718	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C549	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	C721	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C550	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C722	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C551	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C723	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30MA
C553	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C724	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C554	0CK105CD56A	C1608X7R1A105KT 1uF 10% 10V X7R -	C725	0CC200CK41A	C1608C0G1H200JT 20pF 5% 50V C0G -
C555	0CK105CD56A	C1608X7R1A105KT 1uF 10% 10V X7R -	C726	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C601	0CC101CK41A	C1608C0G1H101JT 100pF 5% 50V C0G	C727	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30MA
C602	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C728	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C603	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C729	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C604	0CC100CK41A	C1608C0G1H100JT 10pF 5% 50V C0G -	C730	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C605	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C732	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C606	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C733	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C608	0CC101CK41A	C1608C0G1H101JT 100pF 5% 50V C0G	C734	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C609	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R	C736	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30MA
C610	0CC271CK41A	C1608C0G1H271JT 270pF 5% 50V C0G	C737	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C611	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	C738	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C612	0CE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16V 80MA	C739	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C613	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	C740	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30MA
C615	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C741	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C616	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C742	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C623	0CC470CK41A	C1608C0G1H470JT 47pF 5% 50V C0G -	C743	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30MA

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
C744	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C800	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C745	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C801	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30MA
C746	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C802	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C747	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C803	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30MA
C749	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R	C803	0CK106EF56A	C3216X7R1C106KT 10uF 10% 16V X7R
C750	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C806	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C751	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C807	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C752	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C810	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C753	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C812	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C754	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C813	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C755	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C815	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C756	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C817	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C757	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C818	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C758	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30MA	C822	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30MA
C759	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C822	0CK106EF56A	C3216X7R1C106KT 10uF 10% 16V X7R
C760	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C824	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C761	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C826	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C762	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C828	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C763	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C830	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C764	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C831	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C765	0CE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16V 80MA	C834	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C766	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C836	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C767	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C840	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C768	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C841	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C769	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C844	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C770	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C846	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C771	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C847	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C772	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C850	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C773	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C851	0CK225DFK4A	C2012Y5V1C225MT 2.2uF 20% 16V Y5V
C774	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R	C852	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11
C775	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C853	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11
C776	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C854	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C777	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C855	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C778	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C856	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C779	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C857	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C780	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C859	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C781	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C860	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C782	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C861	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C783	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C862	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C784	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C863	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C785	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C864	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C786	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C865	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C787	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C866	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C788	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C867	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C789	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C868	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C790	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C869	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C791	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R	C870	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C792	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C875	0CK104BF56A	C1005X7R104KET 100nF 10% 16V X7R
C793	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30MA	C900	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R
C794	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	C901	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11
C795	0CC220CK41A	C1608C0G1H220JT 22pF 5% 50V C0G -	C903	0CE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16V 80MA
C796	0CE226WF6DC	MVK5.0TP16VC22M 22uF 20% 16V 30MA	C905	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -
C797	0CE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16V 80MA	C907	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11
C798	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C908	0CK104CF56A	0603B104K160CT 100nF 10% 16V X7R
C799	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	C909	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
C910	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1101	EAH33946001	CDS3C05GTA 5.6V 6.4V 19V 1.9A 1W
C911	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	ZD1104	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C912	0CE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16V 80MA	ZD1105	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C914	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1106	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C915	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	ZD1107	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C917	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1108	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C924	0CE107WH6DC	MVK8.0TP25VC100M 100uF 20% 25V 18	ZD1109	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C925	0CE227WF6DC	MVK8.0TP16VC220M 220uF 20% 16V 80	ZD1110	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C928	0CE227WF6DC	MVK8.0TP16VC220M 220uF 20% 16V 80	ZD1111	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C929	0CE227WF6DC	MVK8.0TP16VC220M 220uF 20% 16V 80	ZD1112	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C931	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1113	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C932	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1114	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C933	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1203	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C934	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1211	EAH33946001	CDS3C05GTA 5.6V 6.4V 19V 1.9A 1W
C935	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1212	EAH33946001	CDS3C05GTA 5.6V 6.4V 19V 1.9A 1W
C937	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	ZD1218	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C954	0CE477WF6DC	MVK10TP16VC470M 470uF 20% 16V 80M	ZD1219	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C955	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25	ZD1220	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C955	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25	ZD1221	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C956	0CK474CH94A	0603F474Z250CT 470nF -20TO+80% 25	ZD1222	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C957	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	ZD1223	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C958	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	ZD1224	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C959	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	ZD1226	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S
C960	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ZD1300	0DZRM00248A	RLZ8.2B 8.2V 7.78TO8.19V 8OHM 500
C961	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	ICs		
C962	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	IC100	0IPRP00703C	STI5100GUC(CUT3.3) 3.3V 5u 27M PB
C969	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	IC1002	0IMMRAL014D	AT24C02BN-SH-T 2KBIT 256x8BIT 1.8
C970	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	IC1003	0IMMRAL014D	AT24C02BN-SH-T 2KBIT 256x8BIT 1.8
C971	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	IC1004	EAN33595101	STHDMI002A 3.135TO3.465 9NSEC 9NS
C972	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	IC102	0ISTLPH026A	74LVC14APW 1.2TO3.6V 0.01mA SCHMI
C973	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	IC103	0IMP242560A	24LC256T-I/SM 256KBIT 256KX8BIT 2
C974	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	IC1100	0IMMRAL014D	AT24C02BN-SH-T 2KBIT 256x8BIT 1.8
C975	0CE107WF6DC	MVK6.3TP16VC100M 100uF 20% 16V 11	IC1101	0IPH741400E	74HC14D 2TO6V 0.002mA SCHMITT TRI
C977	0CK104CK56A	0603B104K500CT 100nF 10% 50V X7R	IC1102	0IPRP00009A	ICL3232CBNZ 3VTO5.5V - SSOP R/TP
C980	0CK103CK56A	0603B103K500CT 10nF 10% 50V X7R -	IC1104	0ITO741570C	TC74LCX157FT 2TO3.6V 0.01mA MULTI
C981	0CE476WF6DC	MVK6.3TP16VC47M 47uF 20% 16V 80MA	IC1105	0IMCRFA018A	NC7SB3157P6X_NL 1.65TO5.5V 0.001m
ZD1102	0CC100CK41A	C1608C0G1H100JT 10pF 5% 50V C0G -	IC1106	0IMCRFA018A	NC7SB3157P6X_NL 1.65TO5.5V 0.001m
ZD1103	0CC100CK41A	C1608C0G1H100JT 10pF 5% 50V C0G -	IC1300	0IMCRMN028C	MSP4450K-QA-D6 7.6TO8.7V_4.75TO5.
DIODEs			IC1301	0ILNR00261C	STA335BW 5TO26V 0 10% 20W 0W 80dB
D100	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S	IC1400	0ISO206900A	CXA2069Q 8.5TO9.5V - - 1.3W QFP T
D1000	0DD184009AA	KDS184 KDS184 TP KEC - 85V - - -	IC200	0IPMG78391A	SC2595STR 2.3TO5V 0 0W SOIC R/TP
D1001	0DD184009AA	KDS184 KDS184 TP KEC - 85V - - -	IC202	0IMMRIH038B	HYB25D(C)256160CE-5 256MBIT 4MX16
D101	EAH33946001	CDS3C05GTA 5.6V 6.4V 19V 1.9A 1W	IC300	0ISTLPH003B	74LVC541APW 1.2TO3.6V 0.01mA BUFF
D102	EAH33946001	CDS3C05GTA 5.6V 6.4V 19V 1.9A 1W	IC301	0IMCRFA013A	74LCX244MTC 2TO3.6V 0.01mA BUFFER
D103	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S	IC302	0ISTLPH003B	74LVC541APW 1.2TO3.6V 0.01mA BUFF
D104	EAH33945901	CDS3C30GTH 30V 50V 120V 1.9A 1W S	IC303	0IMCRFA013A	74LCX244MTC 2TO3.6V 0.01mA BUFFER
D900	0DS226009AA	KDS226 1.2V 85V 300MA 2A 4NSEC 15	IC304	0ISTLPH048A	74LVC245APW 1.2TO3.6V 0.01mA TRAN
D902	0DS226009AA	KDS226 1.2V 85V 300MA 2A 4NSEC 15	IC305	0ISTL00083A	74LCX373MTC 2.0V to 3.6V 10uA LAT
D903	0DS226009AA	KDS226 1.2V 85V 300MA 2A 4NSEC 15	IC306	0ISTL00083A	74LCX373MTC 2.0V to 3.6V 10uA LAT
D904	0DS226009AA	KDS226 1.2V 85V 300MA 2A 4NSEC 15	IC402	0ITO740800C	TC74LCX08FT 2TO3.6V 10uA AND GATE
D905	0DS226009AA	KDS226 1.2V 85V 300MA 2A 4NSEC 15	IC403	0IMCRPH015A	74LVC32AD 1.2TO3.6V 0.01mA OR GAT
D906	0DD100009AM	EU1ZV(1) 200V 2.5V 10UA 15A 400NS	IC404	0ISTLPH026A	74LVC14APW 1.2TO3.6V 0.01mA SCHMI
ZD1100	EAH33946001	CDS3C05GTA 5.6V 6.4V 19V 1.9A 1W	IC410	0ITO741570C	TC74LCX157FT 2TO3.6V 0.01mA MULTI

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
IC500	0IMCRSJ001A	SC1565IST-1.8 2.2TO5.5V 1.8V 0W S	L1401	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.
IC501	0IPMG00027A	SC156515M-1.8TR 2.2TO5.5V 1.8V 0W	L1403	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.
IC502	0IMCRSJ001B	SC1565IST-2.5TR 2.2TO5V 2.5V 0W S	L1412	6210TCE001E	HB-1M2012-800JT(H:1mm) 80OHM 2X1.
IC503	0IPMGKE030A	KIA78R05F 6TO12V 5V 8W DPAK R/TP	L1413	6210TCE001E	HB-1M2012-800JT(H:1mm) 80OHM 2X1.
IC504	0IPMGKE031A	KIA78R33F 4TO10V 3.3V 8W DPAK R/T	L400	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.
IC505	0IPMGKE031A	KIA78R33F 4TO10V 3.3V 8W DPAK R/T	L606	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.
IC506	0ISS455880A	KA4558D 12TO22V 6mV - 0W 400MW 76	L607	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.
IC507	0IPMGKE030A	KIA78R05F 6TO12V 5V 8W DPAK R/TP	L700	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.
IC600	0IPRP00602A	TPS2010ADR 2.7TO5.5V 8.6MSEC 3.4M	L701	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.
IC700	EAN33595901	FLI8548H-LF-BE 300MVTQ3.6V,300MVT	L703	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.
IC701	0IMP242560A	24LC256T-I/SM 256KBIT 256KX8BIT 2	L704	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.
IC702	EAN34099701	M2404HEPROM 4KBIT 512 x 8bit 2.5V	L705	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.
IC801	0IMMRIH038B	HYB25D(C)256160CE-5 256MBIT 4MX16	L706	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.
IC804	0IPMG78391A	SC2595STR 2.3TO5V 0 0W SOIC R/TP	L707	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.
IC900	0IPMGFA061A	FAN1587AD33X 4.8TO10.3V 3.3V 0W T	L900	6210TCE001X	HU-1H4532-121JT 120OHM 4.5X3.2X1.
IC901	0IPMGFA061A	FAN1587AD33X 4.8TO10.3V 3.3V 0W T	L907	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.
IC901	0IPMGFA061A	FAN1587AD33X 4.8TO10.3V 3.3V 0W T	L909	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.
IC902	0IPMG00107A	AZ1117H-2.5TR/E1 15V 2.5V 0W SOT2	L911	6210TCE001X	HU-1H4532-121JT 120OHM 4.5X3.2X1.
IC903	0IPMG00027A	SC156515M-1.8TR 2.2TO5.5V 1.8V 0W	L912	6210TCE001X	HU-1H4532-121JT 120OHM 4.5X3.2X1.
IC904	EAN32662801	KA7809ERTM 35V to 40V 9V 1W DPAK	L913	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.
FILTERS & INDUCTORS			L918	6210TCE001X	HU-1H4532-121JT 120OHM 4.5X3.2X1.
F1	6210VH0004A	6210VH0004A 100OHM 30MM 13MM 34MM	L919	6210TCE001X	HU-1H4532-121JT 120OHM 4.5X3.2X1.
L100	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.	L923	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.
L101	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.	L925	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.
L102	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.	L100	0LC2232101A	Inductor, FI-D3216-223KJT 22UH 10% - 25MA 1
L103	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.	L109	0LC1032101A	Inductor, FI-C3216-103KJT 10UH 10% - 50MA 0
L104	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.	L1209	0LCML00020G	Inductor, MLI-201209-3R3K 3.3UH 10% 0V 30MA
L105	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.	L1209	0LC0233002A	Inductor, FI-B2012-332KJT 3.3UH 10% 50V 50M
L106	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.	L1210	0LCML00020G	Inductor, MLI-201209-3R3K 3.3UH 10% 0V 30MA
L108	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.	L1210	0LC0233002A	Inductor, FI-B2012-332KJT 3.3UH 10% 50V 50M
L1101	6210TCE001L	HB-1T2012-102JT 1000OHM 2X1.25X1M	L1213	0LCML00020G	Inductor, MLI-201209-3R3K 3.3UH 10% 0V 30MA
L1102	6210TCE001L	HB-1T2012-102JT 1000OHM 2X1.25X1M	L1213	0LC0233002A	Inductor, FI-B2012-332KJT 3.3UH 10% 50V 50M
L1104	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.	L1214	0LCML00020G	Inductor, MLI-201209-3R3K 3.3UH 10% 0V 30MA
L1105	6210TCE001P	HB-1S2012-121JT(H:1mm) 120OHM 2X1	L1216	0LCML00020G	Inductor, MLI-201209-3R3K 3.3UH 10% 0V 30MA
L1106	6210TCE001P	HB-1S2012-121JT(H:1mm) 120OHM 2X1	L1216	0LC0233002A	Inductor, FI-B2012-332KJT 3.3UH 10% 50V 50M
L1107	6210TCE001P	HB-1S2012-121JT(H:1mm) 120OHM 2X1	L1217	0LCML00020G	Inductor, MLI-201209-3R3K 3.3UH 10% 0V 30MA
L1108	6210TCE001P	HB-1S2012-121JT(H:1mm) 120OHM 2X1	L1217	0LC0233002A	Inductor, FI-B2012-332KJT 3.3UH 10% 50V 50M
L1109	6210TCE001P	HB-1S2012-121JT(H:1mm) 120OHM 2X1	L1221	0LCML00020G	Inductor, MLI-201209-3R3K 3.3UH 10% 0V 30MA
L1206	6210TCE001Z	HH-1M2012-600JT 60OHM 2X1.25X1MM	L1222	0LCML00020G	Inductor, MLI-201209-3R3K 3.3UH 10% 0V 30MA
L1207	6210TCE001Z	HH-1M2012-600JT 60OHM 2X1.25X1MM	L1304	EAP32842806	Inductor, NR8040T220M 22UH 20% 250V 2.2A 0.
L1208	6210TCE001Z	HH-1M2012-600JT 60OHM 2X1.25X1MM	L1305	EAP32842806	Inductor, NR8040T220M 22UH 20% 250V 2.2A 0.
L1211	6210TCE001L	HB-1T2012-102JT 1000OHM 2X1.25X1M	L1306	EAP32842806	Inductor, NR8040T220M 22UH 20% 250V 2.2A 0.
L1212	6210TCE001L	HB-1T2012-102JT 1000OHM 2X1.25X1M	L1307	EAP32842806	Inductor, NR8040T220M 22UH 20% 250V 2.2A 0.
L1300	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.	L600	0LCTA00003A	Inductor, LEMC3225T6R8M 6.8UH 20% 50V 360MA
L1301	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.	L601	0LCTA00003A	Inductor, LEMC3225T6R8M 6.8UH 20% 50V 360MA
L1302	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.	L604	0LC0233002A	Inductor, FI-B2012-332KJT 3.3UH 10% 50V 50M
L1303	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.	L605	0LCTA00003A	Inductor, LEMC3225T6R8M 6.8UH 20% 50V 360MA
L1309	6210TCE001S	HU-1M2012-121 120OHM 2X1.25X1MM S	TRANSISTORS & FETs		
L1310	6210TCE001S	HU-1M2012-121 120OHM 2X1.25X1MM S	Q1001	0TR830009BA	FET, BSS83 N-CHANNEL MOSFET 10V 2 50MA
L1311	6210TCE001S	HU-1M2012-121 120OHM 2X1.25X1MM S	Q100	0TRIY80001A	2SC3052 NPN 6V 50V 50V 200MA 100N
L1312	6210TCE001S	HU-1M2012-121 120OHM 2X1.25X1MM S	Q101	0TRIY80001A	2SC3052 NPN 6V 50V 50V 200MA 100N
L1314	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.	Q1100	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M
L1315	6210TCE001G	HH-1M3216-501JT 500OHM 3.2X1.6X1.	Q1200	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
Q1201	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR203	0RJ0222C687	RCA86TRJ22R0 22OHM 5% 1/16W 4 SMD
Q1202	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR204	0RJ0222C687	RCA86TRJ22R0 22OHM 5% 1/16W 4 SMD
Q1203	0TR102009AM	KRA102S PNP -30V 0V -50V -0.1A -0	AR205	0RJ0222C687	RCA86TRJ22R0 22OHM 5% 1/16W 4 SMD
Q1204	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR206	0RJ0222C687	RCA86TRJ22R0 22OHM 5% 1/16W 4 SMD
Q1300	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR303	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SMD
Q1301	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR304	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SMD
Q1302	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR305	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SMD
Q1303	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR306	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SMD
Q1304	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR307	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SMD
Q1305	0TR102009AM	KRA102S PNP -30V 0V -50V -0.1A -0	AR308	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SMD
Q1400	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR309	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SMD
Q1401	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR310	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SMD
Q1402	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR311	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SMD
Q1403	0TR150400BA	2SA1504S(ASY) PNP -5V -50V -50V -	AR312	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SMD
Q1404	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR313	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SMD
Q400	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR314	0RJ0332C687	RCA86TRJ33R0 33OHM 5% 1/16W 4 SMD
Q401	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR701	0RZZH033273	MNR04M0ABJ330 33OHM 5% 1/16W 4 SM
Q402	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR702	0RZZH033273	MNR04M0ABJ330 33OHM 5% 1/16W 4 SM
Q500	0TR102009AM	KRA102S PNP -30V 0V -50V -0.1A -0	AR704	EBC32260501	MNR04M0APJ000 0OHM 5% 1/16W 4 SMD
Q502	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR706	0RZZH033273	MNR04M0ABJ330 33OHM 5% 1/16W 4 SM
Q503	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR708	0RZZH033273	MNR04M0ABJ330 33OHM 5% 1/16W 4 SM
Q504	0TR150400BA	2SA1504S(ASY) PNP -5V -50V -50V -	AR711	EBC32260501	MNR04M0APJ000 0OHM 5% 1/16W 4 SMD
Q602	0TR150400BA	2SA1504S(ASY) PNP -5V -50V -50V -	AR800	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 SM
Q603	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR805	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 SM
Q604	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR806	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 SM
Q606	0TR150400BA	2SA1504S(ASY) PNP -5V -50V -50V -	AR807	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 SM
Q607	0TR150400BA	2SA1504S(ASY) PNP -5V -50V -50V -	AR808	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 SM
Q608	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	AR809	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 SM
Q609	0TR150400BA	2SA1504S(ASY) PNP -5V -50V -50V -	AR810	EBC32260405	MNR04M0APJ680 68OHM 5% 1/16W 4 SM
Q900	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	L1205	0RJ0000G676	MCR18EZJH000 0OHM 5% 1/4W 3216 R/T
Q901	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	L1215	0RJ0000G676	MCR18EZJH000 0OHM 5% 1/4W 3216 R/T
Q902	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	L1218	0RH0000D622	MCR10EZJH000 0OHM 5% 1/8W 2012 R/
Q903	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	L1219	0RH0000D622	MCR10EZJH000 0OHM 5% 1/8W 2012 R/
Q904	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	L1220	0RH0000D622	MCR10EZJH000 0OHM 5% 1/8W 2012 R/
Q905	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	R100	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
Q906	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	R100	0RH0000D622	MCR10EZJH000 0OHM 5% 1/8W 2012 R/
Q907	0TR387500AA	2SC3875S(ALY) NPN 5V 60V 50V 150M	R101	0RD9101Q609	RDM94T1J9K10 9.1KOHM 5% 1/4W 3.2X
RESISTORS			R101	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
AR100	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SMD	R101	0RH0000D622	MCR10EZJH000 0OHM 5% 1/8W 2012 R/
AR101	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SMD	R1016	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
AR102	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SMD	R1017	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
AR103	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SMD	R1018	0RJ6800D677	MCR03EZPJ681 680OHM 5% 1/10W 1608
AR104	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SMD	R1019	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
AR105	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SMD	R102	0RD3301Q609	RDM94T1J3K30 3.3KOHM 5% 1/4W 3.2X
AR106	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SMD	R102	0RJ4700D677	MCR03EZPJ471 470OHM 5% 1/10W 1608
AR107	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SMD	R102	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
AR108	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SMD	R102	0RH1302D622	MCR10EZJH133 13KOHM 5% 1/8W 2012
AR109	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SMD	R1020	0RJ6800D677	MCR03EZPJ681 680OHM 5% 1/10W 1608
AR110	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SMD	R1021	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
AR111	0RJ0472C687	RCA86TRJ47R0 47OHM 5% 1/16W 4 SMD	R1022	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
AR200	0RJ0222C687	RCA86TRJ22R0 22OHM 5% 1/16W 4 SMD	R1023	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
AR201	0RJ0222C687	RCA86TRJ22R0 22OHM 5% 1/16W 4 SMD	R103	0RD1101Q609	RDM94T1J1K10 1.1KOHM 5% 1/4W 3.2X
AR202	0RJ0222C687	RCA86TRJ22R0 22OHM 5% 1/16W 4 SMD	R103	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 160
			R103	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
			R103	0RH0000D622	MCR10EZJH000 0OHM 5% 1/8W 2012 R/

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R1038	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1124	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R1039	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1125	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R104	0RD1100Q609	RDM94T1J110R 110OHM 5% 1/4W 3.2X1	R1126	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R104	0RJ4700D677	MCR03EZPJ471 470OHM 5% 1/10W 1608	R1127	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R104	0RH2002D622	MCR10EZHJ203 20KOHM 5% 1/8W 2012	R1128	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R1040	0RJ4702D677	MCR03EZPJ473 47KOHM 5% 1/10W 1608	R1129	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1041	0RJ4702D677	MCR03EZPJ473 47KOHM 5% 1/10W 1608	R113	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R1042	0RJ4702D677	MCR03EZPJ473 47KOHM 5% 1/10W 1608	R1130	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1043	0RJ4702D677	MCR03EZPJ473 47KOHM 5% 1/10W 1608	R1131	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1044	0RJ3301D677	MCR03EZPJ332 3.3KOHM 5% 1/10W 160	R1133	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1049	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1134	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R105	0RD9101Q609	RDM94T1J9K10 9.1KOHM 5% 1/4W 3.2X	R1135	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R105	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 160	R1136	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R105	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160	R1137	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R105	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R1139	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R1050	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R114	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R1052	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1140	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1053	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1141	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1056	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R1148	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1057	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R1150	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1058	0RJ1003D677	MCR03EZPJ104 100KOHM 5% 1/10W 160	R1151	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1059	0RJ2702D677	MCR03EZPJ273 27KOHM 5% 1/10W 1608	R1152	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R106	0RD3301Q609	RDM94T1J3K30 3.3KOHM 5% 1/4W 3.2X	R1157	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R106	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1158	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R106	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1161	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R106	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R1162	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R1060	0RJ3302D677	MCR03EZPJ333 33KOHM 5% 1/10W 1608	R1164	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1061	0RJ3302D677	MCR03EZPJ333 33KOHM 5% 1/10W 1608	R1165	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1065	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1166	0RJ3301D677	MCR03EZPJ332 3.3KOHM 5% 1/10W 160
R107	0RD1101Q609	RDM94T1J1K10 1.1KOHM 5% 1/4W 3.2X	R1167	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R107	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1167	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R108	0RD1100Q609	RDM94T1J110R 110OHM 5% 1/4W 3.2X1	R1168	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R108	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1168	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R109	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1169	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R110	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1169	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R110	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R1170	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R1101	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R1170	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R1102	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R1171	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1103	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R1185	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/
R1104	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1186	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/
R1107	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160	R119	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1108	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160	R120	0RJ1802D677	MCR03EZPJ183 18KOHM 5% 1/10W 1608
R111	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R1200	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608
R1113	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1201	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1114	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 160	R1202	0RJ0682D677	MCR03EZPJ680 68OHM 5% 1/10W 1608
R1115	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1203	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 160
R1116	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 160	R1204	0RJ4702D677	MCR03EZPJ473 47KOHM 5% 1/10W 1608
R1117	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1205	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 160
R1118	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R1207	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 160
R1119	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R1209	0RJ3002D677	MCR03EZPJ303 30KOHM 5% 1/10W 1608
R112	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R121	0RJ1202D677	MCR03EZPJ123 12KOHM 5% 1/10W 1608
R1120	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160	R1210	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 160
R1121	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R1211	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 160
R1122	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160	R1212	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 160
R1123	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1213	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 160

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R1214	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1287	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/
R1215	0RJ1001D477	MCR03EZPF102 1KOHM 1% 1/10W 1608	R1288	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/
R1216	0RJ1001D477	MCR03EZPF102 1KOHM 1% 1/10W 1608	R1289	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/
R1219	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R129	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R122	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1290	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/
R1220	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 160	R1291	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/
R1221	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1292	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/
R1222	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1293	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/
R1223	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 160	R1300	0RJ6202D677	MCR03EZPJ623 62KOHM 5% 1/10W 1608
R1224	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R1301	0RJ2402D677	MCR03EZPJ243 24KOHM 5% 1/10W 1608
R1225	0RJ1001D477	MCR03EZPF102 1KOHM 1% 1/10W 1608	R1302	0RJ4700D677	MCR03EZPJ471 470OHM 5% 1/10W 1608
R1226	0RJ1001D477	MCR03EZPF102 1KOHM 1% 1/10W 1608	R1303	0RJ1501D677	MCR03EZPJ152 1.5KOHM 5% 1/10W 160
R1227	0RJ2201D477	MCR03EZPF222 2.2KOHM 1% 1/10W 160	R1304	0RJ0432D677	MCR03EZPJ430 43OHM 5% 1/10W 1608
R1228	0RJ2201D477	MCR03EZPF222 2.2KOHM 1% 1/10W 160	R1305	0RJ0432D677	MCR03EZPJ430 43OHM 5% 1/10W 1608
R1229	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1307	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R123	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005	R1308	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1230	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1309	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1231	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R131	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1235	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 160	R1310	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1236	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 160	R1311	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1237	0RJ1001D477	MCR03EZPF102 1KOHM 1% 1/10W 1608	R1312	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1238	0RJ1001D477	MCR03EZPF102 1KOHM 1% 1/10W 1608	R1313	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1239	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1314	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R124	0RJ1200C678	MCR01MZPJ121 120OHM 5% 1/16W 1005	R1315	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R1240	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1316	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R1241	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1317	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R1242	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1318	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R1243	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1319	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1244	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1320	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1245	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1321	0RJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W 1608
R125	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1322	0RJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W 1608
R1259	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R1323	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 160
R126	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1324	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 160
R1260	0RJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W 1608	R1327	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1261	0RJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W 1608	R1328	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 1608
R1262	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1329	0RJ0101D677	MCR03EZPJ1R0 1OHM 5% 1/10W 1608 R
R1263	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R133	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1264	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1330	0RJ0101D677	MCR03EZPJ1R0 1OHM 5% 1/10W 1608 R
R1270	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R1331	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R1271	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R1332	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 1608
R1273	0RJ3301D677	MCR03EZPJ332 3.3KOHM 5% 1/10W 160	R1333	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 1608
R1274	0RJ0752D677	MCR03EZPJ750 75OHM 5% 1/10W 1608	R1334	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 1608
R1275	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1338	0RJ3901D677	MCR03EZPJ392 3.9KOHM 5% 1/10W 160
R1276	0RJ3002D677	MCR03EZPJ303 30KOHM 5% 1/10W 1608	R134	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1277	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 160	R1345	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R1278	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 160	R1346	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R1279	0RJ4702D677	MCR03EZPJ473 47KOHM 5% 1/10W 1608	R1347	0RJ0392D677	MCR03EZPJ390 39OHM 5% 1/10W 1608
R128	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1348	0RJ0392D677	MCR03EZPJ390 39OHM 5% 1/10W 1608
R1280	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R1349	0RJ0392D677	MCR03EZPJ390 39OHM 5% 1/10W 1608
R1281	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R1350	0RJ0392D677	MCR03EZPJ390 39OHM 5% 1/10W 1608
R1282	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 160	R1351	0RJ0122D677	MCR03EZPJ120 12OHM 5% 1/10W 1608
R1283	0RJ2203D677	MCR03EZPJ224 220KOHM 5% 1/10W 160	R1352	0RJ0122D677	MCR03EZPJ120 12OHM 5% 1/10W 1608
R1284	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R1353	0RJ0122D677	MCR03EZPJ120 12OHM 5% 1/10W 1608
R1285	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R1354	0RJ0122D677	MCR03EZPJ120 12OHM 5% 1/10W 1608
R1286	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R1355	0RJ0122D677	MCR03EZPJ120 12OHM 5% 1/10W 1608

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R1356	0RJ0122D677	MCR03EZPJ120 12OHM 5% 1/10W 1608	R1453	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 160
R1357	0RJ0122D677	MCR03EZPJ120 12OHM 5% 1/10W 1608	R1454	0RJ4703D677	MCR03EZPJ474 470KOHM 5% 1/10W 160
R1358	0RJ0122D677	MCR03EZPJ120 12OHM 5% 1/10W 1608	R1455	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R1359	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1456	0RJ1501D677	MCR03EZPJ152 1.5KOHM 5% 1/10W 160
R136	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005	R146	0RJ2701D677	MCR03EZPJ272 2.7KOHM 5% 1/10W 160
R1360	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1460	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005
R1361	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1461	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005
R1362	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1462	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005
R1363	0RD3301A609	RDM92T1J3K30 3.3KOHM 5% 1/2W 6.5X	R1463	0RJ1003D677	MCR03EZPJ104 100KOHM 5% 1/10W 160
R1364	0RJ7500D677	MCR03EZPJ751 750OHM 5% 1/10W 1608	R1465	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005
R1365	0RJ7500D677	MCR03EZPJ751 750OHM 5% 1/10W 1608	R1466	0RJ1201C678	MCR01MZPJ122 1.2KOHM 5% 1/16W 100
R1366	0RJ7500D677	MCR03EZPJ751 750OHM 5% 1/10W 1608	R1467	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R1367	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R1468	0RJ1201C678	MCR01MZPJ122 1.2KOHM 5% 1/16W 100
R1367	0RJ0000G676	MCR18EZHJ00 0OHM 5% 1/4W 3216 R/T	R1469	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/
R1368	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R147	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R137	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1470	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R138	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R1471	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R139	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1472	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R140	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1473	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1400	0RJ1501D677	MCR03EZPJ152 1.5KOHM 5% 1/10W 160	R1474	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1401	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160	R1475	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1402	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R1476	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1403	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R1477	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/
R1404	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R1478	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/
R1405	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R148	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1406	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R149	0RJ2701D677	MCR03EZPJ272 2.7KOHM 5% 1/10W 160
R1407	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R150	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1408	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R151	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005
R1409	0RJ1500D677	MCR03EZPJ151 150OHM 5% 1/10W 1608	R152	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1410	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R153	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005
R1411	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 1608	R154	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R1412	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 1608	R155	0RJ3303D677	MCR03EZPJ334 330KOHM 5% 1/10W 160
R1413	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R157	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1414	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R1607	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1415	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 1608	R1608	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1416	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 1608	R1609	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1417	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R162	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1418	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R163	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1419	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R164	0RJ1202D677	MCR03EZPJ123 12KOHM 5% 1/10W 1608
R142	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R165	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R1420	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R166	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1421	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R167	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R1422	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R168	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R1423	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R169	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R1429	0RJ1001C678	MCR01MZPJ102 1KOHM 5% 1/16W 1005	R170	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R143	0RJ2701D677	MCR03EZPJ272 2.7KOHM 5% 1/10W 160	R1703	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005
R1430	0RJ1201C678	MCR01MZPJ122 1.2KOHM 5% 1/16W 100	R1704	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005
R1431	0RJ1201C678	MCR01MZPJ122 1.2KOHM 5% 1/16W 100	R1706	0RJ0332C678	MCR01MZPJ330 330OHM 5% 1/16W 1005
R1433	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005	R1708	0RJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W 1608
R1436	0RJ1201C678	MCR01MZPJ122 1.2KOHM 5% 1/16W 100	R1709	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R1438	0RJ1201C678	MCR01MZPJ122 1.2KOHM 5% 1/16W 100	R1710	0RJ0222C678	MCR01MZPJ220 220OHM 5% 1/16W 1005
R1439	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005	R1713	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R144	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R1714	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005 R
R145	0RJ2701D677	MCR03EZPJ272 2.7KOHM 5% 1/10W 160	R1715	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1452	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R1716	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R1717	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R1777	0RJ2201C678	MCR01MZPJ222 2.2KOHM 5% 1/16W 100
R1718	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005	R1778	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R1719	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R178	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1720	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005	R1780	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R1721	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160	R1784	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1722	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R1787	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R1724	0RJ0332C678	MCR01MZPJ330 33OHM 5% 1/16W 1005	R1789	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005 R
R1726	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R179	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005
R1727	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R1792	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005 R
R1728	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R1794	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005 R
R1729	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R1796	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005 R
R173	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R180	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005
R1730	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R183	0RJ3300D677	MCR03EZPJ331 330OHM 5% 1/10W 1608
R1731	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R184	0RJ3300D677	MCR03EZPJ331 330OHM 5% 1/10W 1608
R1732	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R185	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005
R1733	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R186	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005
R1734	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R187	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005
R1735	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R188	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R1736	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R189	0RJ0000G676	MCR18EZHJ00 0OHM 5% 1/4W 3216 R/T
R1737	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R192	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R1738	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R193	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R1739	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R195	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R1740	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R196	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1741	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R197	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1742	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R200	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R1743	0RJ1000D477	MCR03EZPF101 100OHM 1% 1/10W 1608	R201	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1744	0RJ1500D477	MCR03EZPF151 150OHM 1% 1/10W 1608	R202	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1745	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R203	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1747	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R204	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1748	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R205	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1749	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R206	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R175	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R207	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1750	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R208	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1751	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R209	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1752	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160	R210	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1753	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160	R211	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1758	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R212	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1759	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R213	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1760	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R214	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1761	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R215	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1762	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R216	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1763	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R217	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1764	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R218	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1765	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R219	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1766	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R220	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1767	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R221	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1768	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R222	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1769	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R223	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R177	0RJ0472C678	MCR01MZPJ470 47OHM 5% 1/16W 1005	R224	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1770	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R225	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1771	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R226	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1773	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R227	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1774	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R228	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1775	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R229	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R1776	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160	R230	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608


LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R231	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R415	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R232	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R416	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R233	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R417	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R234	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R421	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R235	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R422	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R236	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R437	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R237	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R438	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R238	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R439	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R239	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R441	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R241	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R446	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R242	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R448	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R243	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R521	EBC32306001	MCR03EZPJ5FX9100 910OHM 1% 1/10W 1
R244	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R522	0RJ9311D477	MCR03EZPJ9311 9.31KOHM 1% 1/10W 1
R245	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R523	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608
R246	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R524	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R247	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R526	0RJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W 1608
R248	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R527	0RJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W 1608
R249	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R528	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R250	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R531	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R251	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R534	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R255	0RJ4701D477	MCR03EZPJ472 4.7KOHM 1% 1/10W 160	R536	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R256	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R537	0RJ1502D677	MCR03EZPJ153 15KOHM 5% 1/10W 1608
R257	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R539	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R258	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R540	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R259	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R541	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R260	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R543	0RJ1502D677	MCR03EZPJ153 15KOHM 5% 1/10W 1608
R301	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R544	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R302	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R547	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R303	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R548	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R304	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R550	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R305	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R554	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R306	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R555	0RJ2202D677	MCR03EZPJ223 22KOHM 5% 1/10W 1608
R309	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R556	0RJ4302D677	MCR03EZPJ433 43KOHM 5% 1/10W 1608
R310	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R557	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R311	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R558	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R312	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R600	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R313	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R603	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R314	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R604	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R315	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R605	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R316	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R606	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R319	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R607	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R320	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R608	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R321	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R609	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R322	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R610	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R323	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R611	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R324	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R612	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R325	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R613	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R326	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R624	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R327	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608	R625	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R329	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R626	0RJ0332D677	MCR03EZPJ330 33OHM 5% 1/10W 1608
R403	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R627	0RJ1003D677	MCR03EZPJ104 100KOHM 5% 1/10W 160
R407	0RJ1202D677	MCR03EZPJ123 12KOHM 5% 1/10W 1608	R629	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R412	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R632	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R413	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608	R633	0RJ0472D677	MCR03EZPJ470 47OHM 5% 1/10W 1608
R414	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R636	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160

LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R637	0RJ4700D677	MCR03EZPJ471 470OHM 5% 1/10W 1608	R713	0RJ0332C678	MCR01MZPJ330 330OHM 5% 1/16W 1005
R639	0RJ0822D677	MCR03EZPJ820 820OHM 5% 1/10W 1608	R717	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005
R640	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R718	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R642	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R720	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 1005
R644	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R722	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R646	0RJ2700D677	MCR03EZPJ271 270OHM 5% 1/10W 1608	R723	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R647	0RJ2200D677	MCR03EZPJ221 220OHM 5% 1/10W 1608	R724	0RJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W 1608
R648	0RJ1001D677	MCR03EZPJ102 1KOHM 5% 1/10W 1608	R725	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005
R649	0RJ1500D677	MCR03EZPJ151 150OHM 5% 1/10W 1608	R727	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005
R650	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	R728	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R651	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R729	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R652	0RJ2001D677	MCR03EZPJ202 2KOHM 5% 1/10W 1608	R733	0RJ0562D677	MCR03EZPJ560 56OHM 5% 1/10W 1608
R653	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R734	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005
R654	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R735	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R655	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R737	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R657	0RJ0102D677	MCR03EZPJ100 10OHM 5% 1/10W 1608	R739	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005
R658	0RJ2201D677	MCR03EZPJ222 2.2KOHM 5% 1/10W 160	R740	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R659	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R741	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005
R662	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R743	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005 R
R663	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R744	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005 R
R664	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R745	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R665	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R746	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R666	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R747	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R667	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R748	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005
R668	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R751	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R669	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R754	0RJ0562D677	MCR03EZPJ560 56OHM 5% 1/10W 1608
R670	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R755	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 1005
R671	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R756	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R672	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R757	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005
R673	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R759	0RJ0562D677	MCR03EZPJ560 56OHM 5% 1/10W 1608
R674	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R762	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 1005
R675	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R764	0RJ0562D677	MCR03EZPJ560 56OHM 5% 1/10W 1608
R676	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R767	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R677	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R769	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R678	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R770	0RJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W 1608
R679	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R771	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R680	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R772	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005
R681	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R775	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005
R682	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R777	0RJ0332C678	MCR01MZPJ330 330OHM 5% 1/16W 1005
R684	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R778	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 1005
R685	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R779	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005
R686	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R780	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R687	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R781	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R688	0RH0000D622	MCR10EZHJ000 0OHM 5% 1/8W 2012 R/	R782	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R701	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	R783	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 1005
R702	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R784	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R703	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005	R785	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R704	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005 R	R786	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R705	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005	R787	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608
R707	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 1005	R788	0RJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W 1608
R708	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R790	0RJ0332D677	MCR03EZPJ330 330OHM 5% 1/10W 1608
R709	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005	R791	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160
R710	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005	R792	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005
R711	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 1005	R793	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 1005
R712	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R794	0RJ1002C678	MCR01MZPJ103 10KOHM 5% 1/16W 1005


LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
R795	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	R930	0RJ3302D677	MCR03EZPJ333 33KOHM 5% 1/10W 1608
R796	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005	R931	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608
R797	0RJ1000C678	MCR01MZPJ101 100OHM 5% 1/16W 1005	R932	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R798	0RJ0000C678	MCR01MZPJ000 0OHM 5% 1/16W 1005 R	R933	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608
R799	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160	R934	0RJ3302D677	MCR03EZPJ333 33KOHM 5% 1/10W 1608
R800	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R935	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R801	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R936	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R805	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R937	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R807	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R938	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R808	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	R939	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R811	0RJ0222D677	MCR03EZPJ220 22OHM 5% 1/10W 1608	R940	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R
R812	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	HARNESSs & CONNECTORs		
R813	0RJ0222C678	MCR01MZPJ220 22OHM 5% 1/16W 1005	C1	6631900012C	Harness, 6631900012C SMH250 SMH250 200mM 2
R816	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	C2	6631900018K	Harness, 3P(2.5MM) SMH250 TERMINAL 600mM 2
R821	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005	C3	6631900027C	Harness, SMH250 SMH250 200mM 2.50MM 13P UL
R822	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	C4	6631900099C	Harness, SMH250 SMP250 400mM 2.50MM 3P UL1
R823	0RJ1500C678	MCR01MZPJ151 150OHM 5% 1/16W 1005	C5	6631900100D	Harness, SMH250 SMP250 600mM 2.50MM 4P UL1
R826	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	C6	6631900108C	Harness, SMH200 SMH200 350mM 2.00MM 6P UL1
R827	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005	C7	6631T20037Y	Harness, SMH200 400mm SMH200 SMH200 400mM
R829	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	C8	6631T25024N	Harness, 6631T25024N SMH250 35097_35098 26
R843	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	C9	6631T39004D	Harness, 6631T39004D 1-1123722-9 1-1123722
R847	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	C10	EAD35664301	Harness, SMH200(900MM) SMH200-14(YEONHO) S
R848	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	C11	EAD35682502	Harness, LVDS PDP STANDARD FI-X30HL(JAE) F
R849	0RJ1000D677	MCR03EZPJ101 100OHM 5% 1/10W 1608	C12	EAD39526501	Harness, 4P(320MM) WITH CORE 12505HS-0400
R850	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	J1100	6630G70016A	A03-7071-094 D-SUB 15P 2.29MM STR
R860	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005	J1102	6630G70017A	A02-0915-101 D-SUB 9P 2.77MM STRA
R877	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005	CN100	6602T20009J	Wafer, SMAW200-10P 10P 2.00MM 1R ANGLE D
R880	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005	CN101	6602T20009E	Wafer, SMAW200-06P 6P 2.00MM 1R ANGLE DI
R881	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005	CN300	6630VE01269	Wafer, 91932-31169LF 68P 1.00MM 1R STRAI
R882	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005	CW	6630V90142A	Wafer, TPH254-R-1419-6A 6P 2.54MM 2R ANG
R883	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005	P100	6602T20009E	Wafer, SMAW200-06P 6P 2.00MM 1R ANGLE DI
R884	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005	P101	6602T20009N	Wafer, SMAW200-14P 14P 2.00MM 1R ANGLE D
R885	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005	P1101	6602T20008J	Wafer, SMW200-10P 10P 2.00MM 1R STRAIGHT
R886	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005	P1102	6630VF00704	Wafer, 12505WS-04A00 4P 1.25MM 1R STRAIG
R888	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005	P1300	6602T25008B	Wafer, SMW250-03P 3P 2.50MM 1R STRAIGHT
R891	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005	P1301	6602T25008C	Wafer, SMW250-04P 4P 2.50MM 1R STRAIGHT
R892	0RJ0682C678	MCR01MZPJ680 68OHM 5% 1/16W 1005	P1400	6602T20008N	Wafer, SMW200-14P 14P 2.00MM 1R STRAIGHT
R896	0RJ0000D677	MCR03EZPJ000 0OHM 5% 1/10W 1608 R	P800	6630V90116A	Wafer, FI-X30SSL-HF 30P 1.00MM 1R ANGLE
R900	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	P900	6602T25008M	Wafer, SMW250-13P 13P 2.50MM 1R STRAIGHT
R900	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	P901	6602T25008J	Wafer, SMW250-10P 10P 2.50MM 1R ANGLE DI
R901	0RJ1002D477	MCR03EZPF103 10KOHM 1% 1/10W 1608	JACKs		
R902	0RJ2002D477	MCR03EZPF203 20KOHM 1% 1/10W 1608	J1000	6612B00015C	DC1R019WDH. SOCKET 21P STRAIGHT S
R911	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	J1001	6612B00015C	DC1R019WDH. SOCKET 21P STRAIGHT S
R913	0RJ3302D677	MCR03EZPJ333 33KOHM 5% 1/10W 1608	J1101	6612F00099A	PEJ024-01 1P 4P STRAIGHT TR 3.6MM
R915	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	J1200	6612M00010A	PSC003-01 21P 21P/1C 3.81MM STRAI
R916	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	J1201	6612M00010A	PSC003-01 21P 21P/1C 3.81MM STRAI
R917	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608	J1203	6612J10031B	PPJ209-01 14.0MM 1RX3C ANGLE BK S
R918	0RJ3302D677	MCR03EZPJ333 33KOHM 5% 1/10W 1608	J600	6612J10023A	KCN-BT-0-0053 10.5MM/11.5MM 1RX1C
R919	0RJ3302D677	MCR03EZPJ333 33KOHM 5% 1/10W 1608	JK	6612BBBHN4D	TOTX177 3P TX 2.54MM ANGLE 15MBPS
R920	0RJ3302D677	MCR03EZPJ333 33KOHM 5% 1/10W 1608	JK100	6612J10033A	PMJ016-13 13P DIN/RCA 14MM ANGLE
R923	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608			
R924	0RJ1002D677	MCR03EZPJ103 10KOHM 5% 1/10W 1608			
R925	0RJ3302D677	MCR03EZPJ333 33KOHM 5% 1/10W 1608			
R926	0RJ3302D677	MCR03EZPJ333 33KOHM 5% 1/10W 1608			
R927	0RJ4701D677	MCR03EZPJ472 4.7KOHM 5% 1/10W 160			




LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION	LOC. NO.	PART NO.	DESCRIPTION / SPECIFICATION
SWITCHs					
SW100	EBF32593901	TMUE312GAB 1C1P 12VDC 0.5A VERTIC			
SW101	140-313B	KPT-1115AM 1C1P 12VDC 0.05A HORIZ			
SW102	140-313B	KPT-1115AM 1C1P 12VDC 0.05A HORIZ			
SW103	140-313B	KPT-1115AM 1C1P 12VDC 0.05A HORIZ			
SW104	140-313B	KPT-1115AM 1C1P 12VDC 0.05A HORIZ			
SW105	140-313B	KPT-1115AM 1C1P 12VDC 0.05A HORIZ			
SW106	140-313B	KPT-1115AM 1C1P 12VDC 0.05A HORIZ			
SW107	140-313B	KPT-1115AM 1C1P 12VDC 0.05A HORIZ			
SW108	140-313B	KPT-1115AM 1C1P 12VDC 0.05A HORIZ			
SW700	EBF32593901	TMUE312GAB 1C1P 12VDC 0.5A VERTIC			
OTHERs					
B1	MAY32943803	Box, BOX DW3 1088 150 350 NO PRINTING 42PC5			
B2	MAY39537401	Box, BOX DW 1104 850 370 2 COLOR 42PC5			
B3	3890TKD002P	Box, LB500J(PCB) BRAND 542*397*445			
X100	6212AC2002B	Crystal, 9H03200164 32.768KHZ 20PPM 12.5p			
X101	6212AB2883A	Crystal, HC-49SM 27.00000MHZ 27MHZ 30PPM			
X1300	156-A02R	Crystal, EUA18.4320F16E33L 18.432MHZ 30PPM			
X700	6212AB2015J	Crystal, HC-49SM 19.66080HZ 19.6608HZ 30PPM			
D100	0DL200000CA	LED, DIP SAM5670(DL-2LRG) ROUND 4.8MM			
IC100	6712000013A	Receiver Module, TSOP4438SO1 4.5TO5.5V 1.5MA 35M			
IC201	SAA30310948	S/W, Firmware 4.17 EUROPE FLASHROM Europass3			
SA1	SAA30310835	S/W, Firmware 5.26 EUROPE FLASHROM EUROPASS3			
P300	EAG34998901	Socket, PCI 10074998-118MCALF 68P 1.27MM			
TU600	EBL32961502	Tuner, Digital TDFC-G106P 170MHZTO862MHZ			
ACCESSORY					
A1	SAC30033609	Title, CD MANUAL PDP DTV Europass 3			
A1	MFL34441603	Manual, Owners EU 27LANS SIMPLE BOOK EUROPASS			
A2	MKJ39170804	Remote Controller, COMPLEX EUROPASS_DVB			
A21	3550V00590A	Cover, MOLD ABS 50PC3DD-UE.AUSRSHR ABS			
A3	EAD36430001	Power Cord, LP-61L + LS-60L 1.87M BLACK			
A3	EAD36223101	Power Cord, LP34A+LS60L LP-34A 1.87M BLACK			
A4	4972V00178A	Supporter, COMPLEX METAL ASSY PDP SET			
A5	3880TKZ004E	Bag, COMPLEX VINYL 180*150 0.58 H&C MODEL			
A6	4950TKA320A	Plate, PRESS SBHG T1.2 SUPPORT UPSET			
A7	FAB30021701	Screw, Machine 1SZZVMR001A RING WALL 5MM 25MM			

7. CORTEZ_PLUS

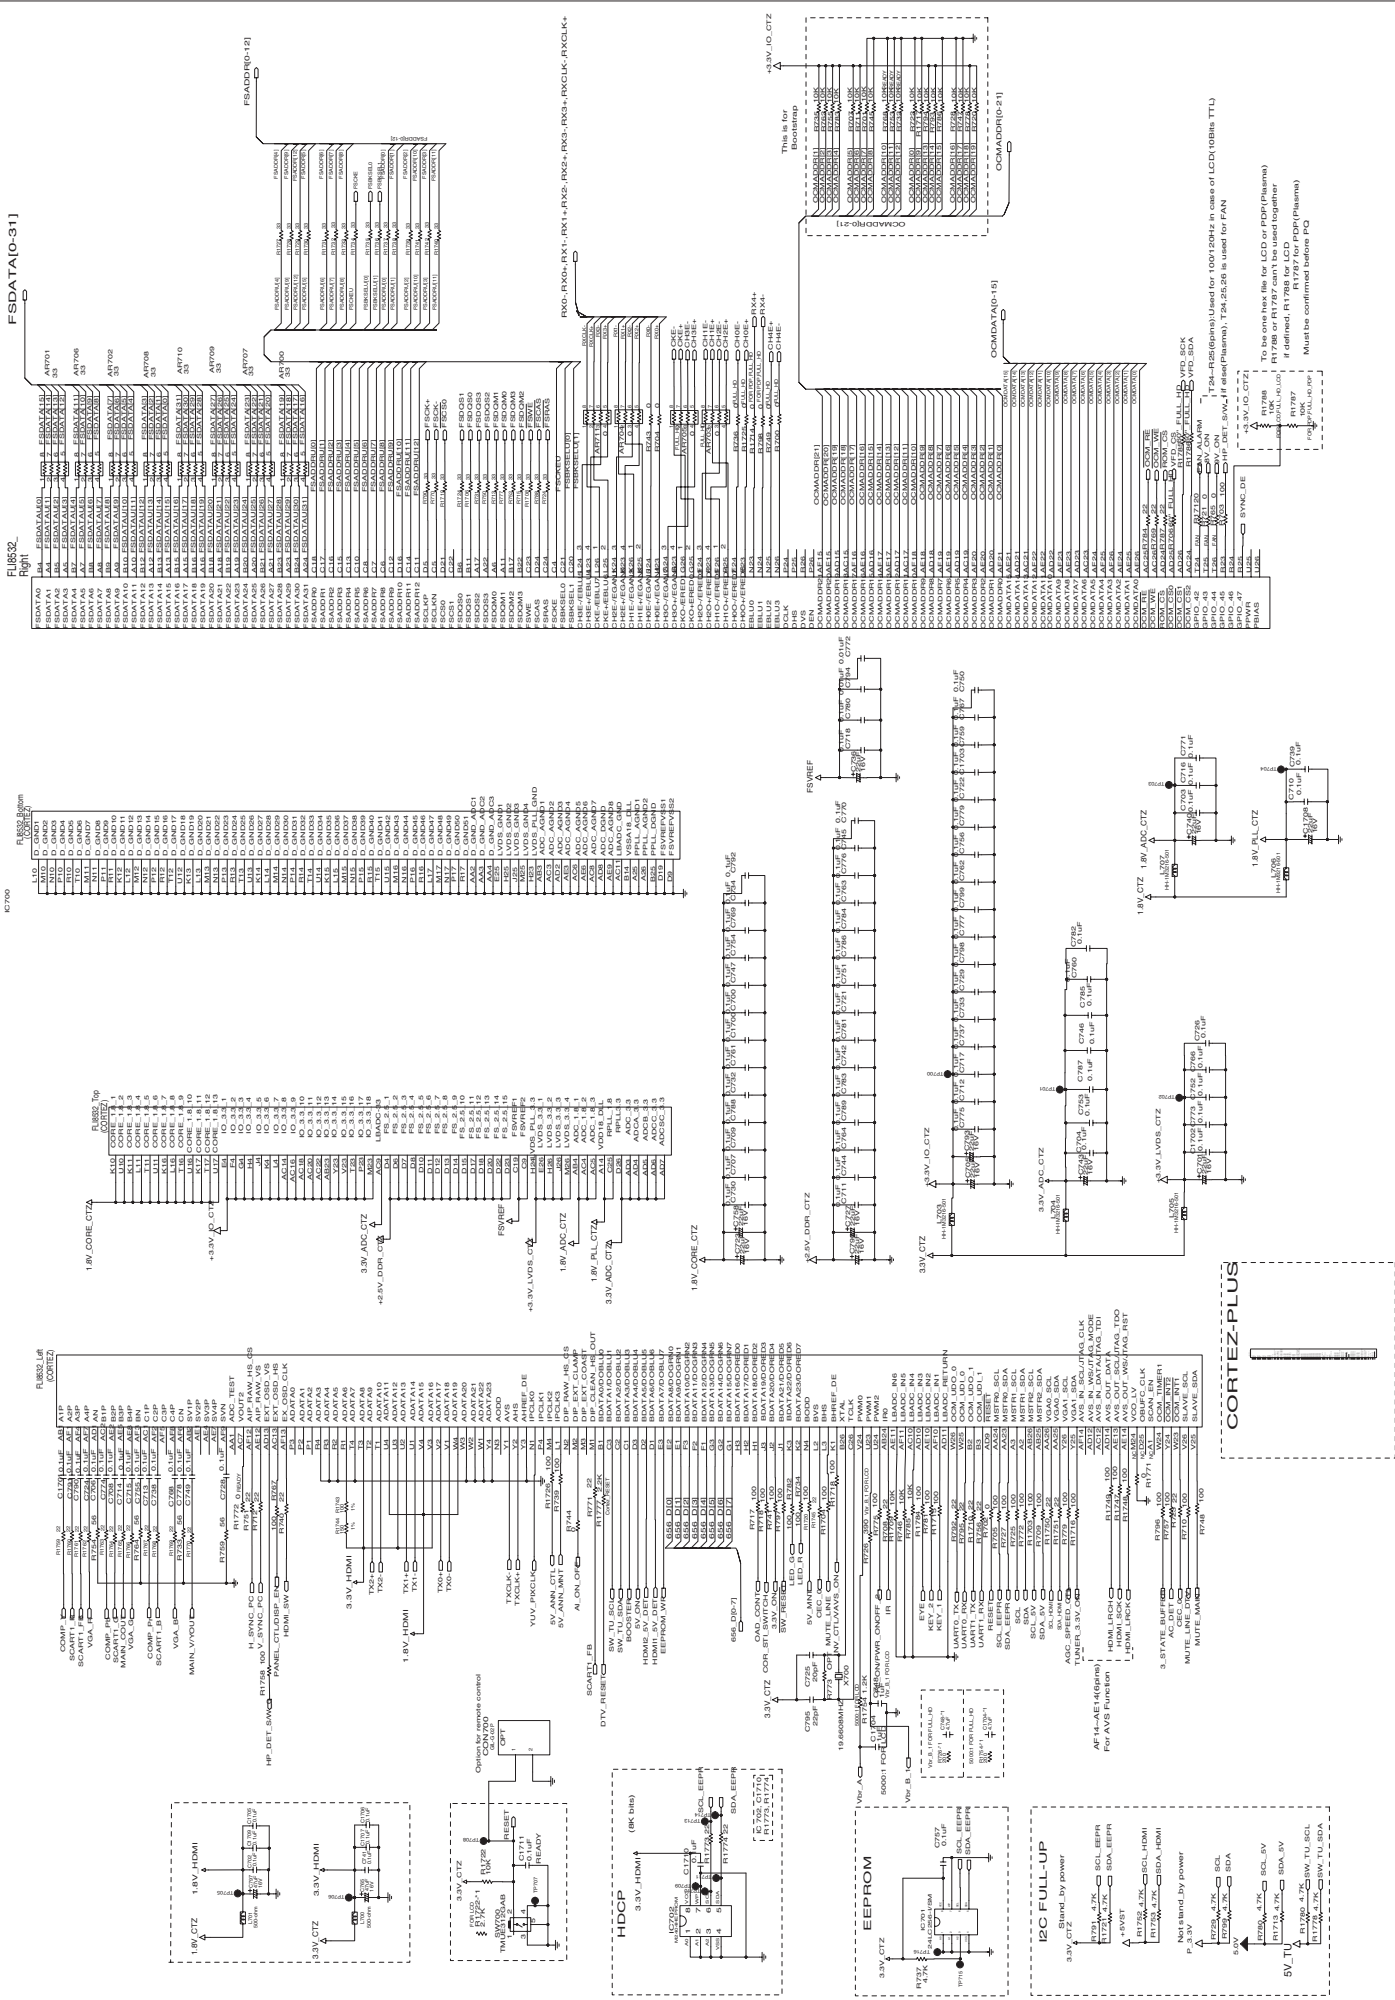

Sli15100 Decoupling Capacitors

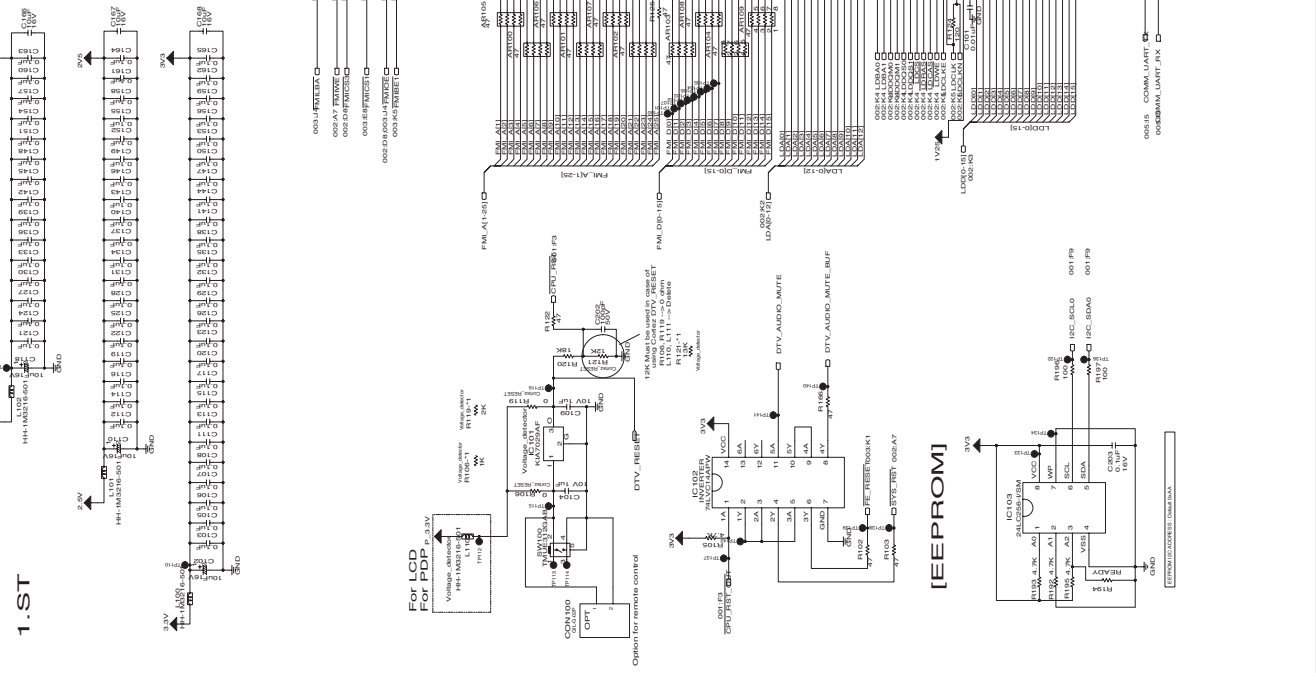

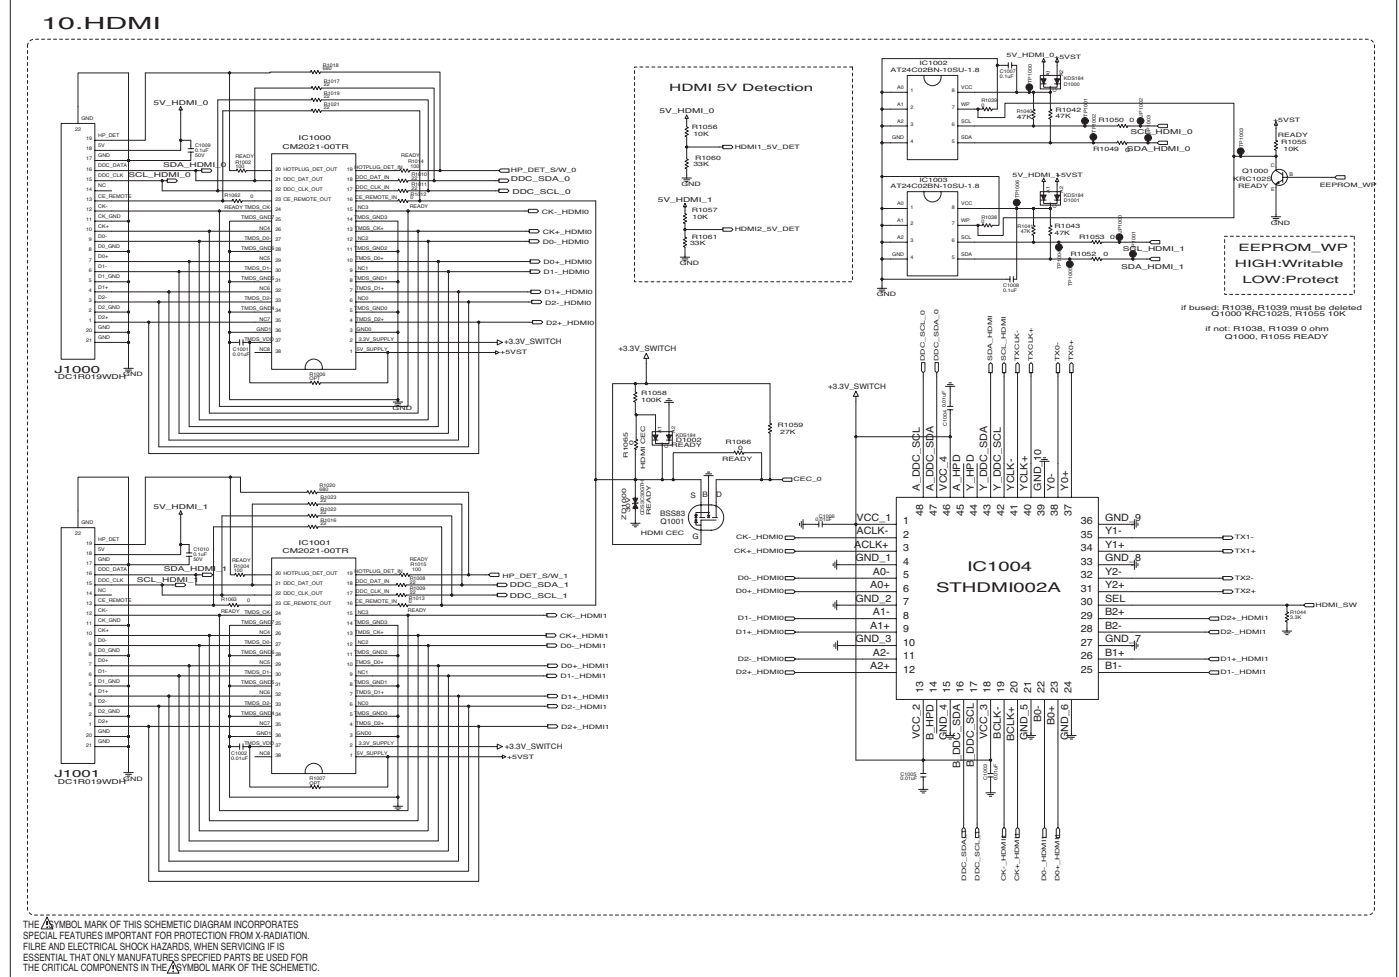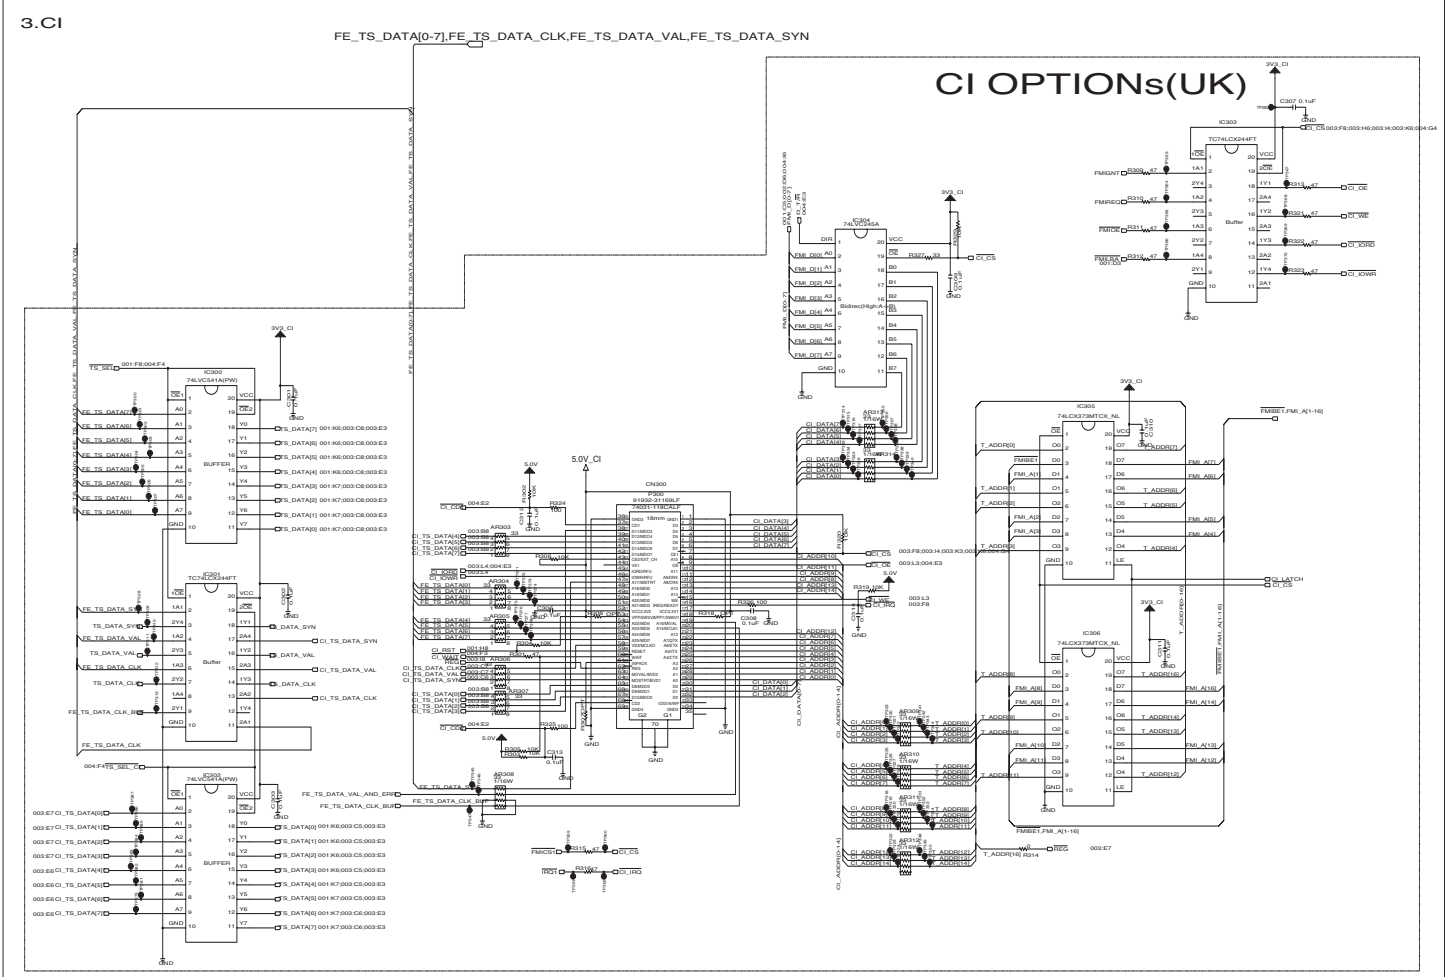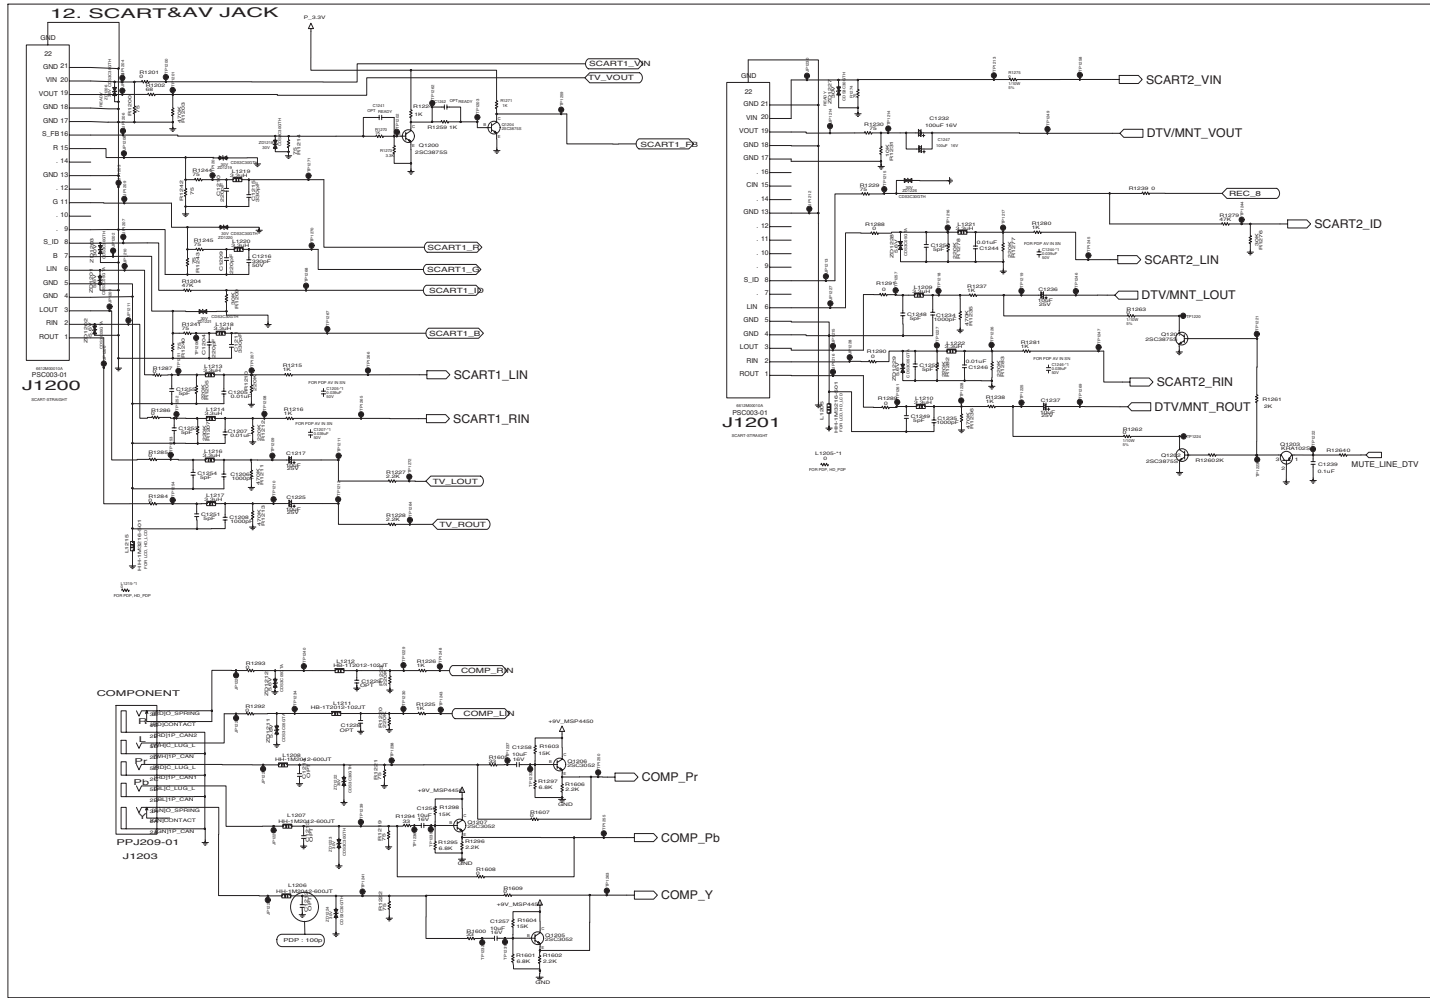

The diagram illustrates a DDR termination board, showing various components and their connections. The components are listed in a table at the bottom of the page, organized by value and quantity.

Value	Quantity
001 C4 0003 0001	1
001 C4 0003 0002	1
001 C4 0003 0003	1
001 C4 0003 0004	1
001 C4 0003 0005	1
001 C4 0003 0006	1
001 C4 0003 0007	1
001 C4 0003 0008	1
001 C4 0003 0009	1
001 C4 0003 0010	1
001 C4 0003 0011	1
001 C4 0003 0012	1
001 C4 0003 0013	1
001 C4 0003 0014	1
001 C4 0003 0015	1
001 C4 0003 0016	1
001 C4 0003 0017	1
001 C4 0003 0018	1
001 C4 0003 0019	1
001 C4 0003 0020	1
001 C4 0003 0021	1
001 C4 0003 0022	1
001 C4 0003 0023	1
001 C4 0003 0024	1
001 C4 0003 0025	1
001 C4 0003 0026	1
001 C4 0003 0027	1
001 C4 0003 0028	1
001 C4 0003 0029	1
001 C4 0003 0030	1
001 C4 0003 0031	1
001 C4 0003 0032	1
001 C4 0003 0033	1
001 C4 0003 0034	1
001 C4 0003 0035	1
001 C4 0003 0036	1
001 C4 0003 0037	1
001 C4 0003 0038	1
001 C4 0003 0039	1
001 C4 0003 0040	1
001 C4 0003 0041	1
001 C4 0003 0042	1
001 C4 0003 0043	1
001 C4 0003 0044	1
001 C4 0003 0045	1
001 C4 0003 0046	1
001 C4 0003 0047	1
001 C4 0003 0048	1
001 C4 0003 0049	1
001 C4 0003 0050	1
001 C4 0003 0051	1
001 C4 0003 0052	1
001 C4 0003 0053	1
001 C4 0003 0054	1
001 C4 0003 0055	1
001 C4 0003 0056	1
001 C4 0003 0057	1
001 C4 0003 0058	1
001 C4 0003 0059	1
001 C4 0003 0060	1
001 C4 0003 0061	1
001 C4 0003 0062	1
001 C4 0003 0063	1
001 C4 0003 0064	1
001 C4 0003 0065	1
001 C4 0003 0066	1
001 C4 0003 0067	1
001 C4 0003 0068	1
001 C4 0003 0069	1
001 C4 0003 0070	1
001 C4 0003 0071	1
001 C4 0003 0072	1
001 C4 0003 0073	1
001 C4 0003 0074	1
001 C4 0003 0075	1
001 C4 0003 0076	1
001 C4 0003 0077	1
001 C4 0003 0078	1
001 C4 0003 0079	1
001 C4 0003 0080	1
001 C4 0003 0081	1
001 C4 0003 0082	1
001 C4 0003 0083	1
001 C4 0003 0084	1
001 C4 0003 0085	1
001 C4 0003 0086	1
001 C4 0003 0087	1
001 C4 0003 0088	1
001 C4 0003 0089	1
001 C4 0003 0090	1
001 C4 0003 0091	1
001 C4 0003 0092	1
001 C4 0003 0093	1
001 C4 0003 0094	1
001 C4 0003 0095	1
001 C4 0003 0096	1
001 C4 0003 0097	1
001 C4 0003 0098	1
001 C4 0003 0099	1
001 C4 0003 0100	1
001 C4 0003 0101	1
001 C4 0003 0102	1
001 C4 0003 0103	1
001 C4 0003 0104	1
001 C4 0003 0105	1
001 C4 0003 0106	1
001 C4 0003 0107	1
001 C4 0003 0108	1
001 C4 0003 0109	1
001 C4 0003 0110	1
001 C4 0003 0111	1
001 C4 0003 0112	1
001 C4 0003 0113	1
001 C4 0003 0114	1

The image displays 11 individual circuit diagrams for the RGB232C board, organized as follows:

- Diagram 1 (Top Left):** Power supply section showing the connection of a 12V input to a 5V regulator (P1100) and a 3.3V regulator (P1101). It includes decoupling capacitors and ground connections.
- Diagram 2 (Top Middle):** Video signal processing section featuring the IC1100 (AT24C02E2N-10SU-1.8) and IC1101 (74VHC04), handling signals like V_SYNC_PC, H_SYNC_PC, and video data lines.
- Diagram 3 (Top Right):** Control logic section for the PDP (P1101) and LCD (P1103) displays, showing address and data bus connections to the IC1100 and IC1101.
- Diagram 4 (Middle Left):** ROM download section for the PDP (P1102), showing the connection of a download cable to the IC1100 and IC1101.
- Diagram 5 (Middle Middle):** PC interface section showing the connection of a PC to the board via a 15-pin D-sub connector, including signals for H_SYNC_PC, V_SYNC_PC, and video data.
- Diagram 6 (Middle Right):** Soft touch key section for the 60" PDP, showing the connection of a touch sensor to the IC1100 and IC1101.
- Diagram 7 (Bottom Left):** J1100 section showing the connection of a 15-pin D-sub connector to the board, including signals for H_SYNC_PC, V_SYNC_PC, and video data.
- Diagram 8 (Bottom Middle):** COR_STL_SWITCH section showing the connection of a switch to the IC1100 and IC1101.
- Diagram 9 (Bottom Right):** VFD section for the 60" PDP, showing the connection of a VFD display to the IC1100 and IC1101.
- Diagram 10 (Far Bottom Left):** J1105 section showing the connection of a 15-pin D-sub connector to the board, including signals for H_SYNC_PC, V_SYNC_PC, and video data.
- Diagram 11 (Far Bottom Right):** J1106 section showing the connection of a 15-pin D-sub connector to the board, including signals for H_SYNC_PC, V_SYNC_PC, and video data.

[illegible]

4. OPTION

[SCART PIN8]

Diagram showing the SCART PIN8 connection circuit, including components like R101, R102, R103, R104, R105, R106, R107, R108, R109, R110, R111, R112, R113, R114, R115, R116, R117, R118, R119, R120, R121, R122, R123, R124, R125, R126, R127, R128, R129, R130, R131, R132, R133, R134, R135, R136, R137, R138, R139, R140, R141, R142, R143, R144, R145, R146, R147, R148, R149, R150, R151, R152, R153, R154, R155, R156, R157, R158, R159, R160, R161, R162, R163, R164, R165, R166, R167, R168, R169, R170, R171, R172, R173, R174, R175, R176, R177, R178, R179, R180, R181, R182, R183, R184, R185, R186, R187, R188, R189, R190, R191, R192, R193, R194, R195, R196, R197, R198, R199, R200, R201, R202, R203, R204, R205, R206, R207, R208, R209, R210, R211, R212, R213, R214, R215, R216, R217, R218, R219, R220, R221, R222, R223, R224, R225, R226, R227, R228, R229, R230, R231, R232, R233, R234, R235, R236, R237, R238, R239, R240, R241, R242, R243, R244, R245, R246, R247, R248, R249, R250, R251, R252, R253, R254, R255, R256, R257, R258, R259, R260, R261, R262, R263, R264, R265, R266, R267, R268, R269, R270, R271, R272, R273, R274, R275, R276, R277, R278, R279, R280, R281, R282, R283, R284, R285, R286, R287, R288, R289, R290, R291, R292, R293, R294, R295, R296, R297, R298, R299, R300, R301, R302, R303, R304, R305, R306, R307, R308, R309, R310, R311, R312, R313, R314, R315, R316, R317, R318, R319, R320, R321, R322, R323, R324, R325, R326, R327, R328, R329, R330, R331, R332, R333, R334, R335, R336, R337, R338, R339, R340, R341, R342, R343, R344, R345, R346, R347, R348, R349, R350, R351, R352, R353, R354, R355, R356, R357, R358, R359, R360, R361, R362, R363, R364, R365, R366, R367, R368, R369, R370, R371, R372, R373, R374, R375, R376, R377, R378, R379, R380, R381, R382, R383, R384, R385, R386, R387, R388, R389, R390, R391, R392, R393, R394, R395, R396, R397, R398, R399, R400, R401, R402, R403, R404, R405, R406, R407, R408, R409, R410, R411, R412, R413, R414, R415, R416, R417, R418, R419, R420, R421, R422, R423, R424, R425, R426, R427, R428, R429, R430, R431, R432, R433, R434, R435, R436, R437, R438, R439, R440, R441, R442, R443, R444, R445, R446, R447, R448, R449, R450, R451, R452, R453, R454, R455, R456, R457, R458, R459, R460, R461, R462, R463, R464, R465, R466, R467, R468, R469, R470, R471, R472, R473, R474, R475, R476, R477, R478, R479, R480, R481, R482, R483, R484, R485, R486, R487, R488, R489, R490, R491, R492, R493, R494, R495, R496, R497, R498, R499, R500, R501, R502, R503, R504, R505, R506, R507, R508, R509, R510, R511, R512, R513, R514, R515, R516, R517, R518, R519, R520, R521, R522, R523, R524, R525, R526, R527, R528, R529, R530, R531, R532, R533, R534, R535, R536, R537, R538, R539, R540, R541, R542, R543, R544, R545, R546, R547, R548, R549, R550, R551, R552, R553, R554, R555, R556, R557, R558, R559, R560, R561, R562, R563, R564, R565, R566, R567, R568, R569, R570, R571, R572, R573, R574, R575, R576, R577, R578, R579, R580, R581, R582, R583, R584, R585, R586, R587, R588, R589, R590, R591, R592, R593, R594, R595, R596, R597, R598, R599, R600, R601, R602, R603, R604, R605, R606, R607, R608, R609, R610, R611, R612, R613, R614, R615, R616, R617, R618, R619, R620, R621, R622, R623, R624, R625, R626, R627, R628, R629, R630, R631, R632, R633, R634, R635, R636, R637, R638, R639, R640, R641, R642, R643, R644, R645, R646, R647, R648, R649, R650, R651, R652, R653, R654, R655, R656, R657, R658, R659, R660, R661, R662, R663, R664, R665, R666, R667, R668, R669, R670, R671, R672, R673, R674, R675, R676, R677, R678, R679, R680, R681, R682, R683, R684, R685, R686, R687, R688, R689, R690, R691, R692, R693, R694, R695, R696, R697, R698, R699, R700, R701, R702, R703, R704, R705, R706, R707, R708, R709, R710, R711, R712, R713, R714, R715, R716, R717, R718, R719, R720, R721, R722, R723, R724, R725, R726, R727, R728, R729, R730, R731, R732, R733, R734, R735, R736, R737, R738, R739, R740, R741, R742, R743, R744, R745, R746, R747, R748, R749, R750, R751, R752, R753, R754, R755, R756, R757, R758, R759, R760, R761, R762, R763, R764, R765, R766, R767, R768, R769, R770, R771, R772, R773, R774, R775, R776, R777, R778, R779, R780, R781, R782, R783, R784, R785, R786, R787, R788, R789, R790, R791, R792, R793, R794, R795, R796, R797, R798, R799, R800, R801, R802, R803, R804, R805, R806, R807, R808, R809, R810, R811, R812, R813, R814, R815, R816, R817, R818, R819, R820, R821, R822, R823, R824, R825, R826, R827, R828, R829, R830, R831, R832, R833, R834, R835, R836, R837, R838, R839, R840, R841, R842, R843, R844, R845, R846, R847, R848, R849, R850, R851, R852, R853, R854, R855, R856, R857, R858, R859, R860, R861, R862, R863, R864, R865, R866, R867, R868, R869, R870, R871, R872, R873, R874, R875, R876, R877, R878, R879, R880, R881, R882, R883, R884, R885, R886, R887, R888, R889, R890, R891, R892, R893, R894, R895, R896, R897, R898, R899, R900, R

MAIN (BOTTOM)

Figure 1: Block diagram of the 16-bit parallel input/output bus. The diagram shows a central 16-bit bus with 16 data lines (D0-D15) and 16 address lines (A0-A15). On the left, there are four 8-bit input/output blocks labeled POWER, TV/INPUT, MENU, and OK, each with an 8-bit address bus (A0-A7) and an 8-bit data bus (D0-D7). On the right, there are four 8-bit input/output blocks labeled VOL-, VOL+, CH-, and CH+, each with an 8-bit address bus (A0-A7) and an 8-bit data bus (D0-D7). The bus is labeled CN101 and CN100.



P/NO : MFL38562708

Sep., 2007
Printed in Korea