


SAMSUNG

PROJECTION TV RECEIVER

Chassis : J51A(REV. 1)
Model : SP43J5HFX/SED
SP43J5HFX/RAD
SP53J5HFX/RAD
SP61J5HFX/RAD

SERVICE Manual

PROJECTION TV RECEIVER

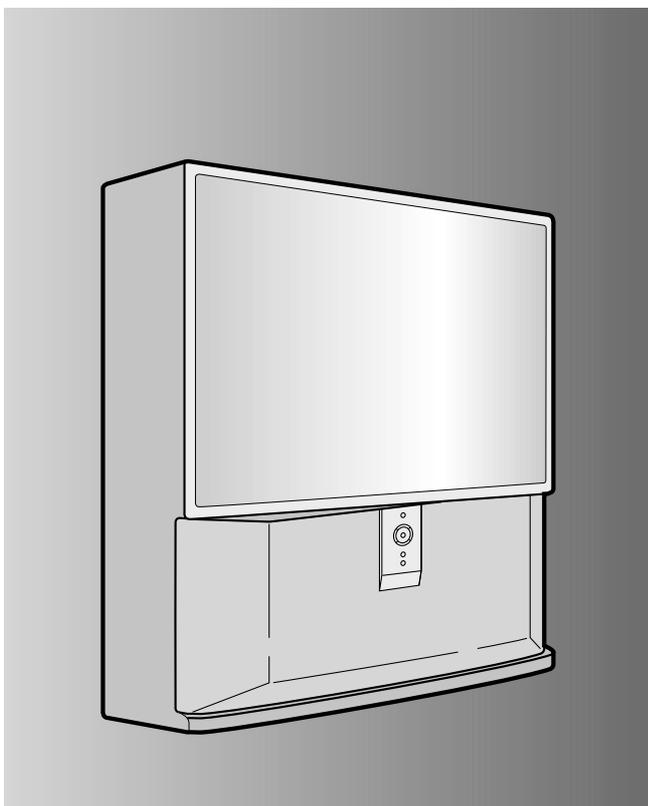

CONTENTS

1. Precautions
2. Reference Information
3. Specifications
4. Alignment and Adjustments
5. Troubleshooting
6. Exploded View and Parts List
7. Electrical Parts List
8. Block Diagrams
9. Wiring Diagram
10. Schematic Diagrams

4. Alignment and Adjustments


4-1 When entering the service mode:

1. Turn on the TV and then select "STANDARD" on the picture adjustment mode.
2. Turn off the TV (STAND-BY).
3. Enter the service mode by pressing the remote control keys in the following sequence :
DISPLAY→MENU→MUTE →Power On

Note : If necessary, re-do steps 1~3.


Initial display when the service mode is switched.

1. When a RF signal is received

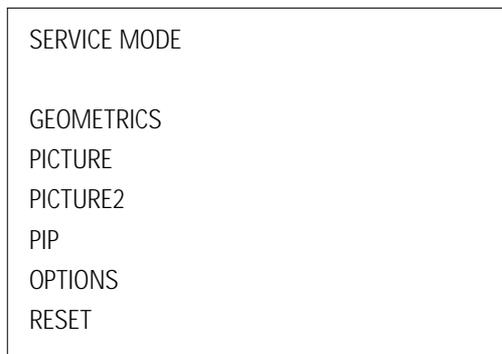

2. When the PC mode is received

(Press to )

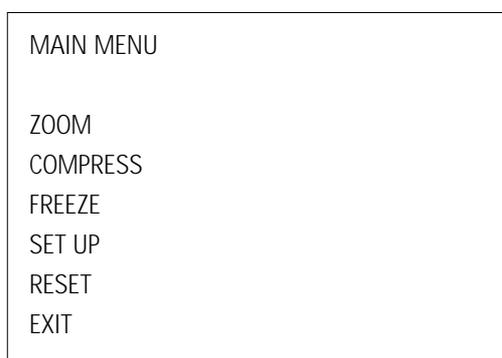

3. Service Mode Control Keys

| | |
|-------------|--|
| MAIN MENU | MENU DISPLAY |
| CH UP/DOWN | Select item by moving cursor |
| VOL UP/DOWN | Decrease or increase the adjustment values |

Note : The PC mode can be switched to the service mode by pressing the F.Mode Key (only on the factory remote control).

PAL (43")

| ITEM | FUNCTION | INITIAL VALUE | ITEM | FUNCTION | INITIAL VALUE |
|----------------------------|--|-----------------|--------|--------------------------|---------------|
| GEOMETRIC(PAL/NTSC) | | | | | |
| VS | V-SHIFT | 106/124 | LOC | LO-CORR | 128 |
| VA | V-SIZE | 60/76(Variable) | HEH | H-EHT | 0 |
| VL | V-LINEAR | 114 | VE | V-EHT | 0 |
| VSC | V-S-COLOR | 104 | VAN | V-ANGLE | 124 |
| HS | H-SHIFT | 73/77 | VBO | V-BOW | 128 |
| HA | H-SIZE | 78/86(Variable) | HSP | H-SYNC-PHASE | 138 |
| PPH | PIN-PHASE | 143/180 | -- | | 0 |
| PAM | PIN-AMP | 70 | -- | | 0 |
| UPC | UP-CORR | 128 | -- | | 0 |
| PICTURE | | | | | |
| SBR | SUB-BRIGHT | 20(Variable) | BCT | B-CUT OFF | 31(Variable) |
| RDR | R-DRIVE | 22(Variable) | GAM | GAMMA LEVEL | 12 |
| GDR | G-DRIVE | 31 | ABM | ABL MODE | 1 |
| BDR | B-DRIVE | 37(Variable) | ATH | ABL Threshold | 1 |
| RCT | R-CUT OFF | 9(Variable) | PYD | PAL/NT Y/C DELAY | 10 |
| GCT | G-CUT OFF | 31 | SYD | SECAM Y/C DELAY | 10 |
| PICTURE2 | | | | | |
| SHC | SUB-HUE | 7 | SFO | SHARPNESS-FO | 2 |
| R-R | R-Y AXIS R-Y | 3 | LTI | LUMINANCE | 2 |
| R-B | R-Y AXIS R-Y | 7 | CTI | CHROMINANCE | 1 |
| G-R | R-Y AXIS R-Y | 15 | POV | PRE-OVERSHOOT | 3 |
| G-B | R-Y AXIS R-Y | 2 | VML | VM-LEVEL | 2 |
| SCN | SUB-CONTRAST | 7(Variable) | VMD | VM-DELAY | 3 |
| SCR | SUB-COLOR | 15 | DCT | DC-TRAN | 3 |
| HWD | HSYNC WIDTH | 1 | DNP | AUTO PEDESTAL | 3 |
| HTM | HSYNC-TIME-MASK | 1 | BPF | BAND PASS FILTER | 12 |
| SHP | SUB-SHARPNESS | 3 | HPF | HIGH PASS FILTER | 10 |
| PIP | | | | | |
| PCN | CONTRAST | 8(Variable) | | | |
| PHP | POS-HOR | 55(Variable) | | | |
| PVP | POS-VER | 27(Variable) | | | |
| OPTION | | | | | |
| TTX | OFF, WEST/ARABIC, EAST/FARSI | | PC | ON, OFF | |
| LNA | ON,OFF | | SCART2 | OFF, TV OUT, MONITOR OUT | |
| | | | THAI | ON, OFF | |
| LANGUAGE | | | | | |
| MULTI-12 | Eng, Arab, French, Thai, Russian, Croatian, Polish, Turkish, Hungaran, Iran, Pakistan, Hindi | | | | |
| MidEast | Eng, Arab, French, Turkish, Iran, Pakistan | | | | |
| Asia | Eng, Thai, Hindi | | | | |
| Russia | Eng, Russia | | | | |
| M. Europe | Eng, Croatian, Polish, Hungaran | | | | |

PAL (53")


| ITEM | FUNCTION | INITIAL VALUE | ITEM | FUNCTION | INITIAL VALUE |
|----------------------------|--|-----------------|--------|--------------------------|---------------|
| GEOMETRIC(PAL/NTSC) | | | | | |
| VS | V-SHIFT | 106/124 | LOC | LO-CORR | 128 |
| VA | V-SIZE | 72/83(Variable) | HEH | H-EHT | 0 |
| VL | V-LINEAR | 114 | VE | V-EHT | 0 |
| VSC | V-S-COLOR | 104 | VAN | V-ANGLE | 124 |
| HS | H-SHIFT | 73/77 | VBO | V-BOW | 128 |
| HA | H-SIZE | 79/86(Variable) | HSP | H-SYNC-PHASE | 138 |
| PPH | PIN-PHASE | 143/180 | -- | | 0 |
| PAM | PIN-AMP | 70 | -- | | 0 |
| UPC | UP-CORR | 128 | -- | | 0 |
| PICTURE | | | | | |
| SBR | SUB-BRIGHT | 19(Variable) | BCT | B-CUT OFF | 28(Variable) |
| RDR | R-DRIVE | 15(Variable) | GAM | GAMMA LEVEL | 12 |
| GDR | G-DRIVE | 31 | ABM | ABL MODE | 1 |
| BDR | B-DRIVE | 29(Variable) | ATH | ABL THRESHOLD | 1 |
| RCT | R-CUT OFF | 17(Variable) | PYD | PAL/NT Y/C DELAY | 10 |
| GCT | G-CUT OFF | 31 | SYD | SECAM Y/C DELAY | 10 |
| PICTURE2 | | | | | |
| SHC | SUB-HUE | 7 | SFO | SHARPNESS-FO | 2 |
| R-R | R-Y AXIS R-Y | 3 | STI | LUMINANCE | 2 |
| R-B | R-Y AXIS R-Y | 7 | CTI | CHROMINANCE | 1 |
| G-R | R-Y AXIS R-Y | 15 | POV | PRE-OVERSHOOT | 3 |
| G-B | R-Y AXIS R-Y | 2 | VML | VM-LEVEL | 2 |
| SCN | SUB-CONTRAST | 13(Variable) | VMD | VM-DELAY | 3 |
| SCR | SUB-COLOR | 15 | DCT | DC-TRAN | 3 |
| HWD | HSYNC WIDTH | 1 | DNP | AUTO PEDESTAL | 3 |
| HTM | HSYNC-TIME-MASK | 1 | BPF | BAND PASS FILTER | 12 |
| SHP | SUB-SHARPNESS | 3 | HPF | HIGH PASS FILTER | 10 |
| PIP | | | | | |
| PCN | CONTRAST | 8(Variable) | | | |
| PHP | POS-HOR | 55(Variable) | | | |
| PVP | POS-VER | 27(Variable) | | | |
| OPTION | | | | | |
| TTX | OFF, WEST/ARABIC, EAST/FARSI | | PC | ON, OFF | |
| LNA | ON,OFF | | SCART2 | OFF, TV OUT, MONITOR OUT | |
| | | | THAI | ON, OFF | |
| LANGUAGE | | | | | |
| MULTI-12 | Eng, Arab, French, Thai, Russian, Croatian, Polish, Turkish, Hungaran, Iran, Pakistan, Hindi | | | | |
| MidEast | Eng, Arab, French, Turkish, Iran, Pakistan | | | | |
| Asia | Eng, Thai, Hindi | | | | |
| Russia | Eng, Russia | | | | |
| M. Europe | Eng, Croatian, Polish, Hungaran | | | | |

PAL (61")


| ITEM | FUNCTION | INITIAL VALUE | ITEM | FUNCTION | INITIAL VALUE |
|----------------------------|--|-----------------|--------|--------------------------|---------------|
| GEOMETRIC(PAL/NTSC) | | | | | |
| VS | V-SHIFT | 106/124 | LOC | LO-CORR | 128 |
| VA | V-SIZE | 90/94(Variable) | HEH | H-EHT | 0 |
| VL | V-LINEAR | 114 | VE | V-EHT | 0 |
| VSC | V-S-COLOR | 104 | VAN | V-ANGLE | 124 |
| HS | H-SHIFT | 73/77 | VBO | V-BOW | 128 |
| HA | H-SIZE | 62/74(Variable) | HSP | H-SYNC-PHASE | 138 |
| PPH | PIN-PHASE | 143/180 | -- | | 0 |
| PAM | PIN-AMP | 70 | -- | | 0 |
| UPC | UP-CORR | 128 | -- | | 0 |
| PICTURE | | | | | |
| SBR | SUB-BRIGHT | 25(Variable) | BCT | B-CUT OFF | 23(Variable) |
| RDR | R-DRIVE | 8(Variable) | GAM | GAMMA LEVEL | 12 |
| GDR | G-DRIVE | 31 | ABM | ABL MODE | 1 |
| BDR | B-DRIVE | 32(Variable) | ATH | ABL Threshold | 1 |
| RCT | R-CUT OFF | 16(Variable) | PYD | PAL/NT Y/C DELAY | 10 |
| GCT | G-CUT OFF | 31 | SYD | SECAM Y/C DELAY | 10 |
| PICTURE2 | | | | | |
| SHC | SUB-HUE | 7 | SFO | SHARPNESS-FO | 2 |
| R-R | R-Y AXIS R-Y | 3 | STI | LUMINANCE | 2 |
| R-B | R-Y AXIS R-Y | 7 | CTI | CHROMINANCE | 1 |
| G-R | R-Y AXIS R-Y | 15 | POV | PRE-OVERSHOOT | 3 |
| G-B | R-Y AXIS R-Y | 2 | VML | VM-LEVEL | 2 |
| SCN | SUB-CONTRAST | 13(Variable) | VMD | VM-DELAY | 3 |
| SCR | SUB-COLOR | 15 | DCT | DC-TRAN | 3 |
| HWD | HSYNC WIDTH | 1 | DNP | AUTO PEDESTAL | 3 |
| HTM | HSYNC-TIME-MASK | 1 | BPF | BAND PASS FILTER | 12 |
| SHP | SUB-SHARPNESS | 3 | HPF | HIGH PASS FILTER | 10 |
| PIP | | | | | |
| PCN | CONTRAST | 8(Variable) | | | |
| PHP | POS-HOR | 55(Variable) | | | |
| PVP | POS-VER | 27(Variable) | | | |
| OPTION | | | | | |
| TTX | OFF, WEST/ARABIC, EAST/FARSI | | PC | ON, OFF | |
| LNA | ON,OFF | | SCART2 | OFF, TV OUT, MONITOR OUT | |
| | | | THAI | ON, OFF | |
| LANGUAGE | | | | | |
| MULTI-12 | Eng, Arab, French, Thai, Russian, Croatian, Polish, Turkish, Hungaran, Iran, Pakistan, Hindi | | | | |
| MidEast | Eng, Arab, French, Turkish, Iran, Pakistan | | | | |
| Asia | Eng, Thai, Hindi | | | | |
| Russia | Eng, Russia | | | | |
| M. Europe | Eng, Croatian, Polish, Hungaran | | | | |

4-2 Screen Change (When adjusting I²C Bus Geometric items)


1 V SHIFT




6 V SIZE




2 V LINEARITY




7 V-S-CORRECTION




3 H SIZE



8 PIN PHASE




4 PIN AMP




9 H SHIFT



5 V ANGLE




10 V BOW



4-3 Beam Alignment


PRECAUTION

1. Input a crosshatch and dot pattern.
2. Select the "STANDARD" video mode.
3. Warm up the TV for at least 10 minutes.
4. Connect an audio oscillator to the pin jig between GT401~GT402 (located on the deflection PCB) and GND.
5. Determine the ZERO-magnet area (using the beam-alignment CY)
6. Check the squarewave at the point where the focus is misaligned (Use an audio oscillator).

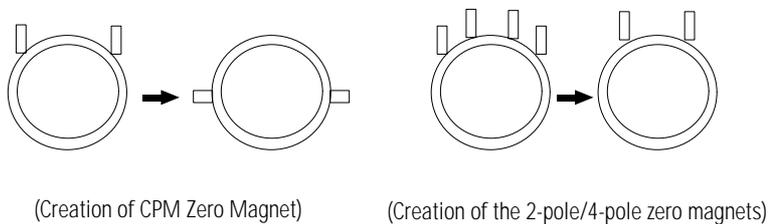

ADJUSTMENT

1. Cover the Red and Blue lenses.
2. Adjust the Green lens as shown in the figures below

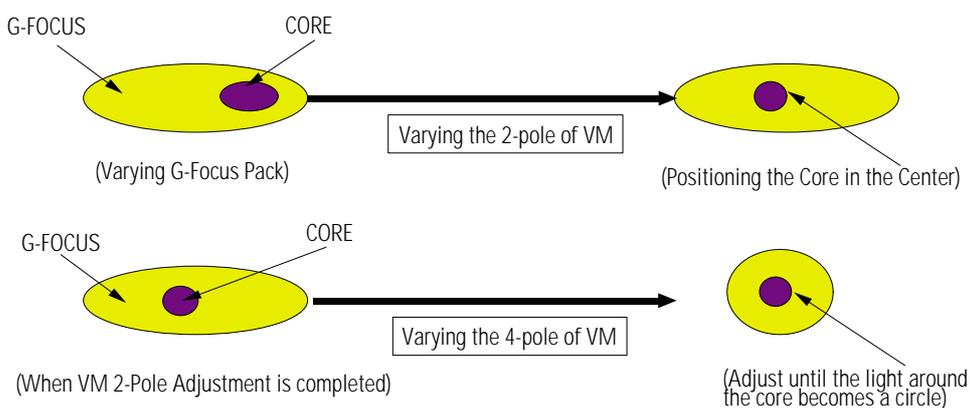

3. Adjust the G-Focus until any light around the core disappears.
4. Cover the Green and Blue lenses.
5. Adjust the Red lens using the same method as with the Green lens.
6. Note: The Blue lens is not adjusted because its focus varies little (VM-coil is installed).
7. After the adjustments are completed, disconnect the jig pin connector.

4-4 Other Adjustments

4-4-1 Screen Adjustment

1. Warm up the TV for at least 30 minutes.
2. Turn to the Video Mode (No Signal) using a remote-control.
3. Connect an oscilloscope to RK,GK,BK.
4. Adjust the VR (VR501, VR531, VR561) screen so that RK, GK, BK pulse is 20Vp-p each. (Turn the R,G,B VR screen fully counterclockwise in the area of each flyback line.)

4-4-2 White Balance Adjustment

1. Select the "STANDARD" video mode.
2. Input 100% white pattern.
3. In the stand-by mode, press the remote-control keys in the following sequence:
DISPLAY→MENU→MUTE →Power On
4. Warm up the TV for at least 30 minutes.
5. Input a 10-step signal.
6. R-cut off, B-cut off, and G-cut off by pressing the Volume +/- keys.
7. Adjust the low light with viewing the dark side of the screen.
8. Select R-drive, G-drive, and B-drive by pressing the Volume +/- keys.
9. Adjust the high light with viewing the light side of the screen.
10. If necessary, redo adjustments 6~9.
11. Press the Menu key to exit.

4-4-3 Sub-Brightness Adjustment

1. Input a sub-brightness adjustment signal. (TOSHIBA PATTERN)
2. In the stand-by mode, press the remote-control keys in the following sequence :
DISPLAY→MENU→MUTE →Power On
3. Select SBT by pressing the Volume +/- keys.
4. Adjust so that the 7th step on the right side of the screen is not seen (Use the Volume +/- keys).
5. Press the Menu key to exit.

4-4-4 High Voltage (31KV) Check

PRECAUTION

1. Input a lion head pattern.
2. Select "STANDARD" video mode.
3. Warm up the TV for at least 10 minutes.
4. Use a 1000:1 probe.

ADJUSTMENT

1. Connect the (+) terminal of the 1000:1 probe to the high voltage distributor and the (-) terminal to GND (located on the deflection board).
2. Adjust VR471 (located on the deflection board) so that the digital meter indicates DC 31V ± 0.1V.

4-4-5 F.S. (Fail Safe) Circuit Check

Note : The F.S. Circuit check must be performed after servicing.

1. Turn on the TV.
2. Select the "STANDARD" video mode.
3. Short GT18, GT17 (located on the Convergence PCB). Then, both sound and picture disappear. (Note: Even if the shorted terminals are removed, both sound and picture do not appear. This proves the F.S. circuit is working.)
4. To restore both sound and picture, turn off the TV and reset it after about 30 seconds.


4-4-6 Static Focus Adjustment

PRECAUTION

1. Select the "STANDARD" video mode.
2. Input a crosshatch pattern.
3. Cover the lenses that are not being adjusted.
4. Connect a convergence jig and read data.
5. Adjust the lens for best focus. (See Fig, 4-1, next page)

STATIC FOCUS (CONTINUED)

Vary the focus pack VR (Red, Blue) on the front cabinet. Adjust the TV for best possible focus around the center of the crosshatch pattern, without losing overall screen balance. Figure Crosshatch Pattern Examine these points together.



Examine these points together

Fig. 4-1 Crosshatch Pattern.

4-4-7 Lens Focus Adjustment

PRECAUTIONS

1. Do this adjustment after the static focus adjustment and the tilt adjustment.
2. Select the "STANDARD" video mode. (Contrast:64, Brightness:32)
3. Input a crosshatch pattern.

ADJUSTMENT

1. Loosen the lens screws.
2. Cover the two lenses that are not being adjusted.
3. Adjust the lens, observing the color aberration vertically and horizontally within 3 blocks of the center of the crosshatch pattern.
4. When the lens is turned clockwise, the color aberration will change as follows:

| Lens | Color Aberration Change |
|------|-------------------------|
| R | Orange - Crimson |
| G | Blue - Red |
| B | Purple - Green |

5. Green lens adjustment: Set the lens at the point where Blue just changes to Red. If the color aberration is irregular throughout the picture screen, adjust the lens to show Red color aberration (approximately 1~3 mm area) within a 3-block grid around the horizontal center-line. If the color aberration is irregular, adjust the lens as shown in the diagram below. (Accurate alignment of Green is important for overall color quality.)
6. Red lens adjustment Set the Red lens at the point where Orange becomes Crimson.
7. Blue lens adjustment Set the Blue lens at the point where Purple becomes Green.





Fig. 4-2 Color Aberration

4-5 Screen-Jig


4-5-1 43J5 Convergence Jig Spec

43J5 Screen Size : X 873, Y 655 (X:374=7*2+30*12, Y:220=14*2+32*6)

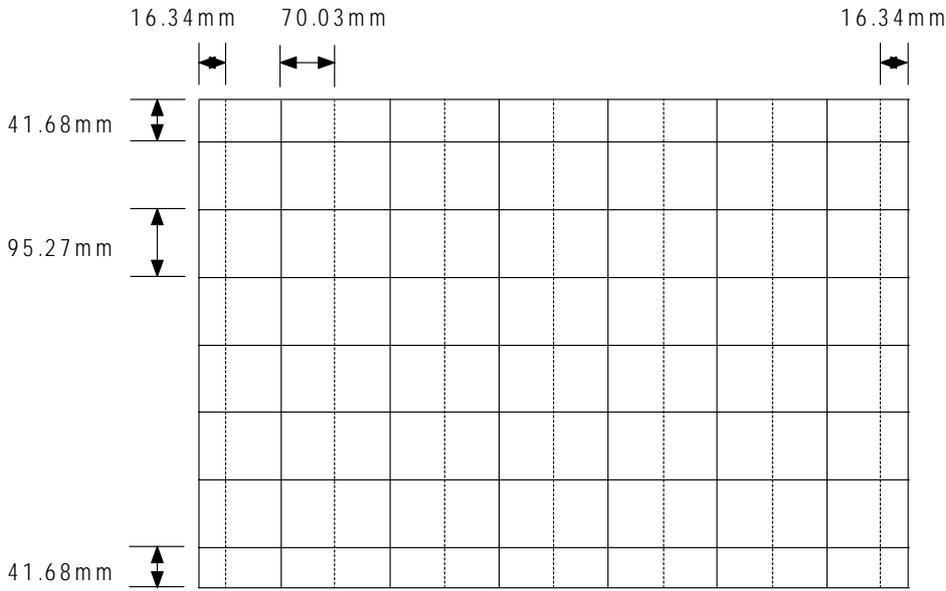


4-5-2 53J5 Convergence Jig Spec

53J5 Screen Size : X 1087, Y 817 (X:374=7*2+30*12, Y:220=14*2+32*6)

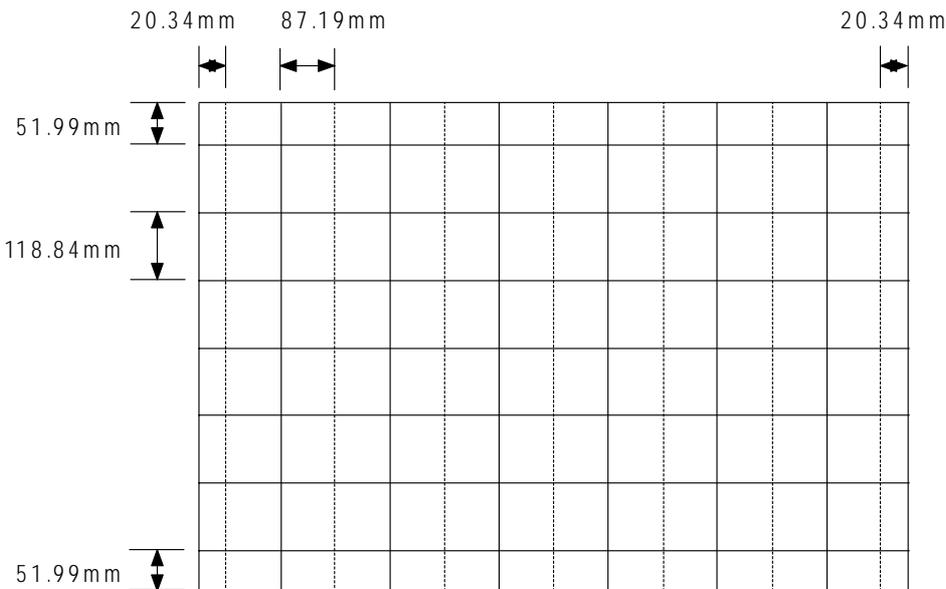


4-5-3 61J5 Convergence Jig Spec

61J5 Screen Size : X 1253, Y 943 (X:374=7*2+30*12, Y:220=14*2+32*6)

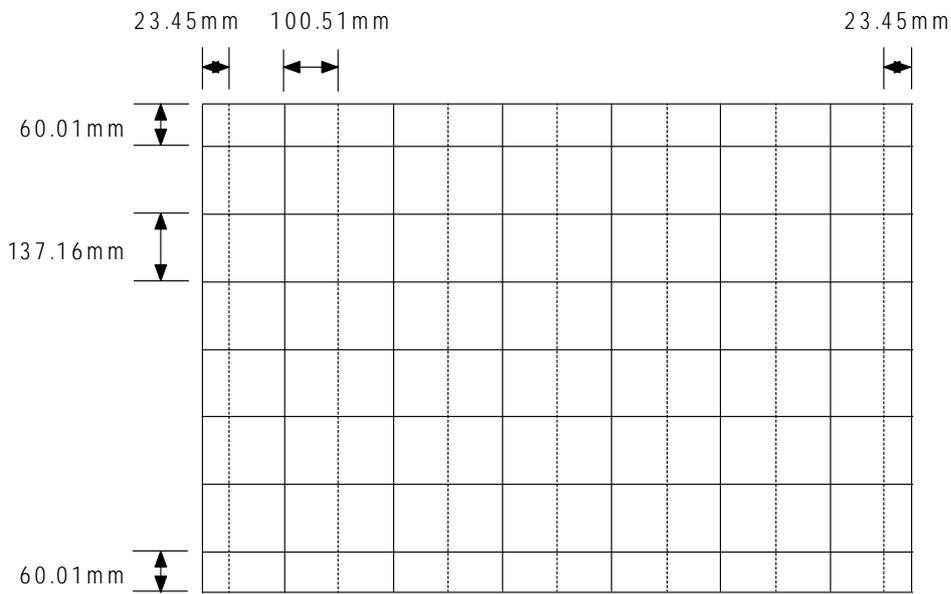

4-6 Remote Control for Servicing (Convergence Mode)

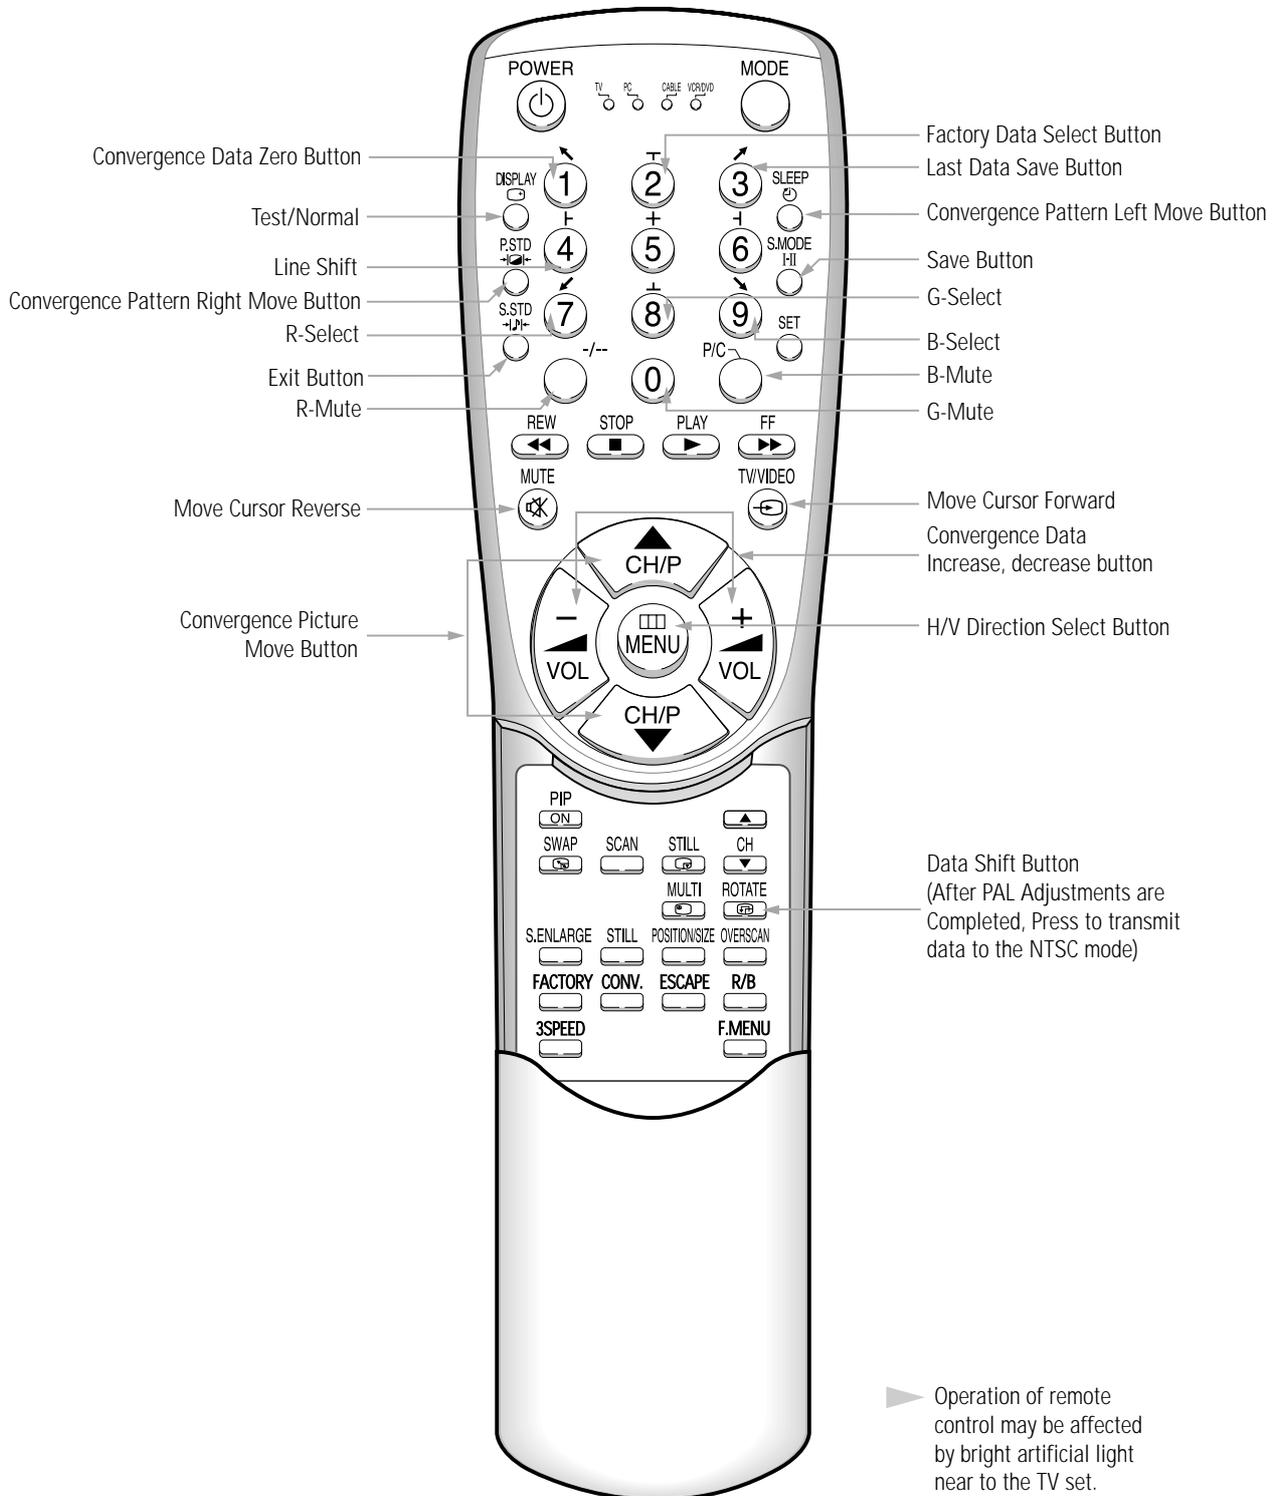

4-6-1 KEY Function

1. R-SELECT 

Press to select RED color.
2. G-SELECT 

Press to select GREEN color.
3. B-SELECT 

Press to select BLUE color.
4. R-MUTE 

Press to mute RED color.
5. G-MUTE 

Press to mute GREEN color.
6. B-MUTE 

Press to mute BLUE color.
7. CANCEL KEY 

Press to revert to the previous data during the Convergence Adjustment.
8. TEST/NORMAL 

Press to check TV mode in the Convergence Mode.
9. LINE SHIFT 

Press to move a line up/down or left/right.
10. FACTORY DATA SELECT BUTTON 

Press to call the factory default values.
11. H/V DIRECTION SELECT BUTTON 

Press to switch the cursor direction horizontally or vertically.


12. SAVE BUTTON 
After the Convergence adjustments are completed, press to save data.

13. EXIT BUTTON 
After the Convergence Adjustments are completed, press to exit to TV mode.

14. MOVE CURSOR FORWARD 
Press to move the cursor right or down.

15. MOVE CURSOR REVERSE 
Press to move the cursor left or up.

16. CONVERGENCE PICTURE MOVE BUTTON



17. CONVERGENCE PATTERN MOVE BUTTON
Press to move the convergence pattern left () or right ().

18. CONVERGENCE DATA ZERO BUTTON 
Press to zero the convergence correction data.

19. DATA SHIFT BUTTON 
Press to transmit data (PAL mode / NTSC mode).


4-7 Convergence Adjustment

1. Warm up the TV for at least 30 minutes.
2. Input a PAL Signal. (Use an antenna or AV source.)



Make sure that both deflection and convergence yokes are properly adjusted so that the center of Green, Red, Blue pattern is aligned on the center of screen jig.

3. Enter the Convergence Mode by pressing the remote control keys in the following sequence:




If OSD is displayed as shown in figure below, press the  key to exit.




Then, redo step 3 to enter the Convergence Mode.


After entering the Convergence Mode, Stand by for about five seconds before doing the adjustments.

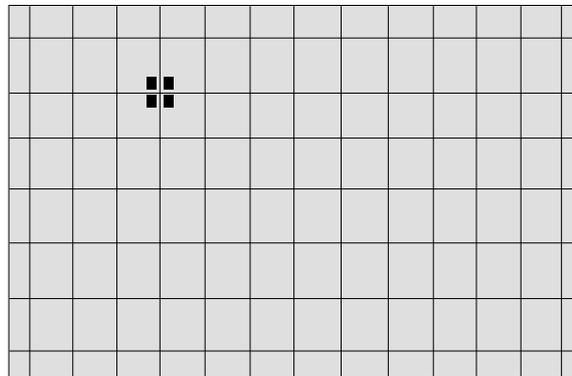


4. To adjust GREEN, first press the  and the  keys, and then press the  key.



5. The  key moves the cursor right, and the  key moves the cursor left.

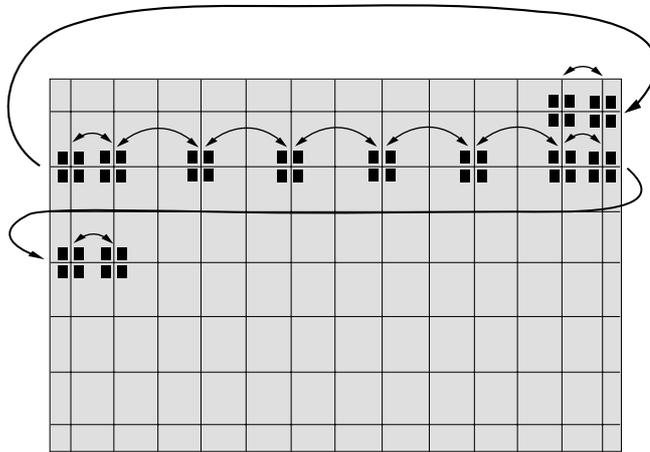


The  key moves the cursor horizontally or vertically.

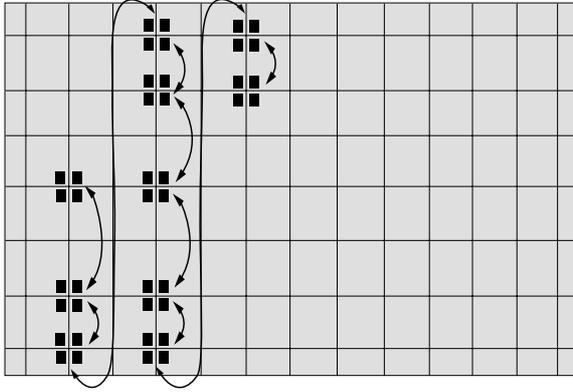

When the  key is pressed once again, the cursor moves horizontally.


7. Use the  key for overall balance.

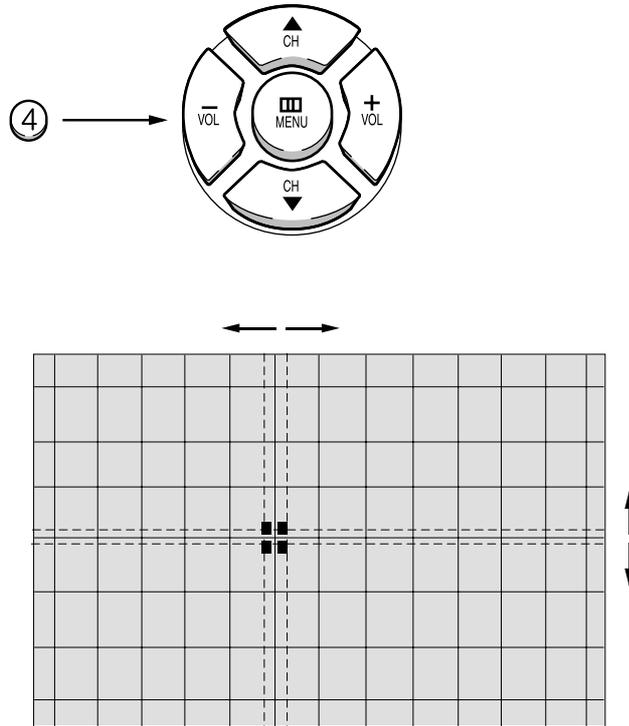

8. After the Line Shift is cancelled by pressing the  key, use the Channel and Volume keys (Up/Down) to make big adjustments.
9. After the green convergence adjustments are completed, press the  key to save the data.

10. Superimpose the Red and Green colors by pressing the  and the  keys.

11. To adjust RED, redo steps 5~8.

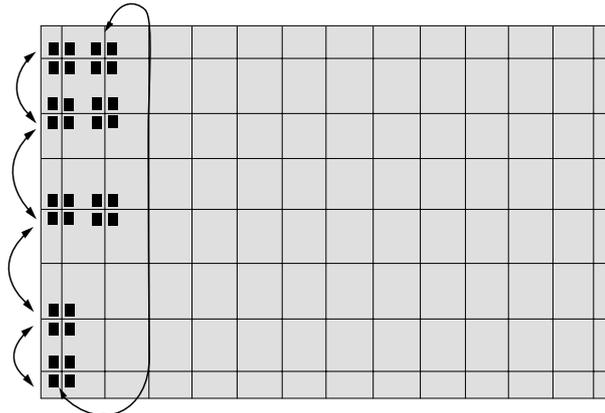

When the cursor moves vertically 

12. To superimpose the blue and green colors, press (1) the  key for R-Mute, (2) the  key to cancel the B-Mute, and (3) the  key for B-select.


13. To adjust BLUE, redo steps 5 ~ 8, 12.

14. If any color is not properly adjusted when displaying the red, blue and green colors, readjust the color.

15. After the color adjustments are completed, press the () key to save the data.




The cursor moves to center, and then automatically moves up and to the left about five seconds later.

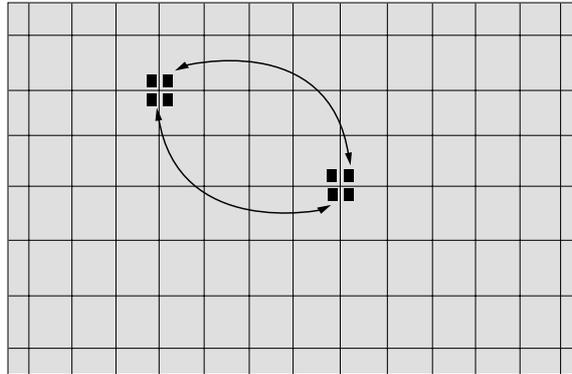


16. After the Convergence Adjustments are completed, press the () key to exit.

4-8 PC Mode

4-8-1 TV Setup Mode

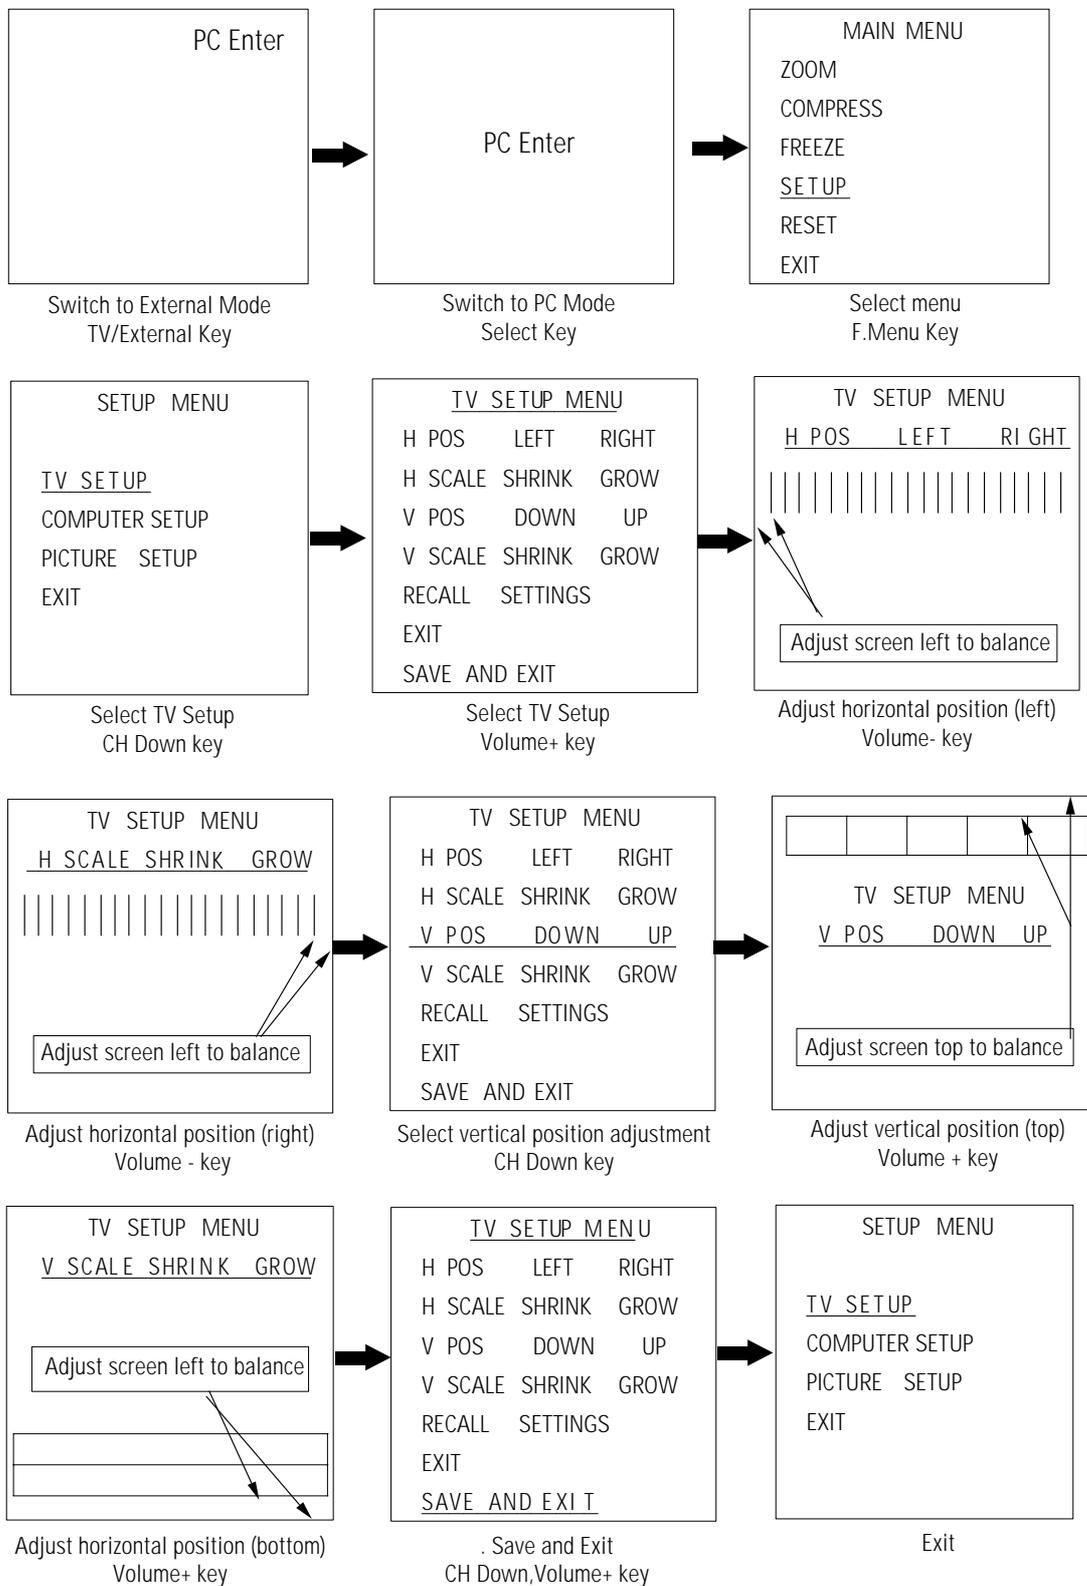


4-8-2 Picture Setup Mode

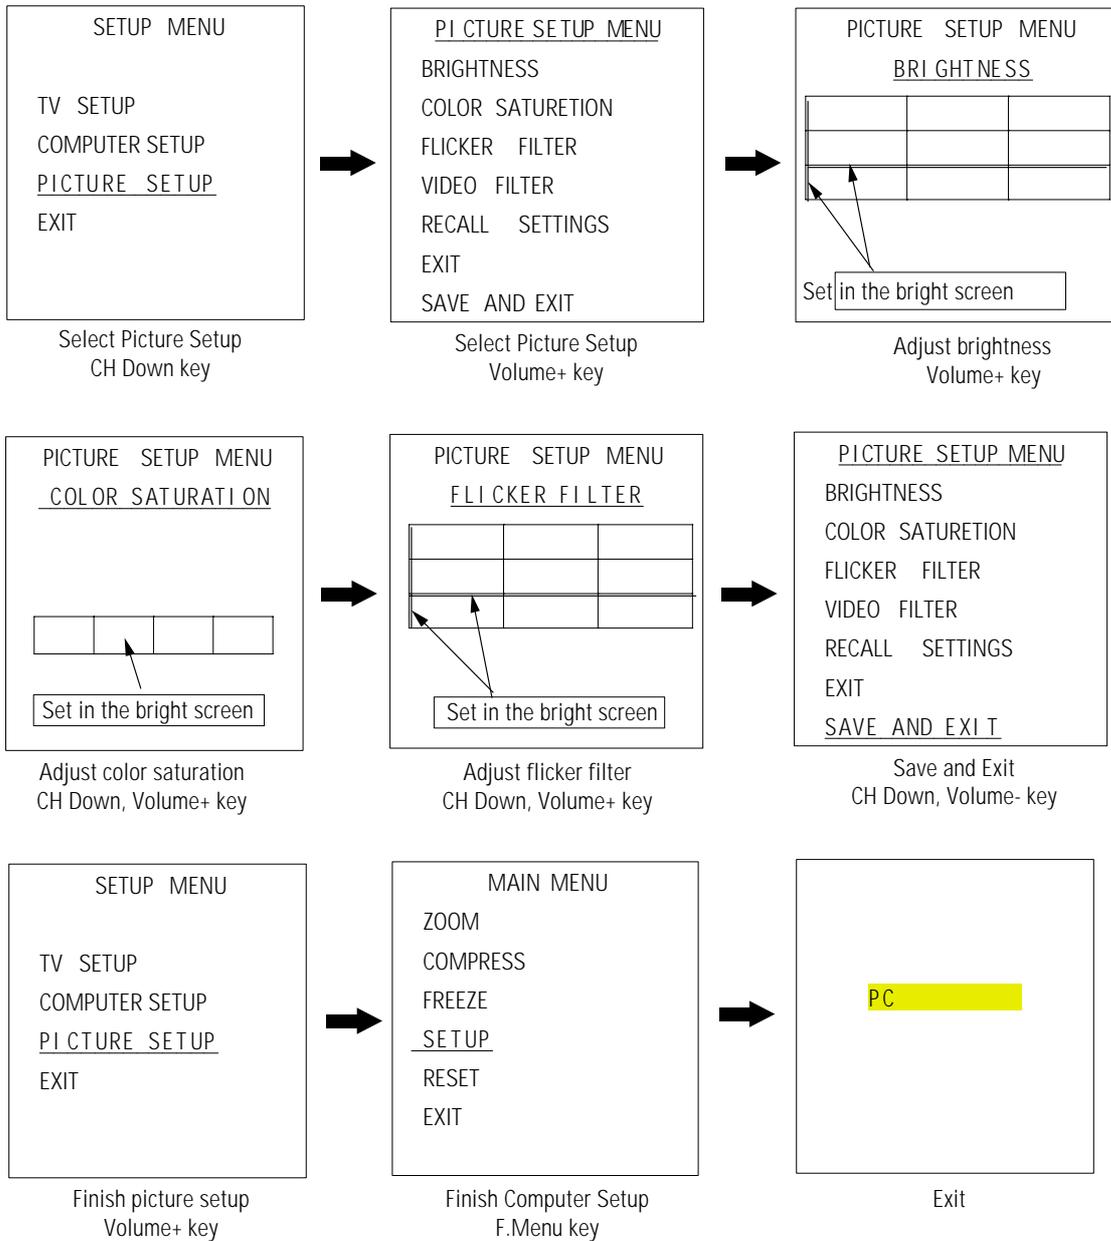

1. Adjust four different modes: VGA3 (VGA), VGA (DOS), VESA (SVGA), VEAS (XGA).
- 2). Perform the setup for each PC mode and picture setup.

4-8-3 Picture Setup Mode (computer setup mode only)

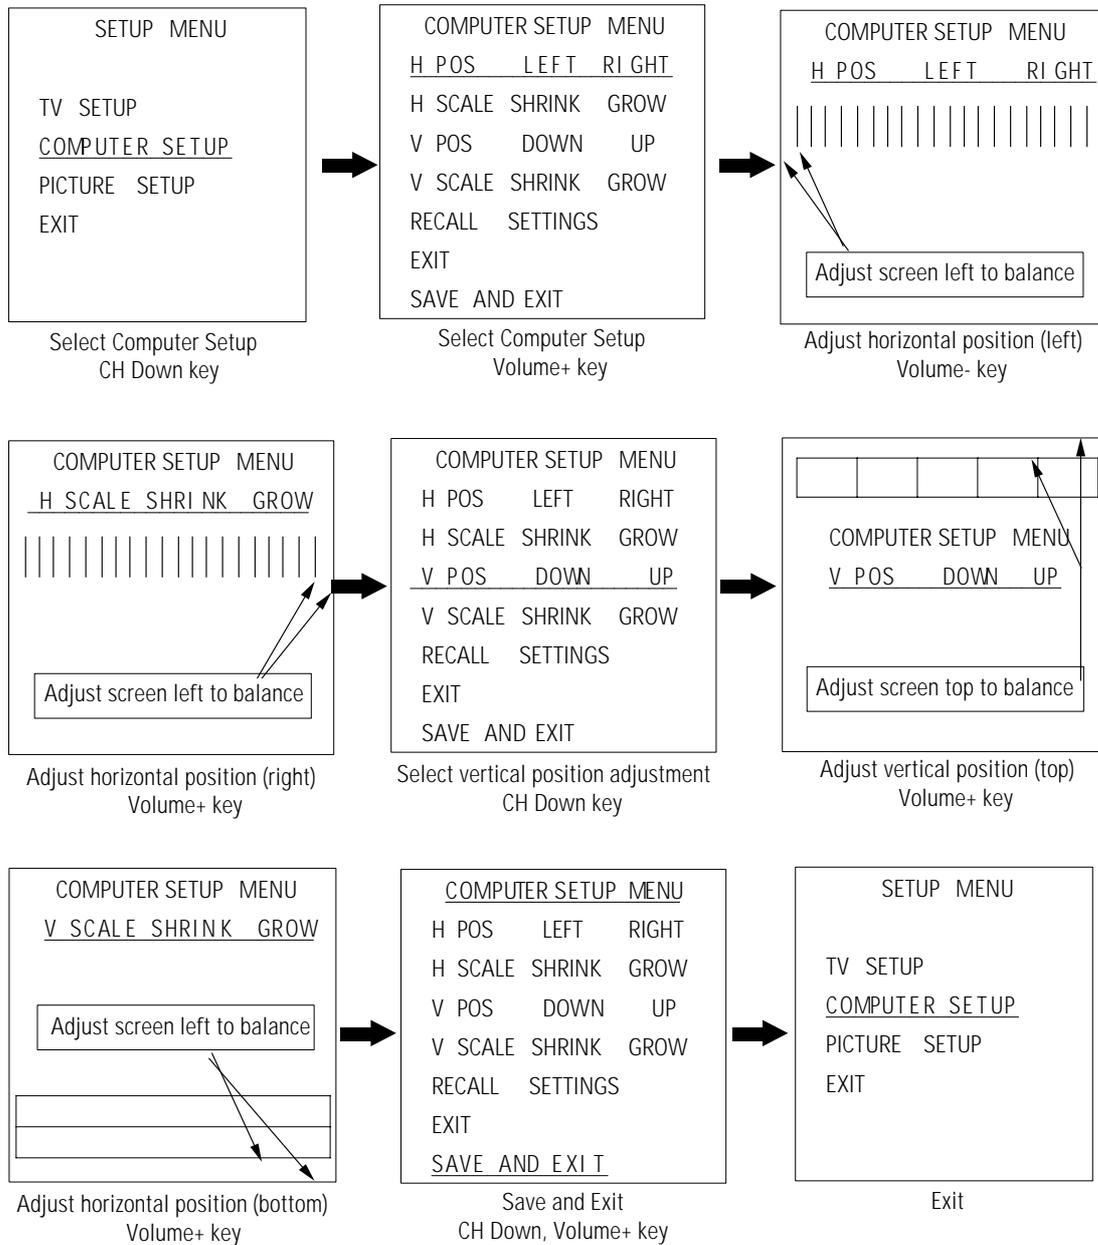

1. Adjust four different modes: VGA3 (VGA), VGA (DOS), VESA (SVGA), VEAS (XGA).
2. Perform the setup for each PC mode and picture setup.

4-9 MICOM and Pins Voltage

4-9-1 Pin Layout

| | | | | |
|--------------|----|--|----|-------------|
| POWER | 1 | S Z M 8 0 4 M 1 | 52 | D2 |
| IR-IN | 2 | | 51 | POWER2 |
| DVD-SEL | 3 | | 50 | BUS-STOP |
| STB-LED | 4 | | 49 | MAIN-NT-V |
| LNA-ON/OFF | 5 | | 48 | TTX-SCL |
| LNA-INPUT | 6 | | 47 | D3 |
| PIP-NT-V | 7 | | 46 | TIMER-LED |
| PIP-L/L' | 8 | | 45 | SECAM L/L' |
| PROTECT | 9 | | 44 | D1 |
| PIP-MODE S/W | 10 | | 43 | AMP-MUTE |
| SCL2 | 11 | | 42 | SOUND-RESET |
| SDA2 | 12 | | 41 | MODE-S/W |
| SCART1-IDENT | 13 | | 40 | XTAL GND |
| LOOP FILTER | 14 | | 39 | VCC |
| ANALOG GND | 15 | | 38 | GND |
| SUB-AFT | 16 | | 37 | XTAL2 |
| KEY1 | 17 | | 36 | XTAL1 |
| MAIN-AFT | 18 | | 35 | /RESET |
| KEY2 | 19 | | 34 | POWER-DTTV |
| SCART2-IDENT | 20 | | 33 | DTTV-SCL |
| ANALOG GND | 21 | | 32 | TTX-SDA |
| ANALOG VCC | 22 | | 31 | SCL1 |
| HALF TONE | 23 | | 30 | SDA1 |
| OSD B | 24 | | 29 | VSYNC |
| OSD G | 25 | | 28 | HSYNC |
| OSD R | 26 | | 27 | BLANK |

4-9-2 Micom Pins

| PIN NO. | ITEM | FUNCTION | OUT VOLT |
|---------|--------------|--------------------------------------|----------|
| 1 | POWER | POWER ON/OFF RELAY CONTROL | H--> L |
| 2 | IR IN | REMOCON INPUT | 4.7V |
| 3 | DVD-SEL | DVD SELECTION OUTPUT | 4.7V |
| 4 | STB-LED | STAND-BY LED OUTPUT | 4.6V |
| 5 | LNA-ON/OFF | LNA CONTROL OUTPUT | L |
| 6 | LNA-INPUT | LNA INPUT | L |
| 7 | PIP-NT-V | PIP VIDEO SAW FILTER SWITCH | L |
| 8 | PIP-L/L' | PIP SECAM SYSTEM SWITCH | L |
| 9 | PROTECT | PROTECT PORT | L |
| 10 | PIP-MODE S/W | PIP SECAM MODE SWITCH | L |
| 11 | SCL 2 | CLOCK BUS LINE | 4.5V |
| 12 | SDA 2 | DATA BUS LINE | 4.5V |
| 13 | SCART1-IDENT | SCART1 IDENT INPUT PORT | L/H |
| 14 | LOOP FILTER | LOOP FILTER | L |
| 15 | ANALOG GND | GND | L |
| 16 | SUB-AFT | SUB AUTO FINE TURNING CONTROL | 2.3V |
| 17 | KEY 1 | KEY SCAN 1 | 4.7V |
| 18 | MAIN-AFT | MAIN TUNER AFT | 2.3V |
| 19 | KEY 2 | KEY SCAN 2 | 4.8V |
| 20 | SCART2-IDENT | SCART2 IDENT INPUT PORT | H |
| 21 | ANALOG GND | GND | L |
| 22 | ANALOG VCC | VCC | 5V |
| 23 | HALF TONE | SIGNAL FOR OSC-FREQUENCY OSD CONTROL | L |
| 24 | OSD B | ON SCREEN DISPLAY BLUE OUTPUT | L/H |
| 25 | OSD G | ON SCREEN DISPLAY GREEN OUTPUT | L/H |
| 26 | OSD R | ON SCREEN DISPLAY RED OUTPUT | L/H |

| PIN NO. | ITEM | FUNCTION | OUT VOLT |
|---------|-------------|------------------------------|----------|
| 27 | BLANK | OSD BLAKING SIGNAL OUTPUT | L/H |
| 28 | HSYNC | HORIZONTAL SYNC INPUT | 4.5V |
| 29 | VSYN | VERTICAL SYNC INPUT | 4.6V |
| 30 | SDA1 | DATA BUS LINE | 4.5V |
| 31 | SCL1 | CLOCK BUS LINE | 4.5V |
| 32 | TTX-SDA | TELETEXT DATA BUS LINE | 5V |
| 33 | DTTV-SCL | DTTV CLOCK LINE | L |
| 34 | POWER-DTTV | DTTV POWER CONTROL | L |
| 35 | /RESET | HARDWARE RESET | 4.8V |
| 36 | XTAL1 | CRYSTAL 1 | 2.3V |
| 37 | XTAL2 | CRYSTAL 2 | 2.1V |
| 38 | GND | GND | L |
| 39 | VCC | VCC | 5V |
| 40 | XTAL GND | CRYSTAL GND | L |
| 41 | MODE-S/W | MAIN SECAM MODE SWITCH | 4.6V |
| 42 | SOUND-RESET | SOUND IC RESET | 4.9V |
| 43 | AMP-MUTE | SOUND AMP. MUTE | L |
| 44 | D1 | CONV. MODE CONTROL DATA1 | L/H |
| 45 | SECAM L/L' | MAIN SECAM SYSTEM SWITCH | H |
| 46 | TIMER-LED | TIMER LED | 4.6V |
| 47 | D3 | CONV. MODE CONTROL DATA3 | L/H |
| 48 | TTX-SCL | TELETEXT CLOCK BUS LINE | 5V |
| 49 | MAIN-NT-V | MAIN VIDEO SAW FILTER SWITCH | L |
| 50 | BUS-STOP | I ² C BUS STOP | 5V |
| 51 | POWER2 | PC POWER CONTROL | 4.6V |
| 52 | D2 | CONV. MODE CONTROL DATA2 | L/H |

4-9-3 PROSCAN MDL

| PIN NO. | ITEM | FUNCTION | OUT VOLT |
|---------|-------------|---------------------------|----------|
| 1 | DVD-Y | DVD-Y INPUT | 2.04V |
| 2 | GND | GND | GND |
| 3 | MAIN-Y/CVBS | Y/CVBS INPUT | 1.28V |
| 4 | MAIN-C | C-INPUT | 2.92V |
| 5 | GND | GND | GND |
| 6 | R/Pr | R/Pr INPUT | 2.0V |
| 7 | G/Y | G/Y INPUT | 2.0V |
| 8 | B/Pb | B/Pb INPUT | 2.0V |
| 9 | F/B | FAST BLANK INPUT | 0.16V |
| 10 | GND | GND | GND |
| 11 | HS1 | 1H-SYNC OUT | - |
| 12 | VS1 | V-SYNC OUT | - |
| 13 | GND | GND | GND |
| 14 | SDA-2 | SERIAL DATA LINE 2 | 3.0V |
| 15 | SCL-2 | SERIAL CLOCK LINE 2 | 3.5V |
| 16 | 5V-B | 5V-B INPUT | 5V |
| 17 | HD | H-DRIVE OUT | 1.6V |
| 18 | H-BLK | H-BLANK INPUT | - |
| 19 | VD+ | VERTICAL DRIVE (+VOLTAGE) | 2.6V |
| 20 | VD- | VERTICAL DRIVE (-VOLTAGE) | 2.6V |
| 21 | ABL | ABL INPUT | 2.15V |
| 22 | V-BLK | V-BLANK INPUT | - |
| 23 | EW | EAST WEST OUT | 2.5V |
| 24 | SC | N.C | - |
| 25 | GND | GND | GND |
| 26 | SYNC | V-SYNC OUT | N.C |
| 27 | SYNC | H-SYNC OUT | N.C |
| 28 | 5V-A | 5V-B INPUT | - |
| 29 | GND | GND | GND |
| 30 | TEST-Y | WHEN CG ADJ PATTERN INPUT | - |

| PIN NO. | ITEM | FUNCTION | OUT VOLT |
|---------|---------|------------------|----------|
| 31 | DTV-Y | DTV-Y INPUT | - |
| 32 | DTV-Pb | DTV-Pb INPUT | - |
| 33 | DTV-Pr | DTV-Pr INPUT | - |
| 34 | - | N.C | - |
| 35 | - | N.C | - |
| 36 | GND | GND | GND |
| 37 | OSD-R | OSD-R INPUT | - |
| 38 | OSD-G | OSD-G INPUT | - |
| 39 | OSD-B | OSD-B INPUT | - |
| 40 | YS | BLANK(MICOM OUT) | - |
| 41 | YM | NOT USED | - |
| 42 | V-MUTE | VIDEO MUTE | 4.72V |
| 43 | GND | GND | GND |
| 44 | 9V | 9V | 9V |
| 45 | T/P-R | TTX/PIP-R | - |
| 46 | T/P-G | TTX/PIP-G | - |
| 47 | T/P-B | TTX/PIP-B | - |
| 48 | T/P-F/B | TTX/PIP-F/B | - |
| 49 | GND | GND | |
| 50 | R-OUT | R-OUT | - |
| 51 | G-OUT | G-OUT | - |
| 52 | B-OUT | B-OUT | - |
| 53 | GND | GND | GND |
| 54 | IK | IK OUT | 3.65V |
| 55 | SPOT | SPOT OUT | - |
| 56 | GND | GND | GND |
| 57 | VM-Y | VM-Y OUT | 5.42V |
| 58 | - | N.C | - |

4-9-4 PIP MODULE

| PIN NO. | ITEM | FUNCTION | OUT VOLT |
|---------|--------------|-----------------------------|----------|
| 1 | SCL | SERIAL CLOCK LINE | 4.7V |
| 2 | SDA | SERIAL DATA LINE | 4.7V |
| 3 | 8V | 8V INPUT | 8V |
| 4 | GND | GND | 0V |
| 5 | CVBS | 5V-D INPUT | - |
| 6 | GND | GND | 0V |
| 7 | 5V-D | 5V-D INPUT | 5V |
| 8 | GND | GND | 0V |
| 9 | PIP-AGC | PIP-AGC OUTPUT | 3.36V |
| 10 | PIP-MODE S/W | PIP SECAM MODE SWITCH | 0V |
| 11 | 12V | 12V INPUT | 12V |
| 12 | PIP-L/L' | SECAM SYSTEM SWITCH | 0V |
| 13 | PIP-NT-V | PIP VIDEO SAW FILTER SWITCH | 0V |
| 14 | SUB-AFT | SUB-AFT OUTPUT | 4.37V |
| 15 | GND | GND | 0V |
| 16 | IF-IN | IF INPUT | - |
| 17 | IF-AGC | N.C | - |
| 18 | V-SYNC | V-SYNC INPUT | - |
| 19 | H-SYNC | H-SYNC INPUT | - |
| 20 | F/B | FAST BLANK OUTPUT | 2.46V |
| 21 | GND | GND | 0V |
| 22 | B | B OUTPUT | 0.66V |
| 23 | G | G OUTPUT | 0.66V |
| 24 | R | R OUTPUT | 0.66V |

4-9-5 F/CONVERTER MODULE

| PIN NO. | ITEM | FUNCTION | OUT VOLT |
|---------|----------|-------------------|----------|
| 1 | 5V | 5V INPUT | 5V |
| 2 | GND | GND | GND |
| 3 | R-IN | PC R INPUT | - |
| 4 | G-IN | PC G INPUT | - |
| 5 | B-IN | PC B INPUT | - |
| 6 | GND | GND | GND |
| 7 | HS | PC H-SYNC INPUT | - |
| 8 | VS | PC V-SYNC INPUT | - |
| 9 | GND | GND | GND |
| 10 | SDA | SERIAL DATA LINE | - |
| 11 | SCL | SERIAL CLOCK LINE | - |
| 12 | GND | GND | GND |
| 13 | IR | INPUT REMOCON | 2.5V |
| 14 | GND | GND | GND |
| 15 | R-OUT/Y3 | PC Y3 OUT | - |
| 16 | N.C | N.C | - |
| 17 | B-OUT/C3 | PC C3 OUT | - |

4-9-6 SOUND MODULE

| PIN NO. | ITEM | FUNCTION | OUT VOLT |
|---------|------------|--------------------------|----------|
| 1 | AV1-RIN | SCART-R INPUT | - |
| 2 | AV1-LIN | SCART-L INPUT | - |
| 3 | GND | GND | 0V |
| 4 | EXT-RIN | EXT-R INPUT | - |
| 5 | EXT-LIN | EXT-L INPUT | - |
| 6 | GND | GND | 0V |
| 7 | AV2-RIN | AV2-R INPUT | - |
| 8 | AV2-LIN | AV2-L INPUT | - |
| 9 | GND | GND | 0V |
| 10 | AV1-LOUT | SCART1-L OUTPUT | - |
| 11 | AV1-ROUT | SCART1-R OUTPUT | - |
| 12 | S-CONTROLO | EXT-SOUND CONTROL OUTPUT | 0V/8V |
| 13 | S-CONTROL1 | EXT-SOUND CONTROL OUTPUT | 0V/8V |
| 14 | M-OUT-L | MONITOR-L OUTPUT | - |
| 15 | M-OUT-R | MONITOR-R OUTPUT | - |
| 16 | GND | GND | 0V |
| 17 | GND | GND | 0V |
| 18 | QSS-IN | QUASI-SPLIT SOUND INPUT | 1.95V |
| 19 | GND | GND | 0V |
| 20 | AM-IN | AM INPUT | 2.53V |
| 21 | SDA | SERIAL DATA LINE | 4.6V |
| 22 | SCL | SERIAL CLOCK LINE | 4.6V |
| 23 | GND | GND | 0V |
| 24 | 5V-A | 5V-A INPUT | 5V |
| 25 | 8V | 8V-INPUT | 8V |
| 26 | AV4-RIN | AV4-R INPUT | - |
| 27 | AV4-LIN | AV4-L INPUT | - |
| 28 | S-RESET | SOUND RESET INPUT | 5V |

| PIN NO. | ITEM | FUNCTION | OUT VOLT |
|---------|----------|-----------------------|----------|
| 30 | 12V | 12V INPUT | 12V |
| 31 | GND | GND | 0V |
| 32 | SURROUND | DOLBY SURROUND OUTPUT | 5.6V |
| 33 | GND | GND | 0V |
| 34 | CENTER | DOLBY CENTER OUTPUT | 5.6V |
| 35 | GND | GND | 0V |
| 36 | MAIN-R | MAIN-R OUTPUT | 5.6V |
| 37 | MAIN-L | MAIN-L OUTPUT | 5.6V |
| 38 | GND | GND | 0V |
| 39 | NC | N.C | - |
| 40 | NC | N.C | - |

4-9-7 H/V MODULE

| PIN NO. | ITEM | FUNCTION | OUT VOLT |
|---------|----------|--------------------|----------|
| 1 | 12V | 12V INPUT | 12V |
| 2 | GND | GND | GND |
| 3 | HD | H-DRIVE INPUT | 1.6V |
| 4 | V-BLK | V-BLANK INPUT | 0.72V |
| 5 | 2H-BLK | 2H-BLANK OUT | 0.54V |
| 6 | GND | GND | GND |
| 7 | PROTECT | PROTECT | ACTIV H |
| 8 | FBT-DC | FBT DC FEED BACK | 4.87V |
| 9 | X-RAY | X-RAY PROTECT F/B | 2.10V |
| 10 | N.C | N.C | - |
| 11 | HV-REG | HV-REG | 3.54V |
| 12 | HV-DRIVE | HIGH VOLTAGE DRIVE | 0.32V |
| 13 | H-DRIVE | H-DRIVE OUT | 25V |
| 14 | GND | GND | GND |
| 15 | HEATER | HEATER INPUT | AC[0.7V] |
| 16 | N.C | N.C | - |
| 17 | 208V | 208V INPUT | 208V |
| 18 | N.C | N.C | - |
| 19 | GND | GND | GND |
| 20 | V2 | V2 INPUT | |
| 21 | N.C | N.C | - |
| 22 | N.C | N.C | - |
| 23 | D-FOCUS | DYNAMIC FOCUS OUT | - |
| 24 | N.C | N.C | - |
| 25 | N.C | N.C | - |
| 26 | SCREEN | SCREEN INPUT | 1356V |

4-9-8 CONV- MODULE


| PIN NO. | ITEM | FUNCTION | OUT VOLT |
|---------|---------|-------------------------|----------|
| 1 | SDA | D2 | - |
| 2 | SCL | D1 | - |
| 3 | GND | GND | GND |
| 4 | BV | BLUE VERTICAL OUT | - |
| 5 | BH | BLUE HORIZONTAL OUT | - |
| 6 | GV | GREEN VERTICAL OUT | - |
| 7 | GH | GREEN HORIZONTAL OUT | - |
| 8 | RV | RED VERTICAL OUT | - |
| 9 | RH | RED HORIZONTAL OUT | - |
| 10 | -5.4V | -5.4V INPUT | -5.4V |
| 11 | 5.4V | 5.4V INPUT | +5.4V |
| 12 | V-BLK | V-BLK INPUT | - |
| 13 | GND | GND | GND |
| 14 | H-BLK | H-BLK INPUT | 0.52V |
| 15 | COMP | COMP VIDEO OUTPUT (N.C) | N.C |
| 16 | IR | INPUT REMOCON | 3V |
| 17 | CTRL | CTRL (N.C) | N.C |
| 18 | D3/SEL | D3 | 0.2V |
| 19 | B | WHEN TEST PATTERN B OUT | - |
| 20 | G(TEST) | WHEN TEST PATTERN G OUT | - |
| 21 | R | WHEN TEST PATTERN R OUT | - |
| 22 | SYNC | SYNC OUTPUT | 4.41V |

4-9-9 TTX-MODULE


| PIN NO. | ITEM | FUNCTION | OUT VOLT |
|---------|---------|-----------------------|-----------|
| 1 | H-SYNC | HOR. SYNC INPUT | 3.6V |
| 2 | V-SYNC | VER. SYNC INPUT | 3.6V |
| 3 | NC | N.C | - |
| 4 | GND | GND | GND |
| 5 | F/B-OUT | FAST BLANK OUT | 0V/1.4V |
| 6 | B-OUT | B OUTPUT | 1.8V/2.4V |
| 7 | G-OUT | G OUTPUT | 1.8V/2.4V |
| 8 | R-OUT | R OUTPUT | 1.8V/2.4V |
| 9 | GND | GND | GND |
| 10 | 5V-D | 5V-D INPUT | 5V |
| 11 | GND | GND | GND |
| 12 | 12V | 12V INPUT | 12V |
| 13 | GND | GND | GND |
| 14 | F/B-IN | EXT. FATS BLANK INPUT | - |
| 15 | B-IN | EXT. B-INPUT | 0.6V |
| 16 | G-IN | EXT. G-INPUT | 0.6V |
| 17 | R-IN | EXT. R-INPUT | 0.6V |
| 18 | GND | GND | GND |
| 19 | CVBS-IN | CVBS INPUT | 1.1V |
| 20 | SCL | SERIAL CLOCK LINE | 5V |
| 21 | SDA | SERIAL DATA LINE | 5V |

8. Block Diagrams


8-1 Main Signal

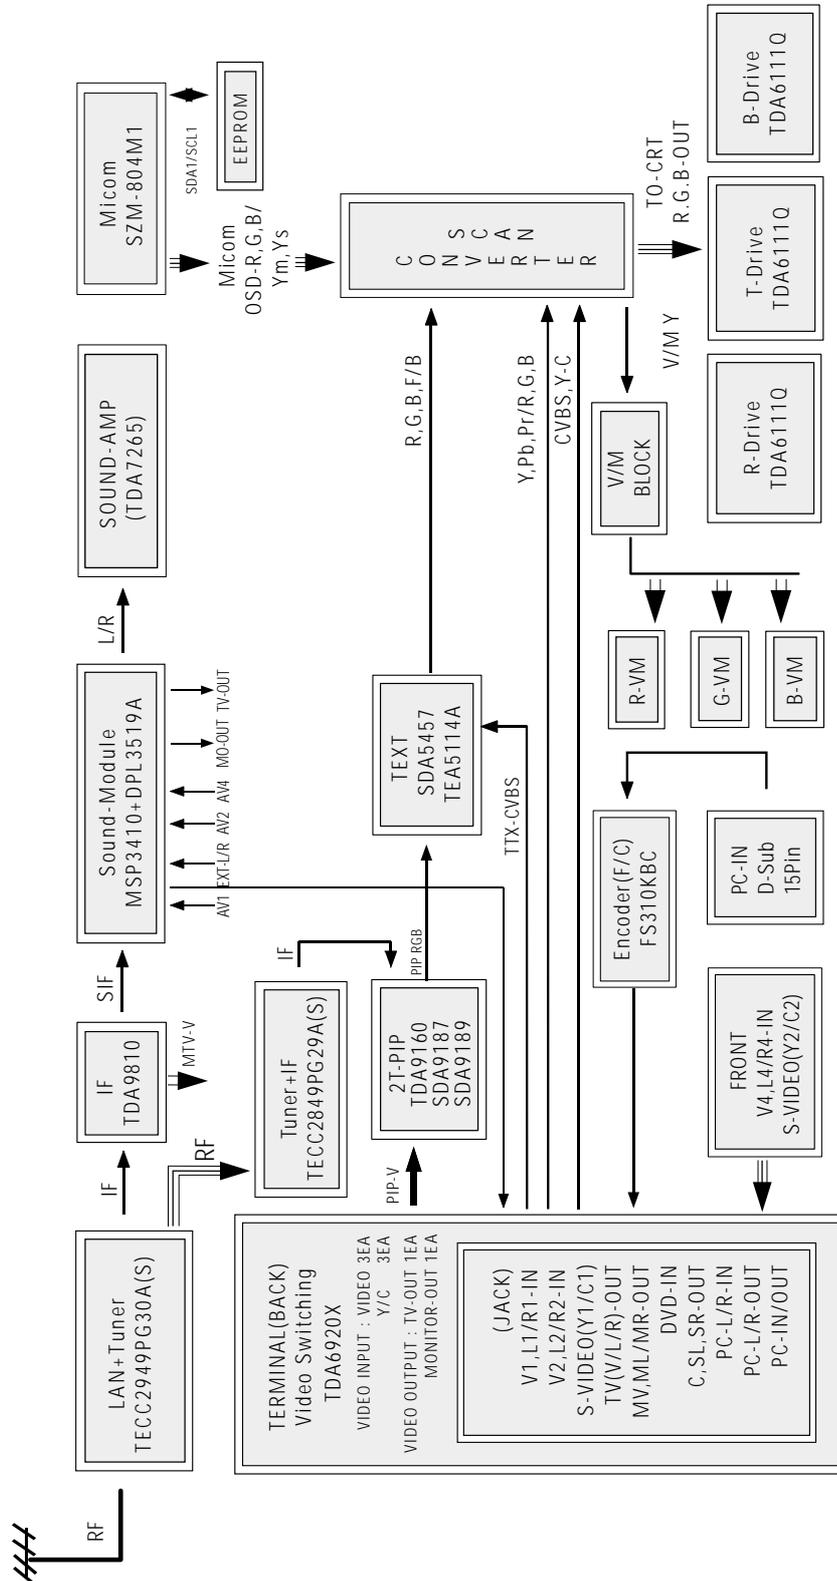


8-2 Video Signal

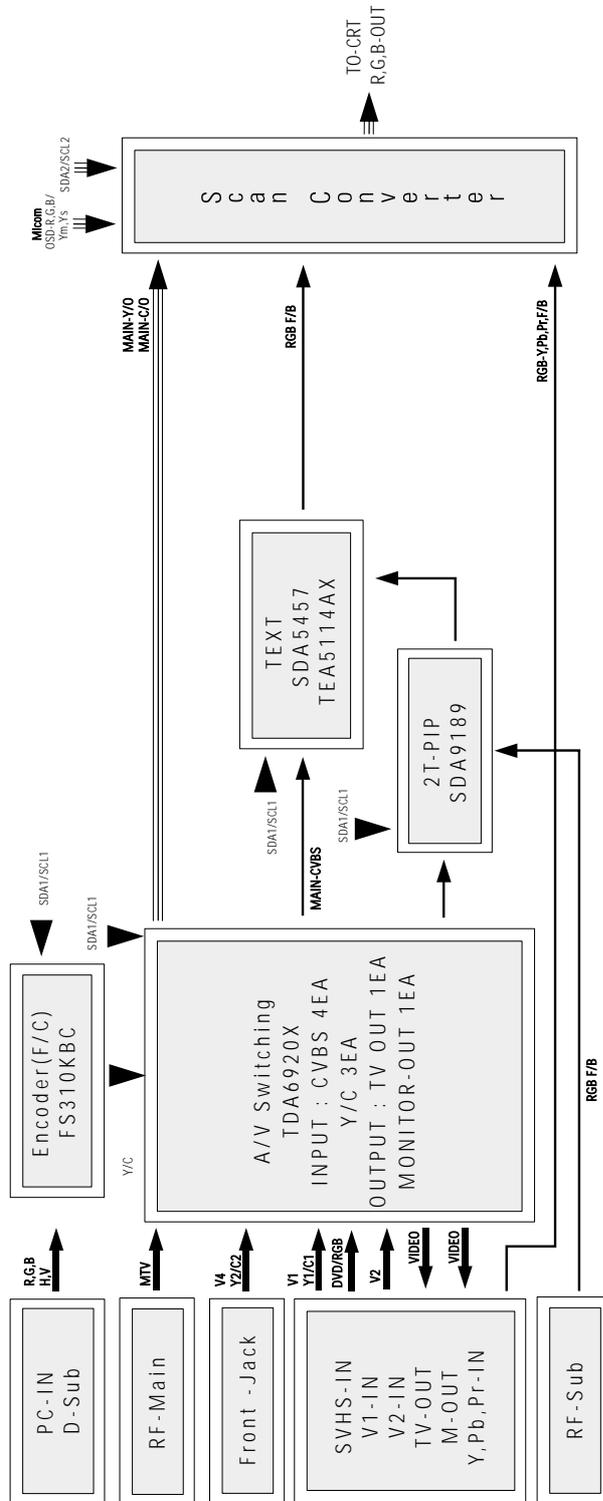

8-3 Sound Signal



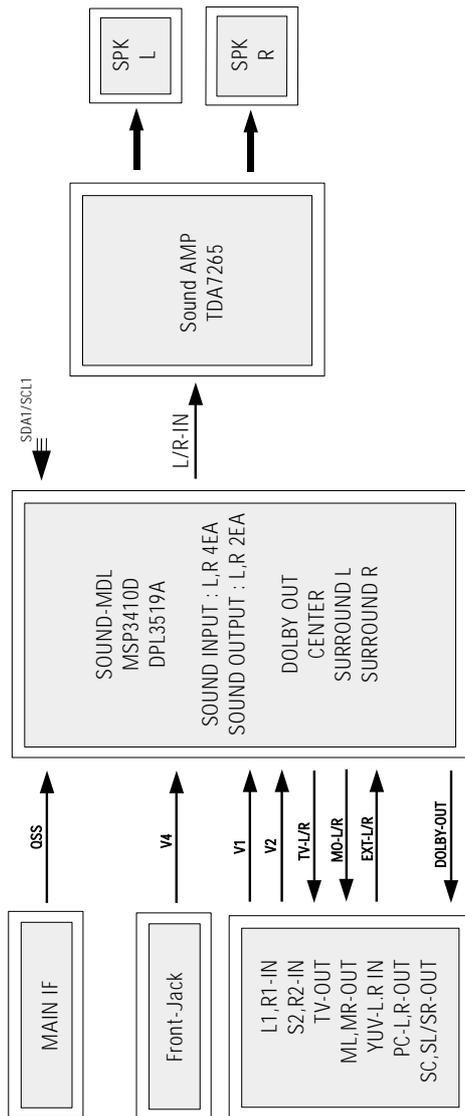


8-4 POWER SUPPLY

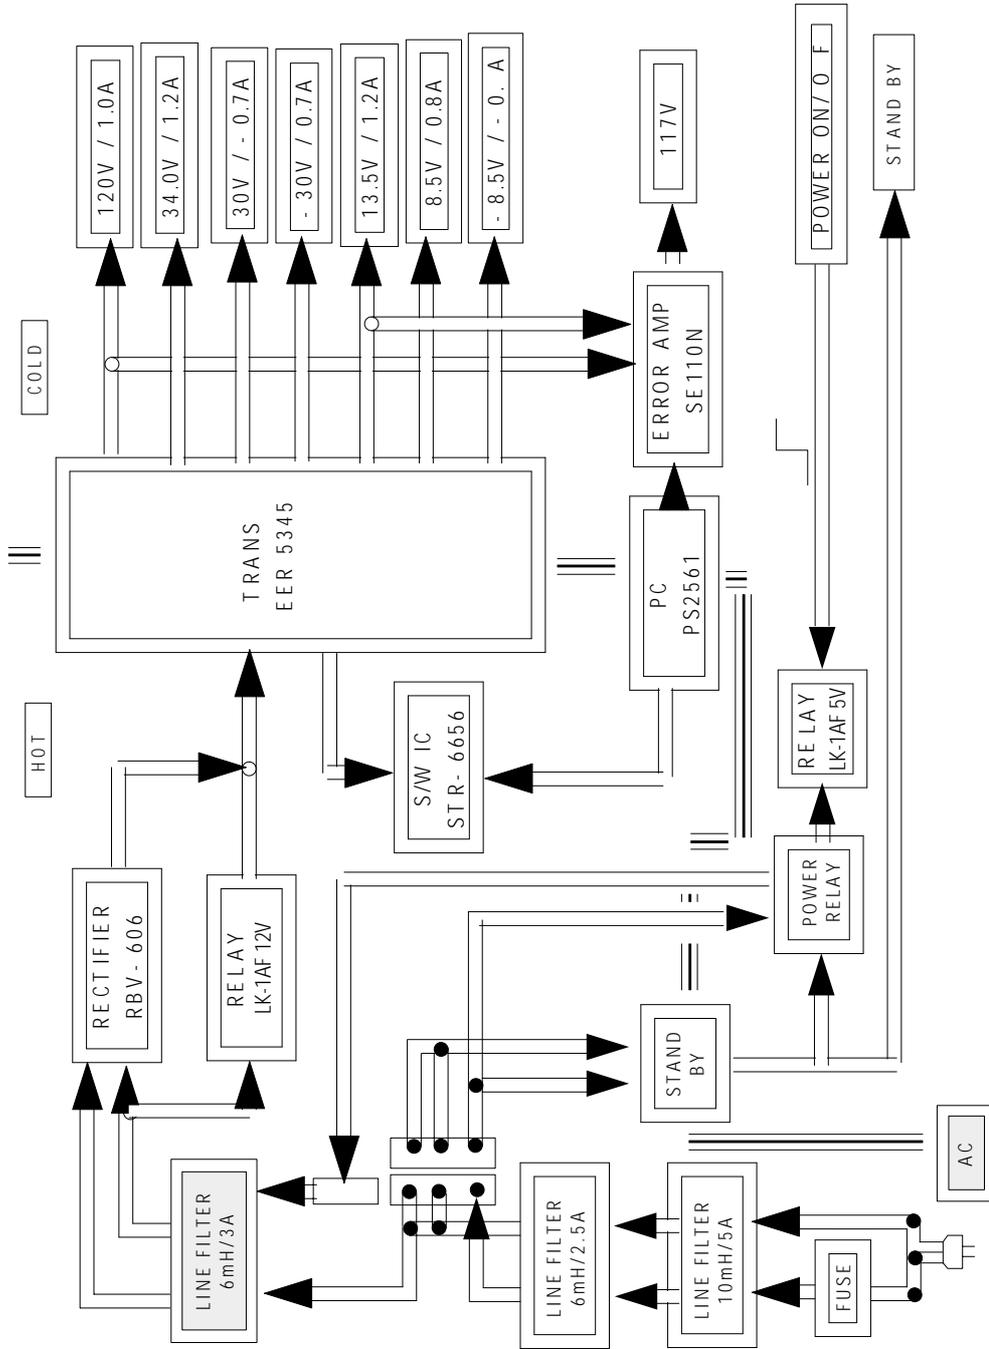










10. Schematic Diagrams

10-1 MAIN A

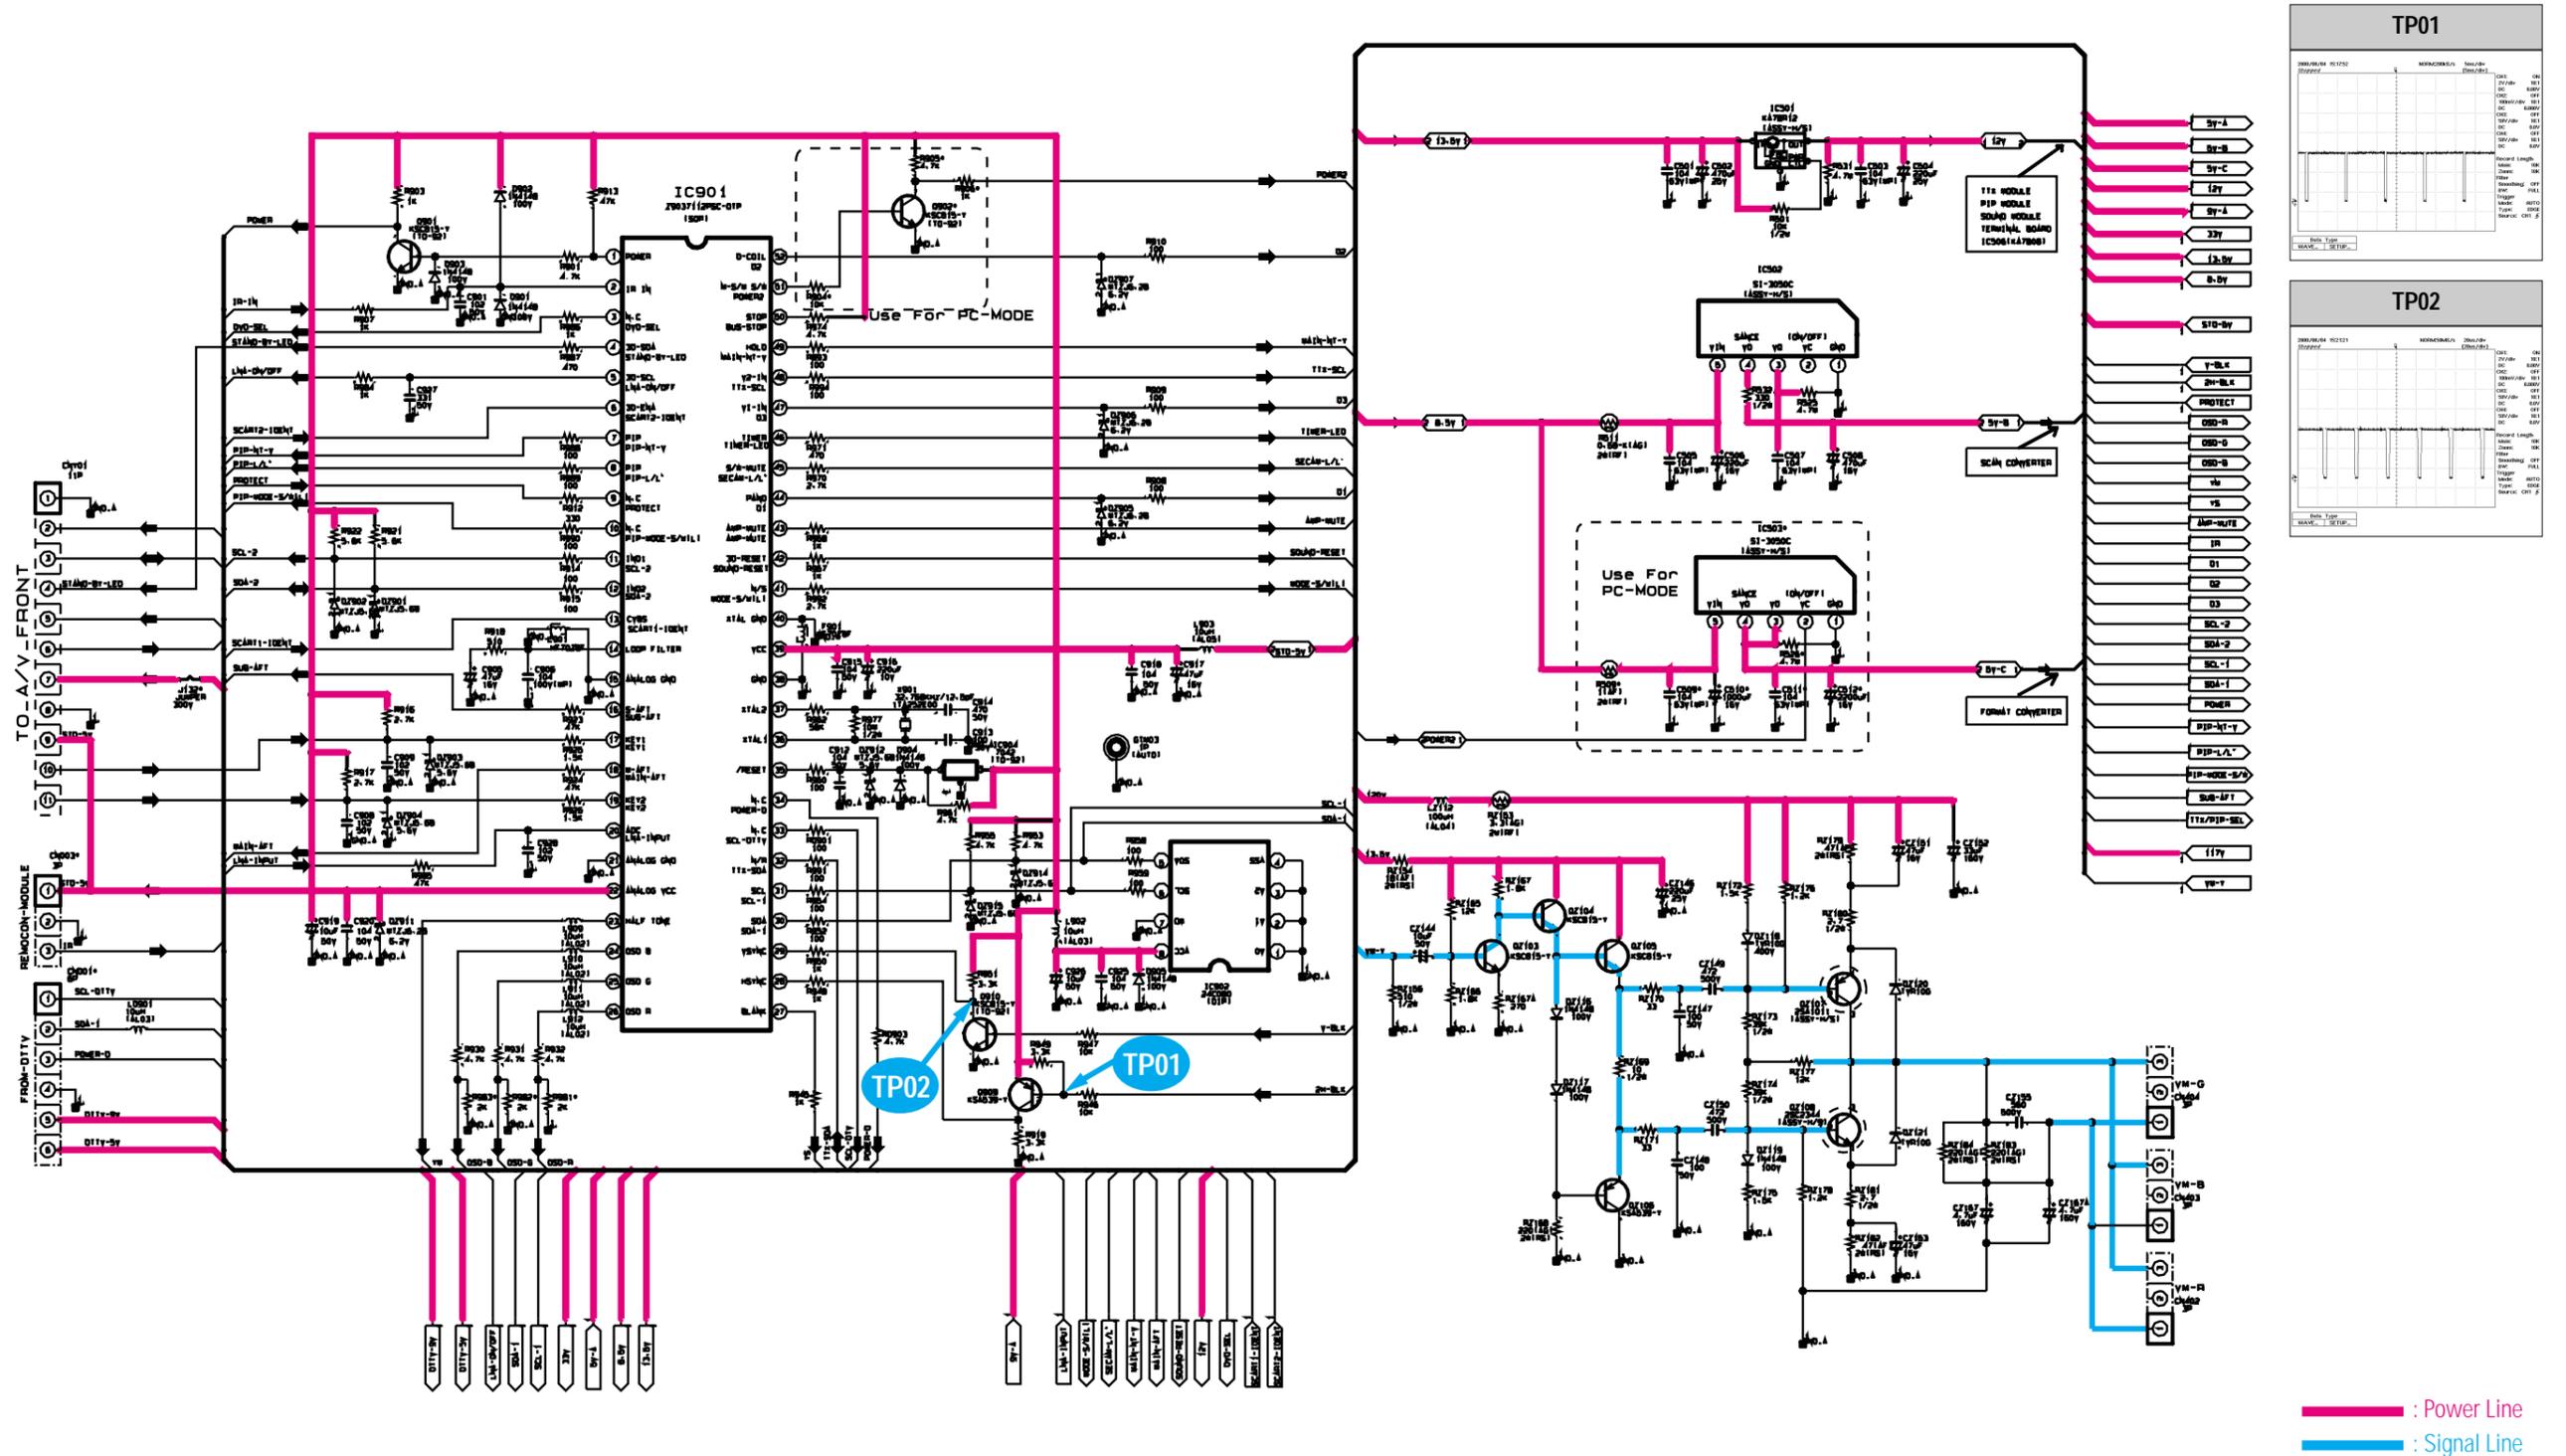



Power Line
Signal Line

10-2 MAIN B

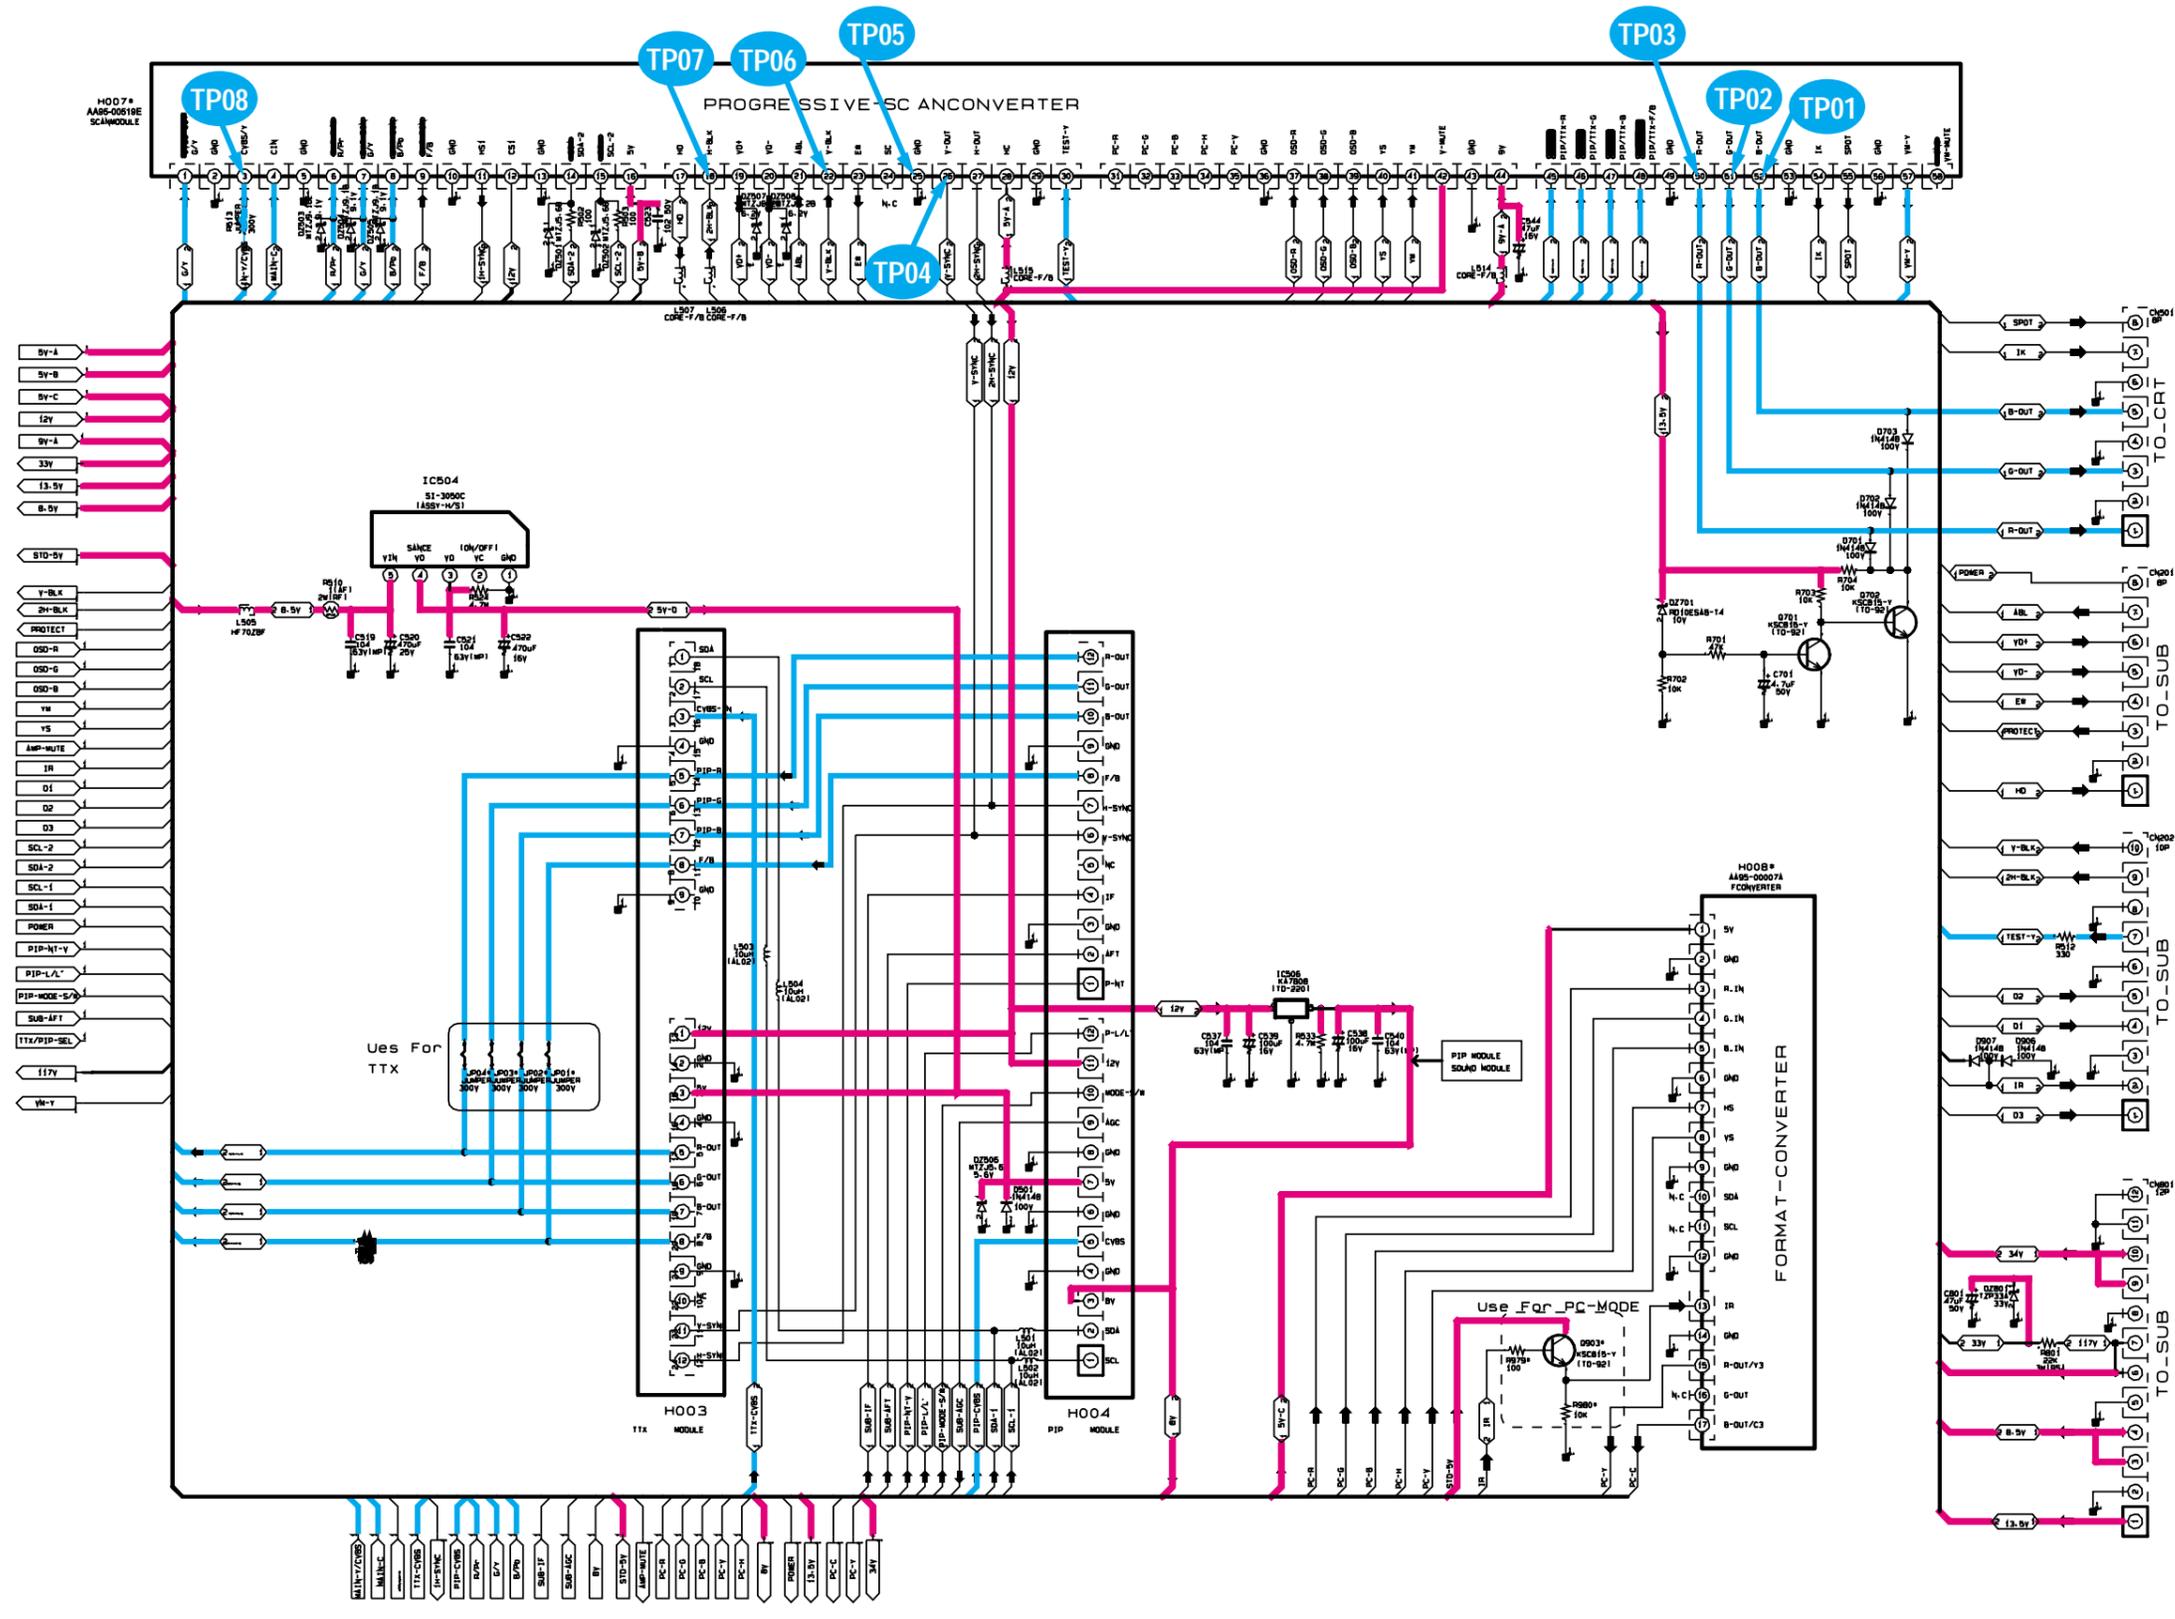




Power Line
Signal Line

10-3 MAIN C

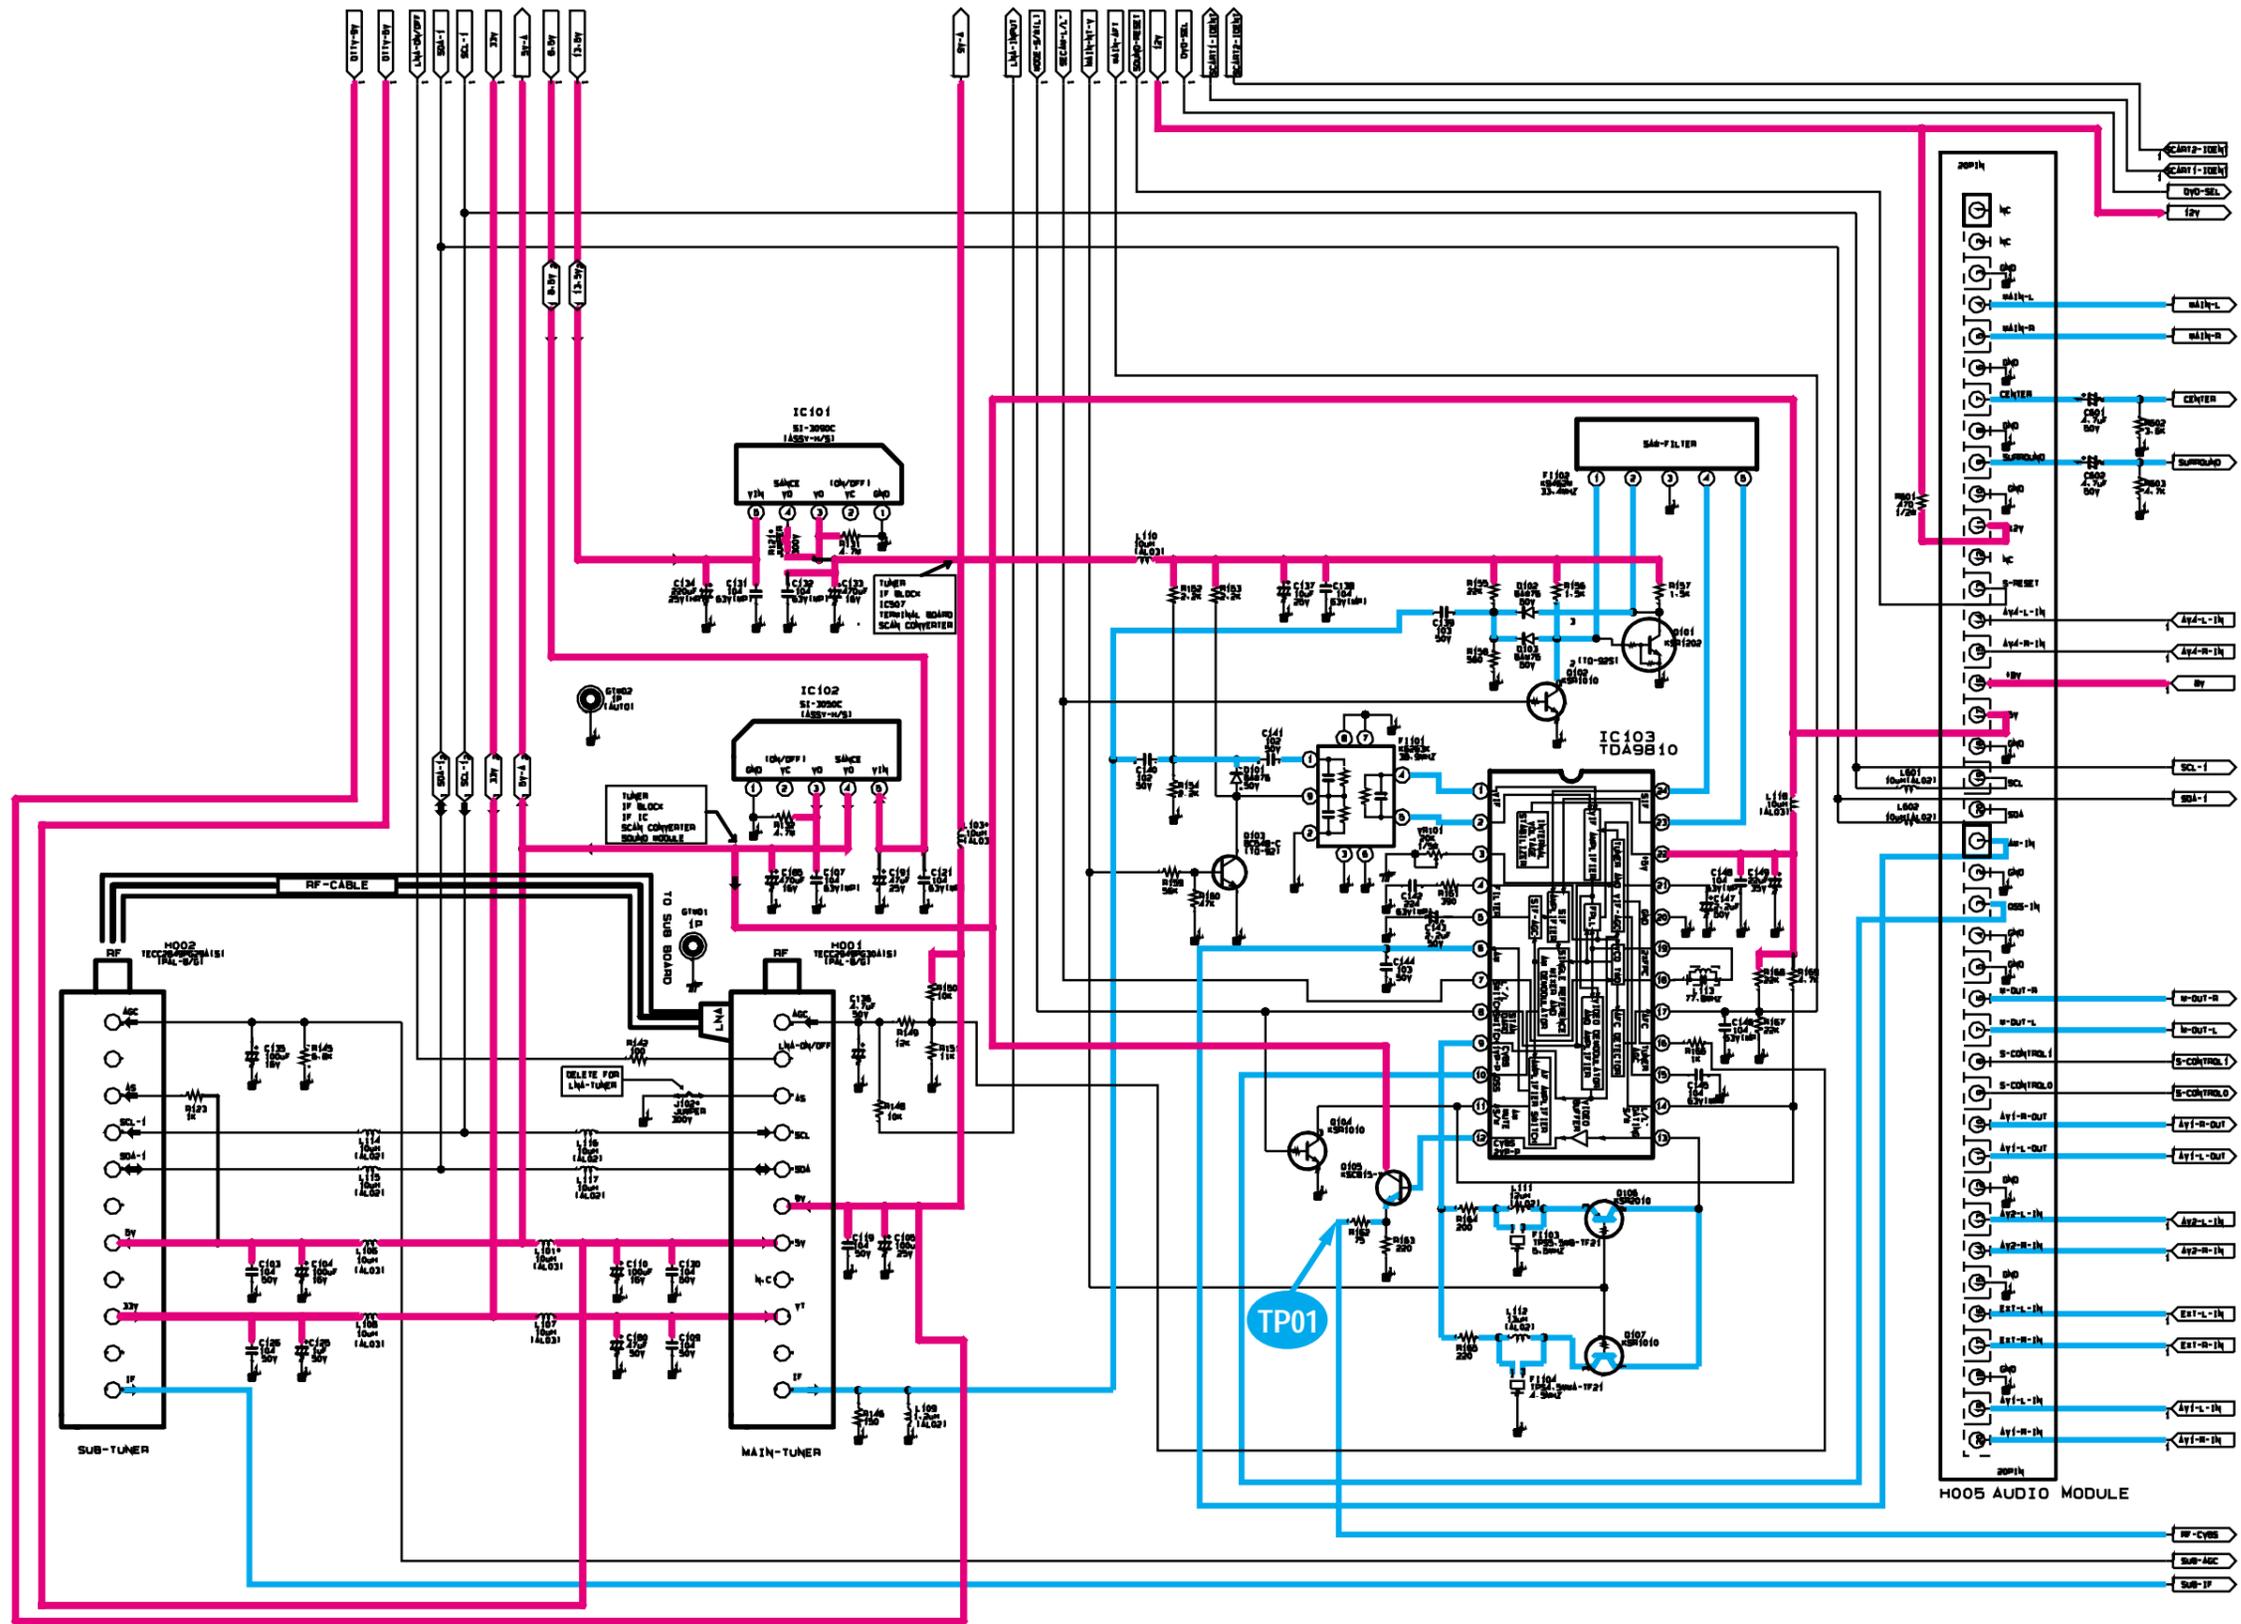


— : Power Line
 — : Signal Line

10-4 MAIN D

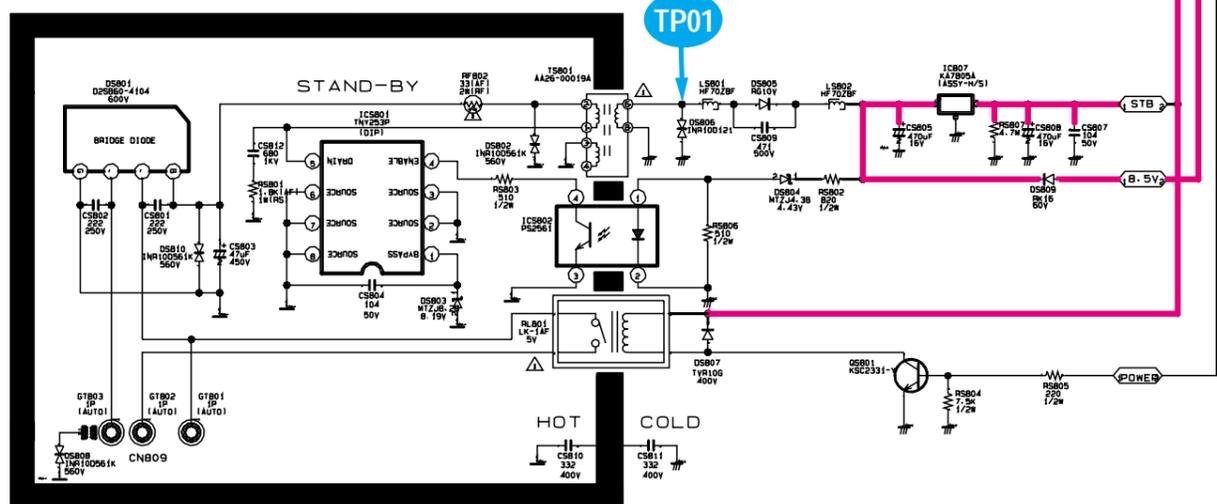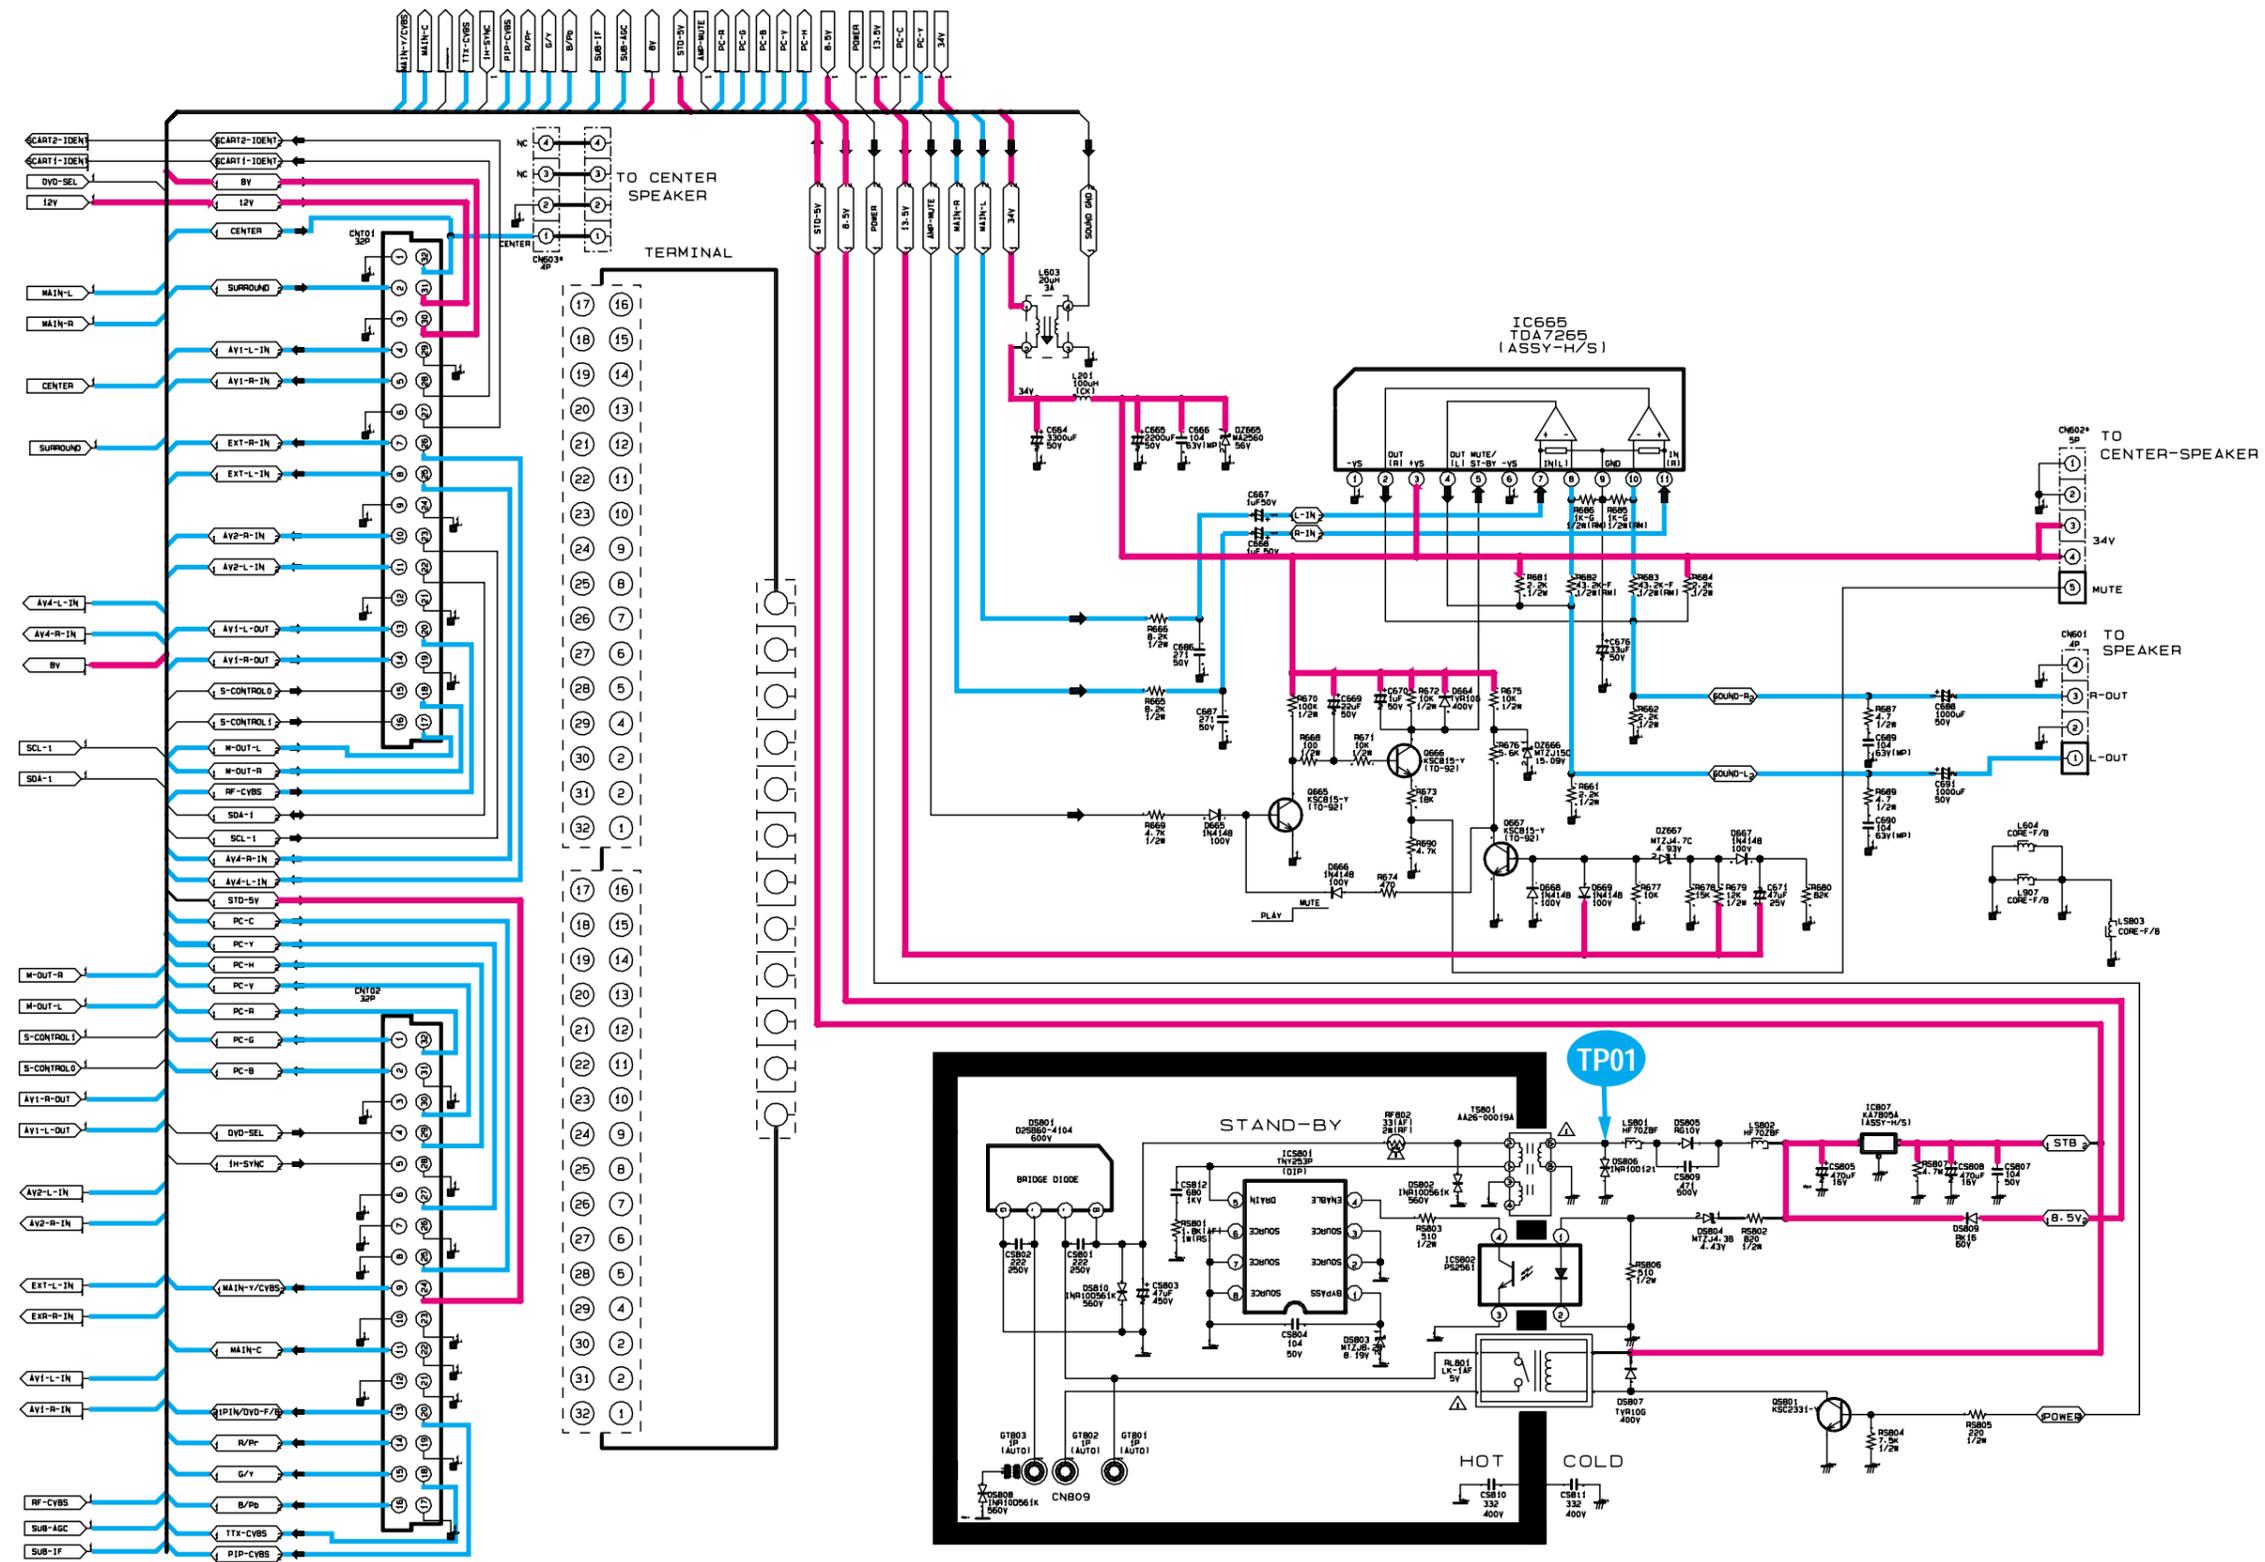


— : Power Line
 — : Signal Line


10-5 SCAN-MODULE 1/3

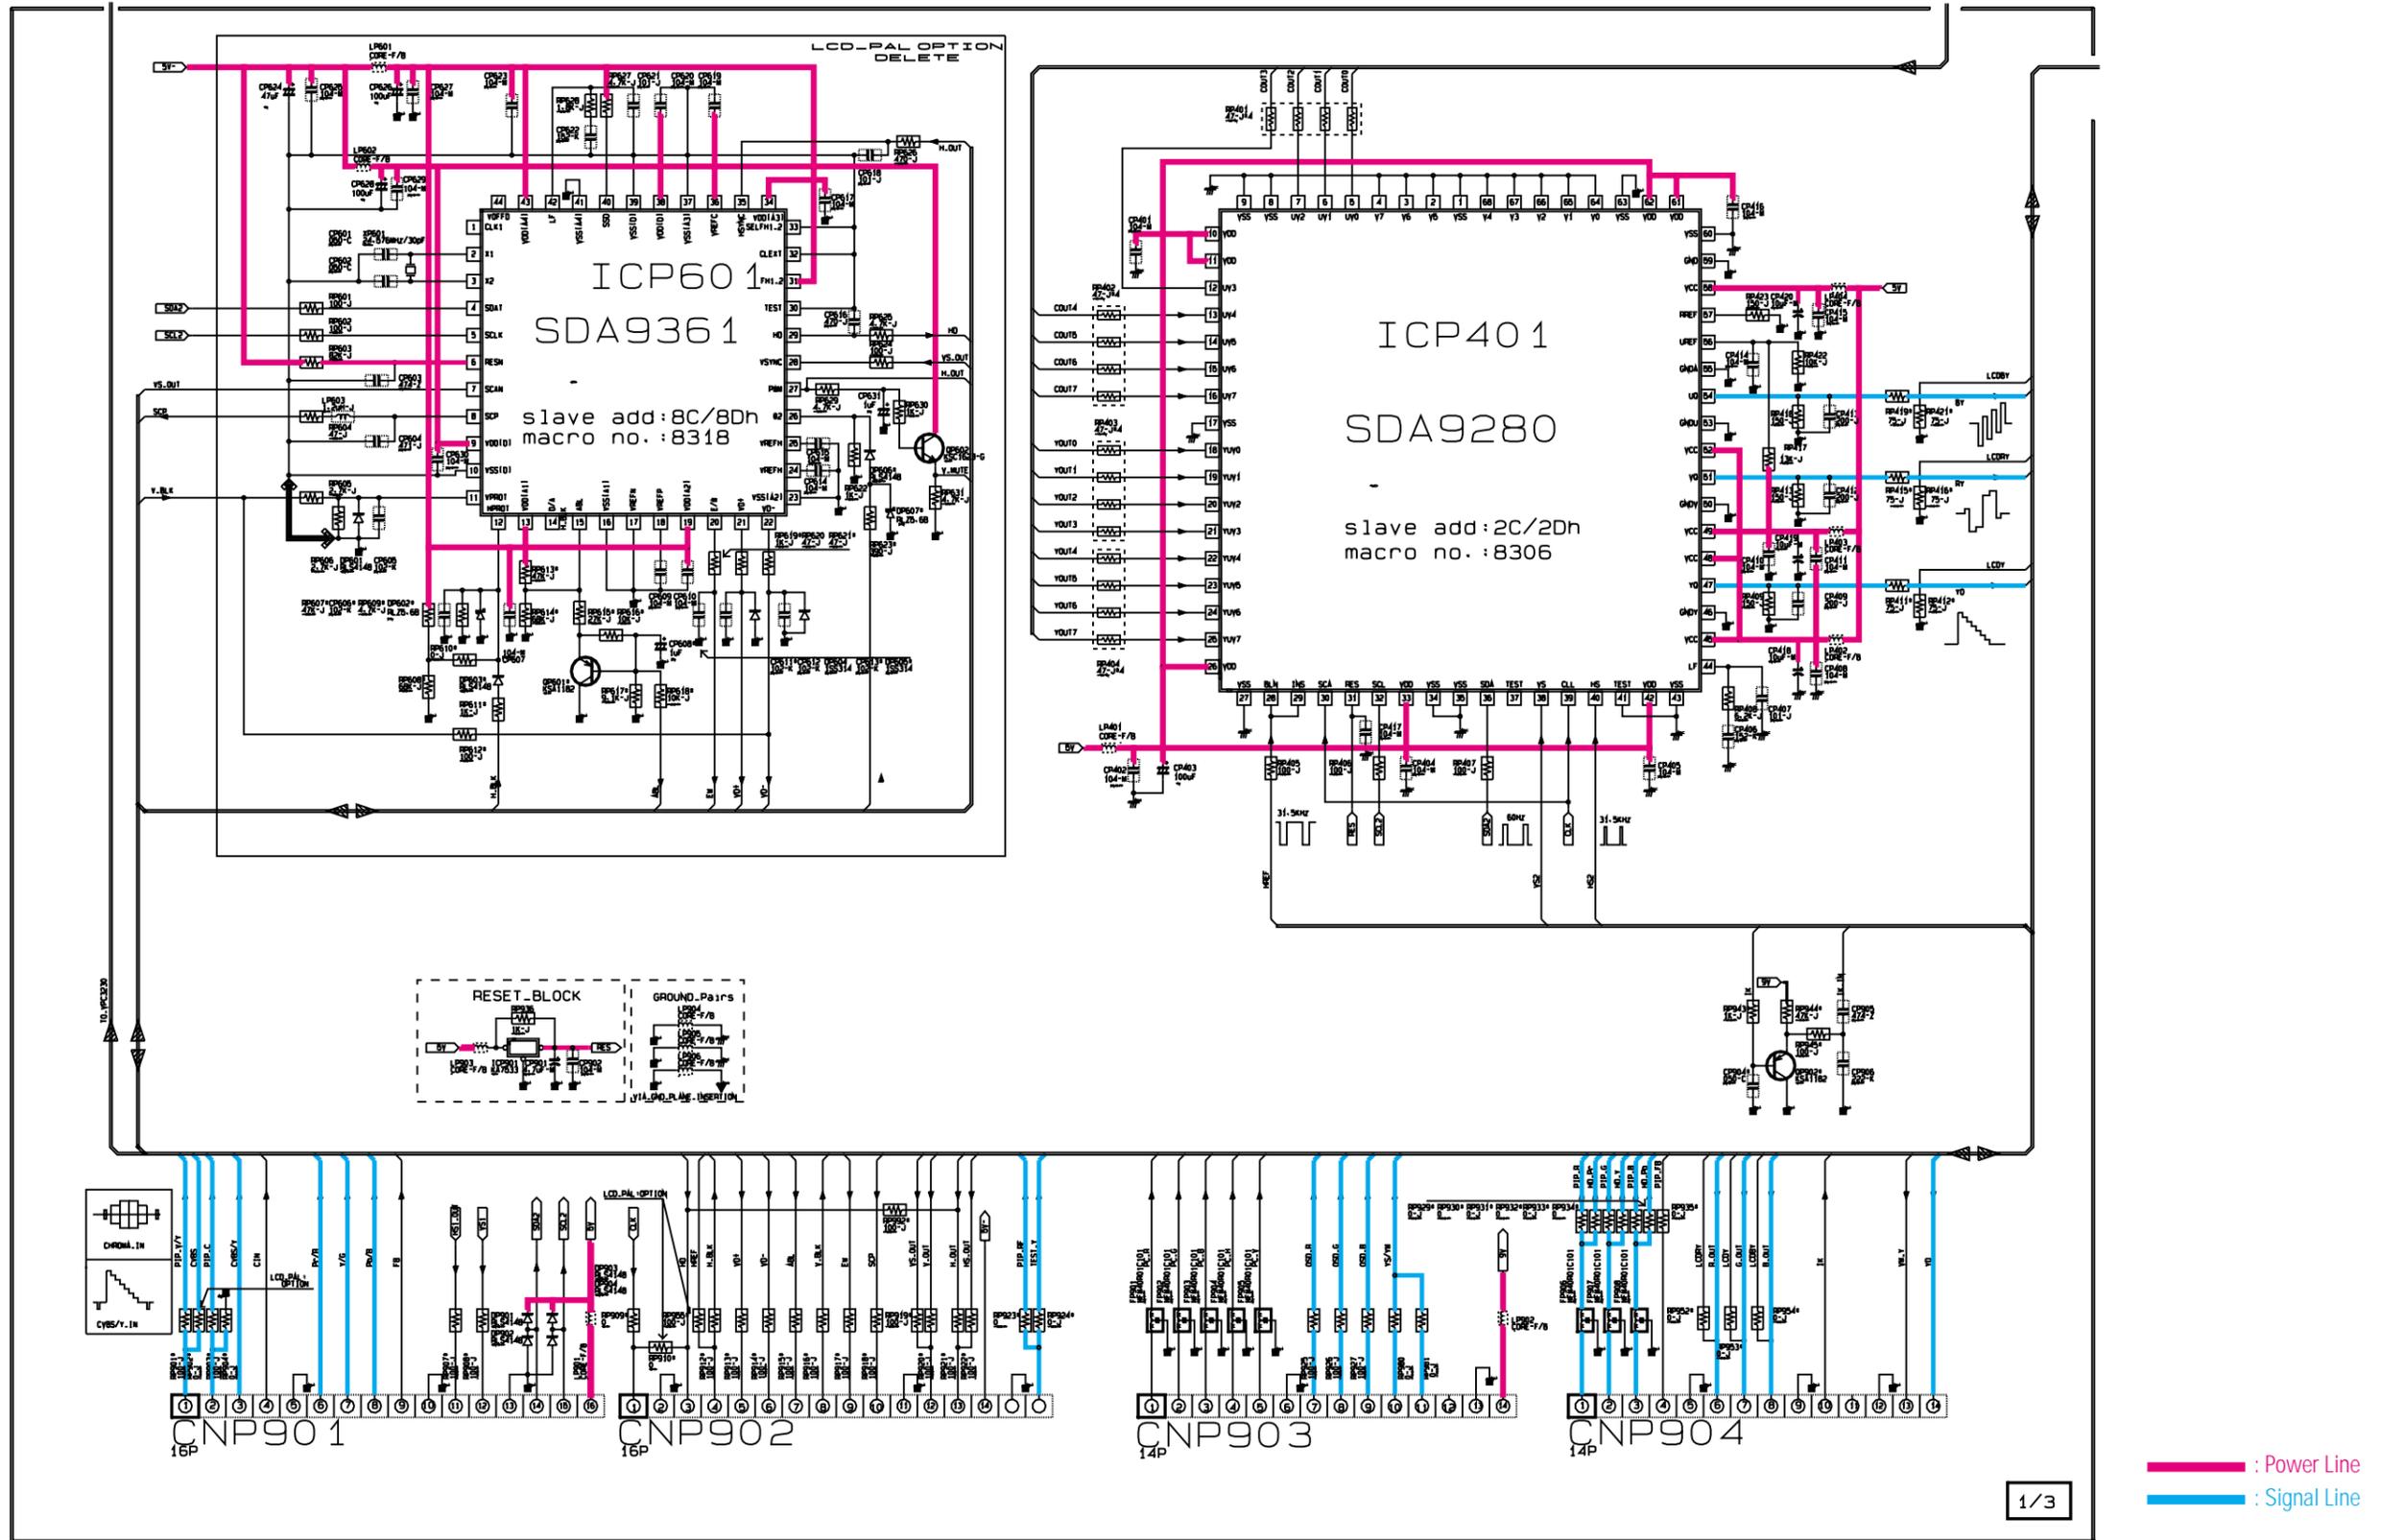

10-6 SCAN-MODULE 2/3

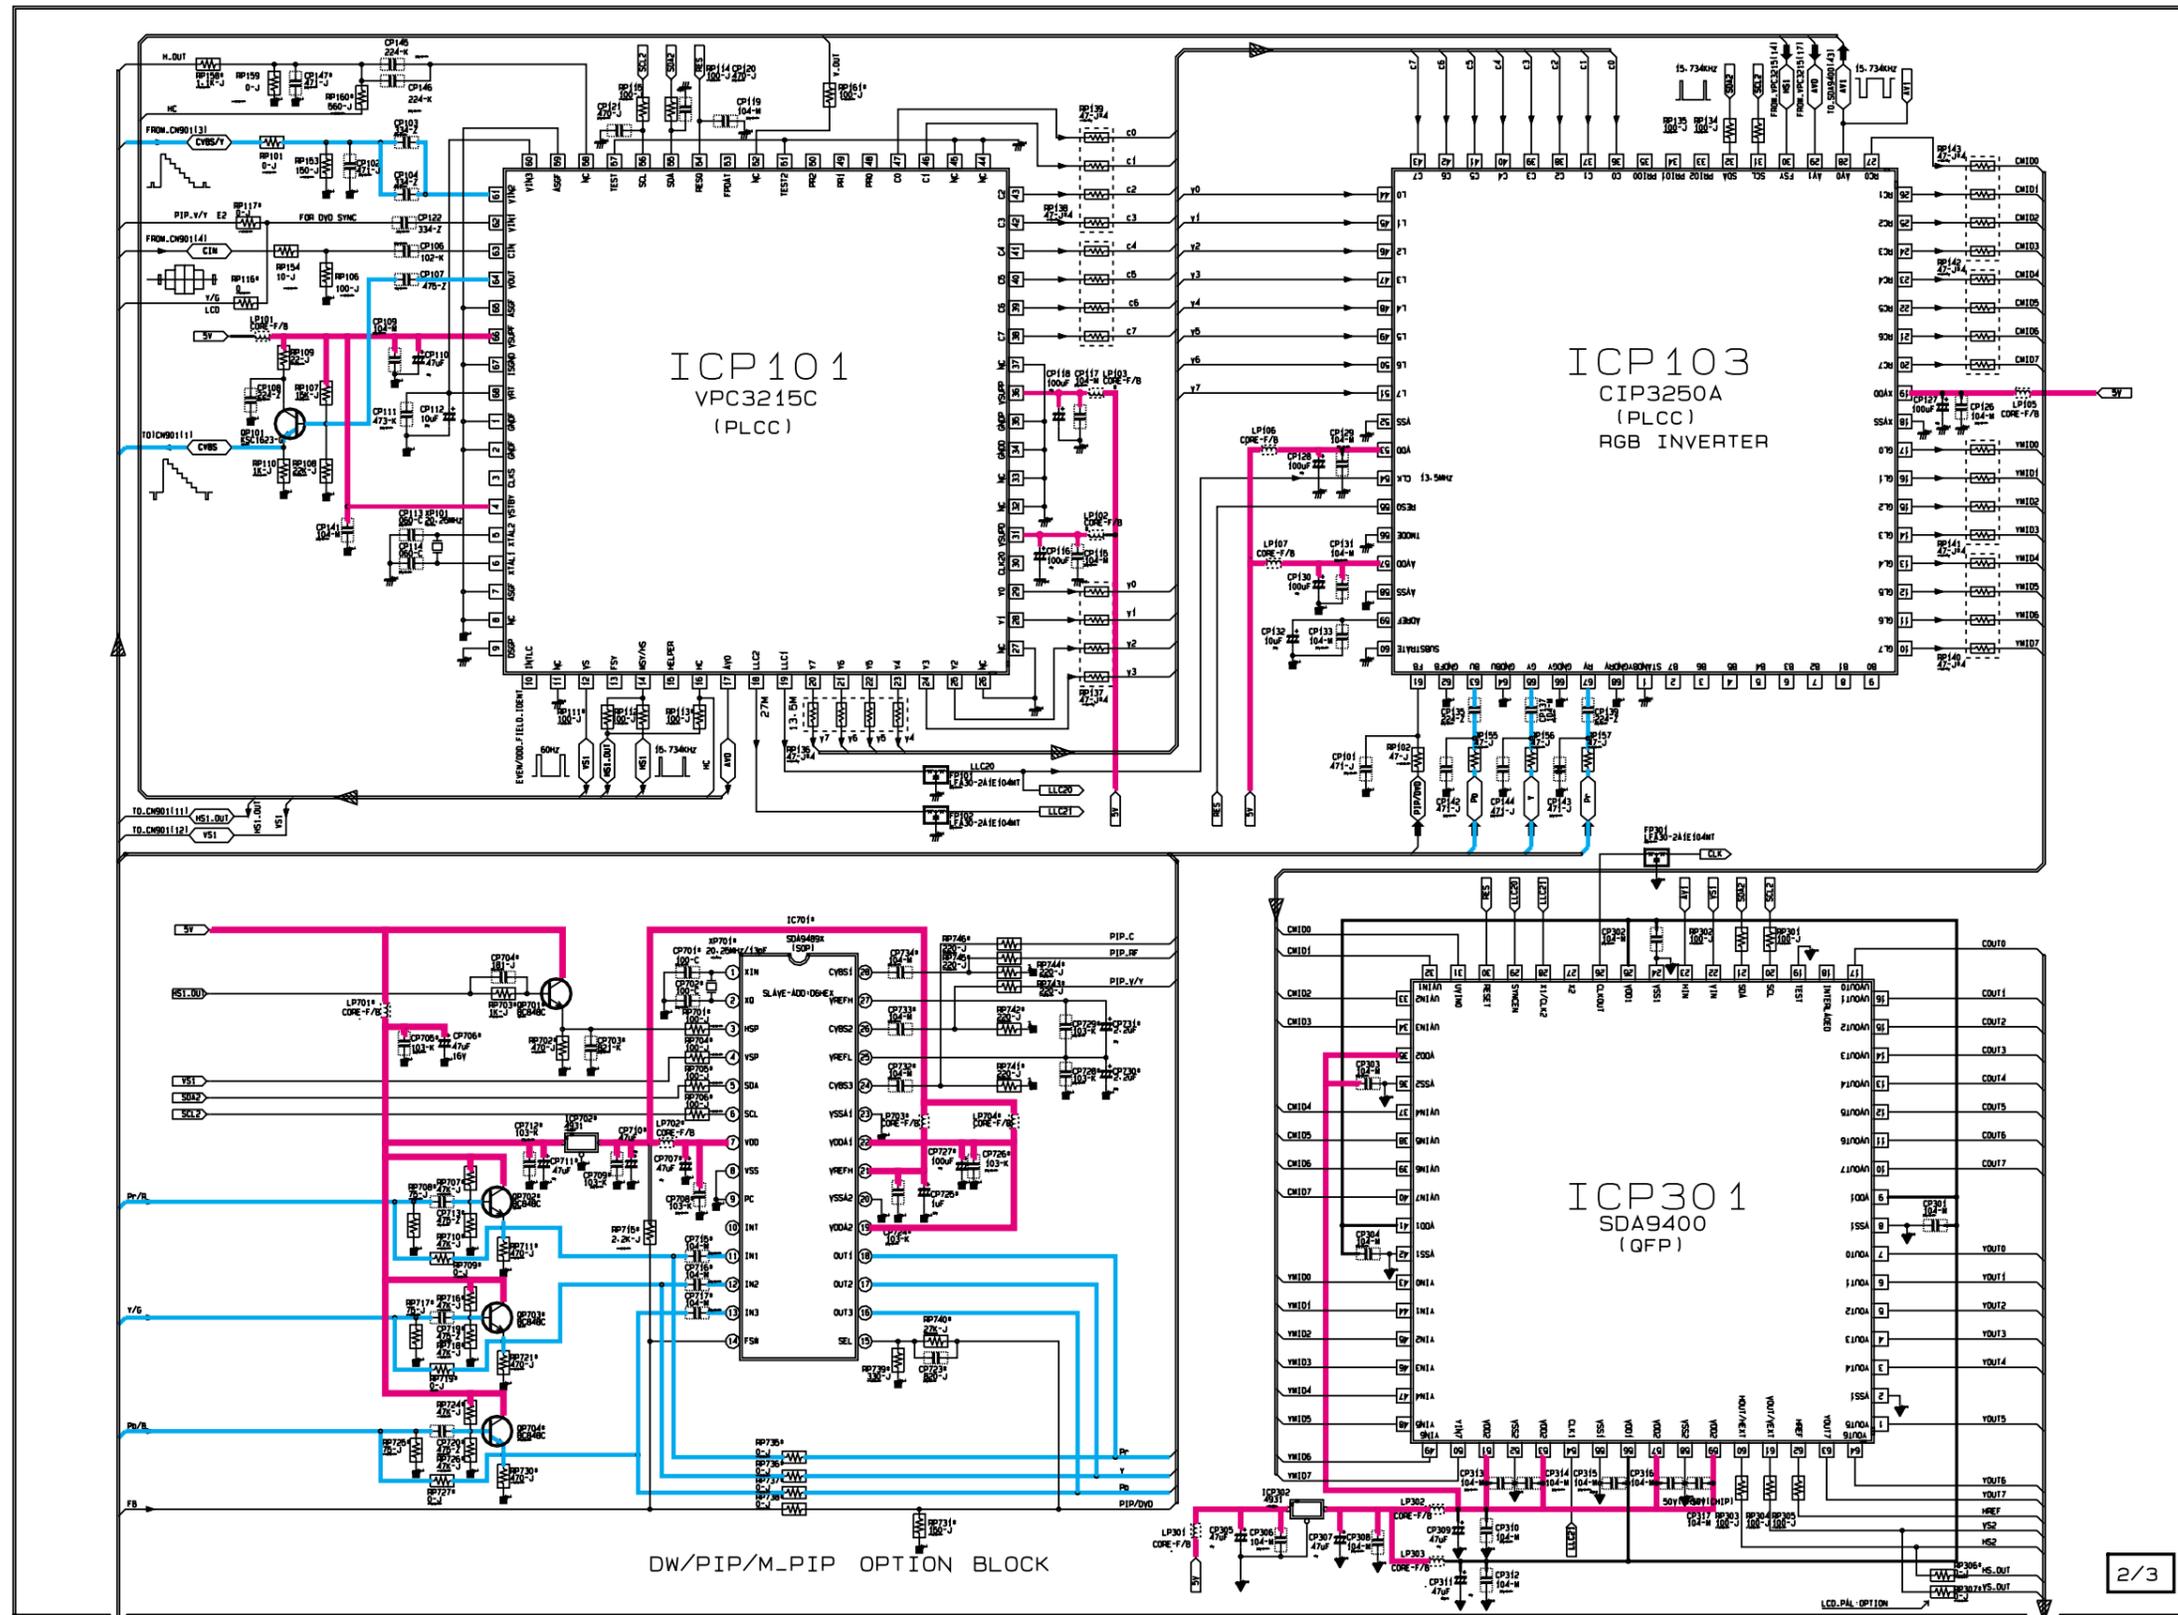


10-7 SCAN-MODULE 3/3

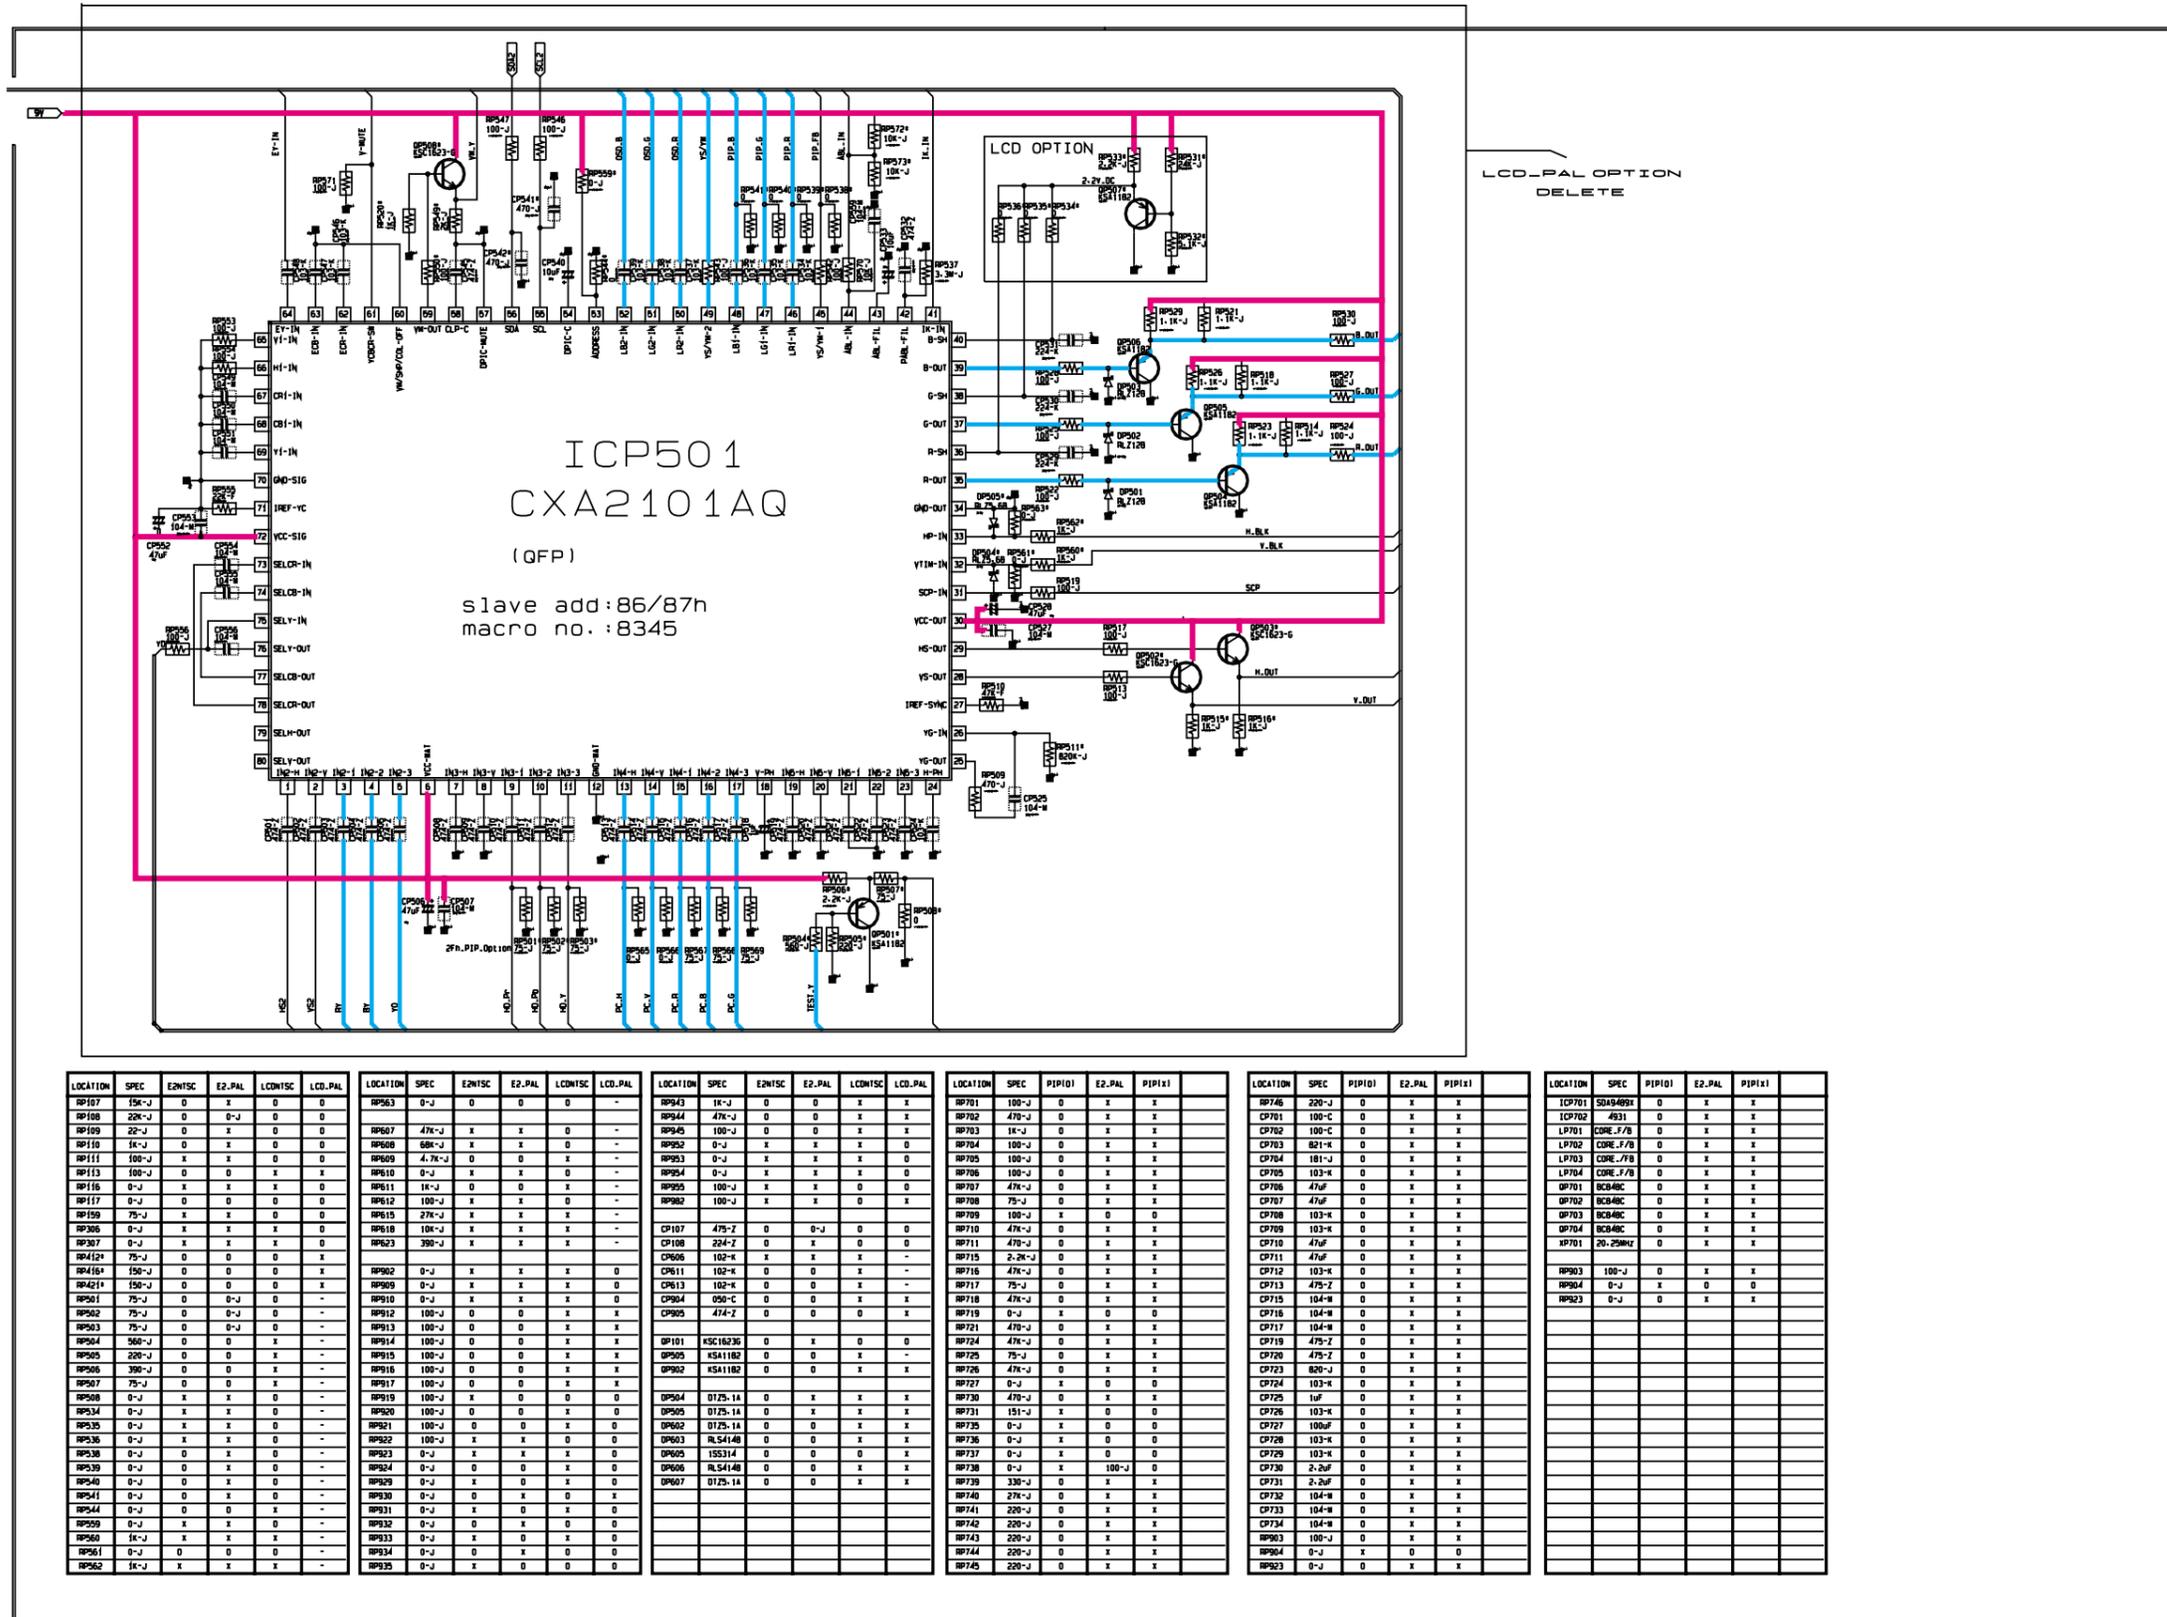


| LOCATION | SPEC | E2NTSC | E2-PAL | LC0NTSC | LC0-PAL | LOCATION | SPEC | E2NTSC | E2-PAL | LC0NTSC | LC0-PAL | LOCATION | SPEC | E2NTSC | E2-PAL | LC0NTSC | LC0-PAL | LOCATION | SPEC | PIPI01 | E2-PAL | PIPIx1 | LOCATION | SPEC | PIPI01 | E2-PAL | PIPIx1 | |
|----------|-------|--------|--------|---------|---------|----------|--------|--------|--------|---------|---------|----------|-------|--------|--------|---------|---------|----------|-------|----------|--------|--------|----------|----------|----------|--------|--------|---|
| RP107 | 15k-J | 0 | x | 0 | 0 | RP263 | 0-J | 0 | 0 | 0 | - | RP343 | 1k-J | 0 | 0 | x | x | RP701 | 100-J | 0 | x | x | RP746 | 220-J | 0 | x | x | |
| RP108 | 22k-J | 0 | 0 | 0 | 0 | RP267 | 47k-J | x | x | 0 | - | RP344 | 47k-J | 0 | 0 | x | x | RP702 | 100-C | 0 | x | x | ICP701 | 50A4693 | 0 | x | x | |
| RP109 | 22-J | 0 | x | 0 | 0 | RP269 | 50k-J | x | x | 0 | - | RP345 | 100-J | 0 | 0 | x | x | RP703 | 100-C | 0 | x | x | ICP702 | 4931 | 0 | x | x | |
| RP110 | 1k-J | 0 | x | 0 | 0 | RP269 | 50k-J | x | x | 0 | - | RP345 | 100-J | 0 | 0 | x | x | CP702 | 100-C | 0 | x | x | LP701 | CORE-F/8 | 0 | x | x | |
| RP111 | 100-J | x | x | 0 | 0 | RP269 | 4.7k-J | 0 | 0 | x | - | RP345 | 0-J | x | x | x | 0 | x | CP703 | 821-K | 0 | x | x | LP702 | CORE-F/8 | 0 | x | x |
| RP112 | 100-J | 0 | 0 | x | x | RP269 | 0-J | x | x | 0 | - | RP345 | 0-J | x | x | x | 0 | x | LP703 | CORE-F/8 | 0 | x | x | LP703 | CORE-F/8 | 0 | x | x |
| RP113 | 100-J | 0 | 0 | x | x | RP269 | 0-J | x | x | 0 | - | RP345 | 0-J | x | x | x | 0 | x | CP704 | 100-J | 0 | x | x | LP704 | CORE-F/8 | 0 | x | x |
| RP114 | 0-J | x | x | x | 0 | RP269 | 1k-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP705 | 103-K | 0 | x | x | CP706 | 47uF | 0 | x | x |
| RP115 | 0-J | 0 | 0 | 0 | 0 | RP269 | 100-J | x | x | 0 | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP707 | 47uF | 0 | x | x | CP707 | 47uF | 0 | x | x |
| RP116 | 0-J | x | x | 0 | 0 | RP269 | 100-J | x | x | 0 | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP708 | 103-K | 0 | x | x | CP708 | 103-K | 0 | x | x |
| RP117 | 0-J | 0 | 0 | 0 | 0 | RP269 | 100-J | x | x | 0 | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP709 | 103-K | 0 | x | x | CP709 | 103-K | 0 | x | x |
| RP118 | 75-J | x | x | 0 | 0 | RP269 | 10k-J | x | x | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP710 | 103-K | 0 | x | x | CP710 | 103-K | 0 | x | x |
| RP119 | 75-J | x | x | 0 | 0 | RP269 | 390-J | x | x | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP711 | 47uF | 0 | x | x | CP711 | 47uF | 0 | x | x |
| RP120 | 0-J | x | x | x | 0 | RP269 | 0-J | x | x | 0 | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP712 | 47uF | 0 | x | x | CP712 | 47uF | 0 | x | x |
| RP121 | 0-J | x | x | x | 0 | RP269 | 0-J | x | x | 0 | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP713 | 103-K | 0 | x | x | CP713 | 103-K | 0 | x | x |
| RP122 | 0-J | x | x | x | 0 | RP269 | 0-J | x | x | 0 | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP714 | 475-Z | 0 | x | x | CP714 | 475-Z | 0 | x | x |
| RP123 | 0-J | x | x | x | 0 | RP269 | 0-J | x | x | 0 | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP715 | 104-H | 0 | x | x | CP715 | 104-H | 0 | x | x |
| RP124 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP716 | 104-H | 0 | x | x | CP716 | 104-H | 0 | x | x |
| RP125 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP717 | 104-H | 0 | x | x | CP717 | 104-H | 0 | x | x |
| RP126 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP718 | 475-Z | 0 | x | x | CP718 | 475-Z | 0 | x | x |
| RP127 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP719 | 475-Z | 0 | x | x | CP719 | 475-Z | 0 | x | x |
| RP128 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP720 | 475-Z | 0 | x | x | CP720 | 475-Z | 0 | x | x |
| RP129 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP721 | 475-Z | 0 | x | x | CP721 | 475-Z | 0 | x | x |
| RP130 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP722 | 475-Z | 0 | x | x | CP722 | 475-Z | 0 | x | x |
| RP131 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP723 | 475-Z | 0 | x | x | CP723 | 475-Z | 0 | x | x |
| RP132 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP724 | 475-Z | 0 | x | x | CP724 | 475-Z | 0 | x | x |
| RP133 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP725 | 475-Z | 0 | x | x | CP725 | 475-Z | 0 | x | x |
| RP134 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP726 | 475-Z | 0 | x | x | CP726 | 475-Z | 0 | x | x |
| RP135 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP727 | 475-Z | 0 | x | x | CP727 | 475-Z | 0 | x | x |
| RP136 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP728 | 475-Z | 0 | x | x | CP728 | 475-Z | 0 | x | x |
| RP137 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP729 | 475-Z | 0 | x | x | CP729 | 475-Z | 0 | x | x |
| RP138 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP730 | 475-Z | 0 | x | x | CP730 | 475-Z | 0 | x | x |
| RP139 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP731 | 475-Z | 0 | x | x | CP731 | 475-Z | 0 | x | x |
| RP140 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP732 | 475-Z | 0 | x | x | CP732 | 475-Z | 0 | x | x |
| RP141 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP733 | 475-Z | 0 | x | x | CP733 | 475-Z | 0 | x | x |
| RP142 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP734 | 475-Z | 0 | x | x | CP734 | 475-Z | 0 | x | x |
| RP143 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP735 | 475-Z | 0 | x | x | CP735 | 475-Z | 0 | x | x |
| RP144 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP736 | 475-Z | 0 | x | x | CP736 | 475-Z | 0 | x | x |
| RP145 | 0-J | x | x | x | 0 | RP269 | 100-J | 0 | 0 | x | - | RP345 | 100-J | 0 | 0 | x | 0 | 0 | CP737 | 475-Z | 0 | x | x | CP737 | 475-Z | 0 | x | x |

Power Line
Signal Line


10-8 A/V TERMINAL

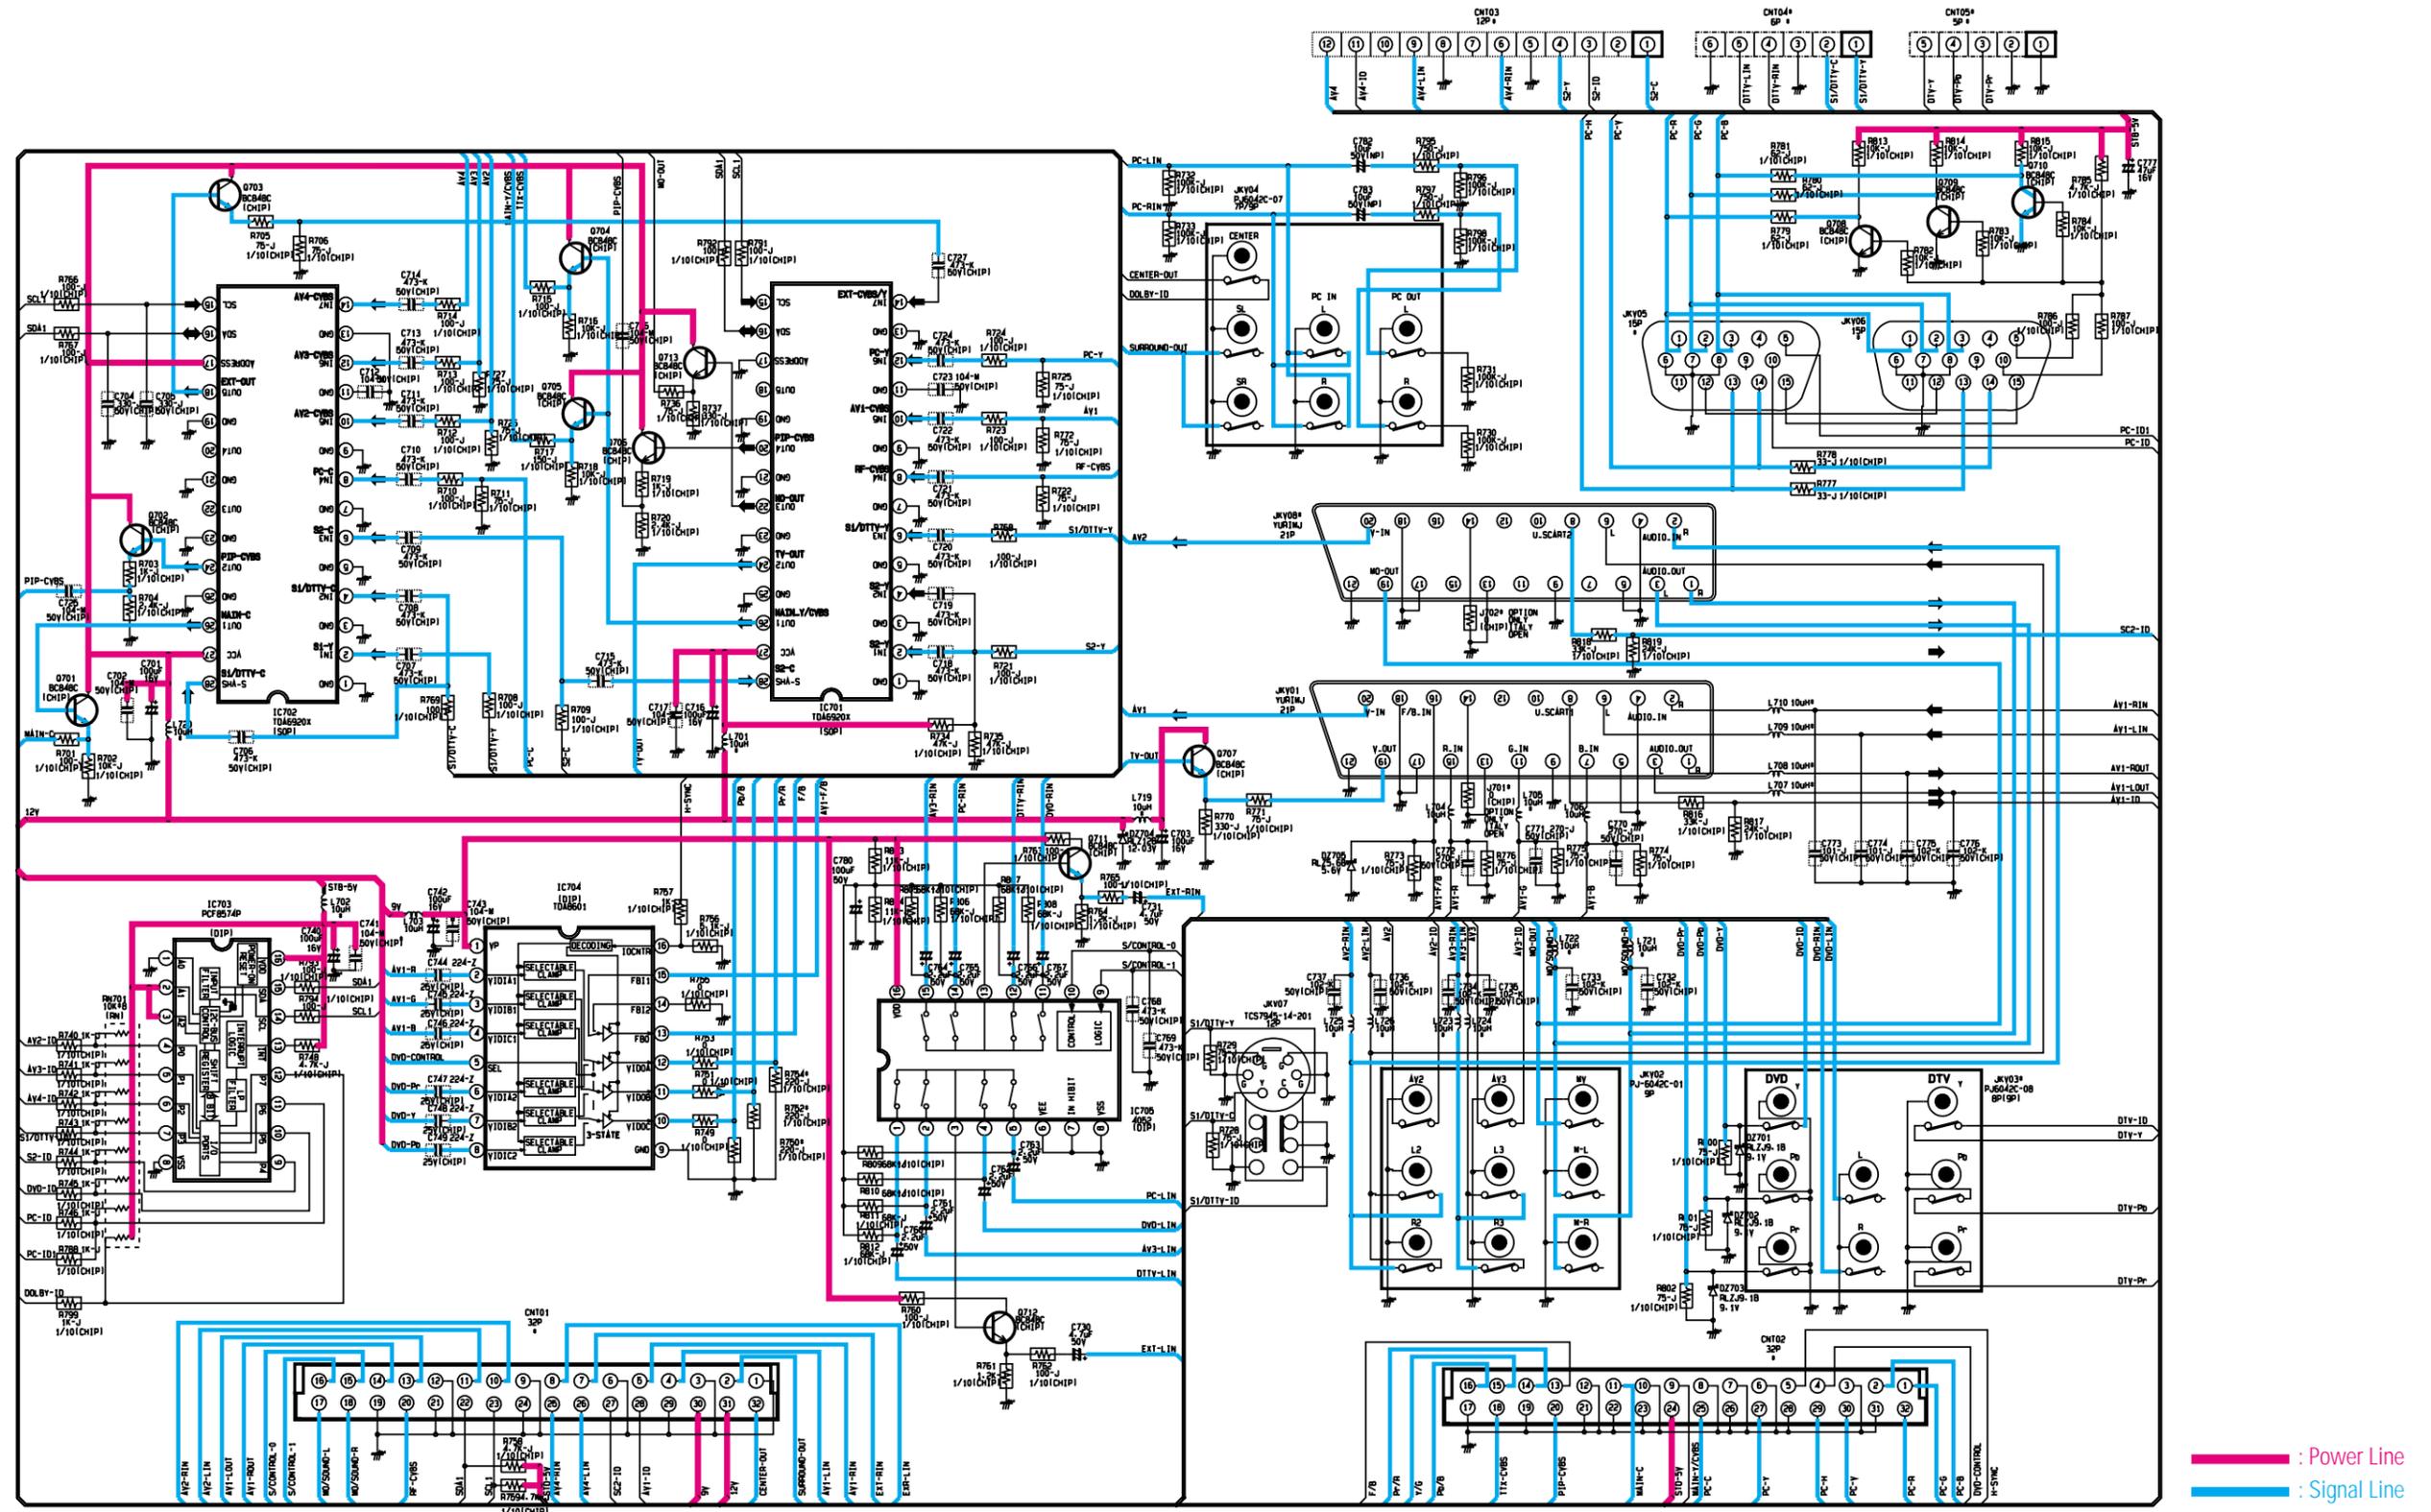


10-9 SOUND-MODULE

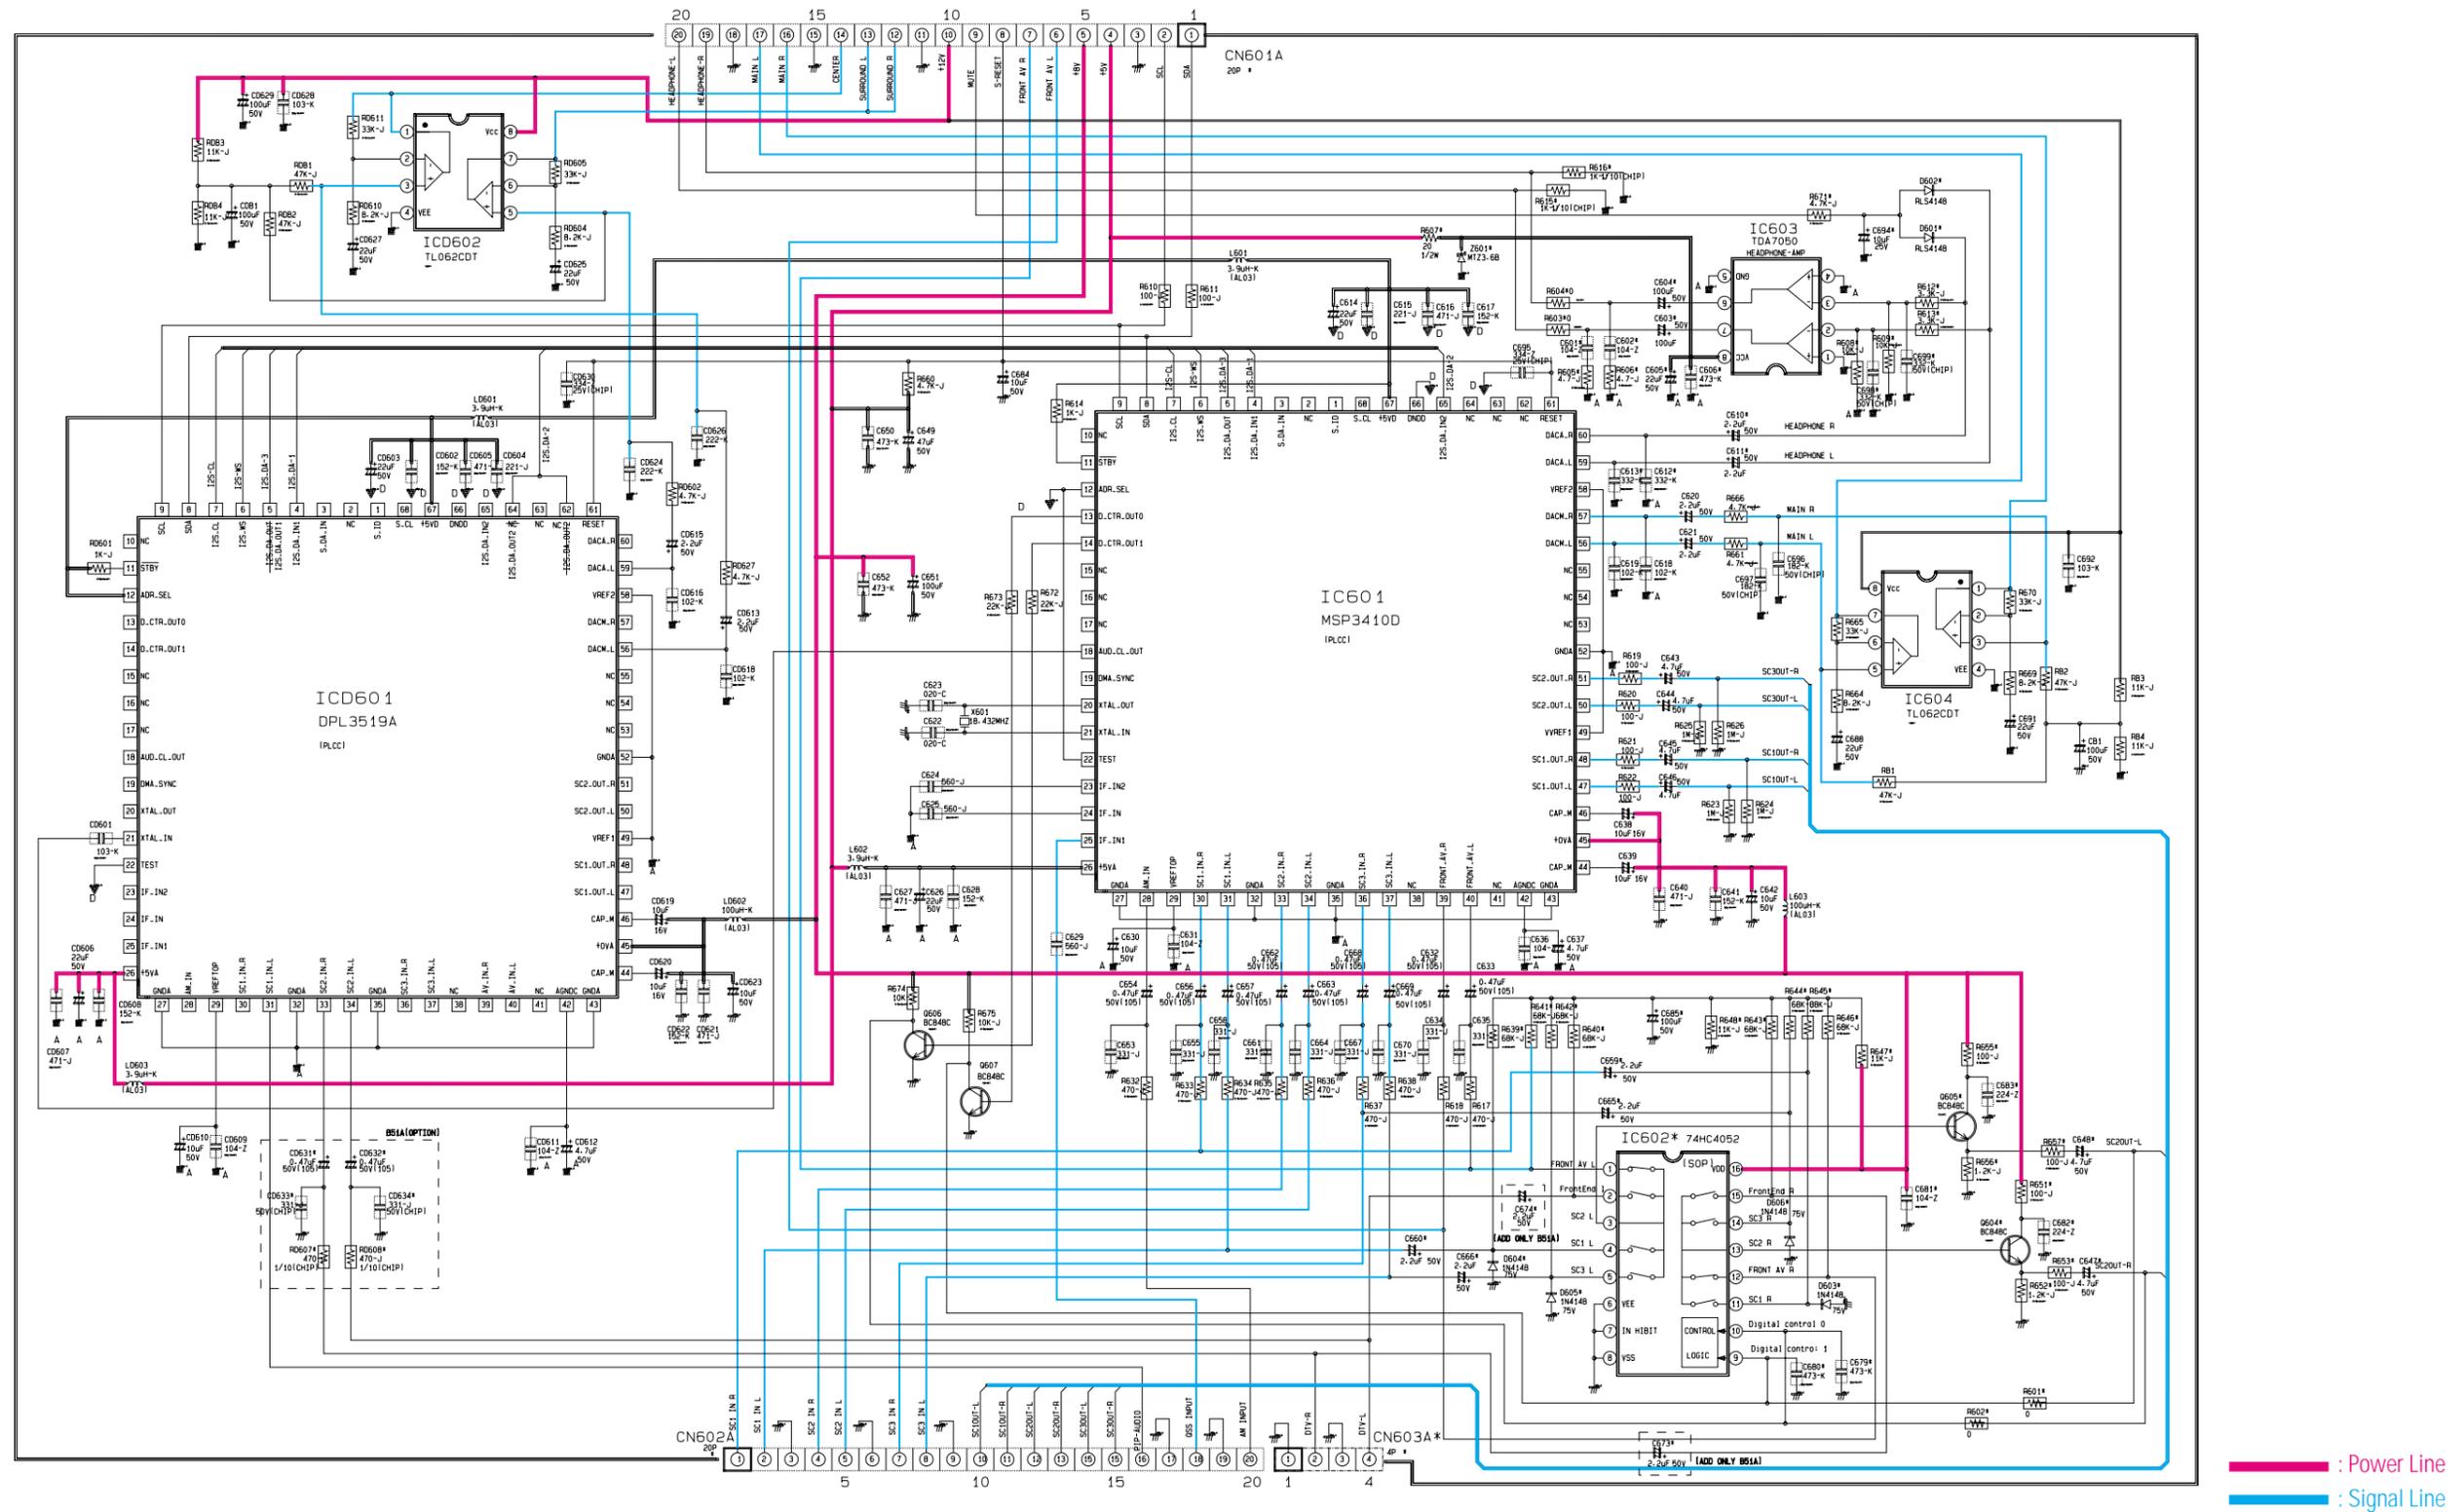


10-10 PIP

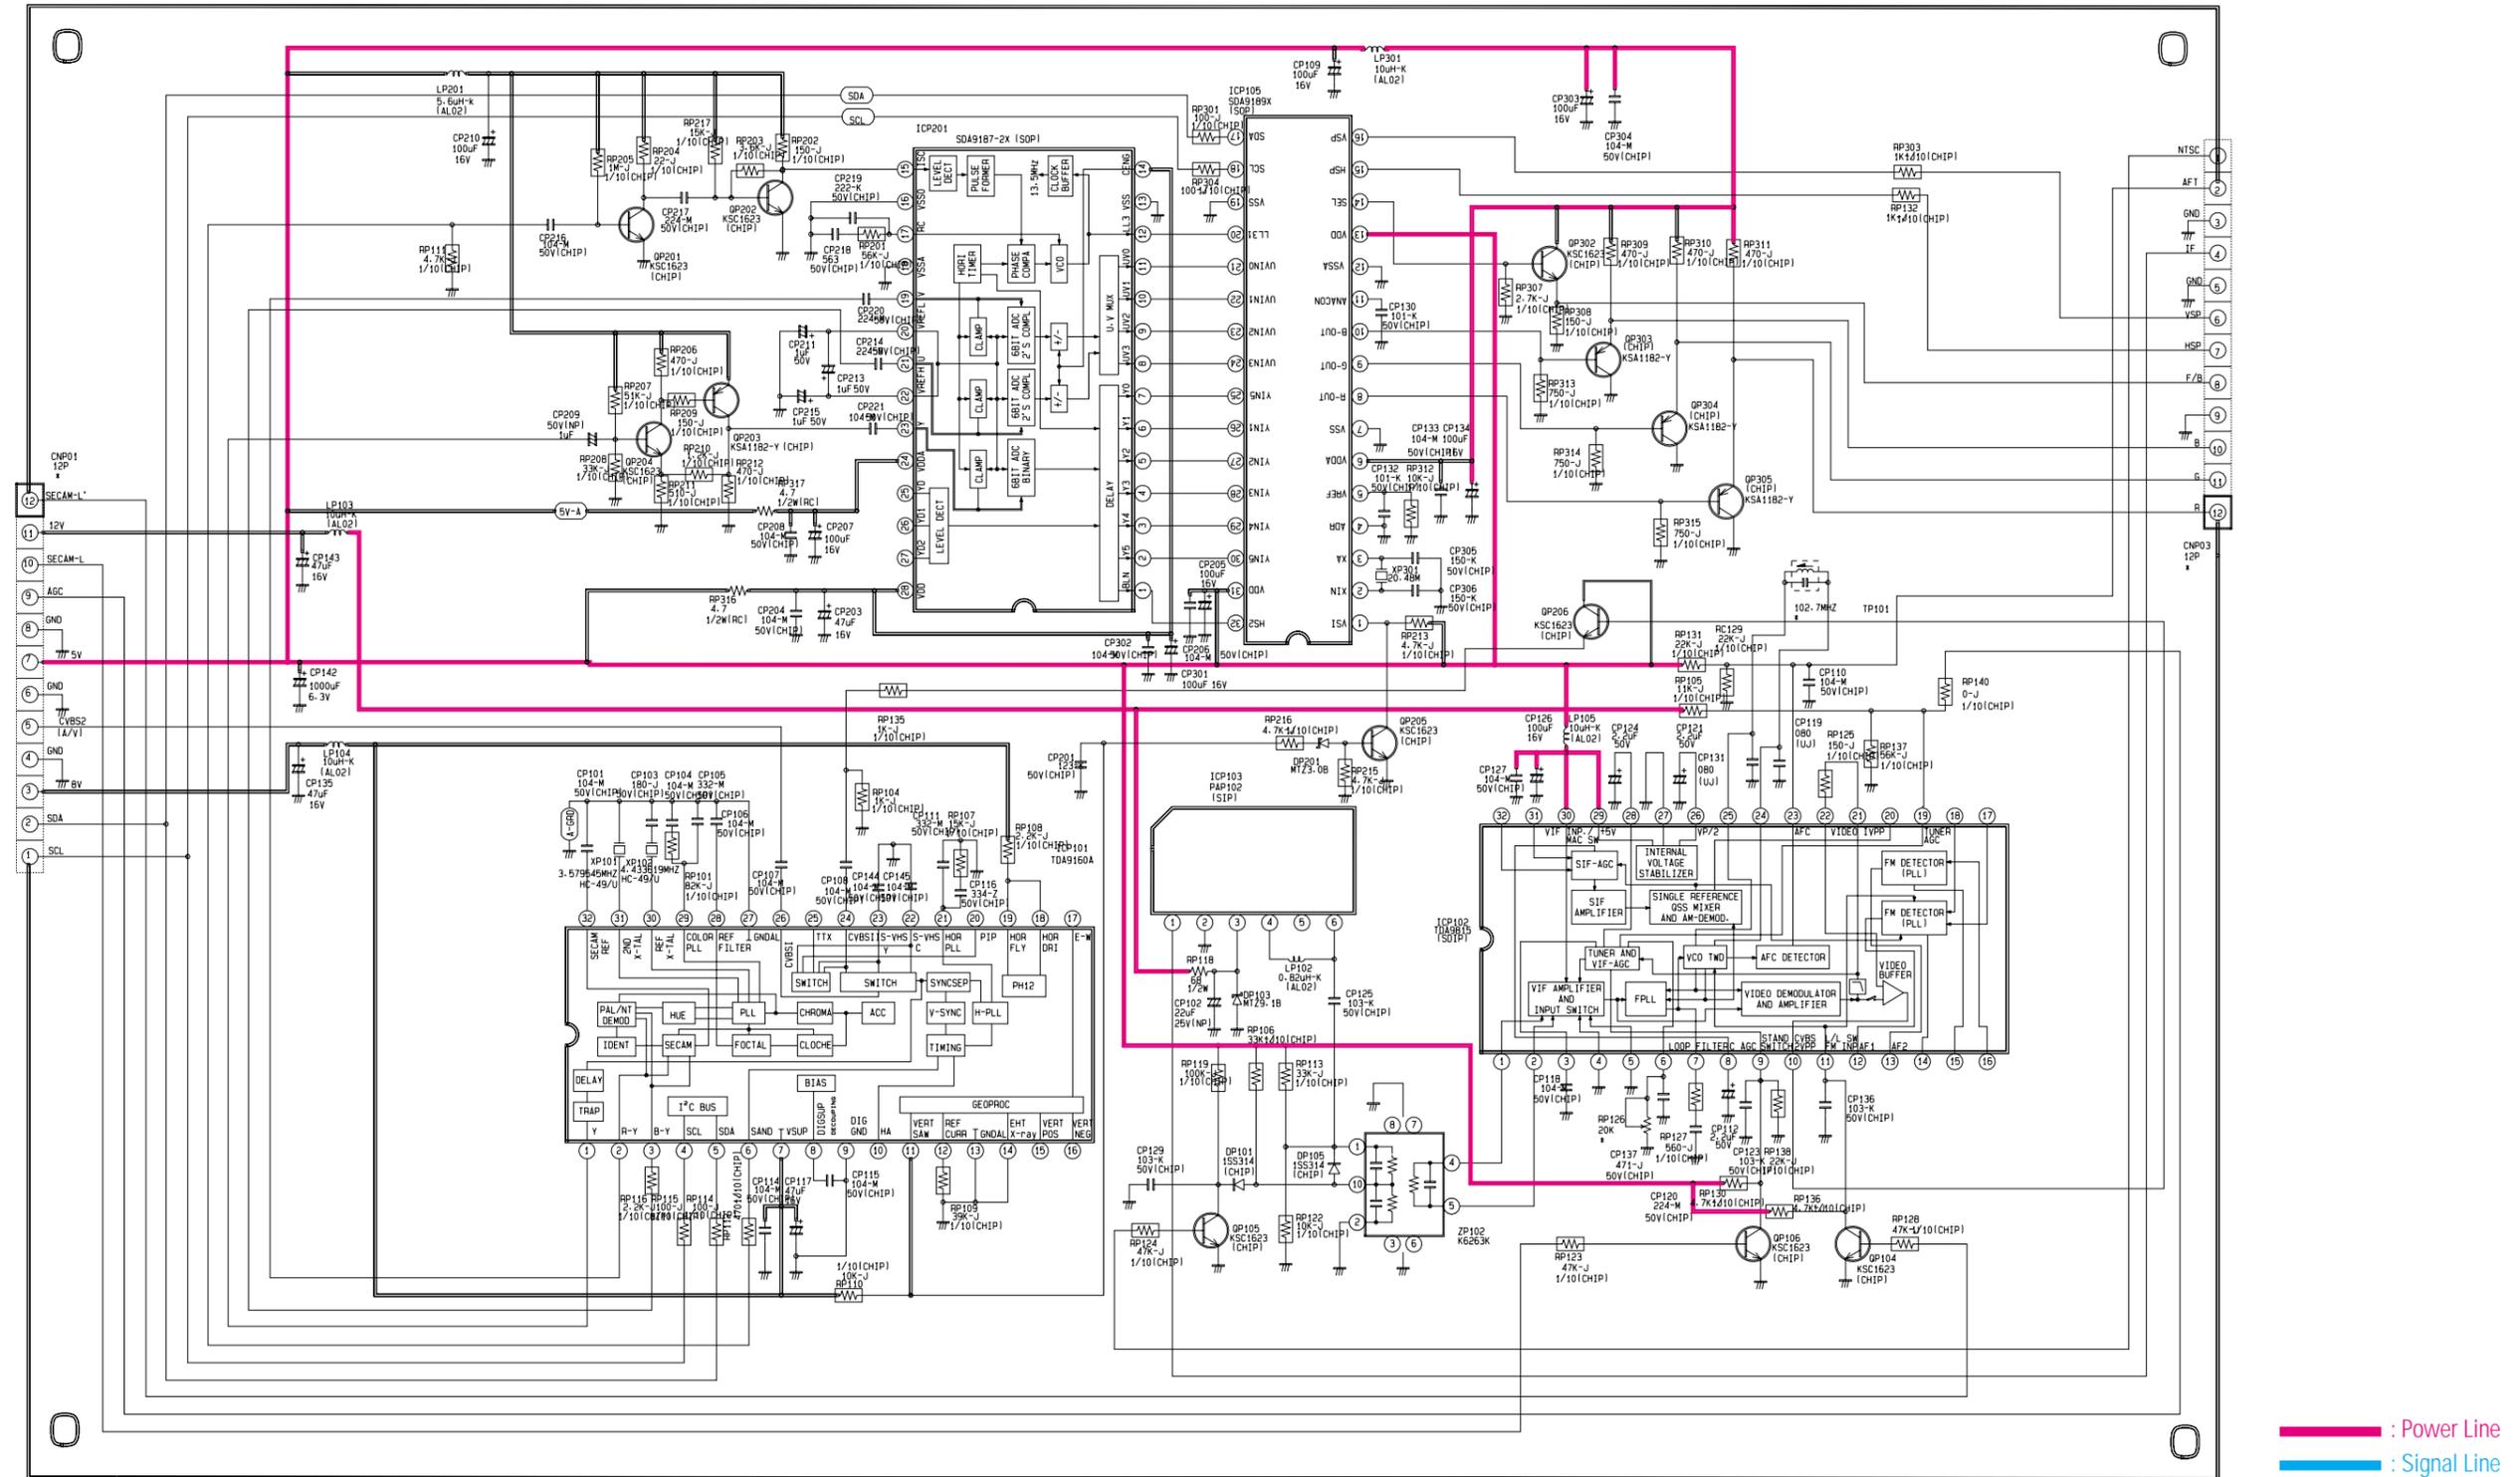

10-11 FORMAT-CONVERTER


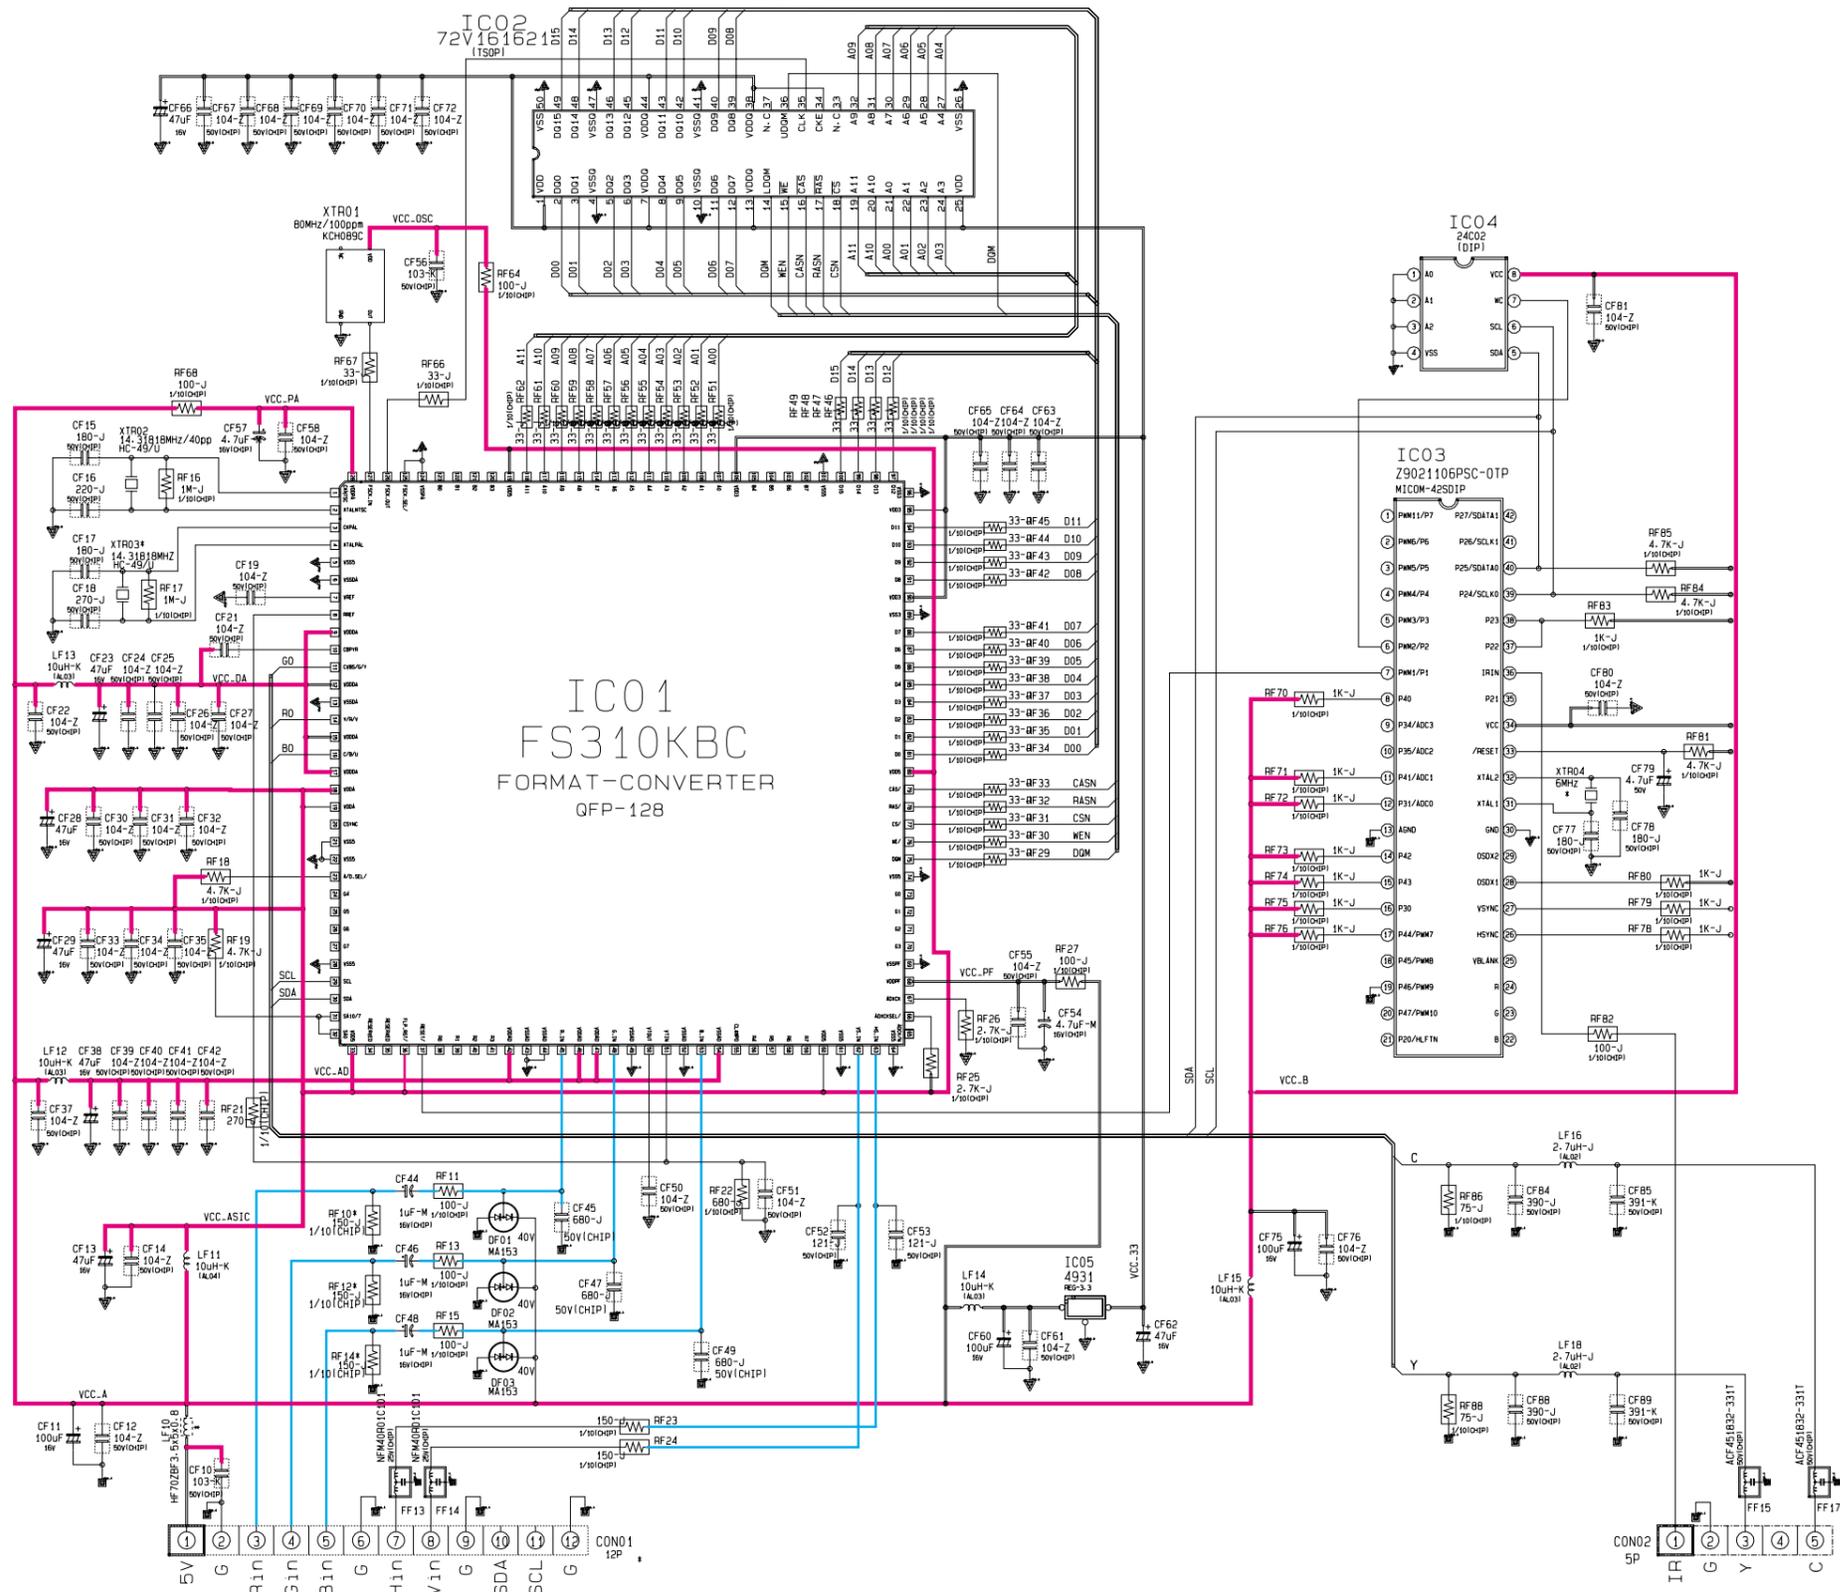


10-12 TTX

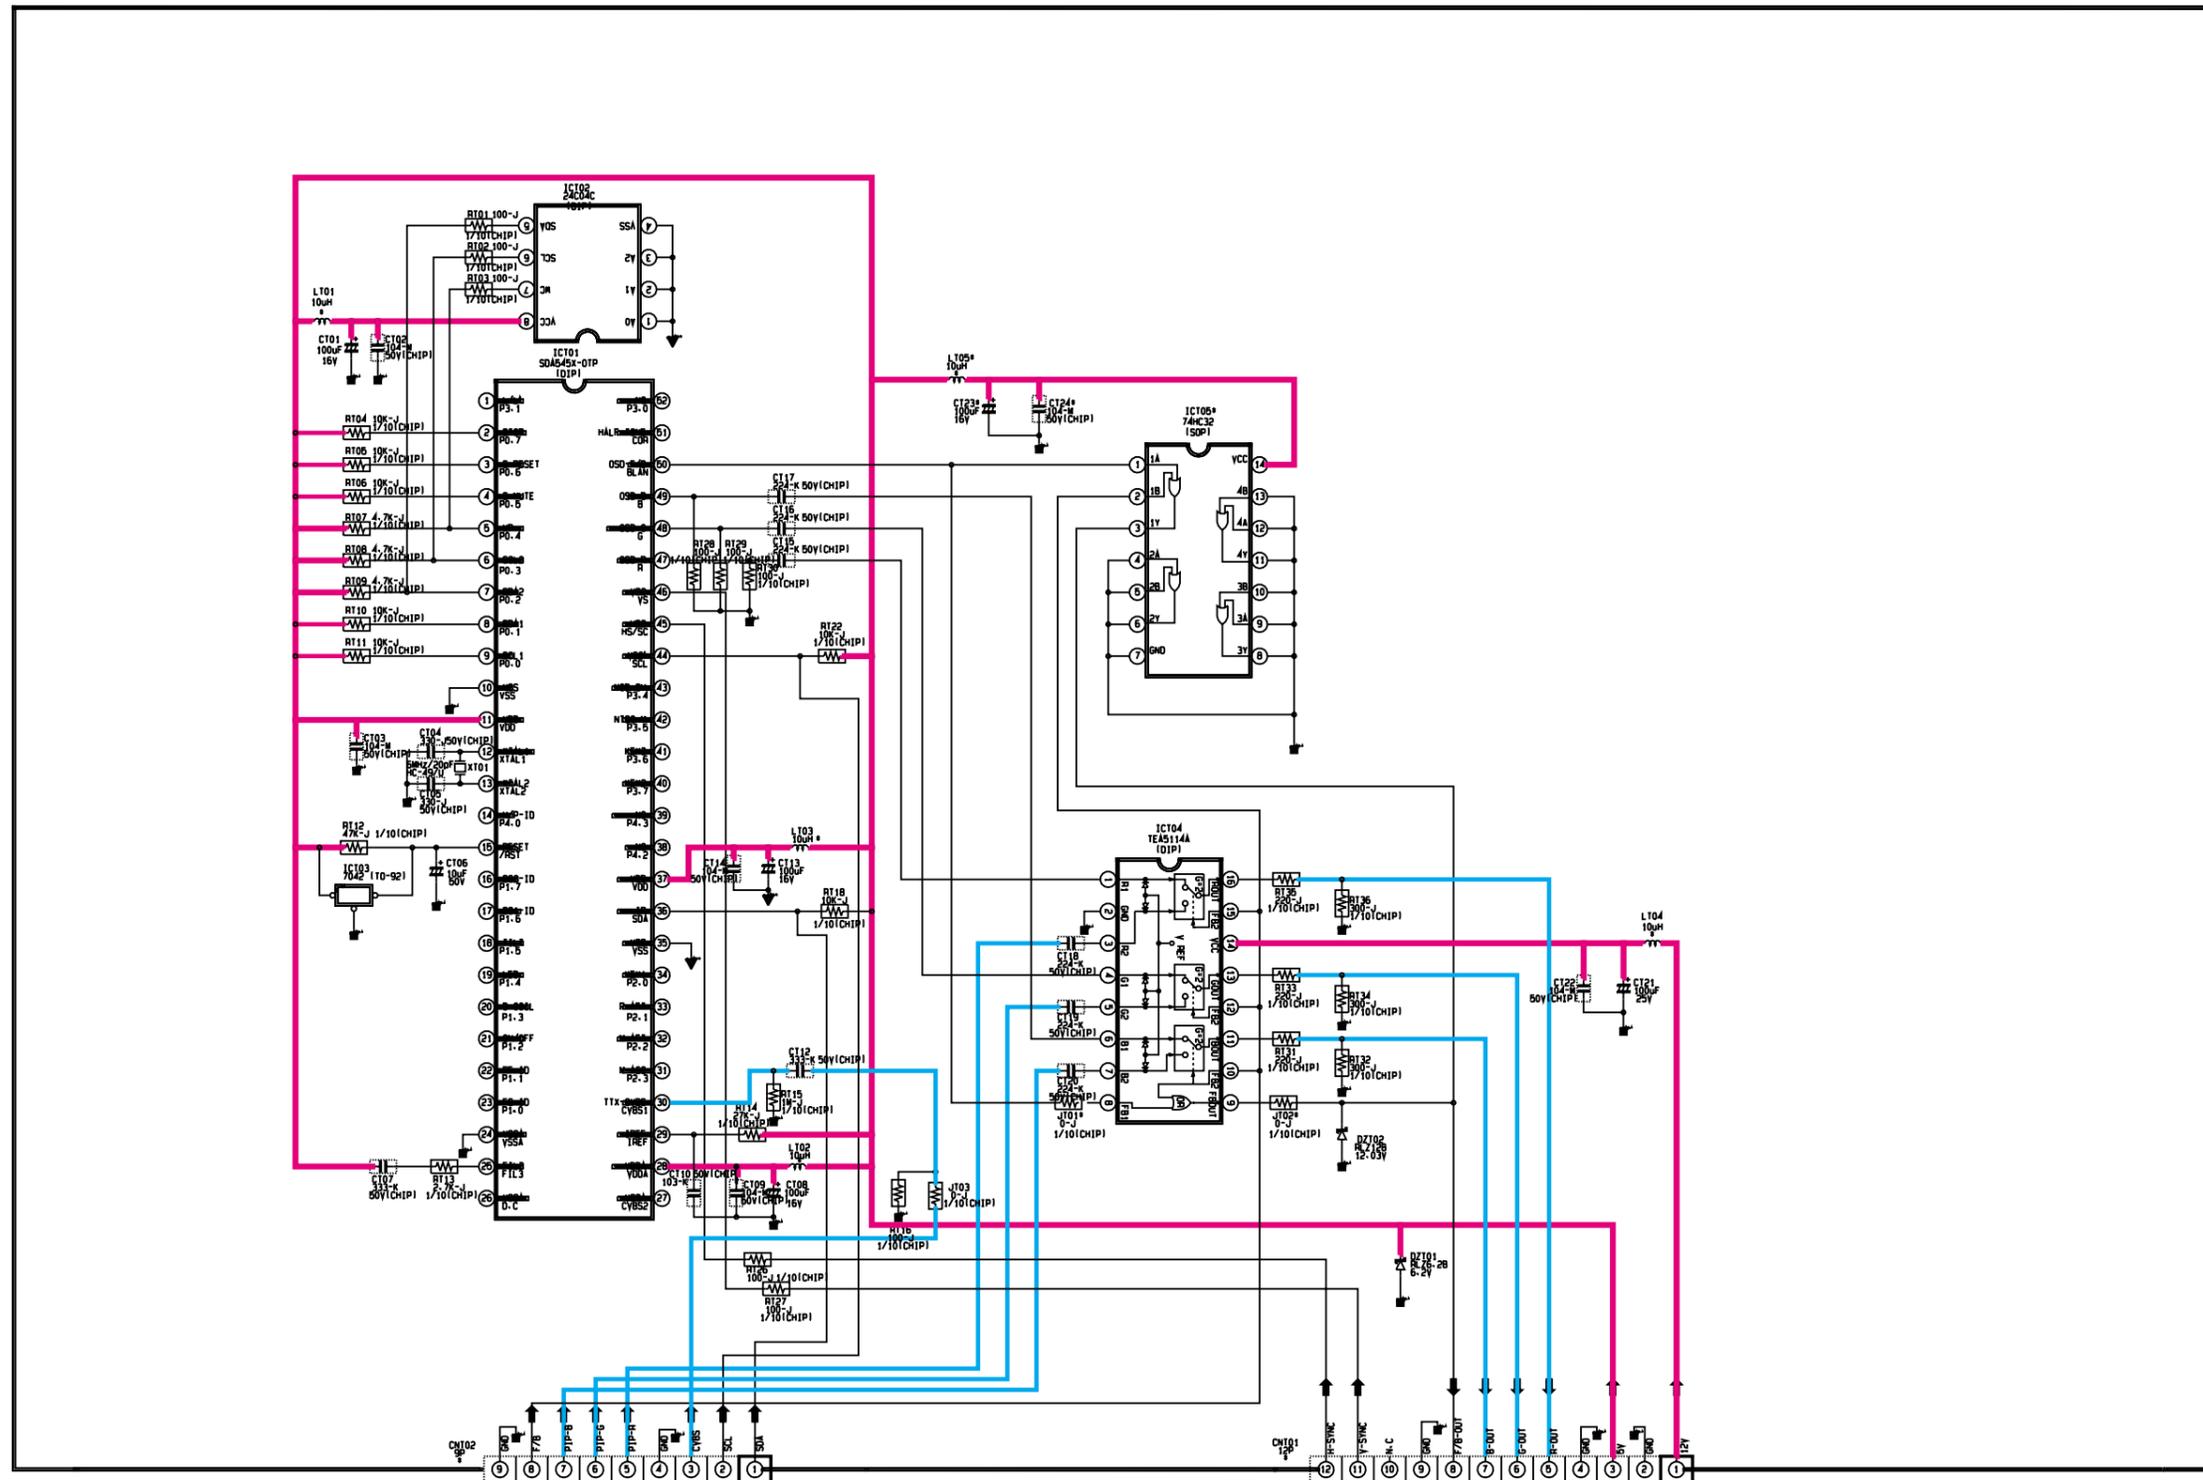


— : Power Line
— : Signal Line

10-13 SUB(POWER+DEFL)-1

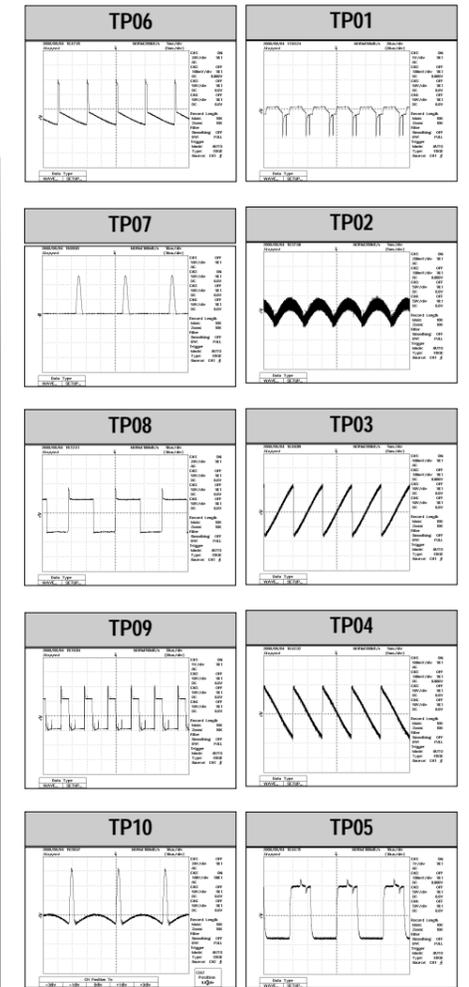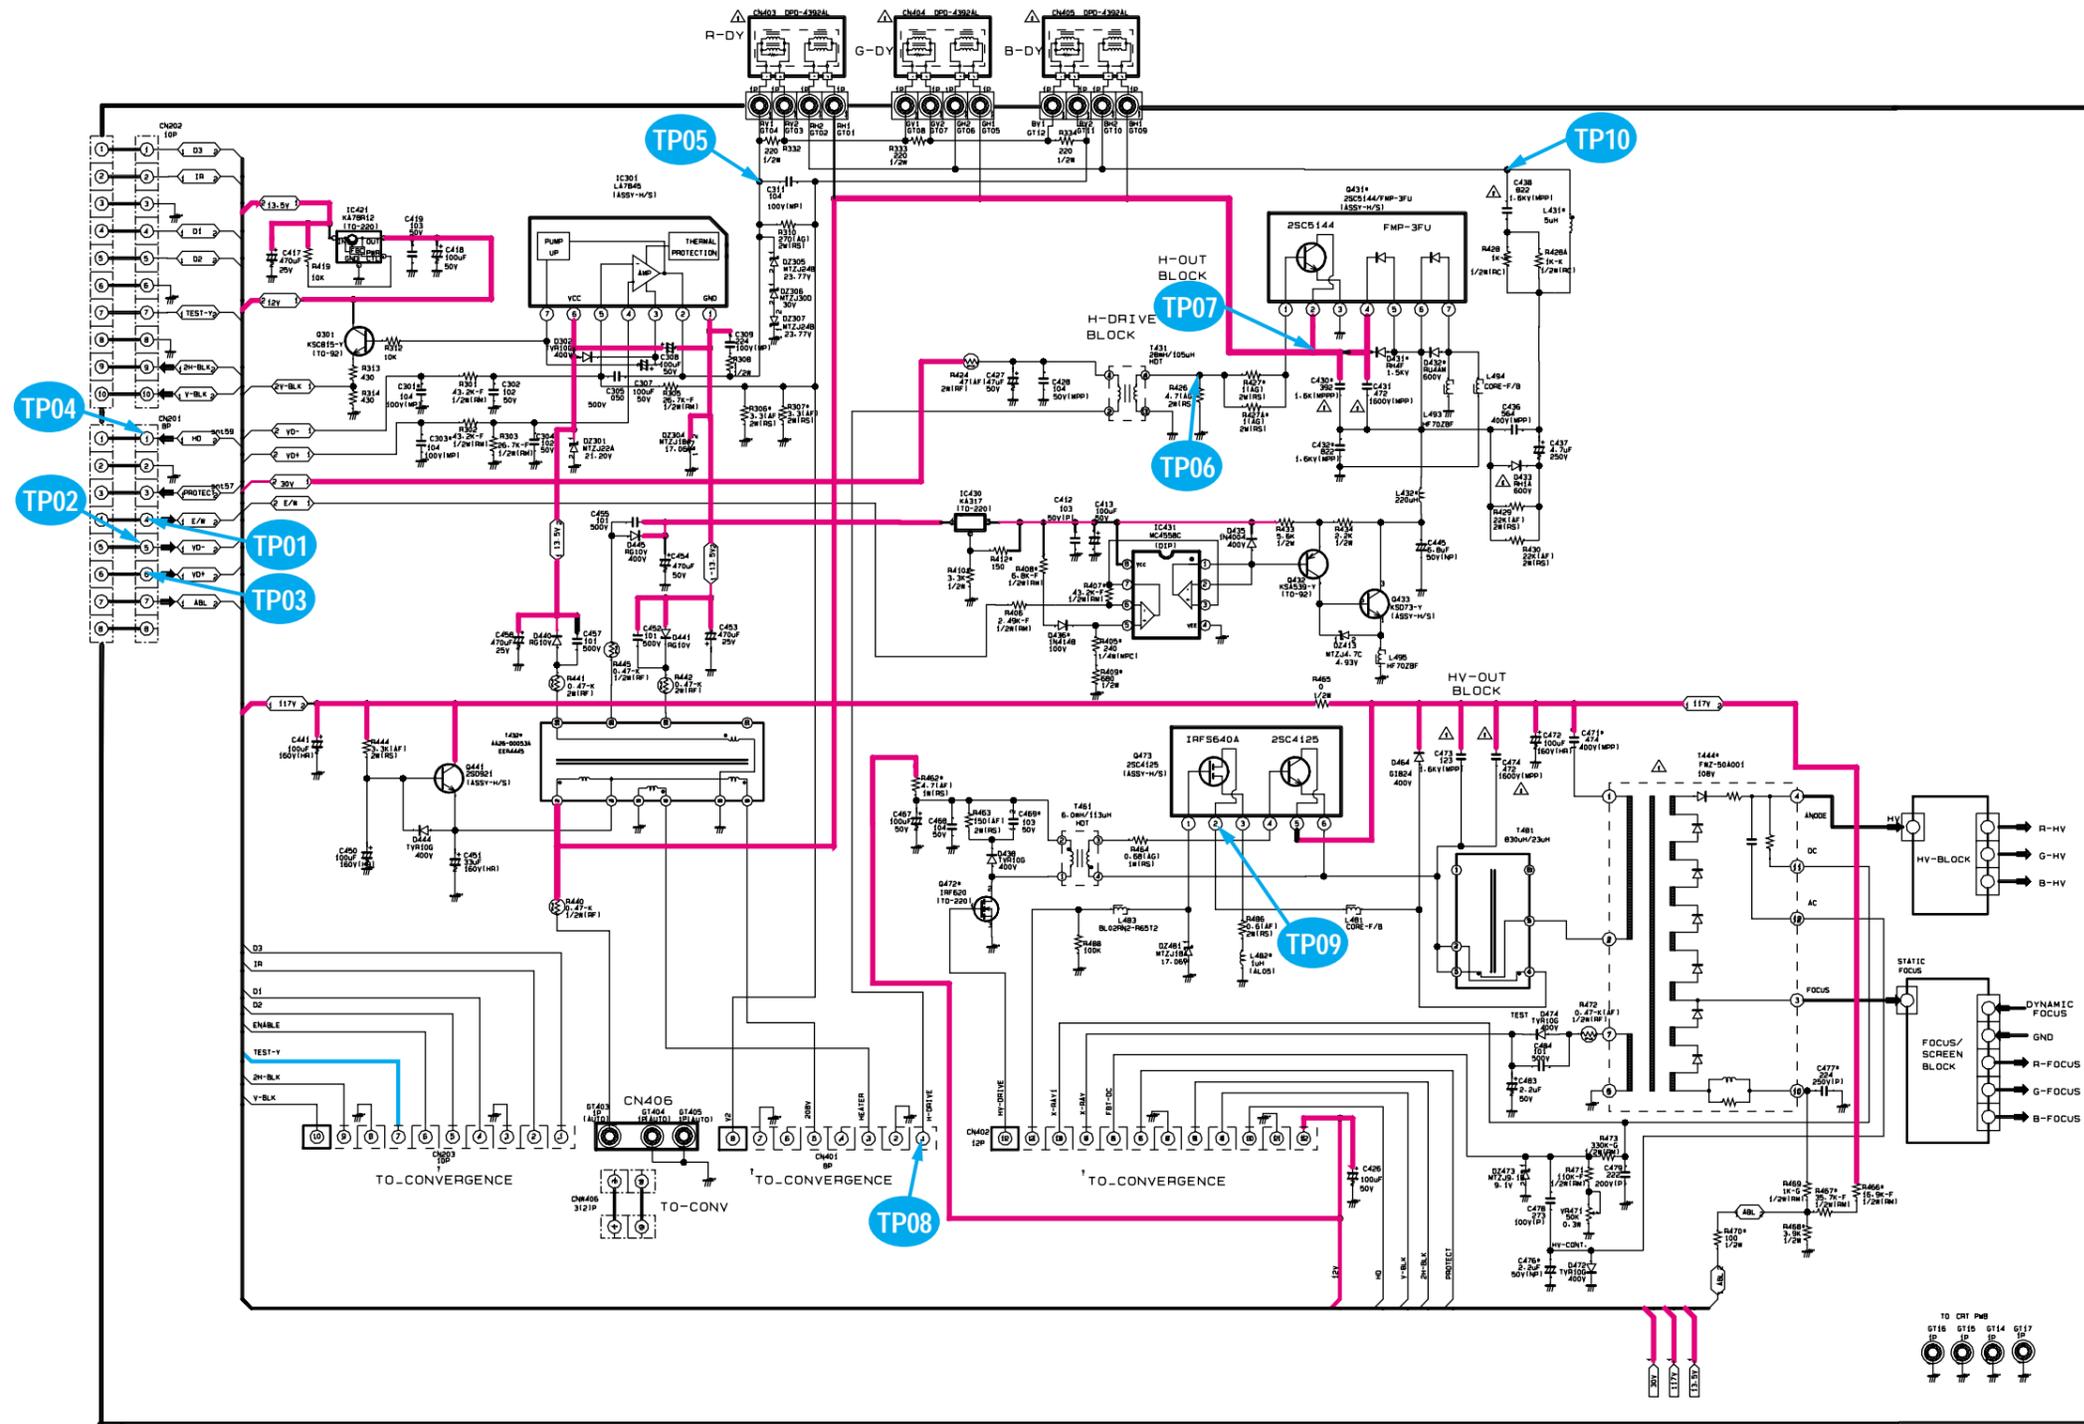


10-14 SUB(POWER+DEFL)-2

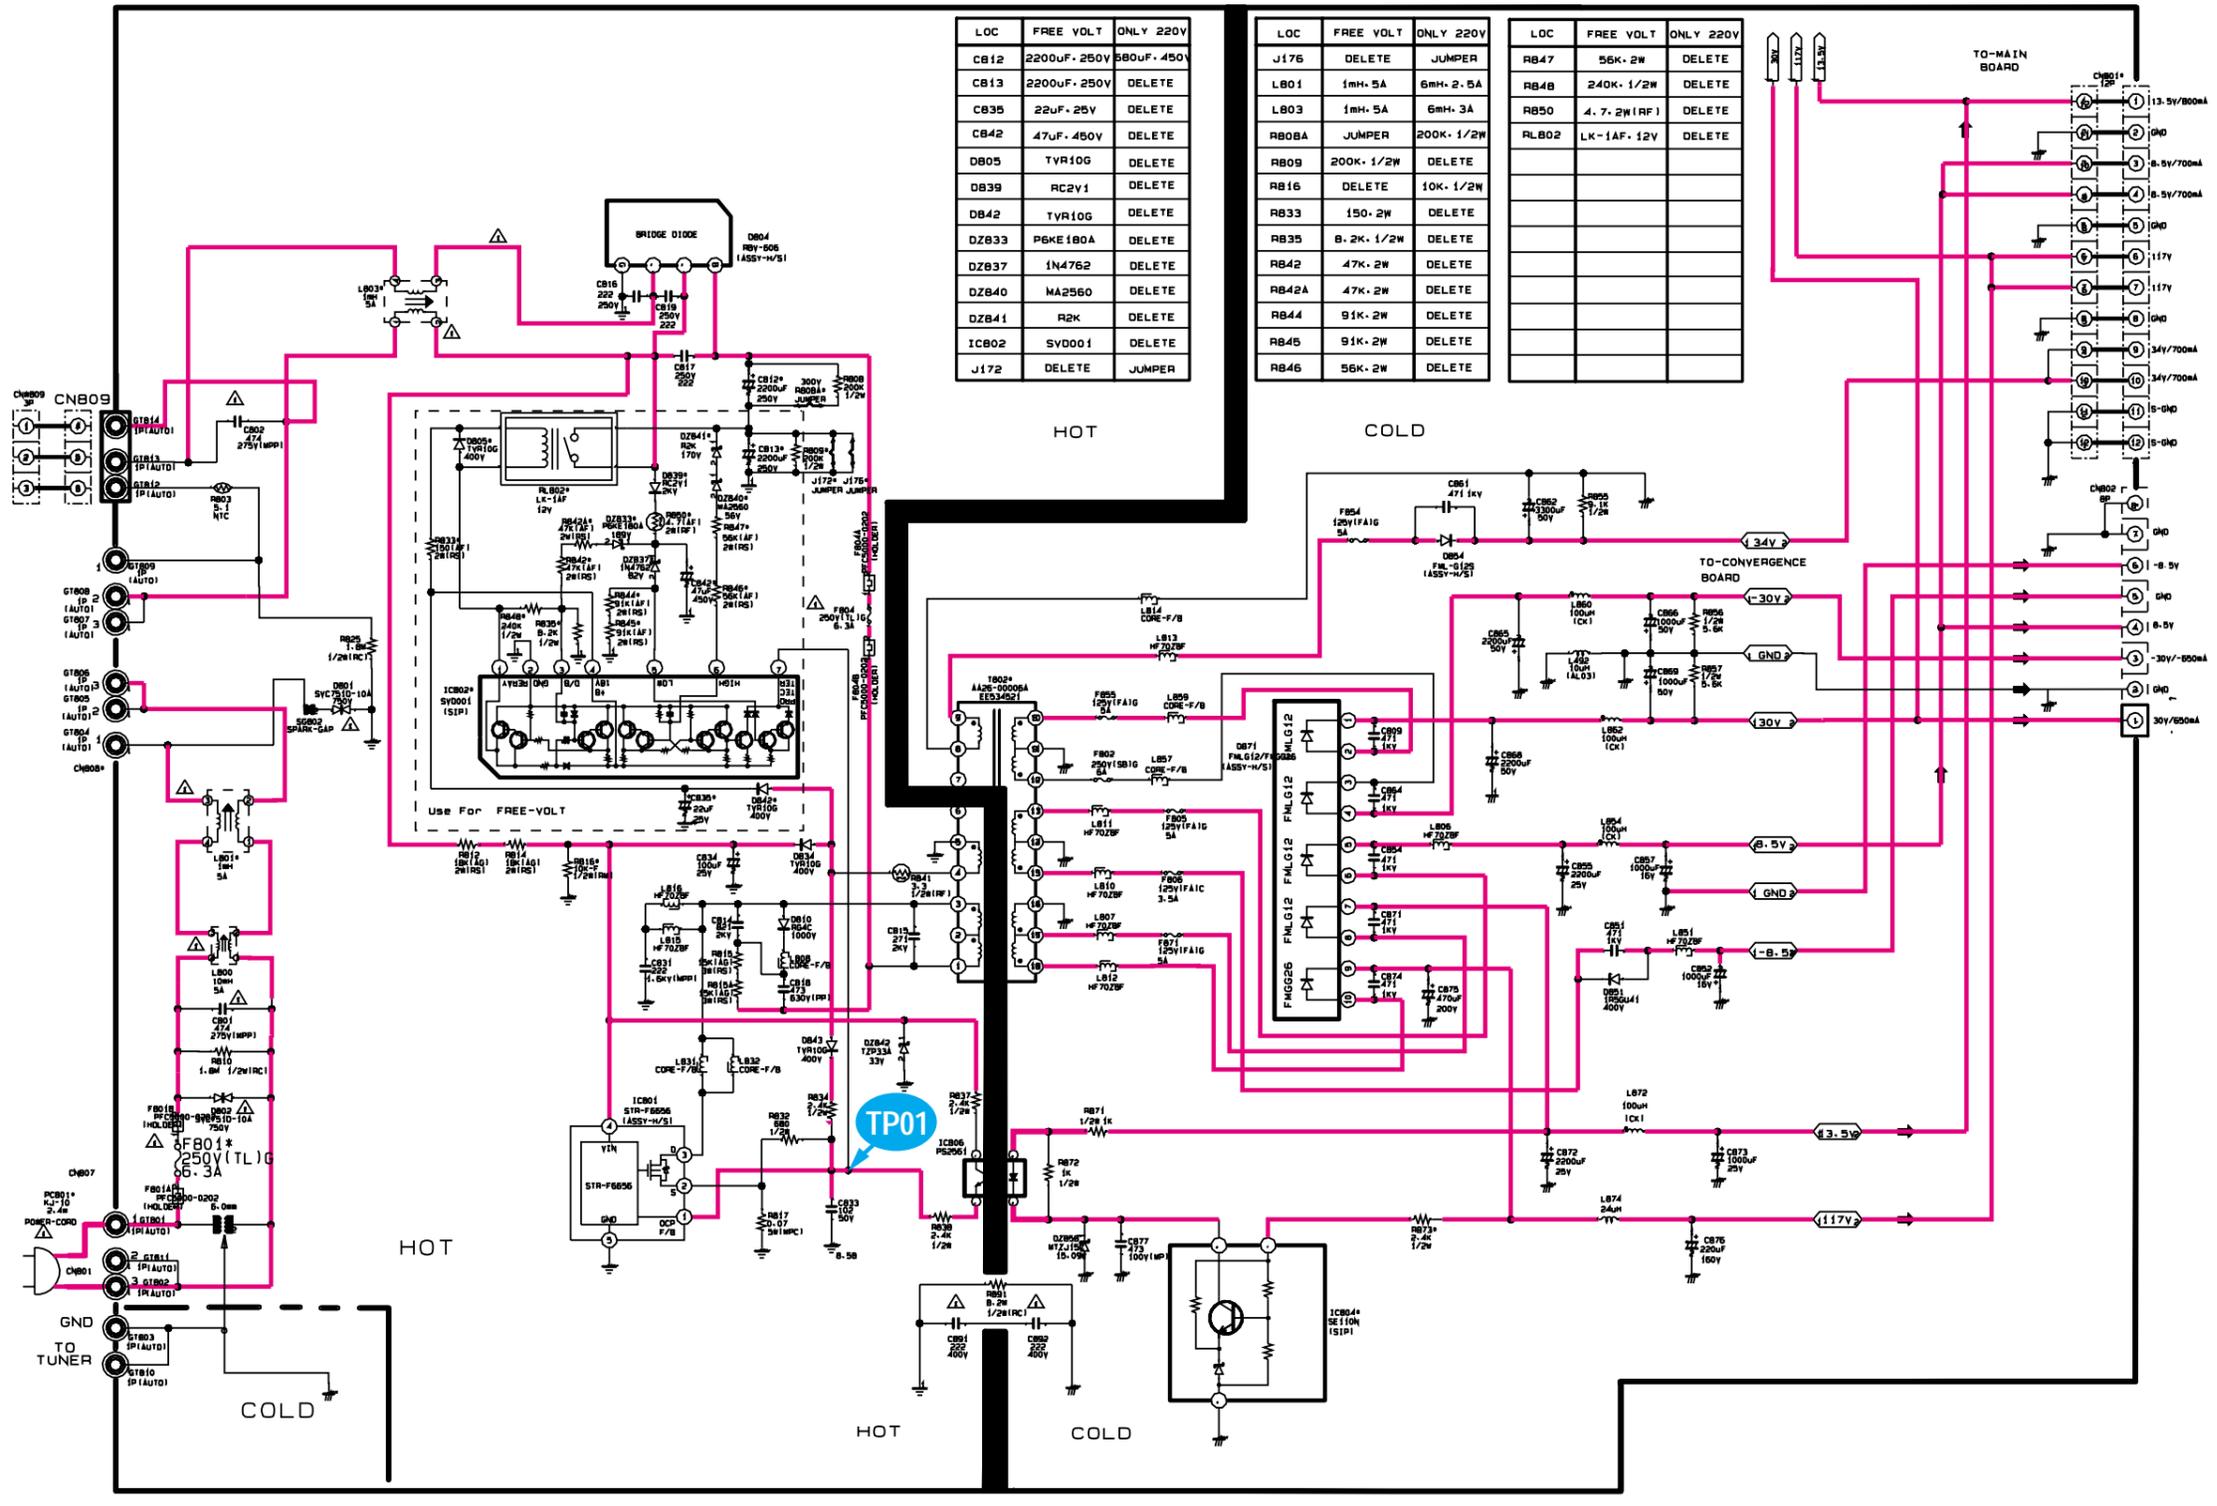

| LOC | FREE VOLT | ONLY 220V |
|-------|-------------|------------|
| CB12 | 2200uF-250V | 580uF-450V |
| CB13 | 2200uF-250V | DELETE |
| CB35 | 22uF-25V | DELETE |
| CB42 | 47uF-450V | DELETE |
| DB05 | TYR10G | DELETE |
| DB39 | RC2Y1 | DELETE |
| DB42 | TYR10G | DELETE |
| DZ833 | P6KE180A | DELETE |
| DZ837 | 1N4762 | DELETE |
| DZ840 | MA2560 | DELETE |
| DZ841 | R2K | DELETE |
| IC802 | SV0001 | DELETE |
| J172 | DELETE | JUMPER |








| LOC | FREE VOLT | ONLY 220V |
|-------|-----------|-----------|
| J176 | DELETE | JUMPER |
| LB01 | 1mH-5A | 6mH-2.5A |
| LB03 | 1mH-5A | 6mH-3A |
| RB08A | JUMPER | 200K-1/2W |
| RB09 | 200K-1/2W | DELETE |
| RB16 | DELETE | 10K-1/2W |
| RB33 | 150-2W | DELETE |
| RB35 | 8-2K-1/2W | DELETE |
| RB42 | 47K-2W | DELETE |
| RB42A | 47K-2W | DELETE |
| RB44 | 91K-2W | DELETE |
| RB45 | 91K-2W | DELETE |
| RB46 | 56K-2W | DELETE |

| LOC | FREE VOLT | ONLY 220V |
|-------|------------|-----------|
| RB47 | 55K-2W | DELETE |
| RB48 | 240K-1/2W | DELETE |
| RB50 | 4.7-2W(RF) | DELETE |
| RL802 | LK-1AF-12V | DELETE |






Power Line
Signal Line

10-15 CONVERGENCE

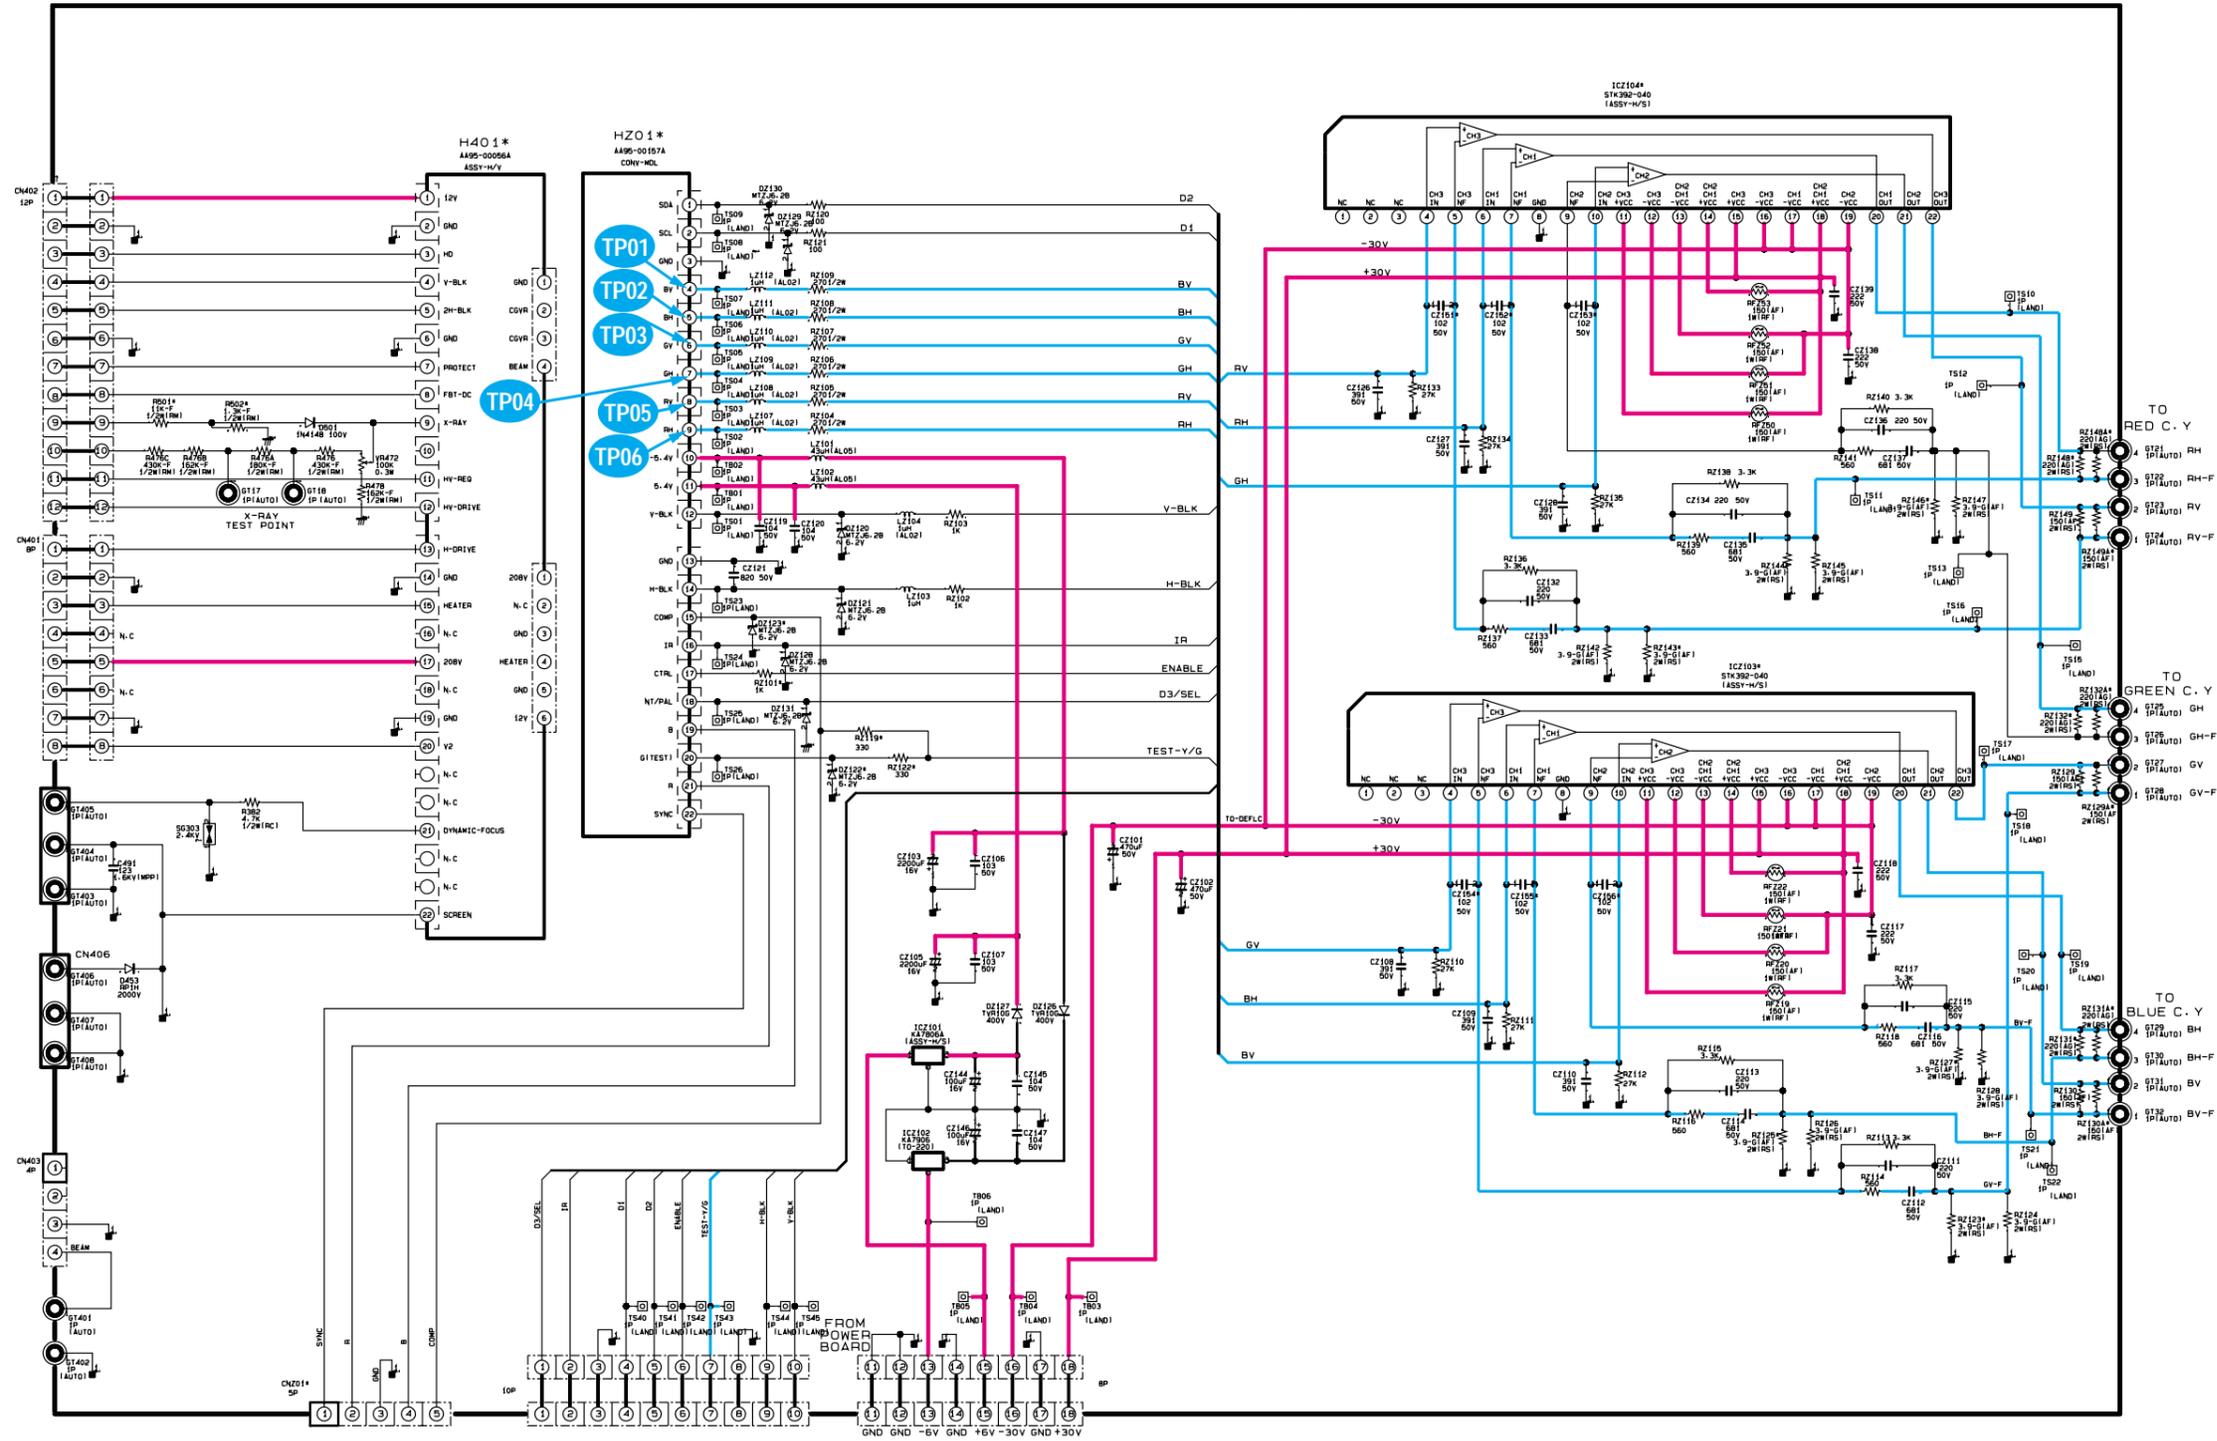


Power Line
Signal Line

10-16 HV-MODULE

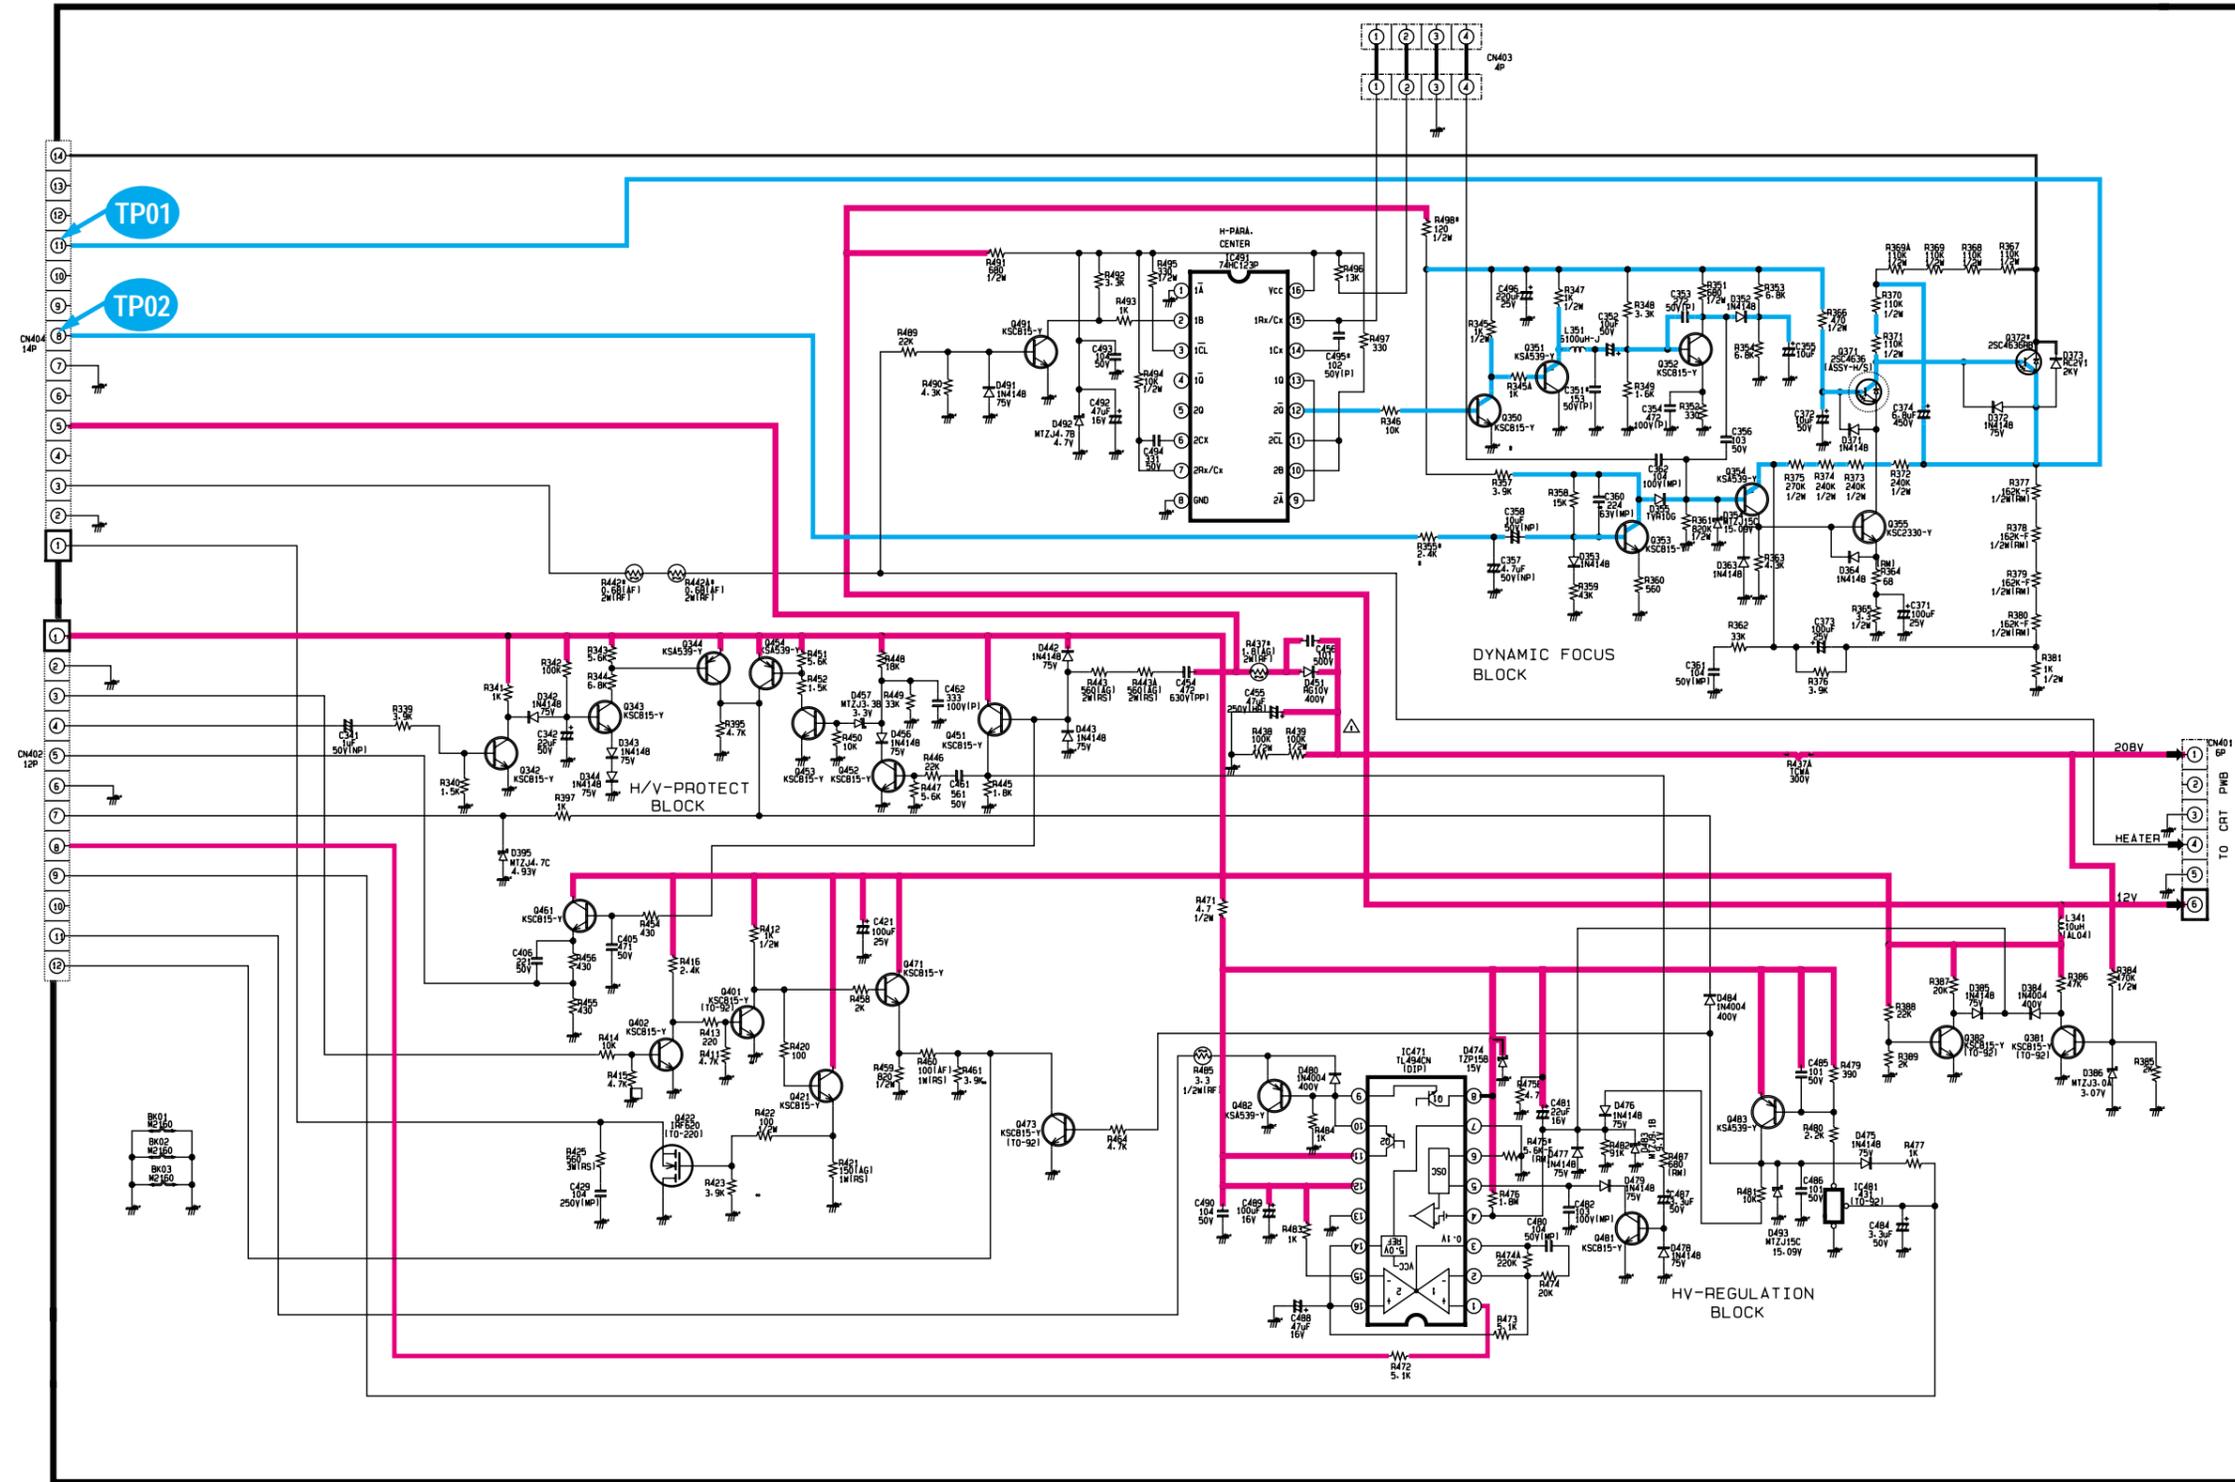


— : Power Line
 — : Signal Line


10-17 CONVERGENCE MODULE

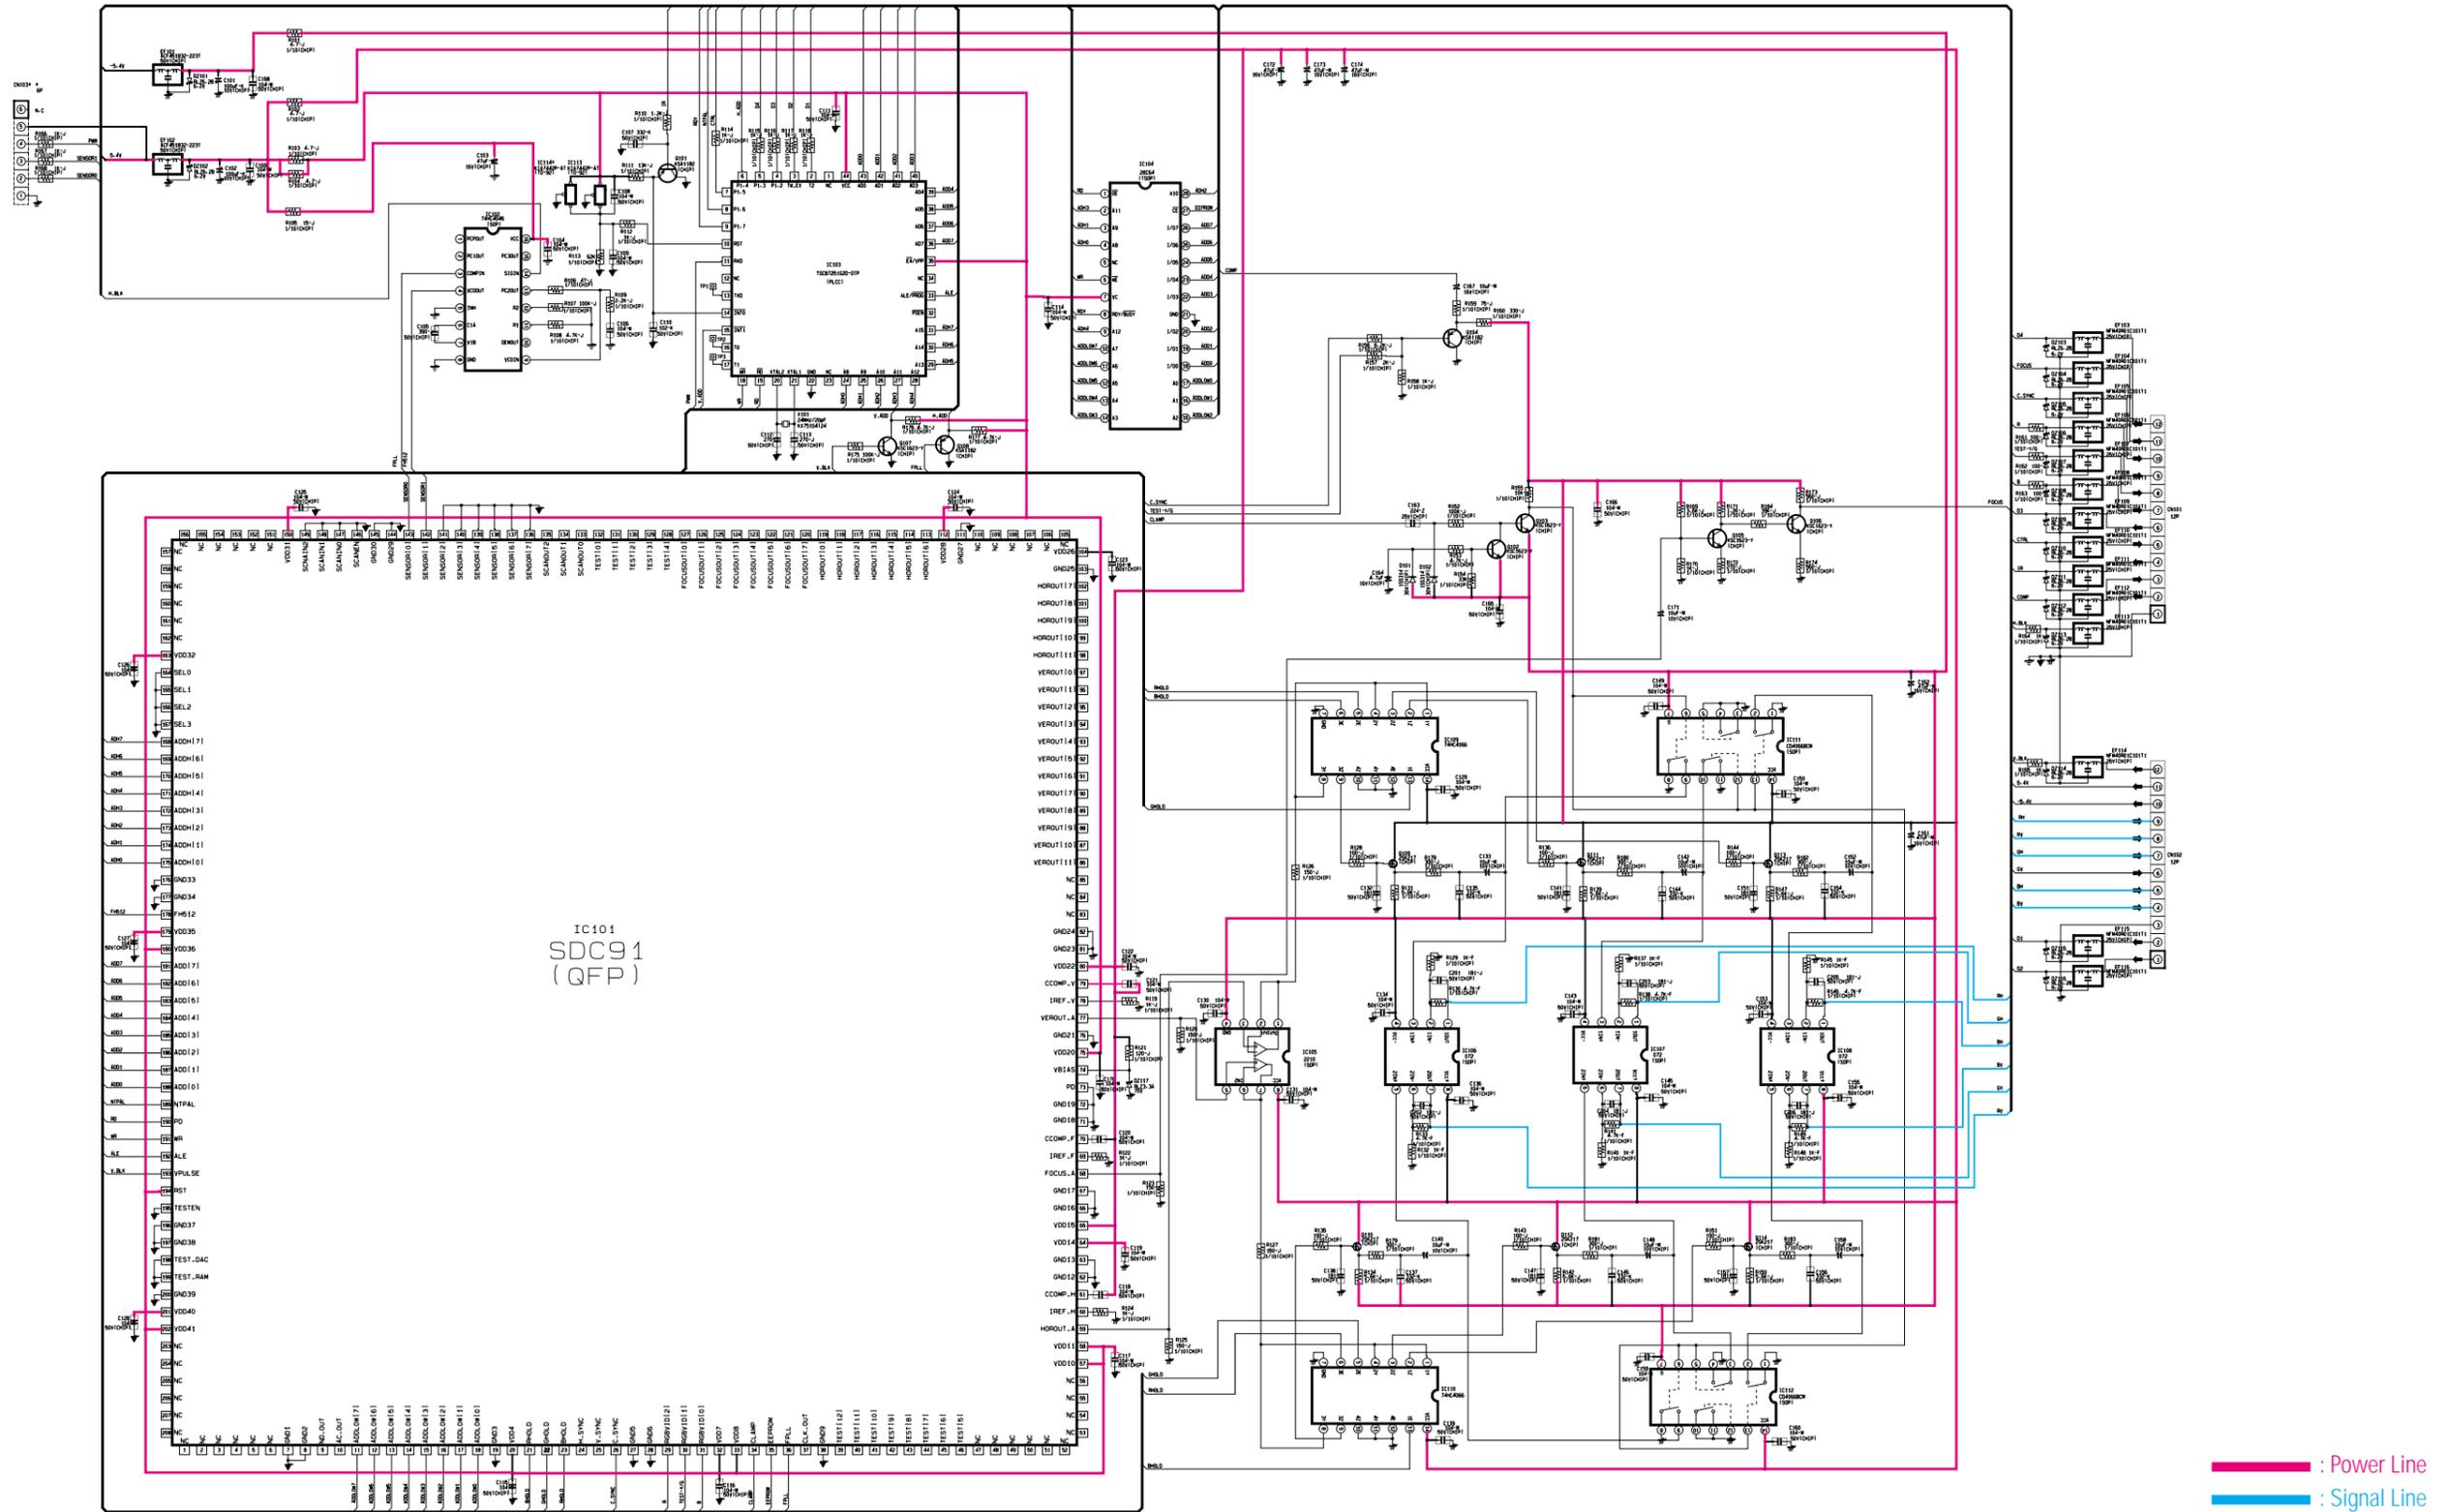

10-18 CRT

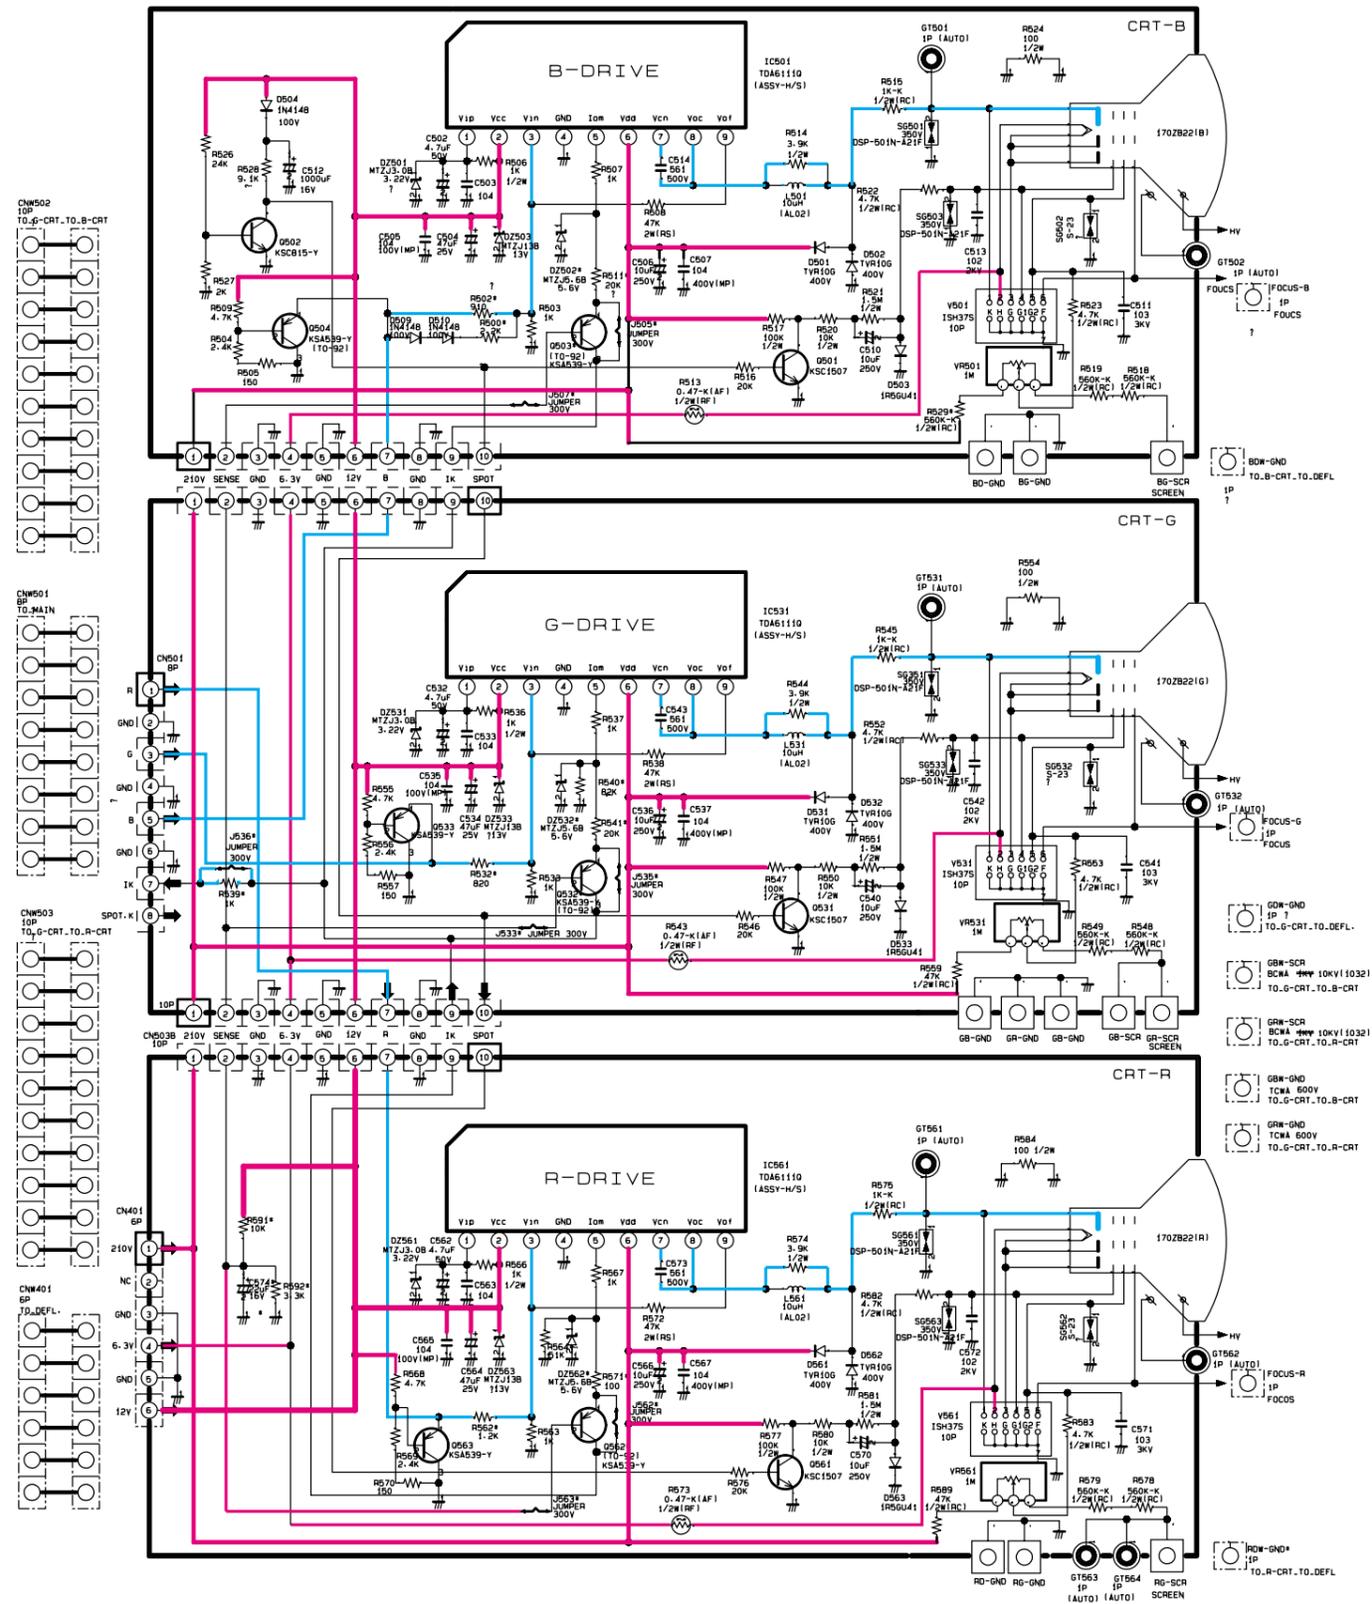


10-19 PCB-CONTROL

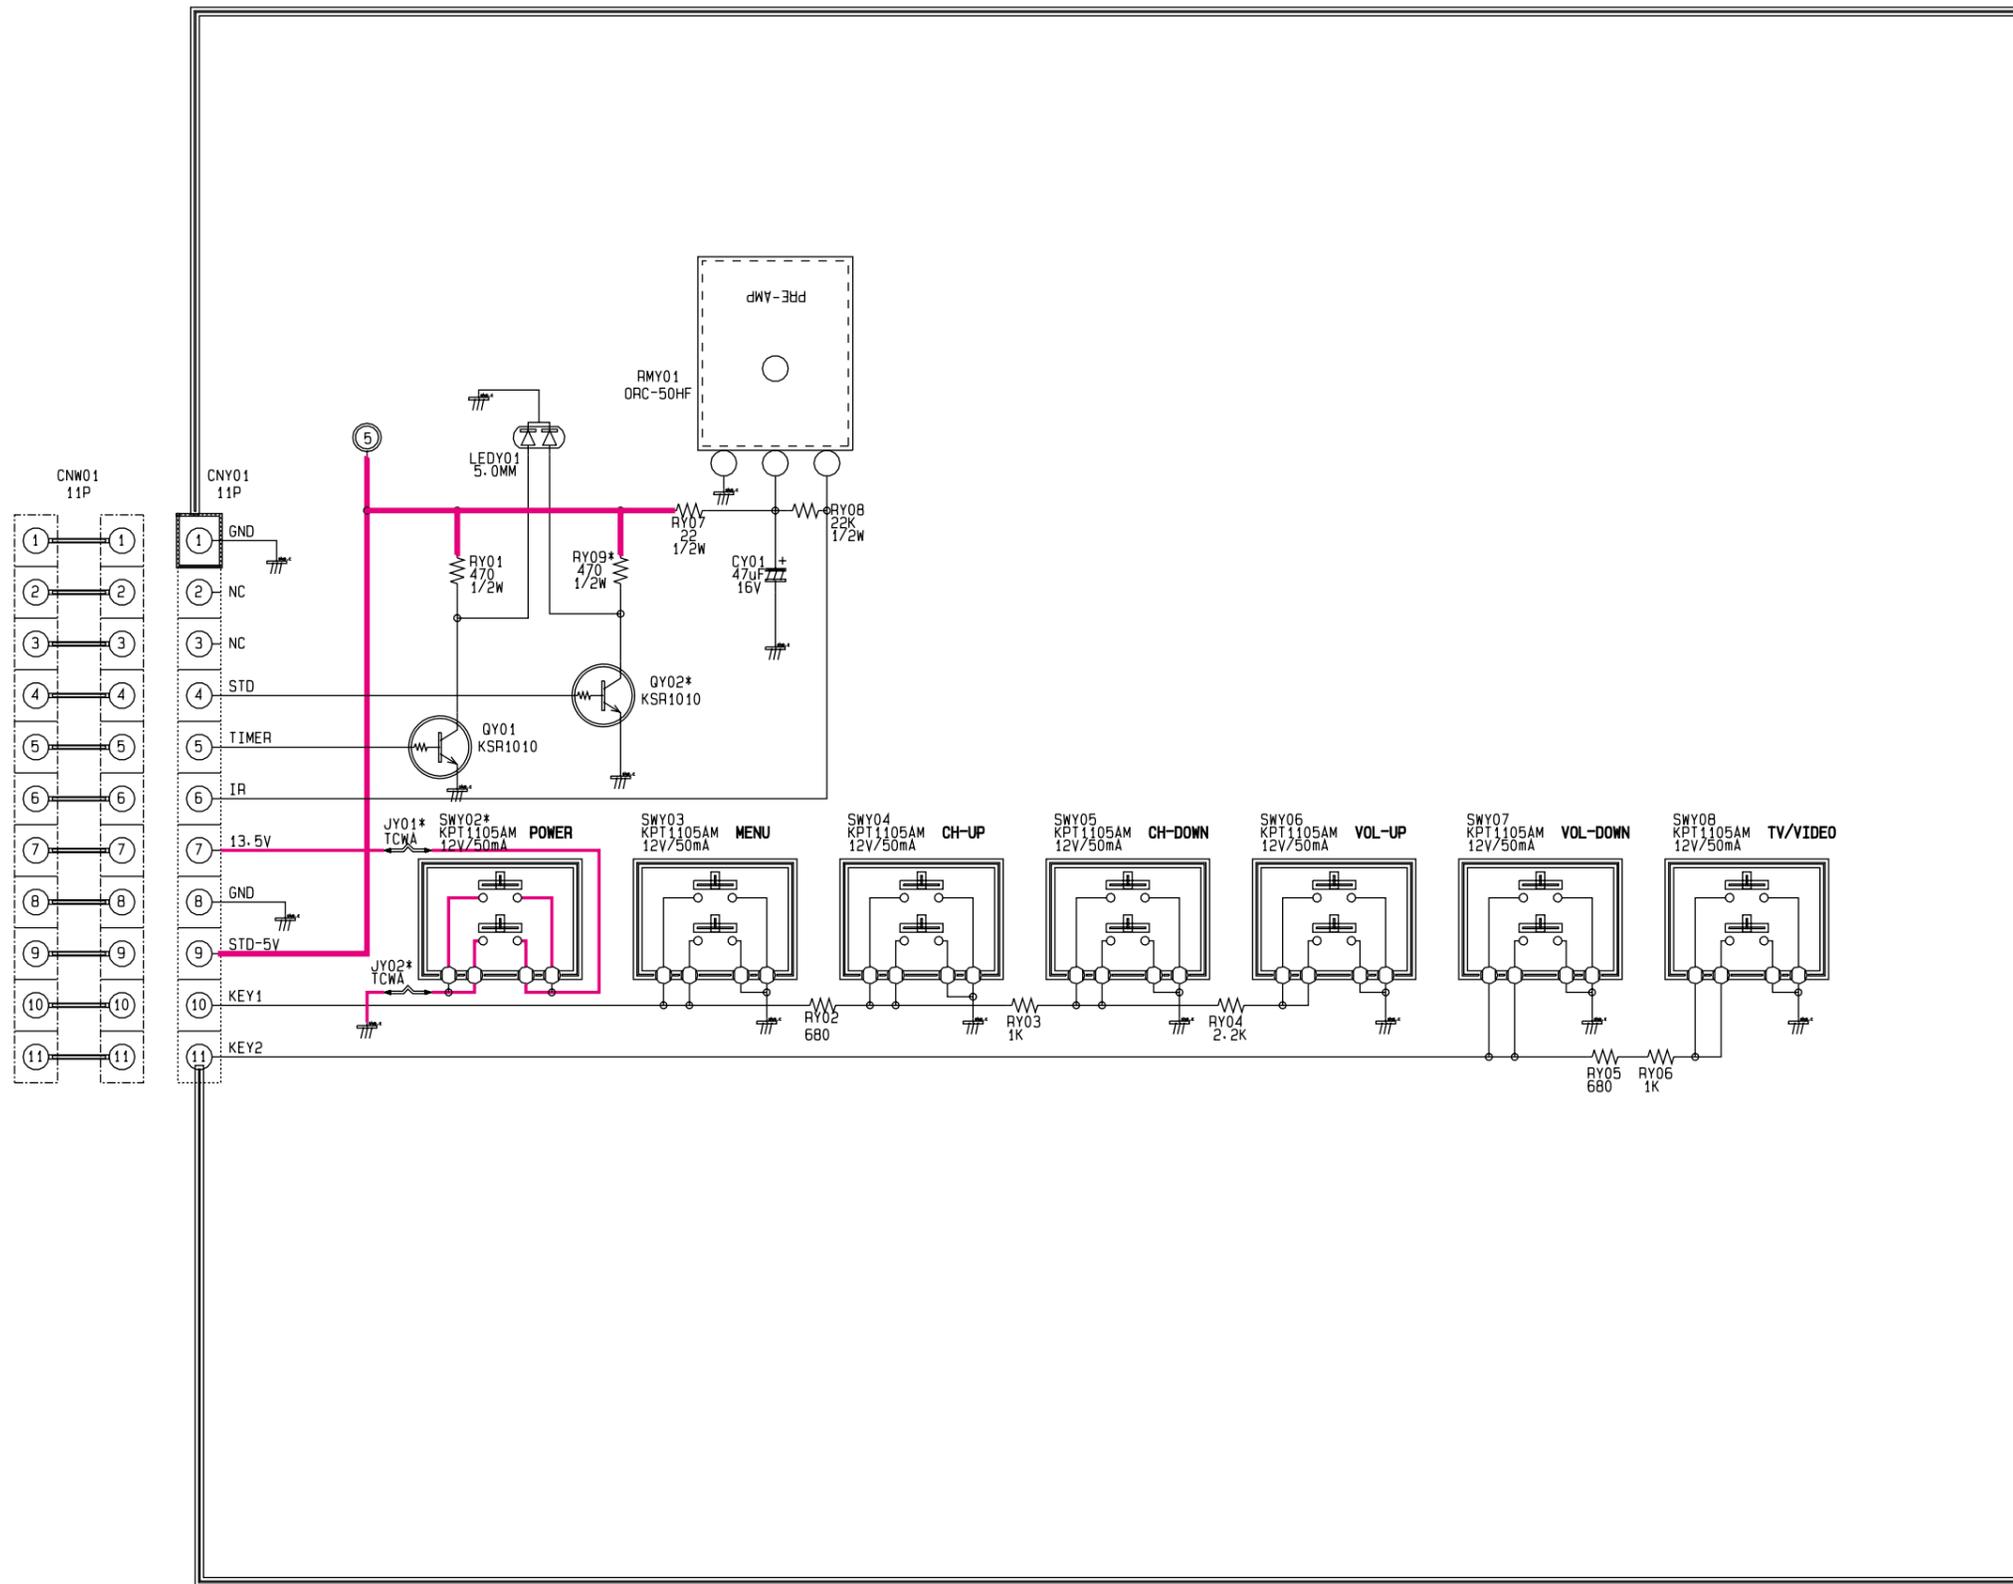

— : Power Line
 — : Signal Line

10-20 FRONT-A/V

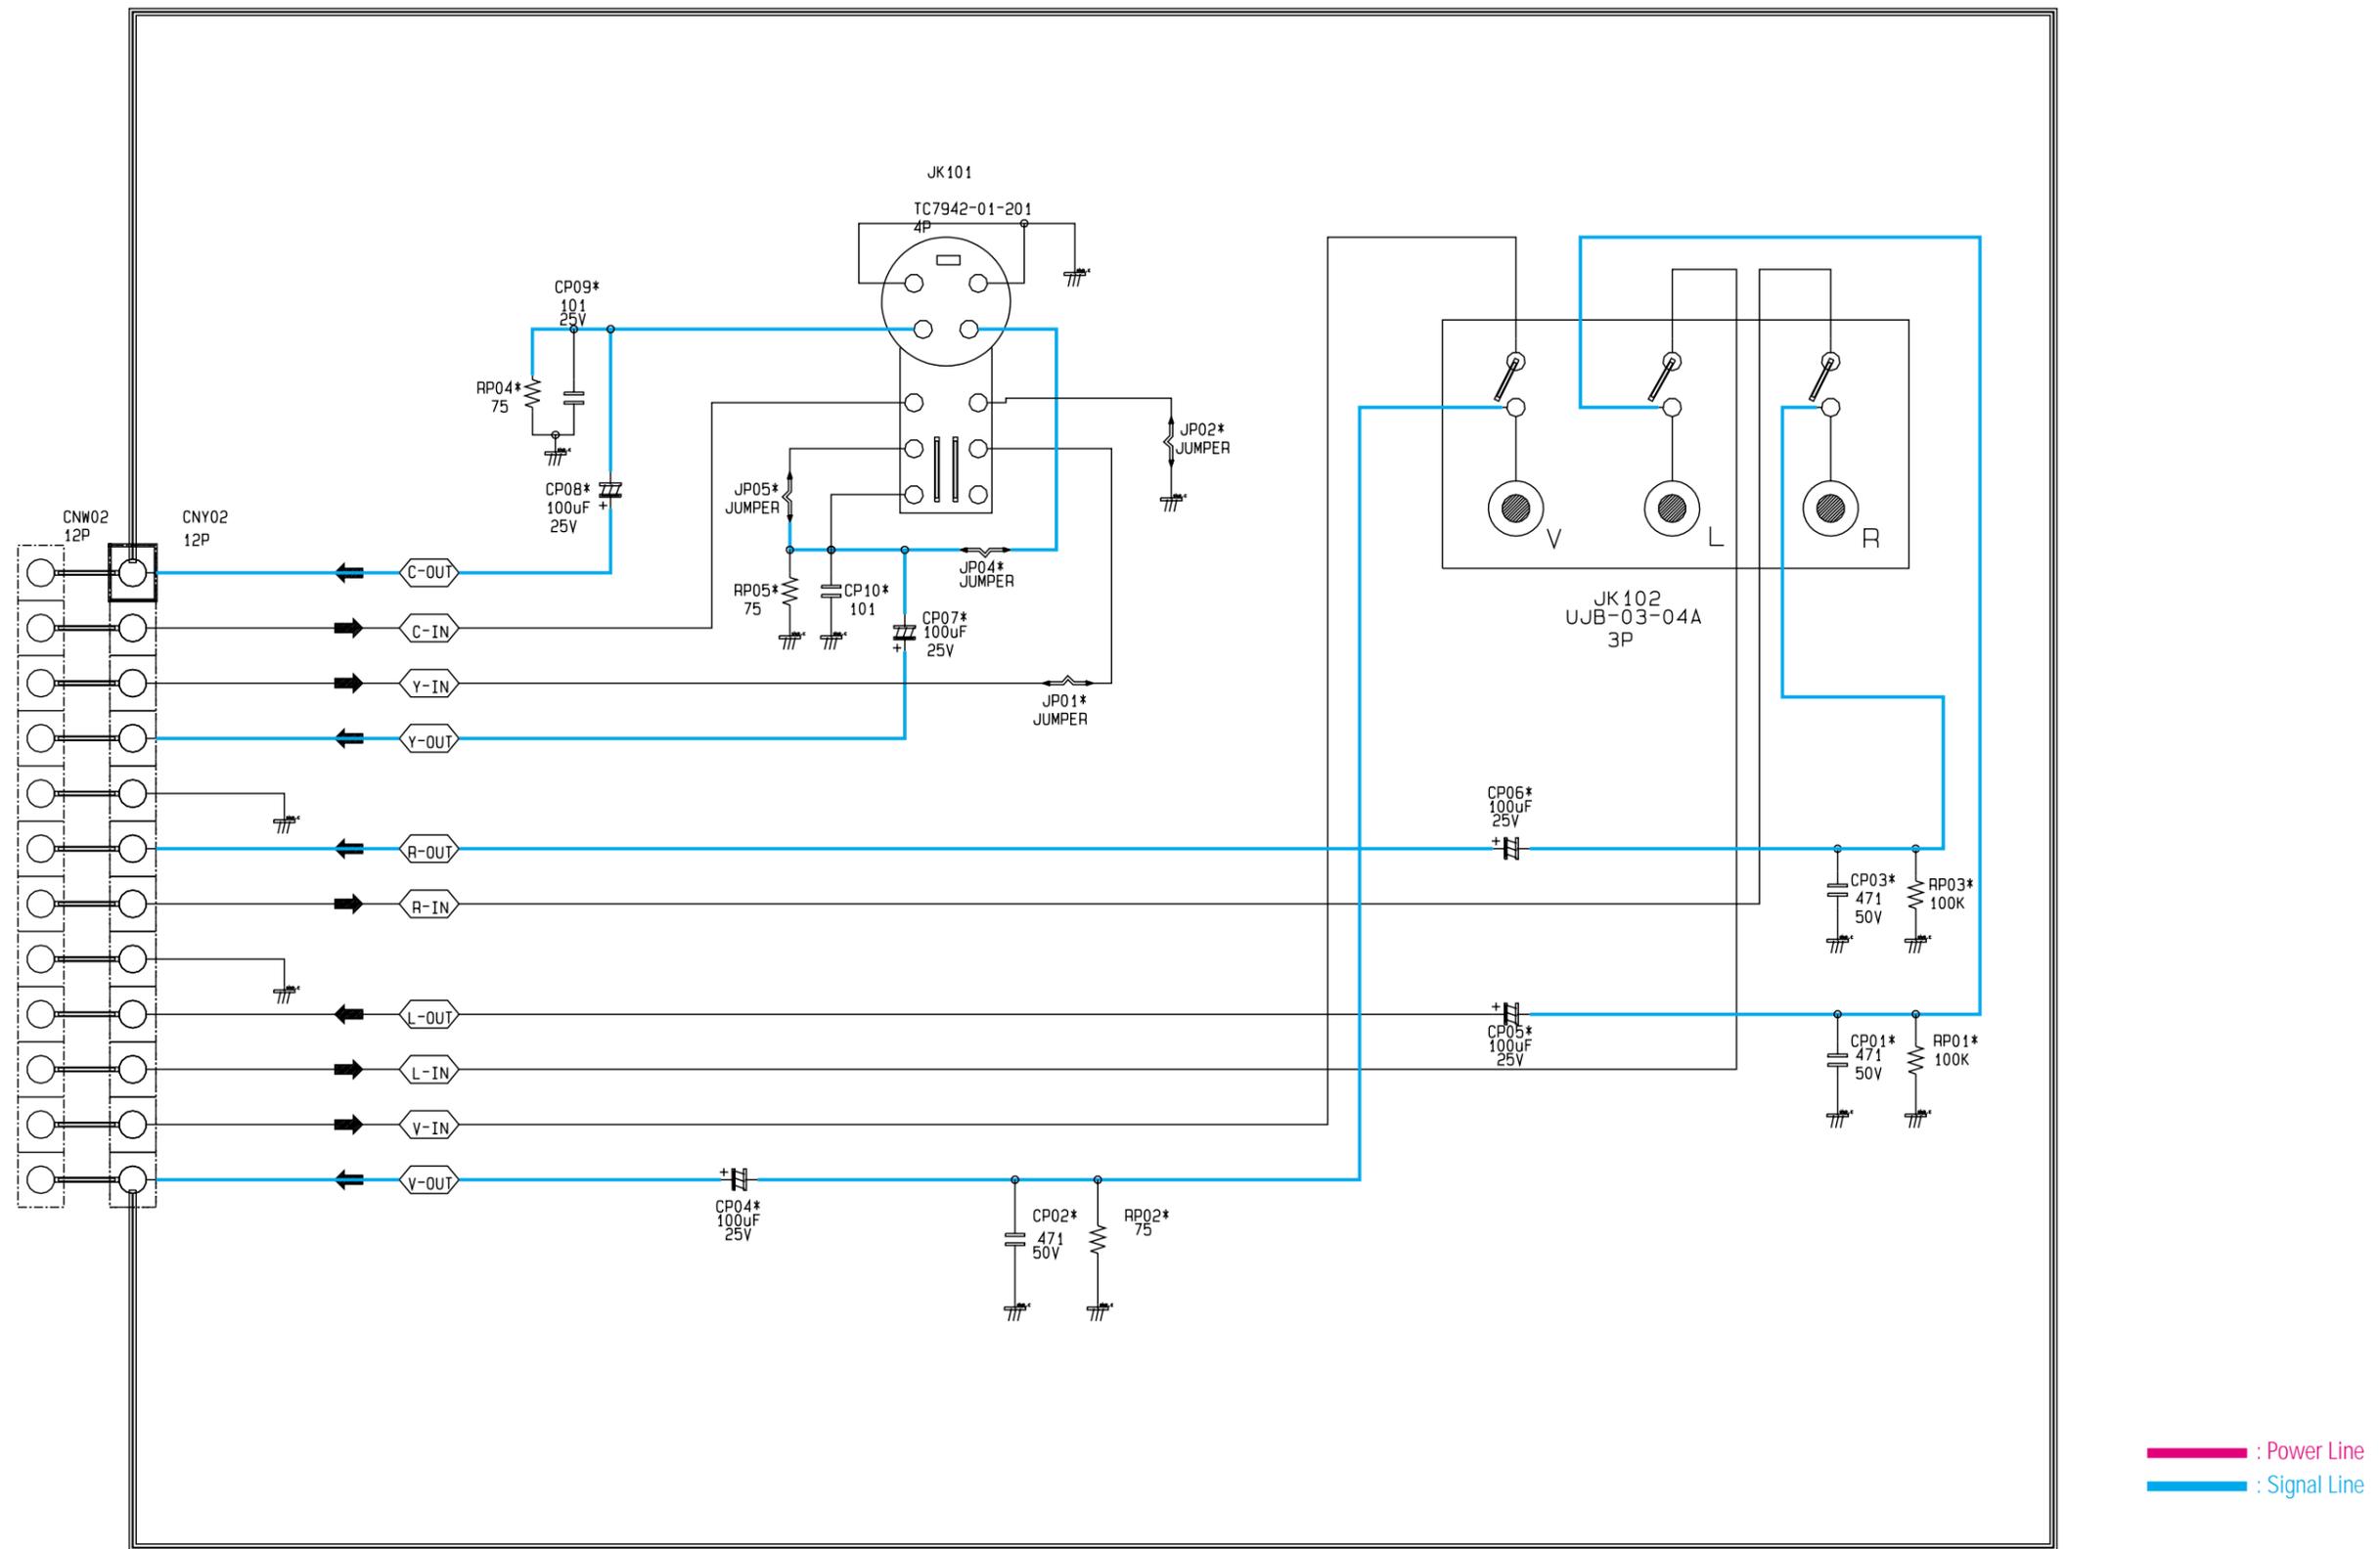

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|-------------|--|---|--------|-------|-------------|-----------------------------------|--|--------|
| | IC604 | 1201-000541 | IC- OP AMP:062,SOP,8P;153MIL,DUAL,6V/mVP | | | AA99-20043V | ASSY-PCB SUB,AUTO; AA95-00007A ,V | S.N.A | |
| | ICD601 | 1204-001198 | IC-DECODER:DPL3519A-A2,PLCC,68P,-,PLASTI | | | CF10 | 2203-000260 | C-CERAMIC,CHIP:10nf,10%,50V,X7R,TP2012 | |
| | ICD602 | 1201-000541 | IC-OP AMP:062,SOP,8P;153MIL,DUAL,6V/mVP | | | CF11 | 2401-001840 | C-AL:100uf,20%,16V,GP,TP6.3x11.5 | |
| | L601 | 2701-000170 | INDUCTOR-AXIAL:3.9uH,10%,3x7mm | | | CF12 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | L602 | 2701-000170 | INDUCTOR-AXIAL:3.9uH,10%,3x7mm | | | CF13 | 2401-001513 | C-AL:47uf,20%,16V,WT,TP5x11.5 | |
| | L603 | 2701-000112 | INDUCTOR-AXIAL:100uH,10%,3x7mm | | | CF14 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | LD601 | 2701-000170 | INDUCTOR-AXIAL:3.9uH,10%,3x7mm | | | CF15 | 2203-000429 | C-CERAMIC,CHIP:0.018nf,5%,50V,NP0,TP201 | |
| | LD602 | 2701-000112 | INDUCTOR-AXIAL:100uH,10%,3x7mm | | | CF16 | 2203-000634 | C-CERAMIC,CHIP:0.022nf,5%,50V,NP0,TP201 | |
| | PCB | AA41-00087A | PCB-AUDIO:PLT51A,2L,FR-4,180X245X1.6T,3A | S.N.A | | CF17 | 2203-000429 | C-CERAMIC,CHIP:0.018nf,5%,50V,NP0,TP201 | |
| | Q606 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | | CF18 | 2203-000683 | C-CERAMIC,CHIP:0.027nf,5%,50V,NP0,TP201 | |
| | Q607 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | | CF19 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R601 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP2012 | | | CF21 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R602 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP2012 | | | CF22 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R610 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | | CF23 | 2401-001513 | C-AL:47uf,20%,16V,WT,TP5x11.5 | |
| | R611 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | | CF24 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R614 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | | CF25 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R617 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP2012 | | | CF26 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R618 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP2012 | | | CF27 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R619 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | | CF28 | 2401-001513 | C-AL:47uf,20%,16V,WT,TP5x11.5 | |
| | R620 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | | CF29 | 2401-001513 | C-AL:47uf,20%,16V,WT,TP5x11.5 | |
| | R621 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | | CF30 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R622 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | | CF31 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R623 | 2007-000477 | R-CHIP:1MOMH,5%,1/10W,DA,TP2012 | | | CF32 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R624 | 2007-000477 | R-CHIP:1MOMH,5%,1/10W,DA,TP2012 | | | CF33 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R625 | 2007-000477 | R-CHIP:1MOMH,5%,1/10W,DA,TP2012 | | | CF34 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R626 | 2007-000477 | R-CHIP:1MOMH,5%,1/10W,DA,TP2012 | | | CF35 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R632 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP2012 | | | CF37 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R633 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP2012 | | | CF38 | 2401-001513 | C-AL:47uf,20%,16V,WT,TP5x11.5 | |
| | R634 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP2012 | | | CF39 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R635 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP2012 | | | CF40 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R636 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP2012 | | | CF41 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R637 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP2012 | | | CF42 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R638 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP2012 | | | CF44 | 2404-000151 | C-TA,CHIP:1uf,20%,16V,-,TP3216,- | |
| | R660 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | | CF45 | 2203-001158 | C-CERAMIC,CHIP:0.068nf,5%,50V,NP0,TP201 | |
| | R661 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | | CF46 | 2404-000151 | C-TA,CHIP:1uf,20%,16V,-,TP3216,- | |
| | R664 | 2007-001177 | R-CHIP:8.2KOHM,5%,1/10W,DA,TP2012 | | | CF47 | 2203-001158 | C-CERAMIC,CHIP:0.068nf,5%,50V,NP0,TP201 | |
| | R665 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP2012 | | | CF48 | 2404-000151 | C-TA,CHIP:1uf,20%,16V,-,TP3216,- | |
| | R666 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | | CF49 | 2203-001158 | C-CERAMIC,CHIP:0.068nf,5%,50V,NP0,TP201 | |
| | R669 | 2007-001177 | R-CHIP:8.2KOHM,5%,1/10W,DA,TP2012 | | | CF50 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R670 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP2012 | | | CF51 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | R672 | 2007-000586 | R-CHIP:22KOHM,5%,1/10W,DA,TP2012 | | | CF52 | 2203-000316 | C-CERAMIC,CHIP:0.12nf,5%,50V,NP0,TP2012 | |
| | R673 | 2007-000586 | R-CHIP:22KOHM,5%,1/10W,DA,TP2012 | | | CF53 | 2203-000316 | C-CERAMIC,CHIP:0.12nf,5%,50V,NP0,TP2012 | |
| | R674 | 2007-000300 | R-CHIP:11KOHM,5%,1/10W,DA,TP2012 | | | CF54 | 2404-001229 | C-TA,CHIP:4.7uf,20%,25V,GP,TP3528 | |
| | R675 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | | | CF55 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | RB1 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP2012 | | | CF56 | 2203-000260 | C-CERAMIC,CHIP:10nf,10%,50V,X7R,TP2012 | |
| | RB2 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP2012 | | | CF57 | 2404-001229 | C-TA,CHIP:4.7uf,20%,25V,GP,TP3528 | |
| | RB3 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP2012 | | | CF58 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | RB4 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP2012 | | | CF60 | 2401-001840 | C-AL:100uf,20%,16V,GP,TP6.3x11.5 | |
| | RD601 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | | CF61 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | RD602 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | | CF62 | 2401-001513 | C-AL:47uf,20%,16V,WT,TP5x11.5 | |
| | RD604 | 2007-001177 | R-CHIP:8.2KOHM,5%,1/10W,DA,TP2012 | | | CF63 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | RD605 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP2012 | | | CF64 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | RD610 | 2007-001177 | R-CHIP:8.2KOHM,5%,1/10W,DA,TP2012 | | | CF65 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | RD611 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP2012 | | | CF66 | 2401-001513 | C-AL:47uf,20%,16V,WT,TP5x11.5 | |
| | RD627 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | | CF67 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | RDB1 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP2012 | | | CF68 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | RDB2 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP2012 | | | CF69 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | RDB3 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP2012 | | | CF70 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | RDB4 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP2012 | | | CF71 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | X601 | 2801-000186 | CRYSTAL-UNIT:18.432MHz,25ppm,28-AAAM,8pf, | | | CF72 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | AA63-40273A | SHIELD-CASE:-,SPT,TO.5,-,CX724AH4HD | | | | CF75 | 2401-001840 | C-AL:100uf,20%,16V,GP,TP6.3x11.5 | |
| | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2,63Sn/37Pb | S.N.A | | | CF76 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2,63Sn/37Pb | S.N.A | | | CF77 | 2203-000429 | C-CERAMIC,CHIP:0.018nf,5%,50V,NP0,TP201 | |
| | AA65-30104B | CLAMP-WIRE:NYLON 66,V2,BLK,W2 Z5,ALL MOD | S.N.A | | | CF78 | 2203-000429 | C-CERAMIC,CHIP:0.018nf,5%,50V,NP0,TP201 | |
| | AA65-30013A | CLAMP-WIRE:NYLON 66,V0,NTR,DAWH-45N,-,- | S.N.A | | | CF79 | 2401-000027 | C-AL:4.7uf,20%,50V,GP,TP5x11.5 | |
| | AA59-40003P | MODULE-FOCUS,PACK:-,F300,NTSC,43.64x62, | | | | CF80 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | 3301-001201 | CORE-FERRITE:AE,230.5x10.25x36mm,1500,28 | | | | CF81 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | |
| | AA39-20577A | LEAD CONNECTOR-ASSY:-,-,6(3P)-,-,YF | | | | CF84 | 2203-000858 | C-CERAMIC,CHIP:0.039nf,5%,50V,NP0,TP201 | |
| | AA39-20010C | LEAD CONNECTOR-ASSY:-,YFH800-01,S,1P,600 | | | | CF85 | 2203-000839 | C-CERAMIC,CHIP:0.39nf,5%,50V,NP0,TP2012 | |
| | AA65-30105A | CLAMP-WIRE:NYLON 66,V2,NTR,15MM,ALL MODE | S.N.A | | | CF86 | 2203-000858 | C-CERAMIC,CHIP:0.039nf,5%,50V,NP0,TP201 | |
| | AA95-00007A | ASSY-F/CONVERTER:-,SVP-434JM,KPT51A,NTSC | | | | CF87 | 2203-000839 | C-CERAMIC,CHIP:0.39nf,5%,50V,NP0,TP2012 | |
| | CON01 | 3711-002709 | CONNECTOR-HEADER:NOWALL,12P1R,2.5MM,ANG | | | CF88 | 2203-000858 | C-CERAMIC,CHIP:0.039nf,5%,50V,NP0,TP201 | |
| | CON02 | 3711-002703 | CONNECTOR-HEADER:NOWALL,5P1R,2.5mm,ANGL | | | CF89 | 2203-000839 | C-CERAMIC,CHIP:0.39nf,5%,50V,NP0,TP2012 | |
| | IC03 | AA13-30021E | IC-MCU:Z90234-R3911,SZM-374FC,ST,24K, | | | DF01 | 0401-000008 | DIODE-SWITCHING:DAN217.80V,100mA,SOT-23, | |
| | IC04 | 1103-001208 | IC-EEPROM:AT24C02-PC27 C,256x8Bit,DIP8P | | | DF02 | 0401-000008 | DIODE-SWITCHING:DAN217.80V,100mA,SOT-23, | |
| | S/CASE | AA63-40037A | SHIELD-CASE:-,SPT,TO.5,SCT12A,- | S.N.A | | DF03 | 0401-000008 | DIODE-SWITCHING:DAN217.80V,100mA,SOT-23, | |
| | XTR01 | 2804-001213 | OSCILLATOR-CLOCK:80MHz,100ppm,10TTL & CM | | | FF13 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pf,3.2x1.25 | |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|-------------|---|--------|
| ... | C405 | 2201-000558 | C-CERAMIC,DISC:0.47nF,10%,50V,Y5P,TP5x3 | | ... | Q454 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | |
| ... | C406 | 2201-000370 | C-CERAMIC,DISC:0.22nF,10%,50V,Y5P,TP4x3 | | ... | Q461 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | C421 | 2401-000302 | C-AL:100uF,20%,25V,GPTP,6.3x11.5 | | ... | Q471 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | C429 | 2305-000704 | C-FILM,MPEF:100nF,5%,250V,TP,16.5x10.3x5 | | ... | Q473 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | C454 | 2303-000331 | C-FILM,PPF:4.7nF,5%,630V,TP,19.5x12x7.7 | | ... | Q481 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | C455 | 2401-001527 | C-AL:47uF,20%,250V,HR,TP,13x25mm,5m | | ... | Q482 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | |
| ... | C456 | 2201-000132 | C-CERAMIC,DISC:0.1nF,10%,500V,Y5P,TP6.5 | | ... | Q483 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | |
| ... | C461 | 2201-000600 | C-CERAMIC,DISC:0.56nF,10%,50V,Y5P,TP5x3 | | ... | Q491 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | C462 | 2301-000246 | C-FILM,PEF:33nF,5%,100V,TP,7x5.0x9.5mm,5 | | ... | R339 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | C480 | 2306-000122 | C-FILM,MPPF:100nF,5%,50V,TP,7.3x4.0x5.0m | | ... | R340 | 2001-000241 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | C481 | 2401-000914 | C-AL:22uF,20%,16V,GPTP,5x11.5 | | ... | R341 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | C482 | 2305-000178 | C-FILM,MPEF:10nF,5%,100V,TP,5mm | | ... | R342 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | C484 | 2401-001026 | C-AL:3.3UF,20%,50V,GPTP,5X11.5 | | ... | R343 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | C485 | 2201-000146 | C-CERAMIC,DISC:0.1nF,5%,50V,SL,TP5x3.5 | | ... | R344 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | C486 | 2201-000146 | C-CERAMIC,DISC:0.1nF,5%,50V,SL,TP5x3.5 | | ... | R345 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP,2.4X6.4M | |
| ... | C487 | 2401-001026 | C-AL:3.3UF,20%,50V,GPTP,5X11.5 | | ... | R345A | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | C488 | 2401-002144 | C-AL:47uF,20%,16V,GPTP,5x11.5 | | ... | R346 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | C489 | 2401-001840 | C-AL:100uF,20%,16V,GPTP,6.3x11.5 | | ... | R347 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP,2.4X6.4M | |
| ... | C490 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP | | ... | R348 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | C492 | 2401-002144 | C-AL:47uF,20%,16V,GPTP,5x11.5 | | ... | R349 | 2001-000252 | R-CARBON:1.6KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | C493 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP | | ... | R351 | 2001-001178 | R-CARBON(S):680OHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | C494 | 2201-000471 | C-CERAMIC,DISC:0.33nF,10%,50V,Y5P,TP4x3 | | ... | R352 | 2001-000003 | R-CARBON:330ohm,5%,1/8W,AA,TP,1.8x3.2mm | |
| ... | C495 | 2301-000192 | C-FILM,PEF:1nF,5%,50V,TP,5.3x10mm,5mm | | ... | R353 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | C496 | 2401-000832 | C-AL:220uF,20%,25V,GPTP,8x11.5,5 | | ... | R354 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | D342 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R355 | 2001-000006 | R-CARBON:2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | D343 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R357 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | D344 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R358 | 2001-000008 | R-CARBON:15KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | D345 | 0403-001325 | DIODE-ZENER:MTZJ15C,14.35-15.09V,500mW,D | | ... | R359 | 2001-000766 | R-CARBON:43KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | D352 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R360 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | D353 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R361 | 2001-001191 | R-CARBON(S):82KOHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | D355 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | | ... | R362 | 2001-000660 | R-CARBON:330OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | D363 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R363 | 2001-000723 | R-CARBON:4.3KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | D364 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R364 | 2001-000938 | R-CARBON:680OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | D371 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R365 | 2001-001120 | R-CARBON(S):3.3OHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | D372 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R366 | 2001-000109 | R-CARBON(S):470OHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | D373 | 0402-000243 | DIODE-RECTIFIER:RC2-V1,2000V,0.2A,DO-201 | | ... | R367 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | D384 | 0402-000132 | DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP | | ... | R368 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | D385 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R369 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | D386 | 0403-001316 | DIODE-ZENER:MTZJ3.0A,2.85-3.07V,500mW,DO | | ... | R369A | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | D395 | 0403-001319 | DIODE-ZENER:MTZJ4.7C,4.68-4.93V,500mW,DO | | ... | R370 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | D442 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R371 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | D443 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R372 | 2001-001110 | R-CARBON(S):240KOHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | D451 | 0402-000534 | DIODE-RECTIFIER:RG10V,400V,1.2A,DO-201,T | | ... | R373 | 2001-001110 | R-CARBON(S):240KOHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | D456 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R374 | 2001-001110 | R-CARBON(S):240KOHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | D457 | 0403-000714 | DIODE-ZENER:MTZJ3.3B,3.3V,3.32-3.53V,500 | | ... | R375 | 2001-001113 | R-CARBON(S):270KOHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | D474 | 0403-000734 | DIODE-ZENER:TZP15B,15V,14.7-16.5V,1W,DO- | | ... | R376 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | D475 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R377 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP,2.5x6.5 | |
| ... | D476 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R378 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP,2.5x6.5 | |
| ... | D477 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R379 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP,2.5x6.5 | |
| ... | D478 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R380 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP,2.5x6.5 | |
| ... | D479 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R381 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP,2.4X6.4M | |
| ... | D480 | 0402-000132 | DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP | | ... | R384 | 2001-001150 | R-CARBON(S):470KOHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | D483 | 0403-000720 | DIODE-ZENER:MTZJ9.1B,9.1V,8.57-9.01V,500 | | ... | R385 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | D484 | 0402-000132 | DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP | | ... | R386 | 2001-000786 | R-CARBON:47KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | D491 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35 | | ... | R387 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | D492 | 0403-000716 | DIODE-ZENER:MTZJ4.7B,4.7V,4.55-4.8V,500m | | ... | R388 | 2001-000522 | R-CARBON:22KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | D493 | 0403-001325 | DIODE-ZENER:MTZJ15C,14.35-15.09V,500mW,D | | ... | R389 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | IC481 | 1203-001217 | IC-POS,ADJUST REG.:431,TO-92,3P,4,58MIL | | ... | R395 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | L341 | 2701-000116 | INDUCTOR-AXIAL:10uH,10%,4.2x9.8mm | | ... | R397 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | Q342 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R411 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | Q343 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R412 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP,2.4X6.4M | |
| ... | Q344 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | | ... | R413 | 2001-000515 | R-CARBON:220OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | Q350 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R414 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | Q351 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | | ... | R415 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | Q352 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R416 | 2001-000006 | R-CARBON:2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | Q353 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R420 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | Q354 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | | ... | R421 | 2003-002159 | R-METAL OXIDE:150OHM,5%,1W,AG,TP,4.3X12M | |
| ... | Q355 | 0501-000366 | TR-SMALL SIGNAL:KSC2330-Y,NPN,1W,TO-92L | | ... | R422 | 2001-000028 | R-CARBON(S):100OHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | Q381 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R423 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | Q382 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R437 | 2008-001087 | R-FUSIBLE(S):1.8ohm,5%,2W,AG,TP,3.9x12mm | |
| ... | Q401 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R438 | 2001-000085 | R-CARBON(S):100KOHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | Q402 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R439 | 2001-000085 | R-CARBON(S):100KOHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | Q421 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R442 | 2008-000254 | R-FUSIBLE(S):0.68ohm,5%,2W,AF,TP,3.9x10m | |
| ... | Q451 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R442A | 2008-000254 | R-FUSIBLE(S):0.68ohm,5%,2W,AF,TP,3.9x10m | |
| ... | Q452 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R443 | 2003-002156 | R-METAL OXIDE:560OHM,5%,2W,AG,TP,6X16MM | |
| ... | Q453 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R443A | 2003-002156 | R-METAL OXIDE:560OHM,5%,2W,AG,TP,6X16MM | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|---|--------|-------|----------|-------------|---|--------|
| ... | R445 | 2001-000258 | R-CARBON:1.8KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ106 | 2201-000180 | C-CERAMIC,DISC:10nF,10%,50V,Y5V,TP7x3.5 | |
| ... | R446 | 2001-000522 | R-CARBON:22KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ107 | 2201-000180 | C-CERAMIC,DISC:10nF,10%,50V,Y5V,TP7x3.5 | |
| ... | R447 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ108 | 2201-000499 | C-CERAMIC,DISC:0.39nF,5%,50V,SL,TP8.5x3 | |
| ... | R448 | 2001-000411 | R-CARBON:18KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ109 | 2201-000499 | C-CERAMIC,DISC:0.39nF,5%,50V,SL,TP8.5x3 | |
| ... | R449 | 2001-000660 | R-CARBON:33KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ110 | 2201-000499 | C-CERAMIC,DISC:0.39nF,5%,50V,SL,TP8.5x3 | |
| ... | R450 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ111 | 2201-000976 | C-CERAMIC,DISC:0.022nF,5%,50V,NPO,TP5x3 | |
| ... | R451 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ112 | 2201-000863 | C-CERAMIC,DISC:0.68nF,10%,50V,Y5P,TP5x3 | |
| ... | R452 | 2001-000241 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ113 | 2201-000976 | C-CERAMIC,DISC:0.022nF,5%,50V,NPO,TP5x3 | |
| ... | R454 | 2001-000761 | R-CARBON:430OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ114 | 2201-000863 | C-CERAMIC,DISC:0.68nF,10%,50V,Y5P,TP5x3 | |
| ... | R455 | 2001-000761 | R-CARBON:430OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ115 | 2201-000976 | C-CERAMIC,DISC:0.022nF,5%,50V,NPO,TP5x3 | |
| ... | R456 | 2001-000761 | R-CARBON:430OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ116 | 2201-000863 | C-CERAMIC,DISC:0.68nF,10%,50V,Y5P,TP5x3 | |
| ... | R458 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ117 | 2201-000327 | C-CERAMIC,DISC:2.2nF,10%,50V,Y5V,TP6.5x | |
| ... | R459 | 2001-001192 | R-CARBON(S):820OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | CZ118 | 2201-000327 | C-CERAMIC,DISC:2.2nF,10%,50V,Y5V,TP6.5x | |
| ... | R460 | 2003-002044 | R-METAL OXIDE(S):100ohm,5%,1W,AF,TP2.5x | | ... | CZ119 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP | |
| ... | R461 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ120 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP | |
| ... | R464 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ121 | 2201-000764 | C-CERAMIC,DISC:0.082nF,5%,50V,NPO,TP8x3 | |
| ... | R471 | 2001-001146 | R-CARBON(S):4.7OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | CZ126 | 2201-000499 | C-CERAMIC,DISC:0.39nF,5%,50V,SL,TP8.5x3 | |
| ... | R472 | 2001-000800 | R-CARBON:5.1KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ127 | 2201-000499 | C-CERAMIC,DISC:0.39nF,5%,50V,SL,TP8.5x3 | |
| ... | R473 | 2001-000800 | R-CARBON:5.1KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ128 | 2201-000499 | C-CERAMIC,DISC:0.39nF,5%,50V,SL,TP8.5x3 | |
| ... | R474 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ132 | 2201-000976 | C-CERAMIC,DISC:0.022nF,5%,50V,NPO,TP5x3 | |
| ... | R474A | 2001-000508 | R-CARBON:220KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ133 | 2201-000863 | C-CERAMIC,DISC:0.68nF,10%,50V,Y5P,TP5x3 | |
| ... | R475 | 2004-001023 | R-METAL:5.6Kohm,1%,1/8W,AA,TP1.8x3.2m | | ... | CZ134 | 2201-000976 | C-CERAMIC,DISC:0.022nF,5%,50V,NPO,TP5x3 | |
| ... | R475B | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ135 | 2201-000863 | C-CERAMIC,DISC:0.68nF,10%,50V,Y5P,TP5x3 | |
| ... | R477 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ136 | 2201-000976 | C-CERAMIC,DISC:0.022nF,5%,50V,NPO,TP5x3 | |
| ... | R479 | 2001-000005 | R-CARBON:390ohm,5%,1/8W,AA,TP1.8x3.2mm | | ... | CZ137 | 2201-000863 | C-CERAMIC,DISC:0.68nF,10%,50V,Y5P,TP5x3 | |
| ... | R480 | 2001-000449 | R-CARBON:2.2KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ138 | 2201-000327 | C-CERAMIC,DISC:2.2nF,10%,50V,Y5V,TP6.5x | |
| ... | R481 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ139 | 2201-000327 | C-CERAMIC,DISC:2.2nF,10%,50V,Y5V,TP6.5x | |
| ... | R482 | 2001-001031 | R-CARBON:91KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ144 | 2401-001840 | C-AL:100uF,20%,16V,GPTP.6.3x11.5 | |
| ... | R483 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ145 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP | |
| ... | R484 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ146 | 2401-001840 | C-AL:100uF,20%,16V,GPTP.6.3x11.5 | |
| ... | R487 | 2001-000924 | R-CARBON:680OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ147 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP | |
| ... | R489 | 2001-000522 | R-CARBON:22KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ151 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP3 | |
| ... | R490 | 2001-000723 | R-CARBON:4.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ152 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP3 | |
| ... | R491 | 2001-001178 | R-CARBON(S):680OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | CZ153 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP3 | |
| ... | R492 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ154 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP3 | |
| ... | R493 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ155 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP3 | |
| ... | R494 | 2001-000066 | R-CARBON(S):10KOHM,5%,1/2W,AA,TP2.4X6.4 | | ... | CZ156 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP3 | |
| ... | R495 | 2001-000037 | R-CARBON(S):330OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | D453 | 0402-001286 | DIODE-RECTIFIER:RP1H,2000V,-1A,-,TP | |
| ... | R496 | 2001-000347 | R-CARBON:13KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | D501 | 0401-000005 | DIODE-SWITCHING:1N14148,100V,200MA,DO-35, | |
| ... | R497 | 2001-000003 | R-CARBON:330ohm,5%,1/8W,AA,TP1.8x3.2mm | | ... | DZ120 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 | |
| ... | R498 | 2001-001070 | R-CARBON(S):120OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | DZ121 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 | |
| .. | | 2001-000262 | R-CARBON:1.8MOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | DZ122 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 | |
| .. | | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1,2.63Sn/37Pb | S.N.A | ... | DZ126 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| .. | | AA65-30105C | CLAMP-WIRE:ALL MODEL,NYLON 66,2V,NTR,5MM | S.N.A | ... | DZ127 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| | | | | | ... | DZ128 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 | |
| | | | | | ... | DZ129 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 | |
| | | | | | ... | DZ130 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 | |
| | | | | | ... | DZ131 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 | |
| | | | | | ... | LZ101 | 2701-001030 | INDUCTOR-AXIAL:43uH,10%,5x14mm | |
| 1 | * | AA95-00055L | ASSY-PCB,CONV AMP,-,SP53J5HF,J51A,-,-,- | | ... | LZ102 | 2701-001030 | INDUCTOR-AXIAL:43uH,10%,5x14mm | |
| .. | C491 | 2306-000322 | C-FILM,MPPFP:12nF,5%,1.6KV,TP:29x20.5x13, | | ... | LZ103 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| .. | CN203 | AA39-00115A | LEAD CONNECTOR:ASSY,-,10P,-,-,-,YBNH2 | | ... | LZ104 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| .. | CN401 | AA39-00128A | LEAD CONNECTOR:ASSY,-,8P,-,-,-,YBNH25 | | ... | LZ107 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| .. | CN402 | AA39-00116A | LEAD CONNECTOR:ASSY,-,12P,-,-,-,YBNH2 | | ... | LZ108 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| .. | CN802 | AA39-00128A | LEAD CONNECTOR:ASSY,-,8P,-,-,-,YBNH25 | | ... | LZ109 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ⚠ | ICZ101 | AA96-50152C | ASSY-H/S,-,TR,AA62-30012A,KA7806A,30MM | | ... | LZ110 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ... | | 1203-000284 | IC-POSIX.FIXED REG.:7806,TO-220,3P,-,PLAS | | ... | LZ111 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ... | | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A | ... | LZ112 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ... | | AA62-30012A | HEAT SINK-ES-,-,A6063 EXTR,-,-,TO220,-,-, | S.N.A | ... | R382 | 2002-001006 | R-COMPOSITION:4.7Kohm,5%,1/2W,AA,TP3.7x | |
| ⚠ | ICZ102 | 1203-000121 | IC-NEGA.FIXED REG.:7906,TO-220,3P,-,PLAS | | ... | R476 | 2004-004046 | R-METAL(S):430Kohm,1%,1/2W,AA,TP2.5x6.5 | |
| ⚠ | ICZ103 | AA96-00034A | ASSY-H/S,-,CONVERGENCE,AA62-30173D,STK3 | | ... | R476A | 2004-004001 | R-METAL(S):180Kohm,1%,1/2W,AA,TP2.5x6.5 | |
| ... | | 0205-000129 | GREASE-SILICON:SC102,JAPAN | | ... | R476B | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP2.5x6.5 | |
| ... | | 1201-001225 | IC-VIDEO AMP:392,SIP,22P,-,THREE,-,PLAST | S.N.A | ... | R476C | 2004-004046 | R-METAL(S):430Kohm,1%,1/2W,AA,TP2.5x6.5 | |
| ... | | 6003-001021 | SCREW-TAPTITE:RH,+B,M3,L15,ZPC(YEL),SWR | S.N.A | ... | R478 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP2.5x6.5 | |
| ... | | AA62-30173D | HEAT SINK-ES-,-,T1,0,WHITE,SCREW-HOLE(2) | S.N.A | ... | R501 | 2004-001376 | R-METAL(S):11Kohm,1%,1/2W,AA,TP2.4x6.4m | |
| ⚠ | ICZ104 | AA96-00034A | ASSY-H/S,-,CONVERGENCE,AA62-30173D,STK3 | | ... | R502 | 2004-004366 | R-METAL(S):1.3Kohm,1%,1/2W,AA,TP2.5x6.5 | |
| .. | PCB | AA41-00135D | PCB-CONVERGENCE AMP:P51A,1L,CEM-1,330x24 | S.N.A | ... | RFZ19 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP:3.9x10mm | |
| .. | SG303 | 4715-001050 | SURGE ABSORBER:2.4KV,20%,1500A,-,DISC-RA | | ... | RFZ20 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP:3.9x10mm | |
| .. | VR472 | 2103-001086 | VR-SEMI:100KOHM,25%,0.3W,TOP | | ... | RFZ21 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP:3.9x10mm | |
| .. | | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1,2.63Sn/37Pb | S.N.A | ... | RFZ22 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP:3.9x10mm | |
| .. | | AA99-20071E | ASSY-PCB SUB,AUTO: AA95-00055L /V | S.N.A | ... | RFZ50 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP:3.9x10mm | |
| ... | CN403 | 3711-002643 | CONNECTOR-HEADER:BOX,4P1R,2.5MM,STRAIGH | | ... | RFZ51 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP:3.9x10mm | |
| ... | CZ101 | 2401-001429 | C-AL:470uF,20%,50V,GPTP:13x20.5 | | ... | RFZ52 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP:3.9x10mm | |
| ... | CZ102 | 2401-001429 | C-AL:470uF,20%,50V,GPTP:13x20.5 | | ... | RZ101 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | CZ103 | 2401-000689 | C-AL:2200uF,20%,16V,GPTP:13x25.5 | | ... | RZ102 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | CZ105 | 2401-000689 | C-AL:2200uF,20%,16V,GPTP:13x25.5 | | ... | RZ103 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |

ASSY-PCB,CONV AMP

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|-------------|--|---|--------|
| ... | RZ104 | 2001-001114 | R-CARBON(S):2700HM,5%,1/2W,AA,TP2.4X6.4 | | ... | AA64-00295H | DOOR-BODY:-,5J5HF,GR-806P P51A PAL,HIPS | | |
| ... | RZ105 | 2001-001114 | R-CARBON(S):2700HM,5%,1/2W,AA,TP2.4X6.4 | | ... | AA64-00289B | INDICATOR-LED:-,PCJ533R,-,ACRYL,-,CLR,- | S.N.A | |
| ... | RZ106 | 2001-001114 | R-CARBON(S):2700HM,5%,1/2W,AA,TP2.4X6.4 | | ... | AA64-00288C | KNOB-POWER:-,43J5,GR806P MASTER,ABS,HB,G | S.N.A | |
| ... | RZ107 | 2001-001114 | R-CARBON(S):2700HM,5%,1/2W,AA,TP2.4X6.4 | | ... | AA64-00287B | KNOB-CHA,VOL:-,PCJ533R,S/METALLIC+UV COA | S.N.A | |
| ... | RZ108 | 2001-001114 | R-CARBON(S):2700HM,5%,1/2W,AA,TP2.4X6.4 | | ... | AA64-00286B | KNOB-CONTROL:-,PCJ533R,GR-806PABS,HB,GR | S.N.A | |
| ... | RZ109 | 2001-001114 | R-CARBON(S):2700HM,5%,1/2W,AA,TP2.4X6.4 | | ... | AA61-30001A | LATCH-DOOR:-,KIFUCO LA701,- | S.N.A | |
| ... | RZ110 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | AA95-00262B | ASSY-PCB,CONTROL:-,SP43J5HP3S/XTT,CHINA, | | |
| ... | RZ111 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | AA39-00120C | LEAD CONNECTOR-ASSY:-,11P,-,35155 | | |
| ... | RZ112 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CNW01 | | | |
| ... | RZ113 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CNY01 | 3711-003973 | CONNECTOR-HEADER:BOX,11P,1R,2.5mm,STRAIG | |
| ... | RZ114 | 2001-000857 | R-CARBON:5600HM,5%,1/8W,AA,TP1.8X3.2MM | | ... | LEDY01 | 0601-001381 | LED-ROUND,RED/GRN,5.0MM,650/563NM | |
| ... | RZ115 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | PCB | AA41-00189A | PCB-CONTROL:-,J51A,1LFR-1.330x245x1.6T,4A | S.N.A |
| ... | RZ116 | 2001-000857 | R-CARBON:5600HM,5%,1/8W,AA,TP1.8X3.2MM | | ... | RMV01 | AA59-60002B | MODULE-REMOCON:-,ORC-50HF,38KHZ,940MM,ME | |
| ... | RZ117 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | SWY03 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | |
| ... | RZ118 | 2001-000857 | R-CARBON:5600HM,5%,1/8W,AA,TP1.8X3.2MM | | ... | SWY04 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | |
| ... | RZ120 | 2001-000281 | R-CARBON:1000HM,5%,1/8W,AA,TP1.8X3.2MM | | ... | SWY05 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | |
| ... | RZ121 | 2001-000281 | R-CARBON:1000HM,5%,1/8W,AA,TP1.8X3.2MM | | ... | SWY06 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | |
| ... | RZ122 | 2001-000003 | R-CARBON:330ohm,5%,1/8W,AA,TP1.8x3.2mm | | ... | SWY07 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | |
| ... | RZ122 | 2001-000003 | R-CARBON:330ohm,5%,1/8W,AA,TP1.8x3.2mm | | ... | SWY08 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | |
| ... | RZ123 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | AA61-20069A | HOLDER-WIRE:-,NYLON66,V0,NTR,PAWH-5NA | S.N.A | |
| ... | RZ124 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2.63Sn/37Pb | S.N.A | |
| ... | RZ125 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | 3301-001201 | CORE-FERRITE-AE,230.5x10.25x36mm,1500,28 | | |
| ... | RZ126 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | AA63-10002B | BAND-TIE:-,NYLON66 V2,-,L140,NTR,-, | S.N.A | |
| ... | RZ127 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | AA99-20061Y | ASSY-PCB SUB,AUTO: AA95-00262B /V | S.N.A | |
| ... | RZ128 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | CY01 | 2401-001496 | C-AL:47uf,20%,16V,GPT,5x7.5 | |
| ... | RZ129 | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | | ... | OY01 | 0504-000123 | TR-DIGITAL:KSR1010,NPN,300mW,10K,TO-92,T | |
| ... | RZ129A | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | | ... | OY02 | 0504-000123 | TR-DIGITAL:KSR1010,NPN,300mW,10K,TO-92,T | |
| ... | RZ130 | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | | ... | RY01 | 2001-000109 | R-CARBON(S):4700HM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | RZ130A | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | | ... | RY02 | 2001-000924 | R-CARBON:6800HM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | RZ131 | 2003-002157 | R-METAL OXIDE:2200HM,5%,2W,AG,TP6X16MM | | ... | RY03 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | RZ131A | 2003-002157 | R-METAL OXIDE:2200HM,5%,2W,AG,TP6X16MM | | ... | RY04 | 2001-000449 | R-CARBON:2.2KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | RZ132 | 2003-002157 | R-METAL OXIDE:2200HM,5%,2W,AG,TP6X16MM | | ... | RY05 | 2001-000924 | R-CARBON:6800HM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | RZ132A | 2003-002157 | R-METAL OXIDE:2200HM,5%,2W,AG,TP6X16MM | | ... | RY06 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | RZ133 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | RY07 | 2001-000020 | R-CARBON(S):220HM,5%,1/2W,AA,TP2.4X6.4M | |
| ... | RZ134 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | RY08 | 2001-001108 | R-CARBON(S):22KOHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | RZ135 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | RY09 | 2001-000109 | R-CARBON(S):4700HM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | RZ136 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CNP01 | AA95-00098D | ASSY-PCB POWER S/W:-,SP43J5HP3S/XTT,J51A | |
| ... | RZ137 | 2001-000857 | R-CARBON:5600HM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CNP02 | AA39-20176G | LEAD CONNECTOR-ASSY:-,3(2)P,-,YFH | |
| ... | RZ138 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | PCB | AA41-00035A | PCB-POWER S/W:J51A,1LCEM-1.245x245x1.6T | S.N.A |
| ... | RZ139 | 2001-000857 | R-CARBON:5600HM,5%,1/8W,AA,TP1.8X3.2MM | | ... | SWP01 | 3403-000179 | SWITCH-PUSH:250V,5A,DPS1,-,JPW-2104B | |
| ... | RZ140 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | AA63-10002B | BAND-TIE:-,NYLON66 V2,-,L140,NTR,-, | S.N.A | |
| ... | RZ141 | 2001-000857 | R-CARBON:5600HM,5%,1/8W,AA,TP1.8X3.2MM | | ... | AA99-20067C | ASSY-PCB SUB,AUTO: AA95-00098D /V | S.N.A | |
| ... | RZ142 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | AA61-00110B | BRACKET-MASTER:-,PCJ533R,SECC-1,T1.0,NTR | S.N.A | |
| ... | RZ143 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2.63Sn/37Pb | S.N.A | |
| ... | RZ144 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | 6003-000334 | SCREW-TAPTITE:RH,+2S,M3,L6,ZPC(YEL),SWR | S.N.A | |
| ... | RZ145 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | AA95-00046D | ASSY-AV SIDE:-,SP43J5HP3C/XTT,J51A,-, | | |
| ... | RZ146 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | CNW02 | AA39-20032J | LEAD CONNECTOR-ASSY:-,67096-12,S,12P,130 | |
| ... | RZ147 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | CNY02 | 3711-003641 | CONNECTOR-HEADER:BOX,12P1R,2.5mm,STRAIG | |
| ... | RZ148 | 2003-002157 | R-METAL OXIDE:2200HM,5%,2W,AG,TP6X16MM | | ... | JK101 | 3722-001163 | JACK-VHS:4P12mm,AU,BLK,N | |
| ... | RZ148A | 2003-002157 | R-METAL OXIDE:2200HM,5%,2W,AG,TP6X16MM | | ... | JK102 | 3722-001031 | JACK-RCA:3P3.6MM,#18,AU | |
| ... | RZ149 | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | | ... | PCB | AA41-10969B | PCB-A/V SIDE:KPT51A/52A,1LFR-1.245X245X | S.N.A |
| ... | RZ149A | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | | ... | AA63-10002A | BAND-TIE:-,NYLON66 V2,-,L100,NTR,-, | S.N.A | |
| ... | | | | | ... | AA98-60004J | ASSY-SUB,PART:APT51A,A/V,-,ALL | S.N.A | |
| ... | | | | | ... | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2.63Sn/37Pb | S.N.A | |
| ... | | | | | ... | AA99-20066X | ASSY-PCB SUB,AUTO: AA95-00046D /V | S.N.A | |
| 1 | * | AA96-00305A | ASSY POWER CORD:-,CP2/NO(4.8),H/C 50mm,V | | ... | CP01 | 2202-000263 | C-CERAMIC,MLC-AXIAL:470pf,10%,50V,Y5P,TP | |
| ... | | 3811-000401 | WIRE-PVC CU:BCWA,300V,ROLL,17/0.16mm,#22 | S.N.A | ... | CP02 | 2202-000263 | C-CERAMIC,MLC-AXIAL:470pf,10%,50V,Y5P,TP | |
| ... | | AA61-20284A | HOLDER:-,P-CORD,PPVO,BLK,KE-002 | S.N.A | ... | CP03 | 2202-000263 | C-CERAMIC,MLC-AXIAL:470pf,10%,50V,Y5P,TP | |
| ... | | AA39-10007B | POWER-CORD:-,VM-0377,2x42/0.15,2.4MT,3P | | ... | CP04 | 2401-000302 | C-AL:100uf,20%,25V,GPTP6.3x11,5 | |
| ... | | | | | ... | CP05 | 2401-000302 | C-AL:100uf,20%,25V,GPTP6.3x11,5 | |
| ... | | | | | ... | CP06 | 2401-000302 | C-AL:100uf,20%,25V,GPTP6.3x11,5 | |
| ... | | | | | ... | CP07 | 2401-000302 | C-AL:100uf,20%,25V,GPTP6.3x11,5 | |
| ... | | | | | ... | CP08 | 2401-000302 | C-AL:100uf,20%,25V,GPTP6.3x11,5 | |
| ... | | | | | ... | CP09 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pf,10%,50V,Y5P,TP | |
| ... | | | | | ... | CP10 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pf,10%,50V,Y5P,TP | |
| 1 | * | AA95-00575A | ASSY-DOOR,BODY:-,SP53J5HF/MVT,J51A,-, | | ... | RP01 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | AV+DB | 6006-001095 | SCREW-ASS'Y TAPT:WPBH,+M4,L12,ZPC(YEL) | S.N.A | ... | RP02 | 2001-000969 | R-CARBON:75OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | CP+DB | 6002-000512 | SCREW-TAPPING:RH,+2,M4,L12,ZPC(BLK),SWR | S.N.A | ... | RP03 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | PC+BM | 6003-001023 | SCREW-TAPTITE:RWH,+B,M3,L10,ZPC(YEL),SW | S.N.A | ... | RP04 | 2001-000969 | R-CARBON:75OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | | AA91-00157P | ASSY-DOOR,BODY:-,HB,J51A PAL,SP43J5HF | | ... | RP05 | 2001-000969 | R-CARBON:75OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | KC+DB | 6002-000512 | SCREW-TAPPING:RH,+2,M4,L12,ZPC(BLK),SWR | S.N.A | ... | 3301-001201 | CORE-FERRITE-AE,230.5x10.25x36mm,1500,28 | | |
| ... | KNOPOW | AA61-60005A | SPRING-CS:-,SUS304,0.6,OD10.7,H10,N4,-, | | | | | | |
| ... | WR+DB | 6002-000512 | SCREW-TAPPING:RH,+2,M4,L12,ZPC(BLK),SWR | S.N.A | | | | | |
| ... | | AA64-00290B | WINDOW-REMOCON:-,PCJ533R,SV-704PPC,-,VI | S.N.A | | | | | |
| ... | | AA64-00294B | DOOR-CONTROL:-,PCJ533R,GR-806P,ABS,HB,GR | | | | | | |

ASSY POWER CORD

ASSY-DOOR,BODY

MEMO

| | | | | | | | |
|-----|-------|-------------|--|-------|-------|-------------|--|
| ... | C457 | 2201-000132 | C-CERAMIC,DISC:0.1nF,10%,500V,Y5P,TP;6.5 | ... | L808 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, |
| ... | C458 | 2401-002288 | C-AL:470uF,20%,25V,WT,TP;10x20,5 | ... | L810 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- |
| ... | C467 | 2401-000360 | C-AL:100uF,20%,50V,GP,TP;8x11.5,5 | ... | L811 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- |
| ... | C468 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP; | ... | L812 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- |
| ... | C469 | 2201-000180 | C-CERAMIC,DISC:10nF,10%,50V,Y5V,TP;7x3,5 | ... | L813 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- |
| ... | C472 | 2401-000262 | C-AL:100uF,20%,160V,HR,TP;16x25,7,5 | ... | L814 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, |
| ... | C476 | 2401-000647 | C-AL:2.2uF,20%,50V,BP,TP;5x11,5 | ... | L815 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- |
| ... | C478 | 2301-000020 | C-FILM,PEF:27nF,5%,100V,TP;7.3x4x12.5mm, | ... | L816 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- |
| ... | C479 | 2301-000200 | C-FILM,PEF:2.2nF,5%,200V,TP;11.0x6.0x9.0 | ... | L831 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, |
| ... | C483 | 2401-000660 | C-AL:2.2uF,20%,50V,GP,TP;5x11,5 | ... | L832 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, |
| ... | C484 | 2201-000132 | C-CERAMIC,DISC:0.1nF,10%,500V,Y5P,TP;6.5 | ... | L851 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- |
| ... | C809 | 2201-000551 | C-CERAMIC,DISC:0.47nF,10%,1kV,Y5P,TP;6.3 | ... | L857 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, |
| ... | C814 | 2201-002041 | C-CERAMIC,DISC:0.82nF,10%,2kV,Y5P,TP;9x5 | ... | L859 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, |
| ... | C815 | 2201-000406 | C-CERAMIC,DISC:0.27nF,10%,2kV,Y5P,TP;6.3 | ... | Q301 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T |
| ... | C816 | 2201-000332 | C-CERAMIC,DISC:2.2nF,20%,250V,Y5U,TP;9x4 | ... | Q432 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T |
| ... | C817 | 2201-000332 | C-CERAMIC,DISC:2.2nF,20%,250V,Y5U,TP;9x4 | ... | R301 | 2004-001897 | R-METAL(S):43.2kOhm,1%,1/2W,AA,TP;2.5x6. |
| ... | C818 | 2301-001216 | C-FILM,PPF:47nF,5%,630V,TP;20x14.5x22,7. | ... | R302 | 2004-001897 | R-METAL(S):43.2kOhm,1%,1/2W,AA,TP;2.5x6. |
| ... | C819 | 2201-000332 | C-CERAMIC,DISC:2.2nF,20%,250V,Y5U,TP;9x4 | ... | R303 | 2004-001984 | R-METAL(S):26.7kOhm,1%,1/2W,AA,TP;2.4x6. |
| ... | C833 | 2201-000292 | C-CERAMIC,DISC:1nF,10%,50V,Y5P,TP;5x3.5, | ... | R305 | 2004-001984 | R-METAL(S):26.7kOhm,1%,1/2W,AA,TP;2.4x6. |
| ... | C834 | 2401-003028 | C-AL:100uF,20%,25V,WT,TP;6.3x11,5 | ... | R306 | 2003-001036 | R-METAL OXIDE(S):3.3ohm,5%,2W,AF,TP;3.9x |
| ... | C851 | 2201-000551 | C-CERAMIC,DISC:0.47nF,10%,1kV,Y5P,TP;6.3 | ... | R307 | 2003-001036 | R-METAL OXIDE(S):3.3ohm,5%,2W,AF,TP;3.9x |
| ... | C852 | 2401-000133 | C-AL:1000uF,20%,16V,GP,TP;10x20,5 | ... | R308 | 2001-000016 | R-CARBON(S):10HM,5%,1/2W,AA,TP;2.4x6.4MM |
| ... | C854 | 2201-000551 | C-CERAMIC,DISC:0.47nF,10%,1kV,Y5P,TP;6.3 | ... | R310 | 2003-002150 | R-METAL OXIDE:270OHM,5%,2W,AG,TP;6x16MM |
| ... | C855 | 2401-003141 | C-AL:2200uF,20%,25V,WT,TP;13x25,5mm | ... | R312 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP;1.8x3.2MM |
| ... | C857 | 2401-000133 | C-AL:1000uF,20%,16V,GP,TP;10x20,5 | ... | R313 | 2001-000761 | R-CARBON:4300HM,5%,1/8W,AA,TP;1.8x3.2MM |
| ... | C861 | 2201-000551 | C-CERAMIC,DISC:0.47nF,10%,1kV,Y5P,TP;6.3 | ... | R314 | 2001-000761 | R-CARBON:4300HM,5%,1/8W,AA,TP;1.8x3.2MM |
| ... | C864 | 2201-000551 | C-CERAMIC,DISC:0.47nF,10%,1kV,Y5P,TP;6.3 | ... | R332 | 2001-001107 | R-CARBON(S):220ohm,5%,1/2W,AA,TP;2.4x6.4 |
| ... | C866 | 2401-000192 | C-AL:1000uF,20%,50V,GP,TP;16x25,7,5 | ... | R333 | 2001-001107 | R-CARBON(S):220ohm,5%,1/2W,AA,TP;2.4x6.4 |
| ... | C869 | 2401-000192 | C-AL:1000uF,20%,50V,GP,TP;16x25,7,5 | ... | R334 | 2001-001107 | R-CARBON(S):220ohm,5%,1/2W,AA,TP;2.4x6.4 |
| ... | C871 | 2201-000551 | C-CERAMIC,DISC:0.47nF,10%,1kV,Y5P,TP;6.3 | ... | R405 | 2009-001109 | R-TEMPERATURE:240ohm,5%,1/4W,AA,TP;2.3x6 |
| ... | C872 | 2401-000703 | C-AL:2200uF,20%,25V,GP,-,12.5x25mm, | ... | R406 | 2004-001983 | R-METAL(S):2.49kOhm,1%,1/2W,AA,TP;2.4x6. |
| ... | C873 | 2401-001998 | C-AL:1000uF,20%,25V,GP,TP;10x20,5mm | ... | R407 | 2004-001897 | R-METAL(S):43.2kOhm,1%,1/2W,AA,TP;2.5x6. |
| ... | C874 | 2201-000551 | C-CERAMIC,DISC:0.47nF,10%,1kV,Y5P,TP;6.3 | ... | R408 | 2004-001402 | R-METAL(S):6.8kOhm,1%,1/2W,AA,TP;2.4x6.4 |
| ... | C877 | 2305-000427 | C-FILM,MPEF:47nF,5%,100V,TP;7.5x12.5x3.5 | ... | R409 | 2001-001178 | R-CARBON(S):680OHM,5%,1/2W,AA,TP;2.4x6.4 |
| ... | D302 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | ... | R410 | 2001-000052 | R-CARBON(S):3.3KOHM,5%,1/2W,AA,TP;2.4x6. |
| ⚠ | D433 | 0402-000537 | DIODE-RECTIFIER:RH1A,600V,0.6A,DO-204AC | ... | R412 | 2001-000362 | R-CARBON:1500HM,5%,1/8W,AA,TP;1.8x3.2MM |
| ⚠ | D435 | 0402-000132 | DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP | ... | R419 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP;1.8x3.2MM |
| ⚠ | D436 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | ... | R424 | 2008-000299 | R-FUSIBLE(S):47ohm,5%,2W,AF,TP;3.9x10mm |
| ⚠ | D438 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | ... | R426 | 2003-002153 | R-METAL OXIDE:4.7OHM,5%,2W,AG,TP;6x16MM |
| ⚠ | D440 | 0402-000534 | DIODE-RECTIFIER:RG10V,400V,1.2A,DO-201,T | ... | R427 | 2003-002152 | R-METAL OXIDE:10HM,5%,2W,AG,TP;6x16MM |
| ⚠ | D441 | 0402-000534 | DIODE-RECTIFIER:RG10V,400V,1.2A,DO-201,T | ... | R427A | 2003-002152 | R-METAL OXIDE:10HM,5%,2W,AG,TP;6x16MM |
| ⚠ | D444 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | ... | R428 | 2002-001017 | R-COMPOSITION:1kOhm,10%,1/2W,AA,TP;3.7x9 |
| ⚠ | D445 | 0402-000534 | DIODE-RECTIFIER:RG10V,400V,1.2A,DO-201,T | ... | R428A | 2002-001017 | R-COMPOSITION:1kOhm,10%,1/2W,AA,TP;3.7x9 |
| ⚠ | D472 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | ... | R429 | 2003-000586 | R-METAL OXIDE(S):22kOhm,5%,2W,AF,TP;4x12 |
| ⚠ | D474 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | ... | R430 | 2003-000586 | R-METAL OXIDE(S):22kOhm,5%,2W,AF,TP;4x12 |
| ⚠ | D801 | 1405-000187 | VARISTOR:750V,1250A,12.5x7mm,TP | ... | R433 | 2001-001155 | R-CARBON(S):5.6kOHM,5%,1/2W,AA,TP;2.4x6. |
| ⚠ | D802 | 1405-000187 | VARISTOR:750V,1250A,12.5x7mm,TP | ... | R434 | 2001-001093 | R-CARBON(S):2.2KOHM,5%,1/2W,AA,TP;2.4x6. |
| ⚠ | D834 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | ... | R441 | 2008-000189 | R-FUSIBLE:0.47ohm,10%,2W,AA,TP;6x15.5mm |
| ⚠ | D843 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | ... | R444 | 2003-000995 | R-METAL OXIDE(S):3.3kOhm,5%,2W,AF,TP;3.9 |
| ⚠ | D851 | 0402-000493 | DIODE-RECTIFIER:1R5GU41,400V,1.5A,DO-15L | ... | R462 | 2003-002026 | R-METAL OXIDE(S):4.7ohm,5%,1W,AF,TP;2.5x |
| ... | DZ301 | 0403-001328 | DIODE-ZENER:MTZJ2A,20.15-21.20V,500mW,D | ... | R463 | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP;3.9x |
| ... | DZ304 | 0403-001327 | DIODE-ZENER:MTZJ18A,16.22-17.06V,500mW,D | ... | R464 | 2003-002158 | R-METAL OXIDE:0.68OHM,5%,1W,AG,TP;4.3X12 |
| ... | DZ305 | 0403-001329 | DIODE-ZENER:MTZJ24B,22.61-23.77V,500mW,D | ... | R465 | 2001-001043 | R-CARBON(S):00HM,5%,1/2W,AA,TP;2.4x6.4MM |
| ... | DZ306 | 0403-001167 | DIODE-ZENER:MTZJ30D,30V,29.02-30.51V,500 | ... | R466 | 2004-001386 | R-METAL(S):16.9kOhm,1%,1/2W,AA,TP;2.4x6. |
| ... | DZ307 | 0403-001329 | DIODE-ZENER:MTZJ24B,22.61-23.77V,500mW,D | ... | R467 | 2004-001986 | R-METAL(S):35.7kOhm,1%,1/2W,AA,TP;2.4x6. |
| ... | DZ413 | 0403-001319 | DIODE-ZENER:MTZJ4.7C,4.68-4.93V,500mW,DO | ... | R468 | 2001-001122 | R-CARBON(S):3.9KOHM,5%,1/2W,AA,TP;2.4x6. |
| ... | DZ473 | 0403-000720 | DIODE-ZENER:MTZJ9.1B,9.1V,8.57-9.01V,500 | ... | R469 | 2004-001390 | R-METAL(S):1kOhm,2%,1/2W,AA,TP;2.4x6.4mm |
| ... | DZ842 | 0403-000700 | DIODE-ZENER:TZP33A,33V,31-35V,1W,DO-41,T | ... | R470 | 2001-000028 | R-CARBON(S):100OHM,5%,1/2W,AA,TP;2.4x6.4 |
| ... | DZ858 | 0403-001325 | DIODE-ZENER:MTZJ15C,14.35-15.09V,500mW,D | ... | R471 | 2004-002011 | R-METAL(S):110kOhm,1%,1/2W,AA,TP;2.4x6.4 |
| ... | F801A | 3602-000114 | FUSE-HOLDER:-,30mohm | S.N.A | R472 | 2008-000252 | R-FUSIBLE(S):0.47ohm,10%,1/2W,AF,TP;2.5x |
| ... | F801B | 3602-000114 | FUSE-HOLDER:-,30mohm | S.N.A | R473 | 2004-001395 | R-METAL(S):330kOhm,2%,1/2W,AA,TP;2.4x6.4 |
| ... | F804A | 3602-000114 | FUSE-HOLDER:-,30mohm | S.N.A | R486 | 2003-002014 | R-METAL OXIDE(S):0.6OHM,5%,2W,AF,TP;3.9X |
| ... | F804B | 3602-000114 | FUSE-HOLDER:-,30mohm | S.N.A | R488 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP;1.8x3.2M |
| ⚠ | F805 | 3601-001086 | FUSE-AXIAL LEAD:125V,5A,FAST-ACTING,GLAS | ... | R808 | 2001-000002 | R-CARBON(S):200KOHM,5%,1/2W,AA,TP;6.4X2. |
| ⚠ | F806 | 3601-001065 | FUSE-AXIAL LEAD:125V,3.5A,FAST-ACTING,CE | ... | R808A | 2001-000002 | R-CARBON(S):200KOHM,5%,1/2W,AA,TP;6.4X2. |
| ⚠ | F854 | 3601-001086 | FUSE-AXIAL LEAD:125V,5A,FAST-ACTING,GLAS | ... | R810 | 2002-001010 | R-COMPOSITION:1.8Mohm,5%,1/2W,AA,TP;3.7x |
| ⚠ | F855 | 3601-001086 | FUSE-AXIAL LEAD:125V,5A,FAST-ACTING,GLAS | ... | R812 | 2003-002151 | R-METAL OXIDE:18KOHM,5%,2W,AG,TP;6x16MM |
| ⚠ | F871 | 3601-001086 | FUSE-AXIAL LEAD:125V,5A,FAST-ACTING,GLAS | ... | R814 | 2003-002151 | R-METAL OXIDE:18KOHM,5%,2W,AG,TP;6x16MM |
| ... | L481 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | ... | R816 | 2004-004029 | R-METAL(S):10kOhm,1%,1/2W,AA,TP;2.5x6.5m |
| ... | L483 | 2901-000299 | FILTER-EMI ON BOARD:-,6A,U/L/CSA,-,9x7,5 | ... | R825 | 2002-001010 | R-COMPOSITION:1.8Mohm,5%,1/2W,AA,TP;3.7x |
| ... | L492 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm | ... | R832 | 2001-001178 | R-CARBON(S):680OHM,5%,1/2W,AA,TP;2.4x6.4 |
| ... | L493 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- | ... | R834 | 2001-001097 | R-CARBON(S):2.4KOHM,5%,1/2W,AA,TP;2.4x6. |
| ... | L494 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | ... | R837 | 2001-001097 | R-CARBON(S):2.4KOHM,5%,1/2W,AA,TP;2.4x6. |
| ... | L495 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- | ... | R838 | 2001-001097 | R-CARBON(S):2.4KOHM,5%,1/2W,AA,TP;2.4x6. |
| ... | L806 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- | ... | R855 | 2001-001196 | R-CARBON(S):9.1KOHM,5%,1/2W,AA,TP;2.4x6. |
| ... | L807 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- | ... | R856 | 2001-001155 | R-CARBON(S):5.6KOHM,5%,1/2W,AA,TP;2.4x6. |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|---------------------------|-------------|---|---|--------|-------|-------------|---|--|--------|
| ... | R857 | 2001-001155 | R-CARBON(S):5.6KOHM,5%,1/2W,AA,TP2.4X6. | | ... | C155 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | |
| ... | R871 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4M | | ... | C156 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP2012 | |
| ... | R872 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4M | | ... | C157 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP2012 | |
| ... | R873 | 2001-001097 | R-CARBON(S):2.4KOHM,5%,1/2W,AA,TP2.4X6. | | ... | C158 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GP,TP3216,- | |
| ... | R891 | 2002-001012 | R-COMPOSITION:8.2Mohm,5%,1/2W,AA,TP3.7x | | ... | C159 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | |
| ... | VR471 | 2103-001024 | VR-SEMI:50Kohm,25%,0.3W,TOP | | ... | C160 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | |
| .. | AA65-30105B | CLAMP-WIRE:NYLON 66,V2,NTR,25MM,ALL MODE | S.N.A | ... | C161 | 2404-000256 | C-TA,CHIP:47uF,20%,16V,GP,TP7343 | | |
| .. | 6003-001023 | SCREW-TAPTITE:RWH,+B,M3,L10,ZPC(YEL),SW | S.N.A | ... | C162 | 2404-000256 | C-TA,CHIP:47uF,20%,16V,GP,TP7343 | | |
| ASSY-PCB, CONV MDL | | | | | | | | | |
| 1 | * | AA95-00422B | ASSY-PCB, CONV MDL:-,SP43J5HP,J51A,-,,-,- | | ... | C164 | 2404-001229 | C-TA,CHIP:4.7uF,20%,25V,GP,TP3528 | |
| .. | C163 | 2305-000289 | C-FILM,MPEF:220nF,5%,63V,TP,-,5mm | | ... | C165 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | |
| .. | CN101 | 3711-002709 | CONNECTOR-HEADER:NOWALL,12P1R,2.5MM,ANG | | ... | C166 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | |
| .. | CN102 | 3711-002709 | CONNECTOR-HEADER:NOWALL,12P1R,2.5MM,ANG | | ... | C167 | 2404-000123 | C-TA,CHIP:10uF,20%,16V,-,TP6032,2.9mm | |
| ▲ | IC113 | 1203-000641 | IC-RESET:7442,T0-92,3P,-,PLASTIC,-,0.3/7 | | ... | C168 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | |
| .. | 0202-001004 | SOLDER-CREAM:SQ-2030M SZH-1,S63A,D0.04,6 | S.N.A | ... | C169 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | |
| .. | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2,63Sn/37Pb | S.N.A | ... | C170 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | |
| .. | AA63-00143A | SHIELD-CASE:-,SPT E TO.5,TO.5,ALLMIGHT,CO | S.N.A | ... | C171 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GP,TP3216,- | | |
| .. | AA99-20068A | ASSY-PCB SUB,AUTO; AA95-00422B ,V | S.N.A | ... | C172 | 2404-000256 | C-TA,CHIP:47uF,20%,16V,GP,TP7343 | | |
| ... | C101 | 2404-000275 | C-TA,CHIP:100uF,10%,10V,GP,TP7343 | | ... | C173 | 2404-000256 | C-TA,CHIP:47uF,20%,16V,GP,TP7343 | |
| ... | C102 | 2404-000275 | C-TA,CHIP:100uF,10%,10V,GP,TP7343 | | ... | C174 | 2404-000256 | C-TA,CHIP:47uF,20%,16V,GP,TP7343 | |
| ... | C103 | 2404-000256 | C-TA,CHIP:47uF,20%,16V,GP,TP7343 | | ... | C201 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP2012 | |
| ... | C104 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | C202 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP2012 | |
| ... | C105 | 2203-000858 | C-CERAMIC,CHIP:0.039nF,5%,50V,NPO,TP,201 | | ... | C203 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP2012 | |
| ... | C106 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | C204 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP2012 | |
| ... | C107 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP2012 | | ... | C205 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP2012 | |
| ... | C108 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | C206 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP2012 | |
| ... | C109 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | D101 | 0401-000160 | DIODE-SWITCHING:ISS314,30V,100mA,USC,TP | |
| ... | C110 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | | ... | D102 | 0401-000160 | DIODE-SWITCHING:ISS314,30V,100mA,USC,TP | |
| ... | C111 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | DZ101 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C112 | 2203-000683 | C-CERAMIC,CHIP:0.027nF,5%,50V,NPO,TP,201 | | ... | DZ102 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C113 | 2203-000683 | C-CERAMIC,CHIP:0.027nF,5%,50V,NPO,TP,201 | | ... | DZ104 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C114 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | DZ105 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C115 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | DZ106 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C116 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | DZ107 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C117 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | DZ108 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C118 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | DZ109 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C119 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | DZ110 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C120 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | DZ111 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C121 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | DZ112 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C122 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | DZ113 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C123 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | DZ114 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C124 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | DZ115 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C125 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | DZ116 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C126 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | DZ117 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C127 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | EF101 | 2901-000229 | FILTER-EMI SMD:50V,0.3A,-,22000pF,4.5x3. | |
| ... | C128 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | EF102 | 2901-000229 | FILTER-EMI SMD:50V,0.3A,-,22000pF,4.5x3. | |
| ... | C129 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | EF104 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C130 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | EF105 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C131 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | EF106 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C132 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP2012 | | ... | EF107 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C133 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GP,TP3216,- | | ... | EF108 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C134 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | EF109 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C135 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP2012 | | ... | EF110 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C136 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | EF111 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C137 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP2012 | | ... | EF112 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C138 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP2012 | | ... | EF113 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C139 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | EF114 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C140 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GP,TP3216,- | | ... | EF115 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C141 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP2012 | | ... | EF116 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C142 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GP,TP3216,- | | ▲ | IC101 | AA13-00071A | IC-ASIC,-,SDC91,QFP:208P,CONV CONTROLL | |
| ... | C143 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ▲ | IC102 | 0801-001043 | IC-CMOS LOGIC:74HC4046,PHASE-LOCKED-LOOP | |
| ... | C144 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP2012 | | ▲ | IC103 | AA09-00032A | IC-MCU:TSC87251G2D-OT,TP:SC87251G2D-OT | |
| ... | C145 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ▲ | IC104 | 1103-001167 | IC-EEPROM:28C64,8KX8BIT,TSOP:28P,-,120NS | |
| ... | C146 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP2012 | | ▲ | IC105 | 1201-001520 | IC-VIDEO AMP:2210,SOP:8P,150MIL,DUAL,7dB | |
| ... | C147 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP2012 | | ▲ | IC106 | 1201-001504 | IC-OP AMP:072,SOP:8P,150MIL,DUAL,-,PLAST | |
| ... | C148 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GP,TP3216,- | | ▲ | IC107 | 1201-001504 | IC-OP AMP:072,SOP:8P,150MIL,DUAL,-,PLAST | |
| ... | C149 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ▲ | IC108 | 1201-001504 | IC-OP AMP:072,SOP:8P,150MIL,DUAL,-,PLAST | |
| ... | C150 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ▲ | IC109 | 0801-001156 | IC-CMOS LOGIC:74HC4066,BILATERAL SWITCH, | |
| ... | C151 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP2012 | | ▲ | IC110 | 0801-001156 | IC-CMOS LOGIC:74HC4066,BILATERAL SWITCH, | |
| ... | C152 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GP,TP3216,- | | ▲ | IC111 | 1001-000105 | IC-ANALOG SWITCH:CD4066BM,BILATERAL CMOS | |
| ... | C153 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ▲ | IC112 | 1001-000105 | IC-ANALOG SWITCH:CD4066BM,BILATERAL CMOS | |
| ... | C154 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP2012 | | ▲ | PCB | AA41-00188D | PCB-CONVERGENCE MODULE:SVP-43J4M,FR-4,4L | S.N.A |
| ... | | | | | ... | Q101 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
| ... | | | | | ... | Q102 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| ... | | | | | ... | Q103 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| ... | | | | | ... | Q104 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
| ... | | | | | ... | Q105 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| ... | | | | | ... | Q106 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|---|--------|-------|----------|-------------|------------------------------------|--------|
| ... | C734 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | | ... | R702 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C735 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | | ... | R703 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C736 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | | ... | R704 | 2007-000511 | R-CHIP:2.4KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C737 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | | ... | R705 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP,2012 | |
| ... | C740 | 2401-001840 | C-AL:100uF,20%,16V,GPTP,6.3x11,5 | | ... | R706 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP,2012 | |
| ... | C741 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | R708 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | C742 | 2401-001840 | C-AL:100uF,20%,16V,GPTP,6.3x11,5 | | ... | R709 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | C743 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | R710 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | C744 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | | ... | R711 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP,2012 | |
| ... | C745 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | | ... | R712 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | C746 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | | ... | R713 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | C747 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | | ... | R714 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | C748 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | | ... | R715 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | C749 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | | ... | R716 | 2007-000300 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C760 | 2401-000667 | C-AL:2.2uF,20%,50V,WT,TP5x11,5 | | ... | R717 | 2007-000401 | R-CHIP:150OHM,5%,1/10W,DA,TP,2012 | |
| ... | C761 | 2401-000667 | C-AL:2.2uF,20%,50V,WT,TP5x11,5 | | ... | R718 | 2007-000300 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C762 | 2401-000667 | C-AL:2.2uF,20%,50V,WT,TP5x11,5 | | ... | R719 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C763 | 2401-000667 | C-AL:2.2uF,20%,50V,WT,TP5x11,5 | | ... | R720 | 2007-000511 | R-CHIP:2.4KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C764 | 2401-000667 | C-AL:2.2uF,20%,50V,WT,TP5x11,5 | | ... | R721 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | C765 | 2401-000667 | C-AL:2.2uF,20%,50V,WT,TP5x11,5 | | ... | R722 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP,2012 | |
| ... | C766 | 2401-000667 | C-AL:2.2uF,20%,50V,WT,TP5x11,5 | | ... | R723 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | C767 | 2401-000667 | C-AL:2.2uF,20%,50V,WT,TP5x11,5 | | ... | R724 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | C768 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | | ... | R725 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP,2012 | |
| ... | C769 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | | ... | R726 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP,2012 | |
| ... | C770 | 2203-000683 | C-CERAMIC,CHIP:0.027nF,5%,50V,NPO,TP,201 | | ... | R727 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP,2012 | |
| ... | C771 | 2203-000683 | C-CERAMIC,CHIP:0.027nF,5%,50V,NPO,TP,201 | | ... | R728 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP,2012 | |
| ... | C772 | 2203-000683 | C-CERAMIC,CHIP:0.027nF,5%,50V,NPO,TP,201 | | ... | R729 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP,2012 | |
| ... | C773 | 2203-000239 | C-CERAMIC,CHIP:0.1nF,5%,50V,NPO,TP,2012 | | ... | R730 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C774 | 2203-000239 | C-CERAMIC,CHIP:0.1nF,5%,50V,NPO,TP,2012 | | ... | R731 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C775 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | | ... | R732 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C776 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | | ... | R733 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C777 | 2401-001496 | C-AL:47uF,20%,16V,GPT,5x7,5 | | ... | R734 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C780 | 2401-000360 | C-AL:100uF,20%,50V,GPT,8x11,5,5 | | ... | R735 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C782 | 2401-000471 | C-AL:10uF,20%,50V,BP,TP5x11,5mm | | ... | R736 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP,2012 | |
| ... | C783 | 2401-000471 | C-AL:10uF,20%,50V,BP,TP5x11,5mm | | ... | R737 | 2007-000766 | R-CHIP:330OHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ701 | 0403-000314 | DIODE-ZENER,RLZJ9.1B,9.1V,8.80-9.30V,400 | | ... | R740 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ702 | 0403-000314 | DIODE-ZENER,RLZJ9.1B,9.1V,8.80-9.30V,400 | | ... | R741 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ703 | 0403-000314 | DIODE-ZENER,RLZJ9.1B,9.1V,8.80-9.30V,400 | | ... | R742 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ704 | 0403-001117 | DIODE-ZENER,RLZ12B,5.6V,5.45-5.73V,400m | | ... | R743 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ705 | 0403-000620 | DIODE-ZENER,RLZ15.6B,5.6V,5.45-5.73V,400m | | ... | R744 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | IC701 | 1001-001030 | IC-VIDEO SWITCH:TDA6920X,-,SOP,28P,300MI | | ... | R745 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | IC702 | 1001-001030 | IC-VIDEO SWITCH:TDA6920X,-,SOP,28P,300MI | | ... | R746 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | J701 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP,2012 | | ... | R748 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
| ... | J702 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP,2012 | | ... | R749 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP,2012 | |
| ... | L701 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R750 | 2007-000572 | R-CHIP:220OHM,5%,1/10W,DA,TP,2012 | |
| ... | L702 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R751 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP,2012 | |
| ... | L703 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R752 | 2007-000572 | R-CHIP:220OHM,5%,1/10W,DA,TP,2012 | |
| ... | L704 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R753 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP,2012 | |
| ... | L705 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R754 | 2007-000572 | R-CHIP:220OHM,5%,1/10W,DA,TP,2012 | |
| ... | L706 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R755 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP,2012 | |
| ... | L707 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R756 | 2007-000964 | R-CHIP:5.1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | L708 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R757 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | L709 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R758 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
| ... | L710 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R759 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
| ... | L719 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R760 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | L720 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R761 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP,2012 | |
| ... | L721 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R762 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | L722 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R763 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | L723 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R764 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP,2012 | |
| ... | L724 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R765 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | L725 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R766 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | L726 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R767 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | PCB | AA41-00076B | PCB-AV TERMINAL:SP43J5HF,FR-4,2LB,1.6T, | S.N.A | ... | R768 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q701 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R769 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q702 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R770 | 2007-000766 | R-CHIP:330OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q703 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R771 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q704 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R772 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q705 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R773 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q706 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R774 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q707 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R775 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q708 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R776 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q709 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R777 | 2007-000781 | R-CHIP:33OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q710 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R778 | 2007-000781 | R-CHIP:33OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q711 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R779 | 2007-001100 | R-CHIP:62OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q712 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R780 | 2007-001100 | R-CHIP:62OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q713 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R781 | 2007-001100 | R-CHIP:62OHM,5%,1/10W,DA,TP,2012 | |
| ... | R701 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | | ... | R782 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|--------------------------|-------------|--|--|--------|--------|-------------|--|--|--------|
| ... | R783 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | | ..2 | HV+BCM | AA60-10011A | SCREW-TAPTITE:HH,+,PC,M4,L12,ZPC(BLK),SW | S.N.A |
| ... | R784 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA26-30006E | TRANS-FLYBACK-,FWZ-50A001B(S),50KV,- | |
| ... | R785 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA67-20025A | MIRROR-BACK SURFACE:43, GLASS,3.0,-,BSM, | |
| ... | R786 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | | ..2 | | AA67-00030A | SUN-SCREEN-,43NEW,H/C,A/S,PMMA,T=93%,T2 | |
| ... | R787 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | | ..2 | | AA67-00028A | SCREEN-TINT-,43NEW-,PMMA,TINT=10%,T3.0 | |
| ... | R788 | 2007-000468 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA65-30008A | CLAMP-CORD:PE,HB,BLK,-,-,- | S.N.A |
| ... | R791 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | | ..2 | | AA91-00241A | ASSY-BRACKET,MAIN,-,-,SECC T1.6 7,53J5 | |
| ... | R792 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | | ..3 | BMSBMM | AA60-10011A | SCREW-TAPTITE:HH,+,PC,M4,L12,ZPC(BLK),SW | S.N.A |
| ... | R793 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | | ..3 | | AA61-00152B | BRACKET-MAIN,M,-,7 PROJECTION,SECC,-,-, | |
| ... | R794 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | | ..3 | | AA61-00153B | BRACKET-MAIN,S,-,7 PROJECTION,SECC,-,-, | |
| ... | R795 | 2007-001155 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA64-60449B | INLAY-COVER:SP-434JMF,PS,T0.5,149.3X69.5 | |
| ... | R796 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA61-20285A | HOLDER-BOX-,3456,PP,VO,WHT,- | S.N.A |
| ... | R797 | 2007-001155 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA61-11008A | BRACKET-MIRROR,S,-,SPT431J,SECC,T1.0,-,- | S.N.A |
| ... | R798 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA61-11007B | BRACKET-MIRROR-,SVP-434JA,SECC,T1.0,BLK | |
| ... | R799 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA61-10361A | BRACKET-MIRROR-,S5288,SECC-1,T1.0,-,-,- | S.N.A |
| ... | R800 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA61-00185J | HOLDER-SCREEN,15T-,43J5,ABS,HB,BLK,- | |
| ... | R801 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA60-00036B | SPACER-COVER,DUST,SPONGE,T2,-,690X400,PJ | |
| ... | R802 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA63-00021E | SPACER-MIRROR:PVC,-,BLK,L870,SP-434JMF,- | |
| ... | R803 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA64-30433A | CABINET-BACK,T-,S4388,-,HPS,HB,BLK,-,- | |
| ... | R804 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA64-00626C | CABINET-BACK,BOARD-,53J5,-,HPS,VO,BLK, | |
| ... | R805 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA64-00579B | CABINET-FRONT,WOOD-,43J5,-,MDF,-,-,T3,- | |
| ... | R806 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA63-60002W | SPACER-FELT:FELT,T0.5,BLK,30X10,-,- | S.N.A |
| ... | R807 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA63-10007C | BAND-PP,-,-,W18,-,CLEAR,1G,- | S.N.A |
| ... | R808 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA63-00021G | SPACER-MIRROR:PVC,-,BLK,L420,524J,434J,- | |
| ... | R809 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | | ..2 | | AA63-00021F | SPACER-MIRROR:PVC,-,BLK,L612,SP-434JMF,- | |
| ... | R810 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | | | | | | |
| ... | R811 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | | | | | | |
| ... | R812 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | | | | | | |
| ... | R813 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | | | | | | |
| ... | R814 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | | | | | | |
| ... | R815 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | | 1 | * | AA90-00103E | ASSY CHASSIS PART:J51A FES,43J5 | S.N.A |
| ... | R816 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP,2012 | | ..2 | CON+HC | 6003-001023 | SCREW-TAPTITE:RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A |
| ... | R817 | 2007-000615 | R-CHIP:24KOHM,5%,1/10W,DA,TP,2012 | | ..2 | DF+FBT | 6003-001023 | SCREW-TAPTITE:RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A |
| ... | R818 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP,2012 | | ..2 | DF+HC | 6003-001023 | SCREW-TAPTITE:RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A |
| ... | R819 | 2007-000615 | R-CHIP:24KOHM,5%,1/10W,DA,TP,2012 | | ..2 | PM+HC | 6003-001023 | SCREW-TAPTITE:RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A |
| ..2 | AA65-30105A | CLAMP-WIRE:NYLON 66,V2,NTR,15MM,ALL MODE | S.N.A | ..2 | TBA+AV | 6003-001026 | SCREW-TAPTITE:RH,+,B,M4,L15,ZPC(BLK),SWR | S.N.A | |
| ..2 | 0202-001004 | SOLDER-CREAM:SO-2030M SZH-1,563A,DO.04,6 | S.N.A | ..2 | TBA+HC | 6003-001023 | SCREW-TAPTITE:RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A | |
| ..2 | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2,63Sn/37Pb | S.N.A | ..2 | TBA+SC | 6003-001026 | SCREW-TAPTITE:RH,+,B,M4,L15,ZPC(BLK),SWR | S.N.A | |
| | | | | ..2 | | AA60-10011A | SCREW-TAPTITE:HH,+,PC,M4,L12,ZPC(BLK),SW | S.N.A | |
| | | | | ..2 | | AA61-00051B | HOLDER-CHASSIS-,PC,J533R,ABS,VO,GRAYE-2 | S.N.A | |
| ASSY CHASSIS PART | | | | | | | | | |
| | | | | | | | | | |
| ASSY CABINET BOT | | | | | | | | | |
| 1 | * | AA91-00232C | ASSY CABINET BOT-,VO,Jersey SP200G SAMS | | | | | | |
| ..2 | | AA60-00064A | SPACER-JERSEY:43J5,Jersey,-,-,GRAY,-,- | S.N.A | | | | | |
| ..2 | | AA64-00673A | BADGE-BRAND:AL,SAMSUNG,-,L72,-,PJT,- | | 1 | * | AA94-00996A | ASSY-CRT-(B):P16LFM00BMB(U),+380MG,7,BA | |
| ..2 | | AA64-00283B | CABINET-BOTTOM-,43J5,Jersey SP-200G D/G | S.N.A | ..2 | | AA61-00057C | HOLDER-CAP-,7 PROJECTION,PC,-,CLEAR,- | S.N.A |
| ..2 | | AA61-20295A | HOLDER-PIN-,SPT555JHD,ABS,HB,BLK,- | S.N.A | ..2 | | AA39-00018A | LEAD CONNECTOR-ASSY-,YFH800-01,YRH187RH | S.N.A |
| | | | | | ..2 | | AA67-10037A | LENS:43INCH,SSM-75RS-43,-,SEKINOS,C | |
| | | | | | ..2 | | AA67-10036A | LENS-ASSY:43INCH,SSM-75RS-43,-,SEKINOS,C | |
| | | | | | ..2 | | AA64-00208B | CASE-COUPLER:B,-,PROJECTION,7,ALDC,-,BL | S.N.A |
| | | | | | ..2 | | AA91-00103C | ASSY-WIRE,CRT,-,-,7CRT,PROJECTION | S.N.A |
| | | | | | ..3 | | AA61-00053B | BRACKET-WIRE-,PROJECTION,SECC-1,T1.6,-, | S.N.A |
| | | | | | ..3 | | AA61-00054B | BRACKET-EARTH-,PROJECTION,PBS,-,-,- | S.N.A |
| | | | | | ..3 | | AA61-00055C | BRACKET-CRT,WIRE-,PJT,SUS304 1/8H,-,-,- | S.N.A |
| ..2 | | AA63-00045B | TERMINAL-BOARD,ANT-,HIPS,-,PCJ533R,- | S.N.A | ..2 | | AA26-30006F | TRANS-FLYBACK-,FWZ-50A001C,55,30KV | |
| ..2 | | AA64-00182U | INLAY BACK:SP53J5HF,J51A TURKEY,PS SHEET | S.N.A | ..2 | | AA63-00061B | SPACER-CAP:EPDM,-,BLK,-,PROJECTION,- | |
| | | | | | ..2 | | AA63-00091C | SPACER-CLENS:SILICON,-,GRAY,-,PROJECTION | S.N.A |
| | | | | | ..2 | | AA63-00060C | SPACER-CRT:SILICON,-,GRAY,7,PROJECTION, | S.N.A |
| | | | | | ..2 | | AA63-60025A | SPACER-DY:NEOPRENE,-,BLK,VO,S4388,- | S.N.A |
| | | | | | ..2 | | AA27-50005C | DEFLECTION-YOKE-,DPD-4392AL,43/PJTCRT, | |
| | | | | | ..2 | | AA03-10021N | CRT-MONO-,P16LFM00BMB(U)-,7,90deg,90 | |
| | | | | | ..2 | | AA27-60003C | MAGNET-CONVERGENCE-,JH92LTU-SC-20,29,1m | |
| ..2 | AC+BCM | AA60-10011A | SCREW-TAPTITE:HH,+,PC,M4,L12,ZPC(BLK),SW | S.N.A | ..2 | | AA63-10002A | BAND-TIE-,NYLON66 V2,-,-,L100,NTR,-,- | S.N.A |
| ..2 | BCM+CM | 6006-001090 | SCREW-ASSY TAPP:WW,HEX,+,M6,L28.0,ZPC(Y | S.N.A | ..2 | | AA63-00099A | SPACER-FELT:PJT,-,BLK,-,30X30 | S.N.A |
| ..2 | BM+CBT | 6003-001026 | SCREW-TAPTITE:RH,+,B,M4,L15,ZPC(BLK),SWR | S.N.A | ..2 | | AA63-00076A | SPACER-LENS:FELT,T1.0,BROWN,7CRT,PROJE | S.N.A |
| ..2 | CBT+CM | 6005-001003 | SCREW-WOOD:HH,+,M4,L20,ZPC(BLK),SWRCH18A | S.N.A | ..2 | | AA61-00056B | BRACKET-LENS-,PROJECTION,SECC,T1.6,-,- | S.N.A |
| ..2 | CBW+CM | 6005-001003 | SCREW-WOOD:HH,+,M4,L20,ZPC(BLK),SWRCH18A | S.N.A | ..2 | | AA60-10011A | SCREW-TAPTITE:HH,+,PC,M4,L12,ZPC(BLK),SW | S.N.A |
| ..2 | CBW+HC | 6005-001003 | SCREW-WOOD:HH,+,M4,L20,ZPC(BLK),SWRCH18A | S.N.A | | | | | |
| ..2 | CBW+TB | AA60-10011A | SCREW-TAPTITE:HH,+,PC,M4,L12,ZPC(BLK),SW | S.N.A | | | | | |
| ..2 | CW+CM | 6005-001003 | SCREW-WOOD:HH,+,M4,L20,ZPC(BLK),SWRCH18A | S.N.A | | | | | |
| ..2 | DB+CM | 6005-001003 | SCREW-WOOD:HH,+,M4,L20,ZPC(BLK),SWRCH18A | S.N.A | | | | | |
| ..2 | FOC+CM | 6003-001023 | SCREW-TAPTITE:RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A | | | | | |
| ..2 | HC+CM | 6005-001003 | SCREW-WOOD:HH,+,M4,L20,ZPC(BLK),SWRCH18A | S.N.A | | | | | |
| ..2 | HS+CM | AA60-00021A | SCREW-WOOD:RH,+,M3.5,L22,ZPC(BLK),SWRCH1 | S.N.A | | | | | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|---------------------|----------|-------------|--|--------|
| ASSY-CRT-(G) | | | | |
| 1 | * | AA94-00995A | ASSY-CRT-(G);P16LFM00HLA(AU),+380MG,7,B | |
| ..2 | | AA61-00057C | HOLDER-CAP,-,7 PROJECTION,PC,-,CLEAR,- | S.N.A |
| ..2 | | AA39-00018A | LEAD CONNECTOR-ASSY,-,YFH800-01,YRH187RH | S.N.A |
| ..2 | | AA67-10039A | LENS,-,SSM-75RS-43,-,GRN C-ELEMENT | |
| ..2 | | AA67-10036A | LENS-ASSY:43INCH,SSM-75RS-43,-,SEKINOS,C | |
| ..2 | | AA64-00207B | CASE-COUPLER,G,-,PROJECTION,7,ALDC8,-,B | S.N.A |
| ..2 | | AA91-00103C | ASSY-WIRE,CRT,-,7CRT,PROJECTION | S.N.A |
| ...3 | | AA61-00053B | BRACKET-WIRE,-,PROJECTION,SECC-1,T1.6,-, | S.N.A |
| ...3 | | AA61-00054B | BRACKET-EARTH,-,PROJECTION,PBS,-,-,- | S.N.A |
| ...3 | | AA61-00055C | BRACKET-CRT,WIRE,-,PJT,SUS304 1/8H,-,-,- | S.N.A |
| ..2 | | AA26-30006F | TRANS-FLYBACK,-,FVZ-50A001C,55,30KV | |
| ..2 | | AA63-00061B | SPACER-CAP:EPDM,-,BLK,-,PROJECTION,- | |
| ..2 | | AA63-00060C | SPACER-CRT:SILICON,-,GRAY,7,PROJECTION, | S.N.A |
| ..2 | | AA63-00091C | SPACER-CLENS:SILICON,-,GRAY,-,PROJECTION | S.N.A |
| ..2 | | AA63-60025A | SPACER-DY:NEOPRENE,-,BLK,VO,S4388,- | S.N.A |
| ..2 | | AA27-50005C | DEFLECTION-YOKE,-,DPD-4392AL,43/PJTCRT, | |
| ..2 | | AA03-10021L | CRT-MONO:P16LFM00HHA(MU),-;7 inch,-,-,- | |
| ..2 | | AA27-00003B | MAGNET-CONVERGENCE,-,JH92LT-029,29,1MM | |
| ..2 | | AA63-10002A | BAND-TIE,-,NYLON66 V2,-,-,L100,NTR,-,- | S.N.A |
| ..2 | | AA63-00099A | SPACER-FELT:PJT,-,BLK,-,30X30 | S.N.A |
| ..2 | | AA63-00076A | SPACER-LENS:FELT,T1.0,BROWN,7CRTPROJE | S.N.A |
| ..2 | | AA61-00056B | BRACKET-LENS,-,PROJECTION,SECC,T1.6,-,-, | S.N.A |
| ..2 | | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A |



ASSY-CRT-(R)

| | | | | |
|------|---|-------------|--|-------|
| 1 | * | AA94-00994A | ASSY-CRT-(R);P16LFM00RFA(AU),+380MG,7,B | |
| ..2 | | AA61-00057C | HOLDER-CAP,-,7 PROJECTION,PC,-,CLEAR,- | S.N.A |
| ..2 | | AA39-00018A | LEAD CONNECTOR-ASSY,-,YFH800-01,YRH187RH | S.N.A |
| ..2 | | AA67-10038A | LENS:43INCH,SSM-75RS-43,-,SEKINOS,R | |
| ..2 | | AA67-10036A | LENS-ASSY:43INCH,SSM-75RS-43,-,SEKINOS,C | |
| ..2 | | AA64-00206B | CASE-COUPLER,R,-,PROJECTION,-,ALDC8,-,BL | S.N.A |
| ..2 | | AA91-00103C | ASSY-WIRE,CRT,-,7CRT,PROJECTION | S.N.A |
| ...3 | | AA61-00053B | BRACKET-WIRE,-,PROJECTION,SECC-1,T1.6,-, | S.N.A |
| ...3 | | AA61-00054B | BRACKET-EARTH,-,PROJECTION,PBS,-,-,- | S.N.A |
| ...3 | | AA61-00055C | BRACKET-CRT,WIRE,-,PJT,SUS304 1/8H,-,-,- | S.N.A |
| ..2 | | AA26-30006F | TRANS-FLYBACK,-,FVZ-50A001C,55,30KV | |
| ..2 | | AA63-00061B | SPACER-CAP:EPDM,-,BLK,-,PROJECTION,- | |
| ..2 | | AA63-00091C | SPACER-CLENS:SILICON,-,GRAY,-,PROJECTION | S.N.A |
| ..2 | | AA63-00060C | SPACER-CRT:SILICON,-,GRAY,7,PROJECTION, | S.N.A |
| ..2 | | AA63-60025A | SPACER-DY:NEOPRENE,-,BLK,VO,S4388,- | S.N.A |
| ..2 | | AA27-50005C | DEFLECTION-YOKE,-,DPD-4392AL,43/PJTCRT, | |
| ..2 | | AA03-10021K | CRT-MONO,-,P16LFM00RFA(AU),-;7,90deg,9 | |
| ..2 | | AA27-00003B | MAGNET-CONVERGENCE,-,JH92LT-029,29,1MM | |
| ..2 | | AA63-10002A | BAND-TIE,-,NYLON66 V2,-,-,L100,NTR,-,- | S.N.A |
| ..2 | | AA63-00099A | SPACER-FELT:PJT,-,BLK,-,30X30 | S.N.A |
| ..2 | | AA63-00076A | SPACER-LENS:FELT,T1.0,BROWN,7CRTPROJE | S.N.A |
| ..2 | | AA61-00056B | BRACKET-LENS,-,PROJECTION,SECC,T1.6,-,-, | S.N.A |
| ..2 | | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A |



ASSY-CABINET,MID

| | | | | |
|-----|--------|-------------|--|-------|
| 1 | * | AA91-00442A | ASSY-CABINET,MID,-,WOOD,KBM21-58,43J5 | |
| ..2 | BF+CM | AA60-10051B | SCREW-WOOD:RH,+M3.5,L11,ZPC(YEL),SWRCH1 | S.N.A |
| ..2 | CABMID | AA60-10050X | SCREW-WOOD:FH,+M3.5,L32,ZPC(YEL),SWRCH1 | S.N.A |
| ..2 | CABMID | AA63-00105D | SPACER-FELT:FELT,T2.0,-,-,- | S.N.A |
| ..2 | CABMID | AA61-00097A | HOLDER-WIRE,-,-,NYLON 6/6,-,NTR,- | S.N.A |
| ..2 | CABMID | AA63-00105C | SPACER-FELT:FELT,T2.0,-,-,- | S.N.A |
| ..2 | CABMID | AA66-40011A | ROLLER-PAPER:PAPER,OD36,L80,T3,-,SP4388P | S.N.A |
| ..2 | CABMID | AA65-30115A | CLAMP-WIRE:FE,-,BLK,2X150,PRJT,- | |
| ..2 | CAS+CM | 6002-000214 | SCREW-TAPPING:TH,+1,M4.0,L16,ZPC(BLK),M | S.N.A |
| ..2 | SPK | AA60-00043A | SPACER-SPEAKER:FELT,T2,-,-,43J5,- | |
| ..2 | SPK+CM | AA60-10051A | SCREW-WOOD:PH,+M4,L16,ZPC(BLK),SWRCH18A | S.N.A |
| ..2 | | AA61-20136A | HOLDER-MASK:PIN,-,S4388,NYLON,-,BLK,#066 | S.N.A |
| ..2 | | AA63-00066C | SPACER-DUAL,LOCK:#250,-,-,11X20,-,- | S.N.A |
| ..2 | | AA63-00193B | COVER-AIRVENT,-,533R,-,HIPS,VO,BLK,-,- | S.N.A |
| ..2 | | AA64-00467C | CABINET-LEG,B,-,43J5,SV704P,ABS,HB,BLK,T | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|
| ..2 | | AA64-01279A | CABINET MIDDLE:43J5,KMB21-58, WOOD,-,- | |
| ..2 | | AA61-10387A | BRACKET-GRILLE,-,SVP-462J,SECC-1,T0.5,-, | S.N.A |
| ..2 | | 3001-000279 | SPEAKER:30W,8ohm,91dB,20Hz | |
| ..2 | | 3001-001107 | SPEAKER:20W,8ohm,95dB,1300Hz | |
| ..2 | | AA39-00042A | LEAD CONNECTOR-ASSY,-,-,-,-,-,-,-,RE | |
| ..2 | | AA39-20505U | LEAD CONNECTOR-ASSY,-,-,4P,-,-,-,YSH250 | |
| ..2 | | AA61-00094B | HOLDER-RAIL,-,PCJ533R,ABS,HB,BLK,240 | S.N.A |
| ..2 | | AA61-00185B | HOLDER-SCREEN,15T,-,43J2,43J5,ABS,HB,BLK | |
| ..2 | | AA61-00185C | HOLDER-SCREEN,15T,-,43J2,43J5,ABS,HB,BLK | |
| ..2 | | AA61-00458A | CASTER,-,-,TP4015-05 NYL,OH47,-,-,SR4 | S.N.A |

ASSY CABINET MASK

| | | | | |
|-----|---|-------------|---|-------|
| 1 | * | AA91-00395A | ASSY CABINET MASK,-,HB,BLK,S704+B702 TAN | |
| ..2 | | AA64-01164B | CABINET-MASK,SIDE:43J5,S704+B702,ABS,HB, | |
| ..3 | | AA64-01164A | CABINET-MASK,SIDE:43J5,L653 APCHUL,ABS,H | S.N.A |
| ..2 | | AA64-01161E | CABINET-MASK,BOT:43J5HF,S704+B702 DOLBY, | |
| ..3 | | AA64-01161A | CABINET-MASK:43J5,L872 APCHUL,ABS,HB,BLK | S.N.A |
| ..2 | | AA64-01161D | CABINET-MASK, TOP:43J5HF,S704+B702 TANTUS | |
| ..3 | | AA64-01161A | CABINET-MASK:43J5,L872 APCHUL,ABS,HB,BLK | S.N.A |
| ..2 | | AA63-00063A | SPACER-DUAL,LOCK:#400,-,-,19X19,SVP-614J | S.N.A |
| ..2 | | AA61-00441B | HOLDER-CORNER:E2 ALL,ABS,BLK,HB,-,S704+B | S.N.A |

ASSY ACCESSORY

| | | | | |
|-----|---|-------------|--|-------|
| 1 | * | AA94-02817A | ASSY ACCESSORY:SP53J5HF/SED,J51A,SWISS | S.N.A |
| ..2 | | AA68-01137A | MANUAL USERS:SP43J5HF/53J5HF,-,GER,-,W/P | S.N.A |
| ..2 | | AA69-30009C | BAG-SHEET:LDPE,TO.08,W150,L120,-,-,- | S.N.A |
| ..2 | | AA68-00856A | MANUAL USERS:J51A,W/P100(G),44PB5,1,ENG | S.N.A |
| ..2 | | AA61-20126A | HOLDER-LEG,-,ABS,HB,BLK,- | S.N.A |
| ..2 | | AA39-40001B | CABLE-RCA,-,RCA,1500mm,0.12/10,RED/WHT/Y | |

REMOCON

| | | | | |
|---|---|-------------|--|--|
| 1 | * | AA59-00100A | REMOCON,-,TM57,KS88P0416S,53,L/GRAY,S/ | |
|---|---|-------------|--|--|

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|--------------|--|--------|
|4 | CP518 | 2401-000598 | C-AL:1uF,20%,50V,GP,TP,4x7,5 | |4 | DP602 | 0403-000620 | DIODE-ZENER:RLZ5.6B,5.6V,5.45-5.73V,400m | |
|4 | CP519 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP | |4 | DP603 | 0401-000133 | DIODE-SWITCHING:RLS4148,100V,200mA,SOD-8 | |
|4 | CP520 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP | |4 | DP604 | 0401-000160 | DIODE-SWITCHING:ISS314,30V,100mA,USC,TP | |
|4 | CP521 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP | |4 | DP605 | 0401-000160 | DIODE-SWITCHING:ISS314,30V,100mA,USC,TP | |
|4 | CP522 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP | |4 | DP606 | 0401-000133 | DIODE-SWITCHING:RLS4148,100V,200mA,SOD-8 | |
|4 | CP523 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP | |4 | DP607 | 0403-000620 | DIODE-ZENER:RLZ5.6B,5.6V,5.45-5.73V,400m | |
|4 | CP524 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | DP901 | 0401-000133 | DIODE-SWITCHING:RLS4148,100V,200mA,SOD-8 | |
|4 | CP525 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | DP902 | 0401-000133 | DIODE-SWITCHING:RLS4148,100V,200mA,SOD-8 | |
|4 | CP527 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | DP903 | 0401-000133 | DIODE-SWITCHING:RLS4148,100V,200mA,SOD-8 | |
|4 | CP528 | 2401-001496 | C-AL:47uF,20%,16V,GP,TP,5x7,5 | |4 | DP904 | 0401-000133 | DIODE-SWITCHING:RLS4148,100V,200mA,SOD-8 | |
|4 | CP529 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |4 | FP101 | 2901-001120 | FILTER-EMI SMD:25V,100mA,-,-,3.2x1.6x1,T | |
|4 | CP530 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |4 | FP102 | 2901-001120 | FILTER-EMI SMD:25V,100mA,-,-,3.2x1.6x1,T | |
|4 | CP531 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |4 | FP301 | 2901-001120 | FILTER-EMI SMD:25V,100mA,-,-,3.2x1.6x1,T | |
|4 | CP532 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP | |4 | FP901 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
|4 | CP533 | 2401-000486 | C-AL:10uF,20%,50V,GP,TP,6.3x7mm,5 | |4 | FP902 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
|4 | CP534 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | FP903 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
|4 | CP535 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | FP904 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
|4 | CP536 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | FP905 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
|4 | CP537 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | FP906 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
|4 | CP538 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | FP907 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
|4 | CP539 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | FP908 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
|4 | CP540 | 2401-000486 | C-AL:10uF,20%,50V,GP,TP,6.3x7mm,5 | | △ | ICP101 | 1204-001362 | IC-VIDEO PROCESS:VPC3215C-B8,PLCC,43P,- | |
|4 | CP541 | 2203-001002 | C-CERAMIC,CHIP:0.047nF,5%,50V,NPO,TP,201 | | △ | ICP103 | 1205-001172 | IC-INTERFACE:CIP3250A-B1,PLCC,68P,-PLAS | |
|4 | CP542 | 2203-001002 | C-CERAMIC,CHIP:0.047nF,5%,50V,NPO,TP,201 | | △ | ICP301 | 1204-001623 | IC-VERTICAL PROCESSO:SDA9400,QFP,64P,-P | |
|4 | CP545 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP | | △ | ICP302 | 1203-001419 | IC-VOLTAGE REGULATOR:4931,TO-252,3P,6x | |
|4 | CP546 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | | △ | ICP401 | 1002-001045 | IC-D/A CONVERTER:9280,8BIT,PLCC,68P,- | |
|4 | CP547 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | | △ | ICP501 | 1204-001550 | IC-VIDEO PROCESS:CXA2101AQ,QFP,80P,-PLA | |
|4 | CP548 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | | △ | ICP601 | 1204-001372 | IC-HOR./VER.PROCESSO:SDA9361,QFP,44P,-P | |
|4 | CP549 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | △ | ICP901 | 1202-000001 | IC-VOLTAGE COMP:7533,TO-92,3P,-SINGLE | |
|4 | CP550 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | △ | LP101 | 3301-001324 | CORE-FERRITE BEAD:AB,150HM,2X1.25X0.9MM | S.N.A |
|4 | CP551 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP102 | 3301-001324 | CORE-FERRITE BEAD:AB,150HM,2X1.25X0.9MM | S.N.A |
|4 | CP552 | 2401-001496 | C-AL:47uF,20%,16V,GP,TP,5x7,5 | |4 | LP103 | 3301-001324 | CORE-FERRITE BEAD:AB,150HM,2X1.25X0.9MM | S.N.A |
|4 | CP553 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP105 | 3301-001324 | CORE-FERRITE BEAD:AB,150HM,2X1.25X0.9MM | S.N.A |
|4 | CP554 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP106 | 3301-001324 | CORE-FERRITE BEAD:AB,150HM,2X1.25X0.9MM | S.N.A |
|4 | CP555 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP107 | 3301-001324 | CORE-FERRITE BEAD:AB,150HM,2X1.25X0.9MM | S.N.A |
|4 | CP556 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP301 | 3301-001324 | CORE-FERRITE BEAD:AB,150HM,2X1.25X0.9MM | S.N.A |
|4 | CP559 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP302 | 3301-001324 | CORE-FERRITE BEAD:AB,150HM,2X1.25X0.9MM | S.N.A |
|4 | CP601 | 2203-001088 | C-CERAMIC,CHIP:0.005nF,0.25pF,50V,NPO,TP | |4 | LP303 | 3301-001324 | CORE-FERRITE BEAD:AB,150HM,2X1.25X0.9MM | S.N.A |
|4 | CP602 | 2203-001088 | C-CERAMIC,CHIP:0.005nF,0.25pF,50V,NPO,TP | |4 | LP401 | 3301-001324 | CORE-FERRITE BEAD:AB,150HM,2X1.25X0.9MM | S.N.A |
|4 | CP603 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP | |4 | LP402 | 3301-001324 | CORE-FERRITE BEAD:AB,150HM,2X1.25X0.9MM | S.N.A |
|4 | CP604 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NPO,TP,2012 | |4 | LP403 | 3301-001324 | CORE-FERRITE BEAD:AB,150HM,2X1.25X0.9MM | S.N.A |
|4 | CP605 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | |4 | LP404 | 3301-001324 | CORE-FERRITE BEAD:AB,150HM,2X1.25X0.9MM | S.N.A |
|4 | CP607 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP601 | 3301-001324 | CORE-FERRITE BEAD:AB,150HM,2X1.25X0.9MM | S.N.A |
|4 | CP609 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP602 | 3301-001324 | CORE-FERRITE BEAD:AB,150HM,2X1.25X0.9MM | S.N.A |
|4 | CP610 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP603 | 2703-001717 | INDUCTOR-SMD:1.2uH,5%,3.2x2.5x2.2mm | |
|4 | CP611 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | |4 | LP901 | 3301-001186 | CORE-FERRITE BEAD:AB,600ohm,3.2x1.6x1.3m | S.N.A |
|4 | CP612 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | |4 | LP902 | 3301-001186 | CORE-FERRITE BEAD:AB,600ohm,3.2x1.6x1.3m | S.N.A |
|4 | CP613 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | |4 | LP903 | 3301-001324 | CORE-FERRITE BEAD:AB,150HM,2X1.25X0.9MM | S.N.A |
|4 | CP614 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP904 | 3301-001184 | CORE-FERRITE BEAD:AB,1.3kohm,4.5x3.2x1.3 | S.N.A |
|4 | CP615 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP905 | 3301-001184 | CORE-FERRITE BEAD:AB,1.3kohm,4.5x3.2x1.3 | S.N.A |
|4 | CP616 | 2203-001002 | C-CERAMIC,CHIP:0.047nF,5%,50V,NPO,TP,201 | |4 | LP906 | 3301-001184 | CORE-FERRITE BEAD:AB,1.3kohm,4.5x3.2x1.3 | S.N.A |
|4 | CP617 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | QP501 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
|4 | CP618 | 2203-000239 | C-CERAMIC,CHIP:0.1nF,5%,50V,NPO,TP,2012 | |4 | QP502 | 0501-000344 | TR-SMALL SIGNAL:KSC1623-G,NPN,200mW,SOT- | |
|4 | CP619 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | QP503 | 0501-000344 | TR-SMALL SIGNAL:KSC1623-G,NPN,200mW,SOT- | |
|4 | CP620 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | QP504 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
|4 | CP621 | 2203-000239 | C-CERAMIC,CHIP:0.1nF,5%,50V,NPO,TP,2012 | |4 | QP505 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
|4 | CP622 | 2203-000142 | C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP,2012 | |4 | QP506 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
|4 | CP623 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | QP508 | 0501-000344 | TR-SMALL SIGNAL:KSC1623-G,NPN,200mW,SOT- | |
|4 | CP624 | 2401-001496 | C-AL:47uF,20%,16V,GP,TP,5x7,5 | |4 | QP602 | 0501-000344 | TR-SMALL SIGNAL:KSC1623-G,NPN,200mW,SOT- | |
|4 | CP625 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | QP902 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
|4 | CP626 | 2401-002009 | C-AL:100uF,20%,16V,GP,TP,6.3x7,5 | |4 | RP101 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | CP627 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | RP102 | 2007-000947 | R-CHIP:470HM,5%,1/10W,DA,TP,2012 | |
|4 | CP628 | 2401-002009 | C-AL:100uF,20%,16V,GP,TP,6.3x7,5 | |4 | RP106 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | CP629 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | RP112 | 2007-0000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | CP630 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | RP113 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | CP631 | 2401-000598 | C-AL:1uF,20%,50V,GP,TP,4x7,5 | |4 | RP114 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | CP901 | 2404-001229 | C-TA,CHIP:4.7uF,20%,25V,GP,TP,3528 | |4 | RP115 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | CP902 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | RP117 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | CP904 | 2203-001088 | C-CERAMIC,CHIP:0.005nF,0.25pF,50V,NPO,TP | |4 | RP134 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | CP905 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP | |4 | RP135 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | CP906 | 2203-000495 | C-CERAMIC,CHIP:2.2nF,10%,50V,X7R,TP,2012 | |4 | RP136 | 2011-000585 | R-NETWORK:47ohm,5%,63mW,L,CHIP,8P,TP | |
|4 | DP501 | 0403-001117 | DIODE-ZENER:RLZ12B,5%,500mW,LL-34,TP | |4 | RP137 | 2011-000585 | R-NETWORK:47ohm,5%,63mW,L,CHIP,8P,TP | |
|4 | DP502 | 0403-001117 | DIODE-ZENER:RLZ12B,5%,500mW,LL-34,TP | |4 | RP138 | 2011-000585 | R-NETWORK:47ohm,5%,63mW,L,CHIP,8P,TP | |
|4 | DP503 | 0403-001117 | DIODE-ZENER:RLZ12B,5%,500mW,LL-34,TP | |4 | RP139 | 2011-000585 | R-NETWORK:47ohm,5%,63mW,L,CHIP,8P,TP | |
|4 | DP504 | 0403-000620 | DIODE-ZENER:RLZ5.6B,5.6V,5.45-5.73V,400m | |4 | RP140 | 2011-000585 | R-NETWORK:47ohm,5%,63mW,L,CHIP,8P,TP | |
|4 | DP505 | 0403-000620 | DIODE-ZENER:RLZ5.6B,5.6V,5.45-5.73V,400m | |4 | RP141 | 2011-000585 | R-NETWORK:47ohm,5%,63mW,L,CHIP,8P,TP | |
|4 | DP601 | 0401-000133 | DIODE-SWITCHING:RLS4148,100V,200mA,SOD-8 | |4 | RP142 | 2011-000585 | R-NETWORK:47ohm,5%,63mW,L,CHIP,8P,TP | |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|-------------------------------------|--------|-------|-------------|---|---|--------|
|4 | RP143 | 2011-000585 | R-NETWORK:47ohm,5%,63mW/L,CHIP8P,TP | |4 | RP568 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP153 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP,2012 | |4 | RP569 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP154 | 2007-000308 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP570 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP155 | 2007-000947 | R-CHIP:470HM,5%,1/10W,DA,TP,2012 | |4 | RP571 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP156 | 2007-000947 | R-CHIP:470HM,5%,1/10W,DA,TP,2012 | |4 | RP601 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP157 | 2007-000947 | R-CHIP:470HM,5%,1/10W,DA,TP,2012 | |4 | RP602 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP159 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |4 | RP603 | 2007-001208 | R-CHIP:82KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP161 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP604 | 2007-000947 | R-CHIP:470HM,5%,1/10W,DA,TP,2012 | |
|4 | RP301 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP605 | 2007-000518 | R-CHIP:2.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP302 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP606 | 2007-000518 | R-CHIP:2.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP303 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP609 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP304 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP611 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP305 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP613 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP401 | 2011-000585 | R-NETWORK:47ohm,5%,63mW/L,CHIP8P,TP | |4 | RP614 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP402 | 2011-000585 | R-NETWORK:47ohm,5%,63mW/L,CHIP8P,TP | |4 | RP619 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP403 | 2011-000585 | R-NETWORK:47ohm,5%,63mW/L,CHIP8P,TP | |4 | RP620 | 2007-000947 | R-CHIP:470HM,5%,1/10W,DA,TP,2012 | |
|4 | RP404 | 2011-000585 | R-NETWORK:47ohm,5%,63mW/L,CHIP8P,TP | |4 | RP621 | 2007-000947 | R-CHIP:470HM,5%,1/10W,DA,TP,2012 | |
|4 | RP405 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP622 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP406 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP623 | 2007-000822 | R-CHIP:3900HM,5%,1/10W,DA,TP,2012 | |
|4 | RP407 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP624 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP408 | 2007-001055 | R-CHIP:6.2KOHM,5%,1/10W,DA,TP,2012 | |4 | RP625 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP409 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP,2012 | |4 | RP626 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP,2012 | |
|4 | RP411 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |4 | RP627 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP412 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |4 | RP628 | 2007-000267 | R-CHIP:1.8KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP413 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP,2012 | |4 | RP629 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP415 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |4 | RP630 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP416 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |4 | RP631 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP417 | 2007-000380 | R-CHIP:13KOHM,5%,1/10W,DA,TP,2012 | |4 | RP709 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP418 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP,2012 | |4 | RP719 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP419 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |4 | RP727 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP421 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |4 | RP735 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP422 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |4 | RP736 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP423 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP,2012 | |4 | RP737 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP501 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |4 | RP738 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP502 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |4 | RP901 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP503 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |4 | RP904 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP504 | 2007-000030 | R-CHIP:5600HM,5%,1/10W,DA,TP,2012 | |4 | RP907 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP505 | 2007-000572 | R-CHIP:2200HM,5%,1/10W,DA,TP,2012 | |4 | RP908 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP506 | 2007-000493 | R-CHIP:2.2KOHM,5%,1/10W,DA,TP,2012 | |4 | RP912 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP507 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |4 | RP913 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP509 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP,2012 | |4 | RP914 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP510 | 2007-000938 | R-CHIP:47KOHM,1%,1/10W,DA,TP,2012 | |4 | RP915 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP513 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP916 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP514 | 2007-000210 | R-CHIP:1.1KOHM,5%,1/10W,DA,TP,2012 | |4 | RP917 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP515 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |4 | RP918 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP516 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |4 | RP920 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP517 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP921 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP518 | 2007-000210 | R-CHIP:1.1KOHM,5%,1/10W,DA,TP,2012 | |4 | RP924 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP519 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP925 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP521 | 2007-000210 | R-CHIP:1.1KOHM,5%,1/10W,DA,TP,2012 | |4 | RP926 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP522 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP927 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP523 | 2007-000210 | R-CHIP:1.1KOHM,5%,1/10W,DA,TP,2012 | |4 | RP929 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP524 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP931 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP525 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP933 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP526 | 2007-000210 | R-CHIP:1.1KOHM,5%,1/10W,DA,TP,2012 | |4 | RP935 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP527 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP936 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP528 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP943 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP529 | 2007-000210 | R-CHIP:1.1KOHM,5%,1/10W,DA,TP,2012 | |4 | RP944 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP530 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP945 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP537 | 2007-000689 | R-CHIP:3.3MOHM,5%,1/10W,DA,TP,2012 | |4 | RP980 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP542 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | XP101 | 2801-003432 | CRYSTAL-UNIT:20.25MHZ,30PPM,28-AAAM,13PF, | |
|4 | RP543 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | AA41-00233B | PCB-PROSCAN:SVP-53J5PFR-4.4L,B,1.6T,245 | S.N.A | |
|4 | RP544 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |3 | AA63-40272A | SHIELD-CASE-; SPT, TO.5, ;CX724AHD | S.N.A | |
|4 | RP546 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |2 | AA95-00529A | ASSY-PCB,PIP-; SP43J5HPJ51A, ; ; | | |
|4 | RP547 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |3 | CNP01 | 3711-002709 | CONNECTOR-HEADER:NOWALL,12P1R,2.5MM,ANG | |
|4 | RP549 | 2007-000671 | R-CHIP:2KOHM,5%,1/10W,DA,TP,2012 | |3 | CNP03 | 3711-002709 | CONNECTOR-HEADER:NOWALL,12P1R,2.5MM,ANG | |
|4 | RP550 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |3 | ICP101 | 1204-000530 | IC-PAL/NTSC DECODER:TDA9160A,DIP,32P,400 | |
|4 | RP553 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |3 | ICP102 | 1204-000560 | IC-DEMULATOR:TDA9815,DIP,32P,400MIL,PL | |
|4 | RP554 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |3 | RP126 | 2103-000665 | VR-SEMI:20Kohm,25%,1/5W,SIDE | |
|4 | RP555 | 2007-000582 | R-CHIP:22KOHM,1%,1/10W,DA,TP,2012 | |3 | TP101 | AA26-10004E | TRANS-IF-;7MG,VIF-;7mm,8pF,116.7MHz,S | |
|4 | RP556 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |3 | ZP102 | 2904-000253 | FILTER-SAW AV:38.9MHz,DIP10K,ST,18dB,B/G | |
|4 | RP560 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |3 | AA99-20066Z | ASSY-PCB SUB,AUTO; AA95-00529A ,V | S.N.A | |
|4 | RP562 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |4 | CP101 | 2203-000021 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP,3216 | |
|4 | RP565 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |4 | CP102 | 2401-000922 | C-AL:22uf,20%,16V,GP,TP5x5.5 | |
|4 | RP566 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |4 | CP103 | 2203-000429 | C-CERAMIC,CHIP:0.018nf,5%,50V,NP0,TP,201 | |
|4 | RP567 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |4 | CP104 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP,2012 | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|-------------|---|--------|
|4 | CP105 | 2203-000717 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,3216 | |4 | QP202 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
|4 | CP106 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | QP203 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
|4 | CP107 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | QP204 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
|4 | CP108 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | QP205 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
|4 | CP109 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP,6.3x11,5 | |4 | QP206 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
|4 | CP110 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | QP302 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
|4 | CP111 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,2012 | |4 | QP303 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
|4 | CP112 | 2401-000660 | C-AL:2.2uF,20%,50V,GP,TP,5x11,5 | |4 | QP304 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
|4 | CP114 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | QP305 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
|4 | CP115 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RC129 | 2007-000586 | R-CHIP:22KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP116 | 2203-000753 | C-CERAMIC,CHIP:330nF,+80-20%,50V,Y5V,TP, | |4 | RP101 | 2007-001208 | R-CHIP:82KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP117 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP,5x11,5 | |4 | RP104 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP118 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP105 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP119 | 2201-000692 | C-CERAMIC,DISC:0.008nF,0.5pF,50V,UJ,TP,4 | |4 | RP106 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP120 | 2203-000578 | C-CERAMIC,CHIP:220nF,20%,50V,Y5V,TP,3216 | |4 | RP107 | 2007-000409 | R-CHIP:15KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP121 | 2401-000660 | C-AL:2.2uF,20%,50V,GP,TP,5x11,5 | |4 | RP108 | 2007-000493 | R-CHIP:2.2KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP123 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | RP109 | 2007-000830 | R-CHIP:39KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP124 | 2401-000660 | C-AL:2.2uF,20%,50V,GP,TP,5x11,5 | |4 | RP110 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP125 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | RP111 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP126 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP,6.3x11,5 | |4 | RP112 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP,2012 | |
|4 | CP127 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP113 | 2007-000774 | R-CHIP:2.2KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP129 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | RP114 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | CP130 | 2203-000239 | C-CERAMIC,CHIP:0.1nF,5%,50V,NP0,TP,2012 | |4 | RP115 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | CP131 | 2201-000692 | C-CERAMIC,DISC:0.008nF,0.5pF,50V,UJ,TP,4 | |4 | RP116 | 2007-000493 | R-CHIP:2.2KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP132 | 2203-000239 | C-CERAMIC,CHIP:0.1nF,5%,50V,NP0,TP,2012 | |4 | RP118 | 2001-000117 | R-CARBON(S):680HM,5%,1/2W,AA,TP,2.4X6.4MM | |
|4 | CP133 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP119 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP134 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP,6.3x11,5 | |4 | RP122 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP135 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP,5x11,5 | |4 | RP123 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP136 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | RP124 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP137 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NP0,TP,2012 | |4 | RP125 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP,2012 | |
|4 | CP142 | 2401-000199 | C-AL:100uF,20%,6.3V,GP,TP,10x12,5 | |4 | RP127 | 2007-000300 | R-CHIP:560OHM,5%,1/10W,DA,TP,2012 | |
|4 | CP143 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP,5x11,5 | |4 | RP128 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP144 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP130 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP145 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP131 | 2007-000586 | R-CHIP:22KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP201 | 2203-000325 | C-CERAMIC,CHIP:12nF,10%,50V,X7R,TP,3216, | |4 | RP132 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP203 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP,5x11,5 | |4 | RP135 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP204 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP136 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP205 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP,6.3x11,5 | |4 | RP137 | 2007-001039 | R-CHIP:56KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP206 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP138 | 2007-000586 | R-CHIP:22KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP207 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP,6.3x11,5 | |4 | RP140 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | CP208 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP201 | 2007-001039 | R-CHIP:56KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP209 | 2401-001914 | C-AL:1uF,20%,50V,BP,TP,5x11,5 | |4 | RP202 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP,2012 | |
|4 | CP210 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP,6.3x11,5 | |4 | RP203 | 2007-000703 | R-CHIP:3.6KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP211 | 2401-000603 | C-AL:1uF,20%,50V,GP,TP,5x11,5 | |4 | RP204 | 2007-000593 | R-CHIP:220HM,5%,1/10W,DA,TP,2012 | |
|4 | CP213 | 2401-000603 | C-AL:1uF,20%,50V,GP,TP,5x11,5 | |4 | RP205 | 2007-000477 | R-CHIP:1MOMH,5%,1/10W,DA,TP,2012 | |
|4 | CP214 | 2203-000578 | C-CERAMIC,CHIP:220nF,20%,50V,Y5V,TP,3216 | |4 | RP206 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP,2012 | |
|4 | CP215 | 2401-000603 | C-AL:1uF,20%,50V,GP,TP,5x11,5 | |4 | RP207 | 2007-001009 | R-CHIP:51KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP216 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP208 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP217 | 2203-000578 | C-CERAMIC,CHIP:220nF,20%,50V,Y5V,TP,3216 | |4 | RP209 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP,2012 | |
|4 | CP218 | 2203-002085 | C-CERAMIC,CHIP:56nF,10%,50V,X7R,TP,2012, | |4 | RP210 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP219 | 2203-000495 | C-CERAMIC,CHIP:2.2nF,10%,50V,X7R,TP,2012 | |4 | RP211 | 2007-001001 | R-CHIP:510OHM,5%,1/10W,DA,TP,2012 | |
|4 | CP220 | 2203-000578 | C-CERAMIC,CHIP:220nF,20%,50V,Y5V,TP,3216 | |4 | RP212 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP,2012 | |
|4 | CP221 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP213 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP301 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP,6.3x11,5 | |4 | RP215 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP302 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP216 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP303 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP,6.3x11,5 | |4 | RP217 | 2007-000409 | R-CHIP:15KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP304 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP301 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | CP305 | 2203-000389 | C-CERAMIC,CHIP:0.015nF,5%,50V,NP0,TP,201 | |4 | RP303 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP306 | 2203-000389 | C-CERAMIC,CHIP:0.015nF,5%,50V,NP0,TP,201 | |4 | RP304 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | DP101 | 0401-000160 | DIODE-SWITCHING:ISS314,30V,100mA,USC,TP | |4 | RP307 | 2007-000518 | R-CHIP:2.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | DP103 | 0403-000720 | DIODE-ZENER:MTZJ9.1B,9.1V,8.57-9.01V,500 | |4 | RP308 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP,2012 | |
|4 | DP105 | 0401-000160 | DIODE-SWITCHING:ISS314,30V,100mA,USC,TP | |4 | RP309 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP,2012 | |
|4 | DP201 | 0403-000334 | DIODE-ZENER:UZ2.7BSA,2.7V,2.54-2.75V,500 | |4 | RP310 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP,2012 | |
|4 | ICP103 | AA13-20004A | IC-HYBRID:-PAP102T,SIP6PPRE-AMP,TP | |4 | RP311 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP,2012 | |
|4 | ICP105 | 1204-000635 | IC-PICTURE PROCESS:SDA9189X,SOP,32P,350M | |4 | RP312 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
|4 | ICP201 | 1002-000206 | IC-A/D CONVERTER:SDA9187-2X,6BIT,SOP,28P | |4 | RP313 | 2007-001155 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
|4 | LP102 | 2701-000219 | INDUCTOR-AXIAL:820nH,10%,2.5x3.4mm | |4 | RP314 | 2007-001155 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
|4 | LP103 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |4 | RP315 | 2007-001155 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
|4 | LP104 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |4 | RP316 | 2001-001146 | R-CARBON(S):4.7OHM,5%,1/2W,AA,TP,2.4X6.4 | |
|4 | LP105 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |4 | RP317 | 2001-001146 | R-CARBON(S):4.7OHM,5%,1/2W,AA,TP,2.4X6.4 | |
|4 | LP201 | 2701-000197 | INDUCTOR-AXIAL:5.6uH,10%,2.5x3.4mm | |4 | XP101 | 2801-000235 | CRYSTAL-UNIT:3.579545MHz,40ppm,28-AAM,S, | |
|4 | LP301 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |4 | XP102 | 2801-000274 | CRYSTAL-UNIT:4.433619MHz,30PPM,28-AAM,20 | |
|4 | PCB | AA41-11003A | PCB-PIP-SCT53A,2L,FR-4,330x245x1.6T,A6 | S.N.A |4 | XP301 | 2802-000121 | RESONATOR-CERAMIC:20.48MHz,0.5%,TP,10.0x | |
|4 | OP104 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |3 | | AA63-40013A | SHIELD-CASE:-,SPT,TO.5,SC151A,WZ74-, | S.N.A |
|4 | OP105 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |3 | | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2,63Sn/37Pb | S.N.A |
|4 | OP106 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |2 | | AA95-00644A | ASSY-PCB,TTX:-,SP43J5HF,J51A,-,ENG VER | |
|4 | OP201 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |3 | CNT01 | 3711-002709 | CONNECTOR-HEADER:NOWALL,12P1R,2.5MM,ANG | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|-------------|--|--------|
|4 | R980 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C636 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
|4 | R981 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C637 | 2401-000027 | C-AL:4.7uF,20%,50V,GP,TP5x11,5 | |
|4 | R982 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C638 | 2401-002235 | C-AL:10uF,20%,16V,GP,TP5x11mm,5mm | |
|4 | R983 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C639 | 2401-002235 | C-AL:10uF,20%,16V,GP,TP5x11mm,5mm | |
|4 | R984 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C640 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NPO,TP,2012 | |
|4 | R985 | 2001-000786 | R-CARBON:47KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C641 | 2203-000142 | C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP,2012 | |
|4 | R986 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C642 | 2401-000480 | C-AL:10uF,20%,50V,GP,TP5x11,5 | |
|4 | R987 | 2001-000780 | R-CARBON:470OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C643 | 2401-000027 | C-AL:4.7uF,20%,50V,GP,TP5x11,5 | |
|4 | R988 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C644 | 2401-000027 | C-AL:4.7uF,20%,50V,GP,TP5x11,5 | |
|4 | R989 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C645 | 2401-000027 | C-AL:4.7uF,20%,50V,GP,TP5x11,5 | |
|4 | R990 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C646 | 2401-000027 | C-AL:4.7uF,20%,50V,GP,TP5x11,5 | |
|4 | R991 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C649 | 2401-002300 | C-AL:47uF,20%,50V,GP,TP6.3x11,5 | |
|4 | R992 | 2001-000472 | R-CARBON:2.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | C650 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | |
|4 | R993 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C651 | 2401-000365 | C-AL:100uF,20%,50V,WT,TP10x12.5mm, | |
|4 | R994 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C653 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NPO,TP,2012 | |
|4 | RD901 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C654 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |
|4 | RD903 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | C655 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NPO,TP,2012 | |
|4 | RF802 | 2008-000294 | R-FUSIBLE(S):33ohm,5%,2W,AF,TP3.9x10mm | |4 | C656 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |
|4 | RS801 | 2003-002194 | R-METAL OXIDE(S):1.8Kohm,5%,1W,AF,TP2.5 | |4 | C657 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |
|4 | RS802 | 2001-001192 | R-CARBON(S):820OHM,5%,1/2W,AA,TP2.4X6.4 | |4 | C658 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NPO,TP,2012 | |
|4 | RS803 | 2001-001159 | R-CARBON(S):510OHM,5%,1/2W,AA,TP2.4X6.4 | |4 | C661 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NPO,TP,2012 | |
|4 | RS804 | 2001-001182 | R-CARBON(S):7.5KOHM,5%,1/2W,AA,TP2.4X6.4 | |4 | C662 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |
|4 | RS805 | 2001-001107 | R-CARBON(S):220ohm,5%,1/2W,AA,TP2.4x6.4 | |4 | C663 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |
|4 | RS806 | 2001-001159 | R-CARBON(S):510OHM,5%,1/2W,AA,TP2.4X6.4 | |4 | C664 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NPO,TP,2012 | |
|4 | RS807 | 2001-000739 | R-CARBON:4.7MOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | C667 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NPO,TP,2012 | |
|4 | RZ153 | 2008-001086 | R-FUSIBLE(S):3.3ohm,5%,2W,AG,TP3.9x12mm | |4 | C668 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |
|4 | RZ154 | 2003-000532 | R-METAL OXIDE(S):18ohm,5%,2W,AF,TP4x12m | |4 | C669 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |
|4 | RZ156 | 2001-001159 | R-CARBON(S):510OHM,5%,1/2W,AA,TP2.4X6.4 | |4 | C670 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NPO,TP,2012 | |
|4 | RZ165 | 2001-000331 | R-CARBON:12KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C684 | 2401-000480 | C-AL:10uF,20%,50V,GP,TP5x11,5 | |
|4 | RZ166 | 2001-000258 | R-CARBON:1.8KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | C688 | 2401-000962 | C-AL:22uF,20%,50V,GP,TP5x11,5 | |
|4 | RZ167 | 2001-000258 | R-CARBON:1.8KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | C691 | 2401-000962 | C-AL:22uF,20%,50V,GP,TP5x11,5 | |
|4 | RZ167A | 2001-000554 | R-CARBON:270OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C692 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |
|4 | RZ168 | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | |4 | C695 | 2203-000761 | C-CERAMIC,CHIP:330nF,10%,16V,X7R,TP,2012 | |
|4 | RZ169 | 2001-000019 | R-CARBON(S):100HM,5%,1/2W,AA,TP2.4X6.4M | |4 | C696 | 2203-000170 | C-CERAMIC,CHIP:1.8nF,10%,50V,X7R,TP,2012 | |
|4 | RZ170 | 2001-000666 | R-CARBON:330HM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C697 | 2203-000170 | C-CERAMIC,CHIP:1.8nF,10%,50V,X7R,TP,2012 | |
|4 | RZ171 | 2001-000666 | R-CARBON:330HM,5%,1/8W,AA,TP1.8X3.2MM | |4 | CB1 | 2401-000365 | C-AL:100uF,20%,50V,WT,TP10x12.5mm, | |
|4 | RZ172 | 2001-000241 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | CD601 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |
|4 | RZ173 | 2001-001139 | R-CARBON(S):39KOHM,5%,1/2W,AA,TP2.4X6.4 | |4 | CD602 | 2203-000142 | C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP,2012 | |
|4 | RZ174 | 2001-001139 | R-CARBON(S):39KOHM,5%,1/2W,AA,TP2.4X6.4 | |4 | CD603 | 2401-000962 | C-AL:22uF,20%,50V,GP,TP5x11,5 | |
|4 | RZ175 | 2001-000241 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | CD604 | 2203-000595 | C-CERAMIC,CHIP:0.22nF,5%,50V,NPO,TP,2012 | |
|4 | RZ176 | 2001-000221 | R-CARBON:1.2KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | CD605 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NPO,TP,2012 | |
|4 | RZ177 | 2001-000331 | R-CARBON:12KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | CD606 | 2401-000962 | C-AL:22uF,20%,50V,GP,TP5x11,5 | |
|4 | RZ178 | 2001-000221 | R-CARBON:1.2KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | CD607 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NPO,TP,2012 | |
|4 | RZ179 | 2003-000713 | R-METAL OXIDE(S):47ohm,5%,2W,AF,TP4x12m | |4 | CD608 | 2203-000142 | C-CERAMIC,CHIP:1.8nF,10%,50V,X7R,TP,2012 | |
|4 | RZ180 | 2001-001100 | R-CARBON(S):2.7OHM,5%,1/2W,AA,TP2.4X6.4 | |4 | CD609 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
|4 | RZ181 | 2001-001100 | R-CARBON(S):2.7OHM,5%,1/2W,AA,TP2.4X6.4 | |4 | CD610 | 2401-000480 | C-AL:10uF,20%,50V,GP,TP5x11,5 | |
|4 | RZ182 | 2003-000713 | R-METAL OXIDE(S):47ohm,5%,2W,AF,TP4x12m | |4 | CD611 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
|4 | RZ183 | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | |4 | CD612 | 2401-000027 | C-AL:4.7uF,20%,50V,GP,TP5x11,5 | |
|4 | RZ184 | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | |4 | CD613 | 2401-000660 | C-AL:2.2uF,20%,50V,GP,TP5x11,5 | |
|4 | VR101 | 2103-000672 | VR-SEMI:20Kohm,25%,1/5W,TOP | |4 | CD615 | 2401-000660 | C-AL:2.2uF,20%,50V,GP,TP5x11,5 | |
| ..2 | | AA95-00427A | ASSY-SOUND:-,SP43J5P3S/XTTJ51A,-,-,CHIN | |4 | CD616 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | |
| ...3 | CN601A | 3711-003626 | CONNECTOR-HEADER:NOWALL,20P,1R,2.5mm,ANG | |4 | CD618 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | |
| ...3 | CN602A | 3711-003626 | CONNECTOR-HEADER:NOWALL,20P,1R,2.5mm,ANG | |4 | CD619 | 2401-002235 | C-AL:10uF,20%,16V,GP,TP5x11mm,5mm | |
| ...3 | LD603 | 2701-000170 | INDUCTOR-AXIAL:3.9uH,10%,3x7mm | |4 | CD620 | 2401-002235 | C-AL:10uF,20%,16V,GP,TP5x11mm,5mm | |
| ...3 | | AA99-20060M | ASSY-PCB SUB,AUTO: AA95-00427A ,V | S.N.A |4 | CD621 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NPO,TP,2012 | |
|4 | C614 | 2401-000962 | C-AL:22uF,20%,50V,GP,TP5x11,5 | |4 | CD622 | 2203-000142 | C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP,2012 | |
|4 | C615 | 2203-000595 | C-CERAMIC,CHIP:0.22nF,5%,50V,NPO,TP,2012 | |4 | CD623 | 2401-000480 | C-AL:10uF,20%,50V,GP,TP5x11,5 | |
|4 | C616 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NPO,TP,2012 | |4 | CD624 | 2203-000495 | C-CERAMIC,CHIP:2.2nF,10%,50V,X7R,TP,2012 | |
|4 | C617 | 2203-000142 | C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP,2012 | |4 | CD625 | 2401-000962 | C-AL:22uF,20%,50V,GP,TP5x11,5 | |
|4 | C618 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | |4 | CD626 | 2203-000495 | C-CERAMIC,CHIP:2.2nF,10%,50V,X7R,TP,2012 | |
|4 | C619 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | |4 | CD627 | 2401-000962 | C-AL:22uF,20%,50V,GP,TP5x11,5 | |
|4 | C620 | 2401-000660 | C-AL:2.2uF,20%,50V,GP,TP5x11,5 | |4 | CD628 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |
|4 | C621 | 2401-000660 | C-AL:2.2uF,20%,50V,GP,TP5x11,5 | |4 | CD629 | 2401-000365 | C-AL:100uF,20%,50V,WT,TP10x12.5mm, | |
|4 | C622 | 2203-000701 | C-CERAMIC,CHIP:0.002nF,0.25pf,50V,NPO,TP | |4 | CD630 | 2203-000761 | C-CERAMIC,CHIP:330nF,10%,16V,X7R,TP,2012 | |
|4 | C623 | 2203-000701 | C-CERAMIC,CHIP:0.002nF,0.25pf,50V,NPO,TP | |4 | CDB1 | 2401-000365 | C-AL:100uF,20%,50V,WT,TP10x12.5mm, | |
|4 | C624 | 2203-001077 | C-CERAMIC,CHIP:0.056nF,5%,50V,NPO,TP,201 | |4 | IC601 | 1204-001689 | IC-SOUND PROCESSOR:MSP3410D-C5,PLCC,68P | |
|4 | C625 | 2203-001077 | C-CERAMIC,CHIP:0.056nF,5%,50V,NPO,TP,201 | |4 | IC604 | 1201-000541 | IC-OP AMP:062,SOP8P,153MIL,DUAL,6V/mV/P | |
|4 | C626 | 2401-000962 | C-AL:22uF,20%,50V,GP,TP5x11,5 | |4 | ICD601 | 1204-001198 | IC-DECODER:DPL3519A-A2,PLCC,68P,-PLASTI | |
|4 | C627 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NPO,TP,2012 | |4 | ICD602 | 1201-000541 | IC-OP AMP:062,SOP8P,153MIL,DUAL,6V/mV/P | |
|4 | C628 | 2203-000142 | C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP,2012 | |4 | L601 | 2701-000170 | INDUCTOR-AXIAL:3.9uH,10%,3x7mm | |
|4 | C629 | 2203-001077 | C-CERAMIC,CHIP:0.056nF,5%,50V,NPO,TP,201 | |4 | L602 | 2701-000170 | INDUCTOR-AXIAL:3.9uH,10%,3x7mm | |
|4 | C630 | 2401-000480 | C-AL:10uF,20%,50V,GP,TP5x11,5 | |4 | L603 | 2701-000112 | INDUCTOR-AXIAL:100uH,10%,3x7mm | |
|4 | C631 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LD601 | 2701-000170 | INDUCTOR-AXIAL:3.9uH,10%,3x7mm | |
|4 | C632 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |4 | LD602 | 2701-000112 | INDUCTOR-AXIAL:100uH,10%,3x7mm | |
|4 | C633 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |4 | PCB | AA41-00087A | PCB-AUDIO:PLT51A,2L,4R,4.180X245X1.6T,3A | S.N.A |
|4 | C634 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NPO,TP,2012 | |4 | Q606 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | |
|4 | C635 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NPO,TP,2012 | |4 | Q607 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|---|--------|-------|----------|-------------|--|--------|
| ...4 | R601 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | | ...4 | CF19 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R602 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | | ...4 | CF21 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R610 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | | ...4 | CF22 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R611 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | | ...4 | CF23 | 2401-001513 | C-AL:47uf,20%,16V,WVT,TP5x11.5 | |
| ...4 | R614 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF24 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R617 | 2007-000931 | R-CHIP:470OHM,5%,1/10W,DA,TP,2012 | | ...4 | CF25 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R618 | 2007-000931 | R-CHIP:470OHM,5%,1/10W,DA,TP,2012 | | ...4 | CF26 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R619 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | | ...4 | CF27 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R620 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | | ...4 | CF28 | 2401-001513 | C-AL:47uf,20%,16V,WVT,TP5x11.5 | |
| ...4 | R621 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | | ...4 | CF29 | 2401-001513 | C-AL:47uf,20%,16V,WVT,TP5x11.5 | |
| ...4 | R622 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | | ...4 | CF30 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R623 | 2007-000477 | R-CHIP:1MOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF31 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R624 | 2007-000477 | R-CHIP:1MOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF32 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R625 | 2007-000477 | R-CHIP:1MOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF33 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R626 | 2007-000477 | R-CHIP:1MOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF34 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R632 | 2007-000931 | R-CHIP:470OHM,5%,1/10W,DA,TP,2012 | | ...4 | CF35 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R633 | 2007-000931 | R-CHIP:470OHM,5%,1/10W,DA,TP,2012 | | ...4 | CF37 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R634 | 2007-000931 | R-CHIP:470OHM,5%,1/10W,DA,TP,2012 | | ...4 | CF38 | 2401-001513 | C-AL:47uf,20%,16V,WVT,TP5x11.5 | |
| ...4 | R635 | 2007-000931 | R-CHIP:470OHM,5%,1/10W,DA,TP,2012 | | ...4 | CF39 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R636 | 2007-000931 | R-CHIP:470OHM,5%,1/10W,DA,TP,2012 | | ...4 | CF40 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R637 | 2007-000931 | R-CHIP:470OHM,5%,1/10W,DA,TP,2012 | | ...4 | CF41 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R638 | 2007-000931 | R-CHIP:470OHM,5%,1/10W,DA,TP,2012 | | ...4 | CF42 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R660 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF44 | 2404-000151 | C-TA,CHIP:1uf,20%,16V,-,TP,3216,- | |
| ...4 | R661 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF45 | 2203-001158 | C-CERAMIC,CHIP:0.068nF,5%,50V,NP0,TP,201 | |
| ...4 | R664 | 2007-001177 | R-CHIP:8.2KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF46 | 2404-000151 | C-TA,CHIP:1uf,20%,16V,-,TP,3216,- | |
| ...4 | R665 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF47 | 2203-001158 | C-CERAMIC,CHIP:0.068nF,5%,50V,NP0,TP,201 | |
| ...4 | R666 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF48 | 2404-000151 | C-TA,CHIP:1uf,20%,16V,-,TP,3216,- | |
| ...4 | R669 | 2007-001177 | R-CHIP:8.2KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF49 | 2203-001158 | C-CERAMIC,CHIP:0.068nF,5%,50V,NP0,TP,201 | |
| ...4 | R670 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF50 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R672 | 2007-000586 | R-CHIP:22KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF51 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | R673 | 2007-000586 | R-CHIP:22KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF52 | 2203-000316 | C-CERAMIC,CHIP:0.12nF,5%,50V,NP0,TP,2012 | |
| ...4 | R674 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF53 | 2203-000316 | C-CERAMIC,CHIP:0.12nF,5%,50V,NP0,TP,2012 | |
| ...4 | R675 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF54 | 2404-001229 | C-TA,CHIP:4.7uf,20%,25V,GPTP,3528 | |
| ...4 | RB1 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF55 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | RB2 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF56 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |
| ...4 | RB3 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF57 | 2404-001229 | C-TA,CHIP:4.7uf,20%,25V,GPTP,3528 | |
| ...4 | RB4 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF58 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | RD601 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF60 | 2401-001840 | C-AL:100uf,20%,16V,GPTP,6.3x11.5 | |
| ...4 | RD602 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF61 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | RD604 | 2007-001177 | R-CHIP:8.2KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF62 | 2401-001513 | C-AL:47uf,20%,16V,WVT,TP5x11.5 | |
| ...4 | RD605 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF63 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | RD610 | 2007-001177 | R-CHIP:8.2KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF64 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | RD611 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF65 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | RD627 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF66 | 2401-001513 | C-AL:47uf,20%,16V,WVT,TP5x11.5 | |
| ...4 | RDB1 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF67 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | RDB2 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF68 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | RDB3 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF69 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | RDB4 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP,2012 | | ...4 | CF70 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...4 | X601 | 2801-000186 | CRYSTAL-UNIT:18.432MHz,25ppm,28-AAM,8pf | | ...4 | CF71 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...3 | | AA63-40273A | SHIELD-CASE-,SPT,E,T0.5,-,CX724AHD | | ...4 | CF72 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...3 | | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2,63Sn/37Pb | S.N.A | ...4 | CF75 | 2401-001840 | C-AL:100uf,20%,16V,GPTP,6.3x11.5 | |
| ...2 | | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2,63Sn/37Pb | S.N.A | ...4 | CF76 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...2 | | AA65-30104B | CLAMP-WIRE-NYLON 66,V2,BLK,W2 Z5,ALL MOD | S.N.A | ...4 | CF77 | 2203-000429 | C-CERAMIC,CHIP:0.018nF,5%,50V,NP0,TP,201 | |
| ...2 | | AA65-30013A | CLAMP-WIRE-NYLON-66,V0,NTR,DAWH-45N,-,- | S.N.A | ...4 | CF78 | 2203-000429 | C-CERAMIC,CHIP:0.018nF,5%,50V,NP0,TP,201 | |
| ...2 | | AA59-40003P | MODULE-FOCUS,PACK:-,F300,NTSC,43,64x62, | | ...4 | CF79 | 2401-000027 | C-AL:4.7uf,20%,50V,GPTP,5x11.5 | |
| ...2 | | 3301-001201 | CORE-FERRITE-AE,230.5x10.25x36mm,1500,28 | | ...4 | CF80 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...2 | | AA39-20577A | LEAD CONNECTOR-ASSY:-,6(3P),-,-,YF | | ...4 | CF81 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ...2 | | AA39-20010C | LEAD CONNECTOR-ASSY:-,YFH800-01,S,TP600 | | ...4 | CF84 | 2203-000858 | C-CERAMIC,CHIP:0.039nF,5%,50V,NP0,TP,201 | |
| ...2 | | AA65-30105A | CLAMP-WIRE-NYLON 66,V2,NTR,15MM,ALL MODE | S.N.A | ...4 | CF85 | 2203-000839 | C-CERAMIC,CHIP:0.39nF,5%,50V,NP0,TP,2012 | |
| ...2 | | AA95-00007A | ASSY-F/CONVERTER:-,SVP-434JM,KPT51A,NTSC | | ...4 | CF86 | 2203-000858 | C-CERAMIC,CHIP:0.039nF,5%,50V,NP0,TP,201 | |
| ...3 | CON01 | 3711-002709 | CONNECTOR-HEADER:NOWALL,12P,1R,2.5MM,ANGL | | ...4 | CF87 | 2203-000839 | C-CERAMIC,CHIP:0.39nF,5%,50V,NP0,TP,2012 | |
| ...3 | CON02 | 3711-002703 | CONNECTOR-HEADER:NOWALL,5P,1R,2.5MM,ANGL | | ...4 | CF88 | 2203-000858 | C-CERAMIC,CHIP:0.039nF,5%,50V,NP0,TP,201 | |
| ...3 | IC03 | AA13-30021E | IC-MCU:Z90234-R3911,SZM-374FC,ST,24K | | ...4 | CF89 | 2203-000839 | C-CERAMIC,CHIP:0.39nF,5%,50V,NP0,TP,2012 | |
| ...3 | IC04 | 1103-001208 | IC-EEPROM:AT24C02-PC27 C,256x8Bit,DIP,8P | | ...4 | DF01 | 0401-000008 | DIODE-SWITCHING:DAN217,80V,100mA,SOT-23, | |
| ...3 | S/CASE | AA63-40037A | SHIELD-CASE-,SPT,E,T0.5,SCT12A,- | S.N.A | ...4 | DF02 | 0401-000008 | DIODE-SWITCHING:DAN217,80V,100mA,SOT-23, | |
| ...3 | XTR01 | 2804-001213 | OSCILLATOR-CLOCK:80MHz,100ppm,10TTL & CM | | ...4 | DF03 | 0401-000008 | DIODE-SWITCHING:DAN217,80V,100mA,SOT-23, | |
| ...3 | | AA99-20043V | ASSY-PCB SUB,AUTO; AA95-00007A ,V | S.N.A | ...4 | FF13 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pf,3.2x1.25 | |
| ...4 | CF10 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | | ...4 | FF14 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pf,3.2x1.25 | |
| ...4 | CF11 | 2401-001840 | C-AL:100uf,20%,16V,GPTP,6.3x11.5 | | ...4 | FF15 | 2901-000233 | FILTER-EMI SMD:50V,0.3A,-,330pf,4.5x3.2x | |
| ...4 | CF12 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ...4 | FF16 | 2901-000233 | FILTER-EMI SMD:50V,0.3A,-,330pf,4.5x3.2x | |
| ...4 | CF13 | 2401-001513 | C-AL:47uf,20%,16V,WVT,TP5x11.5 | | ...4 | FF17 | 2901-000233 | FILTER-EMI SMD:50V,0.3A,-,330pf,4.5x3.2x | |
| ...4 | CF14 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ...4 | IC01 | 1204-001406 | IC-VIDEO PROCESS:FS310KBC,OFF;128P;1100M | |
| ...4 | CF15 | 2203-000429 | C-CERAMIC,CHIP:0.018nF,5%,50V,NP0,TP,201 | | ...4 | IC02 | 1105-001270 | IC-DRAM:72V161621,2Kx524Kx16BITBIT,TSOP | |
| ...4 | CF16 | 2203-000634 | C-CERAMIC,CHIP:0.022nF,5%,50V,NP0,TP,201 | | ...4 | IC05 | 1203-001419 | IC-VOLTAGE REGULATOR:4931,T0-252,3P,6x6 | |
| ...4 | CF17 | 2203-000429 | C-CERAMIC,CHIP:0.018nF,5%,50V,NP0,TP,201 | | ...4 | LF10 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- | |
| ...4 | CF18 | 2203-000683 | C-CERAMIC,CHIP:0.027nF,5%,50V,NP0,TP,201 | | ...4 | LF11 | 2701-000116 | INDUCTOR-AXIAL:10uH,10%,4.2x9.8mm | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|---------------------|-------------|---------------------------------|---|--------|
|4 | LF12 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm | |4 | XTR02 | 2801-000152 | CRYSTAL-UNIT:14.31818MHz,40ppm,28-AAM,16 | |
|4 | LF13 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm | |4 | XTR04 | 2801-000724 | CRYSTAL-UNIT:6MHz,50ppm,28-AAM,20pF,40oh | |
|4 | LF14 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm | | ..2 | AA65-30109A | CLAMP-FBT:NYLON-66,2V,BLK,-,-,- | S.N.A | |
|4 | LF15 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm | | ASSY PCB CRT | | | | |
|4 | LF16 | 2701-000149 | INDUCTOR-AXIAL:2.7uH,10%,2.5x3.4mm | | 1 | * | AA95-00129L | ASSY PCB CRT:-,J51A,43.53,PAL,- | |
|4 | LF17 | 2701-000149 | INDUCTOR-AXIAL:2.7uH,10%,2.5x3.4mm | | ..2 | BDW-GN | AA39-20009G | LEAD CONNECTOR-ASSY:-,YFH800-01,-,1P,700 | |
|4 | LF18 | 2701-000149 | INDUCTOR-AXIAL:2.7uH,10%,2.5x3.4mm | | ..2 | C511 | 2201-000969 | C-CERAMIC,DISC:10nF,+80-20%,3.15kV,Y5V,T | |
|4 | PCB | AA41-10997B | PCB-FORMAT CONNERTER:KPM51A,4L,FR-4,245X | S.N.A | ..2 | C541 | 2201-000969 | C-CERAMIC,DISC:10nF,+80-20%,3.15kV,Y5V,T | |
|4 | RF11 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ..2 | C571 | 2201-000969 | C-CERAMIC,DISC:10nF,+80-20%,3.15kV,Y5V,T | |
|4 | RF13 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ..2 | CN501 | 3711-003051 | CONNECTOR-HEADER:BOX,8P1R,2.5mm,STRAGHT | |
|4 | RF15 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ..2 | CN502 | 3711-003052 | CONNECTOR-HEADER:BOX,10P1R,2.5mm,STRAGH | |
|4 | RF16 | 2007-000477 | R-CHIP:1MOHM,5%,1/10W,DA,TP2012 | | ..2 | CN502B | 3711-003052 | CONNECTOR-HEADER:BOX,10P1R,2.5mm,STRAGH | |
|4 | RF17 | 2007-000477 | R-CHIP:1MOHM,5%,1/10W,DA,TP2012 | | ..2 | CN503 | 3711-003052 | CONNECTOR-HEADER:BOX,10P1R,2.5mm,STRAGH | |
|4 | RF18 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ..2 | CN503B | 3711-003052 | CONNECTOR-HEADER:BOX,10P1R,2.5mm,STRAGH | |
|4 | RF19 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ..2 | CNW401 | AA39-20027B | LEAD CONNECTOR-ASSY:-,67096-006,S,6P,400 | |
|4 | RF21 | 2007-000642 | R-CHIP:270OHM,5%,1/10W,DA,TP2012 | | ..2 | CNW501 | AA39-00127A | LEAD CONNECTOR-ASSY:-,-,8P,-,-,-,35155- | |
|4 | RF22 | 2007-001118 | R-CHIP:680OHM,5%,1/10W,DA,TP2012 | | ..2 | CNW502 | AA39-00112A | LEAD CONNECTOR-ASSY:-,-,-,10P,-,-,-,35155 | |
|4 | RF23 | 2007-000401 | R-CHIP:150OHM,5%,1/10W,DA,TP2012 | | ..2 | CNW503 | AA39-00112A | LEAD CONNECTOR-ASSY:-,-,-,10P,-,-,-,35155 | |
|4 | RF24 | 2007-000401 | R-CHIP:150OHM,5%,1/10W,DA,TP2012 | | ..2 | FOCUS- | AA39-20115A | LEAD CONNECTOR-ASSY:-,BUSHING,-,1P500,3 | |
|4 | RF25 | 2007-000518 | R-CHIP:2.7KOHM,5%,1/10W,DA,TP2012 | | ..2 | FOCUS- | AA39-20115A | LEAD CONNECTOR-ASSY:-,BUSHING,-,1P500,3 | |
|4 | RF26 | 2007-000518 | R-CHIP:2.7KOHM,5%,1/10W,DA,TP2012 | | ..2 | FOCUS- | AA39-20115B | LEAD CONNECTOR-ASSY:-,BUSHING,-,1P700MM | |
|4 | RF27 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ..2 | GRW-GN | 3811-000446 | WIRE-PVC CU:TCWA,600V,ROLL,17/0.16mm,#22 | S.N.A |
|4 | RF29 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..2 | GBW-SC | 3811-000480 | WIRE-PVC CU:BCWA,1KV,ROLL,17/0.16mm,#22, | S.N.A |
|4 | RF30 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..2 | GDW-GN | AA39-20009D | LEAD CONNECTOR-ASSY:-,YFH800-01,-,1P,500 | |
|4 | RF31 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..2 | GRW-GN | 3811-000446 | WIRE-PVC CU:TCWA,600V,ROLL,17/0.16mm,#22 | S.N.A |
|4 | RF32 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..2 | GRW-SC | 3811-000480 | WIRE-PVC CU:BCWA,1KV,ROLL,17/0.16mm,#22, | S.N.A |
|4 | RF33 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | △ | IC501 | AA96-50151B | ASSY-H/S:-,AMP,AA61-10060A,TDA6111Q,- | |
|4 | RF34 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..3 | | 1201-001131 | IC-VIDEO AMP:6111,SIP9P,-,SINGLE,-,PLAS | |
|4 | RF35 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..3 | | 6001-000057 | SCREW-MACHINE:RH,-,M3,L6,ZPC(BLK),SWRCH1 | S.N.A |
|4 | RF36 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..3 | | 6021-000222 | NUT-HEXAGON:2C,M3,ZPC(YEL),SM20C 1 | S.N.A |
|4 | RF37 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..3 | | AA61-10060A | BRACKET-TR:-,-,CUS-1 1/2H,T0.5,-,-,- | S.N.A |
|4 | RF38 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | △ | IC531 | AA96-50151B | ASSY-H/S:-,AMP,AA61-10060A,TDA6111Q,- | |
|4 | RF39 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | △ | IC561 | AA96-50151B | ASSY-H/S:-,AMP,AA61-10060A,TDA6111Q,- | |
|4 | RF40 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..2 | PCB | AA41-10998C | PCB-CRT:P51A,1L,FR-1,330x245x1.6T,3A,M | S.N.A |
|4 | RF41 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..2 | RS06 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4M | |
|4 | RF42 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..2 | RDW-GN | AA39-20009F | LEAD CONNECTOR-ASSY:-,YFH800-01,-,1P,200 | |
|4 | RF43 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..2 | SG502 | AA27-00084A | COIL:S-23,-,-,-,-,-,S-23,5000Mohm | |
|4 | RF44 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..2 | SG532 | AA27-00084A | COIL:S-23,-,-,-,-,-,S-23,5000Mohm | |
|4 | RF45 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..2 | SG562 | AA27-00084A | COIL:S-23,-,-,-,-,-,S-23,5000Mohm | |
|4 | RF46 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | △ | V501 | 3704-001019 | SOCKET-CRT:10P,29.1PI,35.5PI,AU30U | |
|4 | RF47 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | △ | V531 | 3704-001019 | SOCKET-CRT:10P,29.1PI,35.5PI,AU30U | |
|4 | RF48 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | △ | V561 | 3704-001019 | SOCKET-CRT:10P,29.1PI,35.5PI,AU30U | |
|4 | RF49 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..2 | VR501 | 2101-000321 | VR-ROTARY:1Mohm,-,0.6W,SIDE | |
|4 | RF51 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..2 | VR531 | 2101-000321 | VR-ROTARY:1Mohm,-,0.6W,SIDE | |
|4 | RF52 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..2 | VR561 | 2101-000321 | VR-ROTARY:1Mohm,-,0.6W,SIDE | |
|4 | RF53 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..2 | | AA99-20082X | ASSY-PCB SUB,AUTO: AA95-00129L / | S.N.A |
|4 | RF54 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..3 | C502 | 2401-000027 | C-AL:4.7uF,20%,50V,GPTP5x11.5 | |
|4 | RF55 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..3 | C503 | 2201-000119 | C-CERAMIC,DISC:10nF,+80-20%,50V,Y5V,TP, | |
|4 | RF56 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..3 | C504 | 2401-001537 | C-AL:47uF,20%,25V,GPTP6.3x7mm,5mm | |
|4 | RF61 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..3 | C505 | 2305-000149 | C-FILM,MPEF:100nF,5%,100V,TP,12x12.5x6.5 | |
|4 | RF62 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..3 | C506 | 2401-000430 | C-AL:10uF,20%,250V,GPTP10x16mm,5m | |
|4 | RF64 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ..3 | C507 | 2305-000154 | C-FILM,MPEF:100nF,5%,400V,TP,21.5x6.5x11 | |
|4 | RF66 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..3 | C510 | 2401-000430 | C-AL:10uF,20%,250V,GPTP10x16mm,5m | |
|4 | RF67 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..3 | C512 | 2401-000133 | C-AL:1000uF,20%,16V,GPTP,10x20,5 | |
|4 | RF68 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ..3 | C513 | 2201-000983 | C-CERAMIC,DISC:1nF,10%,2kV,Y5P,TP9x5.7, | |
|4 | RF70 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C514 | 2201-000599 | C-CERAMIC,DISC:0.56nF,10%,500V,Y5P,TP5, | |
|4 | RF71 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C532 | 2401-000027 | C-AL:4.7uF,20%,50V,GPTP5x11.5 | |
|4 | RF72 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C533 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | |
|4 | RF73 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C534 | 2401-001537 | C-AL:47uF,20%,25V,GPTP6.3x7mm,5mm | |
|4 | RF74 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C535 | 2305-000149 | C-FILM,MPEF:100nF,5%,100V,TP,12x12.5x6.5 | |
|4 | RF75 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C536 | 2401-000430 | C-AL:10uF,20%,250V,GPTP10x16mm,5m | |
|4 | RF76 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C537 | 2305-000154 | C-FILM,MPEF:100nF,5%,400V,TP,21.5x6.5x11 | |
|4 | RF78 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C540 | 2401-000430 | C-AL:10uF,20%,250V,GPTP10x16mm,5m | |
|4 | RF79 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C542 | 2201-000983 | C-CERAMIC,DISC:1nF,10%,2kV,Y5P,TP9x5.7, | |
|4 | RF80 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C543 | 2201-000599 | C-CERAMIC,DISC:0.56nF,10%,500V,Y5P,TP5, | |
|4 | RF81 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ..3 | C562 | 2401-000027 | C-AL:4.7uF,20%,50V,GPTP5x11.5 | |
|4 | RF82 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ..3 | C563 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | |
|4 | RF83 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C564 | 2401-001537 | C-AL:47uF,20%,25V,GPTP6.3x7mm,5mm | |
|4 | RF84 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ..3 | C565 | 2305-000149 | C-FILM,MPEF:100nF,5%,100V,TP,12x12.5x6.5 | |
|4 | RF85 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ..3 | C566 | 2401-000430 | C-AL:10uF,20%,250V,GPTP10x16mm,5m | |
|4 | RF86 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | | ..3 | C567 | 2305-000154 | C-FILM,MPEF:100nF,5%,400V,TP,21.5x6.5x11 | |
|4 | RF87 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | | ..3 | C570 | 2401-000430 | C-AL:10uF,20%,250V,GPTP10x16mm,5m | |
|4 | RF88 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | | | | | | |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|
| ... | C572 | 2201-000983 | C-CERAMIC,DISC:1nF,10%,2kV,Y5P,TP9x5.7. | |
| ... | C573 | 2201-000599 | C-CERAMIC,DISC:0.56nF,10%,500V,Y5P,TP5. | |
| ... | CN401 | 3711-002645 | CONNECTOR-HEADER:BOX,6P1R,2.5MM,STRAIGH | |
| ... | D501 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| ... | D502 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| ... | D503 | 0402-000493 | DIODE-RECTIFIER:1R5GU41,400V,1.5A,DO-15L | |
| ... | D504 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D509 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D510 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D531 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| ... | D532 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| ... | D533 | 0402-000493 | DIODE-RECTIFIER:1R5GU41,400V,1.5A,DO-15L | |
| ... | D561 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| ... | D562 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| ... | D563 | 0402-000493 | DIODE-RECTIFIER:1R5GU41,400V,1.5A,DO-15L | |
| ... | DZ501 | 0403-001317 | DIODE-ZENER:MTZJ3.0B,3.01-3.22V,500mW,DO | |
| ... | DZ502 | 0403-000508 | DIODE-ZENER:MTZJ5.6B,5.6V,5.45-5.73V,500 | |
| ... | DZ503 | 0403-000708 | DIODE-ZENER:MTZJ13B,13V,12.55-13.21V,500 | |
| ... | DZ531 | 0403-001317 | DIODE-ZENER:MTZJ3.0B,3.01-3.22V,500mW,DO | |
| ... | DZ532 | 0403-000508 | DIODE-ZENER:MTZJ5.6B,5.6V,5.45-5.73V,500 | |
| ... | DZ533 | 0403-000708 | DIODE-ZENER:MTZJ13B,13V,12.55-13.21V,500 | |
| ... | DZ561 | 0403-001317 | DIODE-ZENER:MTZJ3.0B,3.01-3.22V,500mW,DO | |
| ... | DZ562 | 0403-000508 | DIODE-ZENER:MTZJ5.6B,5.6V,5.45-5.73V,500 | |
| ... | DZ563 | 0403-000708 | DIODE-ZENER:MTZJ13B,13V,12.55-13.21V,500 | |
| ... | L501 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |
| ... | L531 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |
| ... | L561 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |
| ... | O501 | 0502-000006 | TR-POWER:KSC1507,NPN,15W,TO-220,TP120- | |
| ... | O502 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | O531 | 0502-000006 | TR-POWER:KSC1507,NPN,15W,TO-220,TP120- | |
| ... | O561 | 0502-000006 | TR-POWER:KSC1507,NPN,15W,TO-220,TP120- | |
| ... | R500 | 2001-000221 | R-CARBON:1.2KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | R502 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R503 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R507 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R508 | 2003-000706 | R-METAL OXIDE(S):47Kohm,5%,2W,AA,TP4.3x | |
| ... | R511 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R513 | 2008-000252 | R-FUSIBLE(S):0.47ohm,10%,1/2W,AF,TP2.5x | |
| ... | R514 | 2001-001122 | R-CARBON(S):3.9KOHM,5%,1/2W,AA,TP2.4X6. | |
| ... | R515 | 2002-001017 | R-COMPOSITION:1Kohm,10%,1/2W,AA,TP3.7x9 | |
| ... | R516 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R517 | 2001-000085 | R-CARBON(S):100KOHM,5%,1/2W,AA,TP2.4X6. | |
| ... | R518 | 2002-001021 | R-COMPOSITION:560KOHM,10%,1/2W,AA,TP3.7 | |
| ... | R519 | 2002-001021 | R-COMPOSITION:560KOHM,10%,1/2W,AA,TP3.7 | |
| ... | R520 | 2001-000066 | R-CARBON(S):10KOHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | R521 | 2001-001052 | R-CARBON(S):1.5MOHM,5%,1/2W,AA,TP2.4X6. | |
| ... | R522 | 2002-001006 | R-COMPOSITION:4.7Kohm,5%,1/2W,AA,TP3.7x | |
| ... | R523 | 2002-001006 | R-COMPOSITION:4.7Kohm,5%,1/2W,AA,TP3.7x | |
| ... | R524 | 2001-000028 | R-CARBON(S):100OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | R526 | 2001-000539 | R-CARBON:24KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R527 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R528 | 2001-001015 | R-CARBON:9.1KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | R529 | 2002-001021 | R-COMPOSITION:560KOHM,10%,1/2W,AA,TP3.7 | |
| ... | R532 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R533 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R536 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4M | |
| ... | R537 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R538 | 2003-000706 | R-METAL OXIDE(S):47Kohm,5%,2W,AA,TP4.3x | |
| ... | R540 | 2001-001000 | R-CARBON:82KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R541 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R543 | 2008-000252 | R-FUSIBLE(S):0.47ohm,10%,1/2W,AF,TP2.5x | |
| ... | R544 | 2001-001122 | R-CARBON(S):3.9KOHM,5%,1/2W,AA,TP2.4X6. | |
| ... | R545 | 2002-001017 | R-COMPOSITION:1Kohm,10%,1/2W,AA,TP3.7x9 | |
| ... | R546 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R547 | 2001-000085 | R-CARBON(S):100KOHM,5%,1/2W,AA,TP2.4X6. | |
| ... | R548 | 2002-001021 | R-COMPOSITION:560KOHM,10%,1/2W,AA,TP3.7 | |
| ... | R549 | 2002-001021 | R-COMPOSITION:560KOHM,10%,1/2W,AA,TP3.7 | |
| ... | R550 | 2001-000066 | R-CARBON(S):10KOHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | R551 | 2001-001052 | R-CARBON(S):1.5MOHM,5%,1/2W,AA,TP2.4X6. | |
| ... | R552 | 2002-001006 | R-COMPOSITION:4.7Kohm,5%,1/2W,AA,TP3.7x | |
| ... | R553 | 2002-001006 | R-COMPOSITION:4.7Kohm,5%,1/2W,AA,TP3.7x | |
| ... | R554 | 2001-000028 | R-CARBON(S):100OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | R559 | 2002-001015 | R-COMPOSITION:47Kohm,5%,1/2W,AA,TP3.7x9 | |
| ... | R562 | 2001-000221 | R-CARBON:1.2KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | R563 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R564 | 2001-000837 | R-CARBON:51KOHM,5%,1/8W,AA,TP1.8X3.2MM | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|-------------|---|---|--------|
| ... | R566 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4M | |
| ... | R567 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R571 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R572 | 2003-000706 | R-METAL OXIDE(S):47Kohm,5%,2W,AA,TP4.3x | |
| ... | R573 | 2008-000252 | R-FUSIBLE(S):0.47ohm,10%,1/2W,AF,TP2.5x | |
| ... | R574 | 2001-001122 | R-CARBON(S):3.9KOHM,5%,1/2W,AA,TP2.4X6. | |
| ... | R575 | 2002-001017 | R-COMPOSITION:1Kohm,10%,1/2W,AA,TP3.7x9 | |
| ... | R576 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R577 | 2001-000085 | R-CARBON(S):100KOHM,5%,1/2W,AA,TP2.4X6. | |
| ... | R578 | 2002-001021 | R-COMPOSITION:560KOHM,10%,1/2W,AA,TP3.7 | |
| ... | R579 | 2002-001021 | R-COMPOSITION:560KOHM,10%,1/2W,AA,TP3.7 | |
| ... | R580 | 2001-000066 | R-CARBON(S):10KOHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | R581 | 2001-001052 | R-CARBON(S):1.5MOHM,5%,1/2W,AA,TP2.4X6. | |
| ... | R582 | 2002-001006 | R-COMPOSITION:4.7Kohm,5%,1/2W,AA,TP3.7x | |
| ... | R583 | 2002-001006 | R-COMPOSITION:4.7Kohm,5%,1/2W,AA,TP3.7x | |
| ... | R584 | 2001-000028 | R-CARBON(S):100OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | R589 | 2002-001015 | R-COMPOSITION:47Kohm,5%,1/2W,AA,TP3.7x9 | |
| ... | SG351 | 4715-001036 | SURGE ABSORBER:350V,20%,-,TP | |
| ... | SG501 | 4715-001036 | SURGE ABSORBER:350V,20%,-,TP | |
| ... | SG503 | 4715-001036 | SURGE ABSORBER:350V,20%,-,TP | |
| ... | SG533 | 4715-001036 | SURGE ABSORBER:350V,20%,-,TP | |
| ... | SG561 | 4715-001036 | SURGE ABSORBER:350V,20%,-,TP | |
| ... | SG563 | 4715-001036 | SURGE ABSORBER:350V,20%,-,TP | |
| .. | AA63-10002A | BAND-TIE:NYLON66 V2,-,L100,NTR,-, | S.N.A | |
| .. | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2.63Sn/37PB | S.N.A | |

ASSY-PCB,H/V

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|-------------|---|--|--------|
| 1 | * | AA95-00056C | ASSY-PCB,H/V:-,SP43J5HP3S/XTT,J51A,-,-,- | |
| .. | BK01 | AA61-10068A | BRACKET-PCB:-,M2160,SPT,TO.3,-,-,- | S.N.A |
| .. | BK02 | AA61-10068A | BRACKET-PCB:-,M2160,SPT,TO.3,-,-,- | S.N.A |
| .. | BK03 | AA61-10068A | BRACKET-PCB:-,M2160,SPT,TO.3,-,-,- | S.N.A |
| .. | CN401 | 3711-001049 | CONNECTOR-HEADER:BOX,6P1R,2.5mm,ANGLE,- | |
| .. | CN402 | 3711-002709 | CONNECTOR-HEADER:NOWALL,12P1R,2.5MM,ANG | |
| .. | CN403 | AA39-20052A | LEAD CONNECTOR-ASSY:-,YBNH025-04,YSHO25- | |
| .. | CN404 | 3711-001283 | CONNECTOR-HEADER:NOWALL,14P1R,2.5mm,ANG | |
| △ | IC471 | 1203-000610 | IC-PWM CONTROLLER:494,DIP,16P,300MIL,PLA | |
| .. | L351 | AA27-10003M | COIL-CHOKE:-,6100uH,J,40,34mA,TP,EL0607R | |
| .. | PCB | AA41-00199C | PCB-H/V MODULE:P53A,CEM-1,1L,C,1.6T,330x | S.N.A |
| .. | Q371 | AA96-50291A | ASSY-H/S:-,AA62-30154B,2SC4636,- | |
| ... | 0205-000129 | GREASE-SILICON:SC102,JAPAN | S.N.A | |
| ... | 0502-000442 | TR-POWER:2SC4636RB,NPN,2W,TO-220,ST,10- | | |
| ... | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A | |
| ... | AA62-30154B | HEAT SINK-ES:-,A6063,EXTR,-,SILVER ANO | S.N.A | |
| .. | Q422 | 0505-000156 | FET-SILICON:IRF620,N,200V,5A,0.8ohm,50W, | S.N.A |
| .. | R425 | 2003-000736 | R-METAL OXIDE(S):560ohm,5%,3W,AA,TP6x16 | |
| .. | R485 | 2008-001096 | R-FUSIBLE(S):3.30Hm,5%,1/2W,AC,BK,2.5X6. | |
| .. | AA99-20071J | ASSY-PCB SUB,AUTO: AA95-00056C ,V | S.N.A | |
| ... | C341 | 2401-001914 | C-AL:1uF,20%,50V,BPTP5x11.5 | |
| ... | C342 | 2401-000962 | C-AL:22uF,20%,50V,GPTP,5x11.5 | |
| ... | C351 | 2301-000175 | C-FILM,PEF:15nF,5%,50V,TP,1.3x1.5x13mm,5 | |
| ... | C352 | 2401-000480 | C-AL:10uF,20%,50V,GPTP,5x11.5 | |
| ... | C353 | 2301-000204 | C-FILM,PEF:2.7nF,5%,50V,TP,4x3.9x13mm, | |
| ... | C354 | 2301-000261 | C-FILM,PEF:4.7nF,5%,100V,TP,10.5x12.5x6. | |
| ... | C355 | 2401-000480 | C-AL:10uF,20%,50V,GPTP,5x11.5 | |
| ... | C356 | 2201-000180 | C-CERAMIC,DISC:10nF,10%,50V,Y5P,TP7x3.5 | |
| ... | C357 | 2401-001989 | C-AL:4.7uF,20%,50V,BPTP5x11.5 | |
| ... | C358 | 2401-000471 | C-AL:10uF,20%,50V,BPTP,5x11.5mm | |
| ... | C360 | 2305-000289 | C-FILM,MPEF:220nF,5%,63V,TP,-,5mm | |
| ... | C361 | 2306-000122 | C-FILM,MPEF:100nF,5%,50V,TP,7.3x4.0x5.0m | |
| ... | C362 | 2305-000149 | C-FILM,MPEF:100nF,5%,100V,TP,12x12.5x6.5 | |
| ... | C371 | 2401-000302 | C-AL:100uF,20%,25V,GPTP6.3x11.5 | |
| ... | C372 | 2401-000480 | C-AL:10uF,20%,50V,GPTP,5x11.5 | |
| ... | C373 | 2401-000302 | C-AL:100uF,20%,25V,GPTP6.3x11.5 | |
| ... | C374 | 2401-001621 | C-AL:6.8uF,20%,450V,GPTP,13x20,5 | |
| ... | C405 | 2201-000558 | C-CERAMIC,DISC:0.47nF,10%,50V,Y5P,TP5x3 | |
| ... | C406 | 2201-000370 | C-CERAMIC,DISC:0.22nF,10%,50V,Y5P,TP4x3 | |
| ... | C421 | 2401-000302 | C-AL:100uF,20%,25V,GPTP6.3x11.5 | |
| ... | C429 | 2305-000704 | C-FILM,MPEF:100nF,5%,250V,TP,16.5x10.3x5 | |
| ... | C454 | 2303-000331 | C-FILM,PPF:4.7nF,5%,630V,TP,19.5x12x7.7. | |
| ... | C455 | 2401-001527 | C-AL:47uF,20%,250V,HR,TP,13x25mm,5m | |
| ... | C456 | 2201-000132 | C-CERAMIC,DISC:0.1nF,10%,500V,Y5P,TP6.5 | |
| ... | C461 | 2201-000600 | C-CERAMIC,DISC:0.56nF,10%,50V,Y5P,TP5x3 | |
| ... | C462 | 2301-000246 | C-FILM,PEF:33nF,5%,100V,TP,7x5.0x9.5mm,5 | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|
| ... | C480 | 2306-000122 | C-FILM,MPPF;100nF,5%,50V,TP,7.3x4.0x5.0m | |
| ... | C481 | 2401-000914 | C-AL:22uF,20%,16V,GP,TP,5x11,5 | |
| ... | C482 | 2305-000178 | C-FILM,MPEF;10nF,5%,100V,TP,-5mm | |
| ... | C484 | 2401-001026 | C-AL:3.3UF,20%,50V,GP,TP,5x11,5 | |
| ... | C485 | 2201-000146 | C-CERAMIC,DISC:0.1nF,5%,50V,SL,TP,5x3.5, | |
| ... | C486 | 2201-000146 | C-CERAMIC,DISC:0.1nF,5%,50V,SL,TP,5x3.5, | |
| ... | C487 | 2401-001026 | C-AL:3.3UF,20%,50V,GP,TP,5x11,5 | |
| ... | C488 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP,5x11,5 | |
| ... | C489 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP,6.3x11,5 | |
| ... | C490 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | |
| ... | C492 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP,5x11,5 | |
| ... | C493 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | |
| ... | C494 | 2201-000471 | C-CERAMIC,DISC:0.33nF,10%,50V,Y5P,TP,4x3 | |
| ... | C495 | 2301-000192 | C-FILM,PEF;1nF,5%,50V,TP,5.3x10mm,5mm | |
| ... | C496 | 2401-000832 | C-AL:220uF,20%,25V,GP,TP,8x11,5,5 | |
| ... | D342 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D343 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D344 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D345 | 0403-001325 | DIODE-ZENER:MTZJ15C,14.35-15.09V,500mW,D | |
| ... | D352 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D353 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D355 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| ... | D363 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D364 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D371 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D372 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D373 | 0402-000243 | DIODE-RECTIFIER:RC2-V1,2000V,0.2A,DO-201 | |
| ... | D384 | 0402-000132 | DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP | |
| ... | D385 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D386 | 0403-001316 | DIODE-ZENER:MTZJ3.0A,2.85-3.07V,500mW,DO | |
| ... | D395 | 0403-001319 | DIODE-ZENER:MTZJ4.7C,4.68-4.93V,500mW,DO | |
| ... | D442 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D443 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D451 | 0402-000534 | DIODE-RECTIFIER:RG10V,400V,1.2A,DO-201,T | |
| ... | D456 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D457 | 0403-000714 | DIODE-ZENER:MTZJ3.3B,3.3V,3.32-3.53V,500 | |
| ... | D474 | 0403-000734 | DIODE-ZENER:TZP15B,15V,14.7-16.5V,1W,DO | |
| ... | D475 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D476 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D477 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D478 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D479 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D480 | 0402-000132 | DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP | |
| ... | D483 | 0403-000720 | DIODE-ZENER:MTZJ9.1B,9.1V,8.57-9.01V,500 | |
| ... | D484 | 0402-000132 | DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP | |
| ... | D491 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | D492 | 0403-000716 | DIODE-ZENER:MTZJ4.7B,4.7V,4.55-4.8V,500m | |
| ... | D493 | 0403-001325 | DIODE-ZENER:MTZJ15C,14.35-15.09V,500mW,D | |
| ... | IC481 | 1203-001217 | IC-POS,ADJUST REG.;431,TO-92,3P4,58MIL | |
| ... | L341 | 2701-000116 | INDUCTOR-AXIAL:10uH,10%,4.2x9.8mm | |
| ... | Q342 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | Q343 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | Q344 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | |
| ... | Q350 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | Q351 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | |
| ... | Q352 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | Q353 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | Q354 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | |
| ... | Q355 | 0501-000366 | TR-SMALL SIGNAL:KSC2330-Y,NPN,1W,TO-92L, | |
| ... | Q381 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | Q382 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | Q401 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | Q402 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | Q421 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | Q451 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | Q452 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | Q453 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | Q454 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | |
| ... | Q461 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | Q471 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | Q473 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | Q481 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | Q482 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | |
| ... | Q483 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | |
| ... | Q491 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ... | R339 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R340 | 2001-000241 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|
| ... | R341 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R342 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R343 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R344 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R345 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP,2.4X6.4M | |
| ... | R345A | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R346 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R347 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP,2.4X6.4M | |
| ... | R348 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R349 | 2001-000252 | R-CARBON:1.6KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R351 | 2001-001178 | R-CARBON(S):680OHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | R352 | 2001-000003 | R-CARBON:330ohm,5%,1/8W,AA,TP,1.8x3.2mm | |
| ... | R353 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R354 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R355 | 2001-000006 | R-CARBON:2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R357 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R358 | 2001-000008 | R-CARBON:15KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R359 | 2001-000766 | R-CARBON:43KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R360 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R361 | 2001-001191 | R-CARBON(S):820KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | R362 | 2001-000660 | R-CARBON:33KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R363 | 2001-000723 | R-CARBON:4.3KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R364 | 2001-000938 | R-CARBON:680OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R365 | 2001-001120 | R-CARBON(S):3.30KOHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | R366 | 2001-000109 | R-CARBON(S):470OHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | R367 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | R368 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | R369 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | R369A | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | R370 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | R371 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | R372 | 2001-001110 | R-CARBON(S):240KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | R373 | 2001-001110 | R-CARBON(S):240KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | R374 | 2001-001110 | R-CARBON(S):240KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | R375 | 2001-001113 | R-CARBON(S):270KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | R376 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R377 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP,2.5x6.5 | |
| ... | R378 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP,2.5x6.5 | |
| ... | R379 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP,2.5x6.5 | |
| ... | R380 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP,2.5x6.5 | |
| ... | R381 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP,2.4X6.4M | |
| ... | R384 | 2001-001150 | R-CARBON(S):470KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | R385 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R386 | 2001-000786 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R387 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R388 | 2001-000522 | R-CARBON:22KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R389 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R395 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R397 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R411 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R412 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP,2.4X6.4M | |
| ... | R413 | 2001-000515 | R-CARBON:220OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R414 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R415 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R416 | 2001-000006 | R-CARBON:2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R420 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R421 | 2003-002159 | R-METAL OXIDE:1500OHM,5%,1W,AG,TP,4.3X12MM | |
| ... | R422 | 2001-000028 | R-CARBON(S):100OHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | R423 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R437 | 2008-001087 | R-FUSIBLE(S):1.8ohm,5%,2W,AG,TP,3.9x12mm | |
| ... | R438 | 2001-000085 | R-CARBON(S):100KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | R439 | 2001-000085 | R-CARBON(S):100KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | R442 | 2008-000254 | R-FUSIBLE(S):0.68ohm,5%,2W,AF,TP,3.9x10m | |
| ... | R442A | 2008-000254 | R-FUSIBLE(S):0.68ohm,5%,2W,AF,TP,3.9x10m | |
| ... | R443 | 2003-002156 | R-METAL OXIDE:560OHM,5%,2W,AG,TP,6X16MM | |
| ... | R443A | 2003-002156 | R-METAL OXIDE:560OHM,5%,2W,AG,TP,6X16MM | |
| ... | R445 | 2001-000258 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R446 | 2001-000522 | R-CARBON:22KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R447 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R448 | 2001-000411 | R-CARBON:18KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R449 | 2001-000660 | R-CARBON:33KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R450 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R451 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R452 | 2001-000241 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R454 | 2001-000761 | R-CARBON:4300HM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R455 | 2001-000761 | R-CARBON:4300HM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R456 | 2001-000761 | R-CARBON:4300HM,5%,1/8W,AA,TP,1.8X3.2MM | |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|---------------------------|----------|-------------|--|--------|-------|----------|-------------|--|--------|
| ... | R458 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ117 | 2201-000327 | C-CERAMIC,DISC:2.2nf,10%,50V,Y5V,TP6.5x | |
| ... | R459 | 2001-001192 | R-CARBON(S):820OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | CZ118 | 2201-000327 | C-CERAMIC,DISC:2.2nf,10%,50V,Y5V,TP6.5x | |
| ... | R460 | 2003-002044 | R-METAL OXIDE(S):100ohm,5%,1W,AF,TP2.5x | | ... | CZ119 | 2201-000119 | C-CERAMIC,DISC:100nf,+80-20%,50V,Y5V,TP | |
| ... | R461 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ120 | 2201-000119 | C-CERAMIC,DISC:100nf,+80-20%,50V,Y5V,TP | |
| ... | R464 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ121 | 2201-000764 | C-CERAMIC,DISC:0.082nf,5%,50V,NPO,TP8x3 | |
| ... | R471 | 2001-001146 | R-CARBON(S):4.7OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | CZ126 | 2201-000499 | C-CERAMIC,DISC:0.39nf,5%,50V,SL,TP8.5x3 | |
| ... | R472 | 2001-000800 | R-CARBON:5.1KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ127 | 2201-000499 | C-CERAMIC,DISC:0.39nf,5%,50V,SL,TP8.5x3 | |
| ... | R473 | 2001-000800 | R-CARBON:5.1KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ128 | 2201-000499 | C-CERAMIC,DISC:0.39nf,5%,50V,SL,TP8.5x3 | |
| ... | R474 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ132 | 2201-000976 | C-CERAMIC,DISC:0.022nf,5%,50V,NPO,TP5x3 | |
| ... | R474A | 2001-000508 | R-CARBON:220KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ133 | 2201-000863 | C-CERAMIC,DISC:0.68nf,10%,50V,Y5P,TP5x3 | |
| ... | R475 | 2004-001023 | R-METAL:5.6Kohm,1%,1/8W,AA,TP1.8x3.2m | | ... | CZ134 | 2201-000976 | C-CERAMIC,DISC:0.022nf,5%,50V,NPO,TP5x3 | |
| ... | R475B | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ135 | 2201-000863 | C-CERAMIC,DISC:0.68nf,10%,50V,Y5P,TP5x3 | |
| ... | R477 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ136 | 2201-000976 | C-CERAMIC,DISC:0.022nf,5%,50V,NPO,TP5x3 | |
| ... | R479 | 2001-000005 | R-CARBON:390ohm,5%,1/8W,AA,TP1.8x3.2mm | | ... | CZ137 | 2201-000863 | C-CERAMIC,DISC:0.68nf,10%,50V,Y5P,TP5x3 | |
| ... | R480 | 2001-000449 | R-CARBON:2.2KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ138 | 2201-000327 | C-CERAMIC,DISC:2.2nf,10%,50V,Y5V,TP6.5x | |
| ... | R481 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ139 | 2201-000327 | C-CERAMIC,DISC:2.2nf,10%,50V,Y5V,TP6.5x | |
| ... | R482 | 2001-001031 | R-CARBON:91KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ144 | 2401-001840 | C-AL:100uf,20%,16V,GTP6.3x11.5 | |
| ... | R483 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ145 | 2201-000119 | C-CERAMIC,DISC:100nf,+80-20%,50V,Y5V,TP | |
| ... | R484 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ146 | 2401-001840 | C-AL:100uf,20%,16V,GTP6.3x11.5 | |
| ... | R487 | 2001-000924 | R-CARBON:680OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ147 | 2201-000119 | C-CERAMIC,DISC:100nf,+80-20%,50V,Y5V,TP | |
| ... | R489 | 2001-000522 | R-CARBON:22KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ151 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP3 | |
| ... | R490 | 2001-000723 | R-CARBON:4.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ152 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP3 | |
| ... | R491 | 2001-001178 | R-CARBON(S):680OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | CZ153 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP3 | |
| ... | R492 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ154 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP3 | |
| ... | R493 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ155 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP3 | |
| ... | R494 | 2001-000066 | R-CARBON(S):10KOHM,5%,1/2W,AA,TP2.4X6.4 | | ... | CZ156 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP3 | |
| ... | R495 | 2001-000037 | R-CARBON(S):330OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | D453 | 0402-001286 | DIODE-RECTIFIER:RPH,2000V,1A,-,TP | |
| ... | R496 | 2001-000347 | R-CARBON:13KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | D501 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | R497 | 2001-000003 | R-CARBON:330ohm,5%,1/8W,AA,TP1.8x3.2mm | | ... | DZ120 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 | |
| ... | R498 | 2001-001070 | R-CARBON:1.2MOHM,5%,1/2W,AA,TP2.4X6.4 | | ... | DZ121 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 | |
| ... | | 2001-000262 | R-CARBON(S):8MOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | DZ122 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 | |
| .. | | 0202-000187 | SOLDER-WIRE FLUX:-RS60S,D1.2.63Sn/37Pb | S.N.A | ... | DZ126 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| .. | | AA65-30105C | CLAMP-WIRE ALL MODEL,NYLON 66,V2,NTR,5MM | S.N.A | ... | DZ127 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| ASSY-PCB, CONV AMP | | | | | | | | | |
| 1 | * | AA95-00055L | ASSY-PCB, CONV AMP-; SP53J5HF, J51A, --; | | ... | DZ128 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 | |
| .. | C491 | 2306-000322 | C-FILM,MPPF:12nf,5%,1.6KV,TP29x20.5x13, | | ... | DZ129 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 | |
| .. | CN203 | AA39-00115A | LEAD CONNECTOR-ASSY;-;10P;-;YBNH2 | | ... | DZ130 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 | |
| .. | CN401 | AA39-00128A | LEAD CONNECTOR-ASSY;-;8P;-;YBNH25 | | ... | DZ131 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 | |
| .. | CN402 | AA39-00116A | LEAD CONNECTOR-ASSY;-;12P;-;YBNH2 | | ... | LZ101 | 2701-001030 | INDUCTOR-AXIAL:43uH,10%,5x14mm | |
| .. | CN802 | AA39-00128A | LEAD CONNECTOR-ASSY;-;8P;-;YBNH25 | | ... | LZ102 | 2701-001030 | INDUCTOR-AXIAL:43uH,10%,5x14mm | |
| ⚠ | ICZ101 | AA96-50152C | ASSY-H/S;-;TR,AA62-30012A,KA7806A,30MM | | ... | LZ103 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ... | | 1203-000284 | IC-POSIFIXED REG.:7806,TO-220,3P,-,PLAS | | ... | LZ104 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ... | | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A | ... | LZ107 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ... | | AA62-30012A | HEAT SINK-ES;-A6063 EXTR;-;T0220,-; | S.N.A | ... | LZ108 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ⚠ | ICZ102 | 1203-000121 | IC-NEGA.FIXED REG.:7906,TO-220,3P,-,PLAS | | ... | LZ109 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ⚠ | ICZ103 | AA96-00034A | ASSY-H/S;-;CONVERGENCE,AA62-30173D,STK3 | | ... | LZ110 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ... | | 0205-000129 | GREASE-SILICON:SC102,JAPAN | S.N.A | ... | LZ111 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ... | | 1201-001225 | IC-VIDEO AMP:392,SIP,22P,-,THREE,-,PLAST | | ... | LZ112 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ... | | 6003-001021 | SCREW-TAPTITE:RH,+B,M3,L15,ZPC(YEL),SWR | S.N.A | ... | R382 | 2002-001006 | R-COMPOSITION:4.7kohm,5%,1/2W,AA,TP3.7x | |
| ... | | AA62-30173D | HEAT SINK-ES;-;T1.0,WHITE,SCREW-HOLE(2 | S.N.A | ... | R476 | 2004-004046 | R-METAL(S):430Kohm,1%,1/2W,AA,TP2.5x6.5 | |
| ⚠ | ICZ104 | AA96-00034A | ASSY-H/S;-;CONVERGENCE,AA62-30173D,STK3 | | ... | R476A | 2004-004001 | R-METAL(S):180Kohm,1%,1/2W,AA,TP2.5x6.5 | |
| .. | PCB | AA41-00135D | PCB-CONVERGENCE AMP:P51A,1L,CEM-1,330x24 | S.N.A | ... | R476B | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP2.5x6.5 | |
| .. | SG303 | 4715-001050 | SURGE ABSORBER:2.4KV,20%,1500A,-,DISC-RA | | ... | R476C | 2004-004046 | R-METAL(S):430Kohm,1%,1/2W,AA,TP2.5x6.5 | |
| .. | VR472 | 2103-001086 | VR-SEMI:100KOHM,25%,0.3W,TOP | | ... | R478 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP2.5x6.5 | |
| .. | | 0202-000187 | SOLDER-WIRE FLUX:-RS60S,D1.2.63Sn/37Pb | S.N.A | ... | R501 | 2004-001376 | R-METAL(S):11Kohm,1%,1/2W,AA,TP2.4x6.4 | |
| .. | | AA99-20071E | ASSY-PCB SUB,AUTO; AA95-00055L /V | S.N.A | ... | R502 | 2004-004366 | R-METAL(S):1.3Kohm,1%,1/2W,AA,TP2.5x6.5 | |
| ... | CN403 | 3711-002643 | CONNECTOR-HEADER:BOX,4P,1R,2.5MM,STRAIGH | | ... | RFZ19 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP3.9x10mm | |
| ... | CZ101 | 2401-001429 | C-AL:470uf,20%,50V,GTP,13x20.5 | | ... | RFZ20 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP3.9x10mm | |
| ... | CZ102 | 2401-001429 | C-AL:470uf,20%,50V,GTP,TP13x20.5 | | ... | RFZ21 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP3.9x10mm | |
| ... | CZ103 | 2401-000689 | C-AL:2200uf,20%,16V,GTP,TP13x25.5 | | ... | RFZ22 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP3.9x10mm | |
| ... | CZ105 | 2401-000689 | C-AL:2200uf,20%,16V,GTP,TP13x25.5 | | ... | RFZ50 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP3.9x10mm | |
| ... | CZ106 | 2201-000180 | C-CERAMIC,DISC:10nf,10%,50V,Y5V,TP7x3.5 | | ... | RFZ51 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP3.9x10mm | |
| ... | CZ107 | 2201-000180 | C-CERAMIC,DISC:10nf,10%,50V,Y5V,TP7x3.5 | | ... | RFZ52 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP3.9x10mm | |
| ... | CZ108 | 2201-000499 | C-CERAMIC,DISC:0.39nf,5%,50V,SL,TP8.5x3 | | ... | RFZ53 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP3.9x10mm | |
| ... | CZ109 | 2201-000499 | C-CERAMIC,DISC:0.39nf,5%,50V,SL,TP8.5x3 | | ... | RZ101 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | CZ110 | 2201-000499 | C-CERAMIC,DISC:0.39nf,5%,50V,SL,TP8.5x3 | | ... | RZ102 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | CZ111 | 2201-000976 | C-CERAMIC,DISC:0.022nf,5%,50V,NPO,TP5x3 | | ... | RZ103 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | CZ112 | 2201-000863 | C-CERAMIC,DISC:0.68nf,10%,50V,Y5P,TP5x3 | | ... | RZ104 | 2001-001114 | R-CARBON(S):270OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | CZ113 | 2201-000976 | C-CERAMIC,DISC:0.022nf,5%,50V,NPO,TP5x3 | | ... | RZ105 | 2001-001114 | R-CARBON(S):270OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | CZ114 | 2201-000863 | C-CERAMIC,DISC:0.68nf,10%,50V,Y5P,TP5x3 | | ... | RZ106 | 2001-001114 | R-CARBON(S):270OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | CZ115 | 2201-000976 | C-CERAMIC,DISC:0.022nf,5%,50V,NPO,TP5x3 | | ... | RZ107 | 2001-001114 | R-CARBON(S):270OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | CZ116 | 2201-000863 | C-CERAMIC,DISC:0.68nf,10%,50V,Y5P,TP5x3 | | ... | RZ108 | 2001-001114 | R-CARBON(S):270OHM,5%,1/2W,AA,TP2.4X6.4 | |
| | | | | | ... | RZ109 | 2001-001114 | R-CARBON(S):270OHM,5%,1/2W,AA,TP2.4X6.4 | |
| | | | | | ... | RZ110 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| | | | | | ... | RZ111 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| | | | | | ... | RZ112 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| | | | | | ... | RZ113 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2MM | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|---|--------|
| ... | RZ114 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | RZ115 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | RZ116 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | RZ117 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | RZ118 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | RZ120 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | RZ121 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | RZ122 | 2001-000003 | R-CARBON:330ohm,5%,1/8W,AA,TP1.8x3.2mm | |
| ... | RZ123 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | RZ124 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | RZ125 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | RZ126 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | RZ127 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | RZ128 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | RZ129 | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | |
| ... | RZ129A | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | |
| ... | RZ130 | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | |
| ... | RZ130A | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | |
| ... | RZ131 | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | |
| ... | RZ131A | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | |
| ... | RZ132 | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | |
| ... | RZ132A | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | |
| ... | RZ133 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | RZ134 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | RZ135 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | RZ136 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | RZ137 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | RZ138 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | RZ139 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | RZ140 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | RZ141 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | RZ142 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | RZ143 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | RZ144 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | RZ145 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | RZ146 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | RZ147 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | RZ148 | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | |
| ... | RZ148A | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | |
| ... | RZ149 | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | |
| ... | RZ149A | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | |

ASSY-DOOR,BODY

| | | | | |
|-----|--------|-------------|--|-------|
| 1 | * | AA95-00575A | ASSY-DOOR,BODY:-,SP53J5HFH/MVT,J51A,-,-, | |
| ..2 | AV+DB | 6006-001095 | SCREW-ASSY TAPT:WPBH,+M4,L12,ZPC(YEL) | S.N.A |
| ..2 | CP+DB | 6002-000512 | SCREW-TAPPING:RH,+2,M4,L12,ZPC(BLK),SWR | S.N.A |
| ..2 | PC+BM | 6003-001023 | SCREW-TAPTITE:RWH,+B,M3,L10,ZPC(YEL),SW | S.N.A |
| ..2 | | AA91-00157P | ASSY-DOOR,BODY:-,HB,J51A PAL,SP43J5HF | |
| ..3 | KC+DB | 6002-000512 | SCREW-TAPPING:RH,+2,M4,L12,ZPC(BLK),SWR | S.N.A |
| ..3 | KNOPOW | AA61-60005A | SPRING-CS:-,SUS304,0.6,ODT0.7,H10,N4,-,- | |
| ..3 | WR+DB | 6002-000512 | SCREW-TAPPING:RH,+2,M4,L12,ZPC(BLK),SWR | S.N.A |
| ..3 | | AA64-00290B | WINDOW-REMOCON:-,PCJ533R,SV-704PPC,-,VI | S.N.A |
| ..3 | | AA64-00294B | DOOR-CONTROL:-,PCJ533R,GR-806PABS,HB,GR | |
| ..3 | | AA64-00295H | DOOR-BODY:-,53J5HF,GR-806P P51A PAL,HIPS | |
| ..3 | | AA64-00289B | INDICATOR-LED:-,PCJ533R,-,ACRYL,-,CLR,- | S.N.A |
| ..3 | | AA64-00288C | KNOB-POWER:-,43J5,GR806P MASTER,ABS,HB,G | S.N.A |
| ..3 | | AA64-00287B | KNOB-CHA,VOL:-,PCJ533R,S/METALLIC+UV COA | S.N.A |
| ..3 | | AA64-00286B | KNOB-CONTROL:-,PCJ533R,GR-806PABS,HB,GR | S.N.A |
| ..3 | | AA61-30001A | LATCH-DOOR:-,KIFUCO LA701,- | S.N.A |
| ..2 | | AA95-00262B | ASSY-PCB,CONTROL:-,SP43J5HP3S/XTT,CHINA, | |
| ..3 | CNW01 | AA39-00120C | LEAD CONNECTOR-ASSY:-,11P,-,-,35155 | |
| ..3 | CNY01 | 3711-003973 | CONNECTOR-HEADER:BOX,11P,1R,2.5mm,STRAIG | |
| ..3 | LEDY01 | 0601-001381 | LED ROUND,RED/GRN,5.0MM,650/563NM | |
| ..3 | PCB | AA41-00189A | PCB-CONTROL:J51A,1LFR-1.330x245x1.6T,4A | S.N.A |
| ..3 | RMVY01 | AA59-60002B | MODULE-REMOCON:-,ORC-50HF,38KHZ,940MM,ME | |
| ..3 | SWY03 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | |
| ..3 | SWY04 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | |
| ..3 | SWY05 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | |
| ..3 | SWY06 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | |
| ..3 | SWY07 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | |
| ..3 | SWY08 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | |
| ..3 | | AA61-20069A | HOLDER-WIRE:-,NYLON-66,VO,NTR,PAWH-5NA | S.N.A |
| ..3 | | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2.63Sn/37Pb | S.N.A |

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|
| ... | | 3301-001201 | CORE-FERRITE:AE,230,5x10.25x36mm,1500,28 | |
| ... | | AA63-10002B | BAND-TIE:-,NYLON66 V2,-,-,L140,NTR,-,- | S.N.A |
| ... | | AA99-20061Y | ASSY-PCB SUB,AUTO: AA95-00262B /V | S.N.A |
| ... | ... | 2401-001496 | C-AL:47uf,20%,16V,GTP5x7,5 | |
| ... | ... | 0504-000123 | TR-DIGITAL:KSR1010,NPN,300mW,10K,TO-92,T | |
| ... | ... | 0504-000123 | TR-DIGITAL:KSR1010,NPN,300mW,10K,TO-92,T | |
| ... | ... | 2001-000109 | R-CARBON(S):470OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | ... | 2001-000924 | R-CARBON:680OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | ... | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | ... | 2001-000449 | R-CARBON:2.2KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | ... | 2001-000924 | R-CARBON:680OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | ... | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | ... | 2001-000020 | R-CARBON(S):220OHM,5%,1/2W,AA,TP2.4X6.4M | |
| ... | ... | 2001-001108 | R-CARBON(S):22KOHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | ... | 2001-000109 | R-CARBON(S):470OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ..2 | | AA95-00098D | ASSY-PCB,POWER S/W:-,SP43J5HP3S/XTT,J51A | |
| ..3 | CNP01 | AA39-20176G | LEAD CONNECTOR-ASSY:-,3(2)P,-,-,YFH | |
| ..3 | CNP02 | AA39-20176G | LEAD CONNECTOR-ASSY:-,3(2)P,-,-,YFH | |
| ..3 | PCB | AA41-00035A | PCB-POWER S/W:J51A,1LCEM-1.245x245x1.6T | S.N.A |
| ..3 | SWP01 | 3403-000179 | SWITCH-PUSH:250V,5A,DPOST,-,JPW-2104B | |
| ..3 | | AA63-10002B | BAND-TIE:-,NYLON66 V2,-,-,L140,NTR,-,- | S.N.A |
| ..3 | | AA99-20067C | ASSY-PCB SUB,AUTO: AA95-00098D /V | S.N.A |
| ..3 | | AA61-00110B | BRACKET-MASTER:-,PCJ533R,SECC-1,T1.0,NTR | S.N.A |
| ..3 | | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2.63Sn/37Pb | S.N.A |
| ..3 | | 6003-00033A | SCREW-TAPTITE:RH,+2S,M3,L6,ZPC(YEL),SWR | S.N.A |
| ..2 | | AA95-00046D | ASSY-AV SIDE:-,SP43J5HP3S/XTT,J51A,-,-, | |
| ..3 | CNW02 | AA39-20032J | LEAD CONNECTOR-ASSY:-,67096-12,S,12P,130 | |
| ..3 | CNY02 | 3711-003641 | CONNECTOR-HEADER:BOX,12P,1R,2.5mm,STRAIG | |
| ..3 | JK101 | 3722-001163 | JACK-VHS:4P,12mm,AU,BLK,N | |
| ..3 | JK102 | 3722-001031 | JACK-RCA:3P,6MM,#8,AU | |
| ..3 | PCB | AA41-10969B | PCB-A/V SIDE:KPT51A/52A,1LFR-1,245X245X | S.N.A |
| ..3 | | AA63-10002A | BAND-TIE:-,NYLON66 V2,-,-,L100,NTR,-,- | S.N.A |
| ..3 | | AA98-60004J | ASSY-SUB,PART:APT51A,A/V,-,ALL | S.N.A |
| ..3 | | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2.63Sn/37Pb | S.N.A |
| ..3 | | AA99-20066X | ASSY-PCB SUB,AUTO: AA95-00046D /V | S.N.A |
| ..4 | CP01 | 2202-000263 | C-CERAMIC,MLC-AXIAL:470pF,10%,50V,Y5P,TP | |
| ..4 | CP02 | 2202-000263 | C-CERAMIC,MLC-AXIAL:470pF,10%,50V,Y5P,TP | |
| ..4 | CP03 | 2202-000263 | C-CERAMIC,MLC-AXIAL:470pF,10%,50V,Y5P,TP | |
| ..4 | CP04 | 2401-000302 | C-AL:100uf,20%,25V,GTP6.3x11,5 | |
| ..4 | CP05 | 2401-000302 | C-AL:100uf,20%,25V,GTP6.3x11,5 | |
| ..4 | CP06 | 2401-000302 | C-AL:100uf,20%,25V,GTP6.3x11,5 | |
| ..4 | CP07 | 2401-000302 | C-AL:100uf,20%,25V,GTP6.3x11,5 | |
| ..4 | CP08 | 2401-000302 | C-AL:100uf,20%,25V,GTP6.3x11,5 | |
| ..4 | CP09 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP | |
| ..4 | CP10 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP | |
| ..4 | RP01 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ..4 | RP02 | 2001-000969 | R-CARBON:75OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ..4 | RP03 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ..4 | RP04 | 2001-000969 | R-CARBON:75OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ..4 | RP05 | 2001-000969 | R-CARBON:75OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ..3 | | 3301-001201 | CORE-FERRITE:AE,230,5x10.25x36mm,1500,28 | |

ASSY-PCB,SUB

| | | | | |
|-----|------|-------------|--|--|
| 1 | * | AA95-00425B | ASSY-PCB,SUB:-,SP53J5HF,J51A,PAL,-,-, | |
| ..2 | C430 | 2301-001219 | C-FILM,MPE-PPF:3.9nf,5%,1.6KV,TP29x8.5x | |
| ..2 | C431 | 2306-000326 | C-FILM,MPPF:4.7nf,5%,1.6KV,TP28.5x16x9m | |
| ..2 | C432 | 2306-000267 | C-FILM,MPPF:8.2nf,5%,1.6KV,TP28.5x18.5x | |
| ..2 | C436 | 2306-000235 | C-FILM,MPPF:560nf,5%,400V,TP26*22.5*14, | |
| ..2 | C438 | 2306-000267 | C-FILM,MPPF:8.2nf,5%,1.6KV,TP28.5x18.5x | |
| ..2 | C471 | 2301-001091 | C-FILM,MPPF:470nf,5%,400V,TP26x21.5x14, | |
| ..2 | C473 | 2306-000322 | C-FILM,MPPF:12nf,5%,1.6KV,TP29x20.5x13, | |
| ..2 | C474 | 2306-000326 | C-FILM,MPPF:4.7nf,5%,1.6KV,TP28.5x16x9m | |
| ..2 | C477 | 2301-000213 | C-FILM,PEF:220nf,5%,250V,TP21.5x11,7,5 | |
| ..2 | C801 | 2306-000321 | C-FILM,MPPF:470NF,5%,275V,TP:-,22,5 | |
| ..2 | C802 | 2306-000321 | C-FILM,MPPF:470NF,5%,275V,TP:-,22,5 | |
| ..2 | C812 | 2401-003465 | C-AL:680UF,20%,450V,GPBK,35X60MM,2 | |
| ..2 | C831 | 2306-000323 | C-FILM,MPPF:2.2nf,5%,1.6KV,TP28.5x15.5x | |
| ..2 | C862 | 2401-002225 | C-AL:3300uf,20%,50V,VT,TK,22x41,7,5 | |
| ..2 | C865 | 2401-000737 | C-AL:2200uf,20%,50V,GP,TP18x35,5,7 | |
| ..2 | C868 | 2401-000737 | C-AL:2200uf,20%,50V,GP,TP18x35,5,7 | |
| ..2 | C875 | 2401-002251 | C-AL:470uf,20%,200V,GPBK,25x40mm,1 | |
| ..2 | C876 | 2401-000787 | C-AL:220uf,20%,160V,GP,TP16x31.5mm | |
| ..2 | C891 | 2201-000987 | C-CERAMIC,DISC:2.2nf,20%,400V,Y5U,TP,12. | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|-------------|--|--------|
| ... | C102 | 2404-000275 | C-TA,CHIP:100UF,10%,10V,GPTP;7343 | | ... | C205 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP;2012 | |
| ... | C103 | 2404-000256 | C-TA,CHIP:47UF,20%,16V,GPTP;7343 | | ... | C206 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP;2012 | |
| ... | C104 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | D101 | 0401-000160 | DIODE-SWITCHING:ISS314,30V,100mA,USC,TP | |
| ... | C105 | 2203-000858 | C-CERAMIC,CHIP:0.039nF,5%,50V,NPO,TP;201 | | ... | D102 | 0401-000160 | DIODE-SWITCHING:ISS314,30V,100mA,USC,TP | |
| ... | C106 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | DZ101 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C107 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP;2012 | | ... | DZ102 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C108 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | DZ104 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C109 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | DZ105 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C110 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP;2012,- | | ... | DZ106 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C111 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | DZ107 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C112 | 2203-000683 | C-CERAMIC,CHIP:0.027nF,5%,50V,NPO,TP;201 | | ... | DZ108 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C113 | 2203-000683 | C-CERAMIC,CHIP:0.027nF,5%,50V,NPO,TP;201 | | ... | DZ109 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C114 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | DZ110 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C115 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | DZ111 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C116 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | DZ112 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C117 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | DZ113 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C118 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | DZ114 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C119 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | DZ115 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C120 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | DZ116 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C121 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | DZ117 | 0403-001284 | DIODE-ZENER:RLZ3.3A,3.16-3.38V,500V,MV,LL- | |
| ... | C122 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | EF101 | 2901-000229 | FILTER-EMI SMD:50V0.3A,-,22000pF,4.5x3. | |
| ... | C123 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | EF102 | 2901-000229 | FILTER-EMI SMD:50V0.3A,-,22000pF,4.5x3. | |
| ... | C124 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | EF104 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
| ... | C125 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | EF105 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
| ... | C126 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | EF106 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
| ... | C127 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | EF107 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
| ... | C128 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | EF108 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
| ... | C129 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | EF109 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
| ... | C130 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | EF110 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
| ... | C131 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | EF111 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
| ... | C132 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP;2012 | | ... | EF112 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
| ... | C133 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GPTP;3216,- | | ... | EF113 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
| ... | C134 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | EF114 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
| ... | C135 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP;2012 | | ... | EF115 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
| ... | C136 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | EF116 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
| ... | C137 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP;2012 | | △ | IC101 | AA13-00071A | IC-ASIC;-SDC91,QFP208PCONV CONTROL | |
| ... | C138 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP;2012 | | △ | IC102 | 0801-001043 | IC-CMOS LOGIC:74HC4046,PHASE-LOCKED-LOOP | |
| ... | C139 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | △ | IC103 | AA09-00032A | IC-MCU:TSC87251G2D-OTP;TSC87251G2D-OT | |
| ... | C140 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GPTP;3216,- | | △ | IC104 | 1103-001167 | IC-EEPROM;28C64,8KX8BIT,TSOP;28P,-,120NS | |
| ... | C141 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP;2012 | | △ | IC105 | 1201-001520 | IC-VIDEO AMP:2210,SOP;8P;150MIL,DUAL,7dB | |
| ... | C142 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GPTP;3216,- | | △ | IC106 | 1201-001504 | IC-OP AMP;072,SOP;8P;150MIL,DUAL,-,PLAST | |
| ... | C143 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | △ | IC107 | 1201-001504 | IC-OP AMP;072,SOP;8P;150MIL,DUAL,-,PLAST | |
| ... | C144 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP;2012 | | △ | IC108 | 1201-001504 | IC-OP AMP;072,SOP;8P;150MIL,DUAL,-,PLAST | |
| ... | C145 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | △ | IC109 | 0801-001156 | IC-CMOS LOGIC:74HC4066,BILATERAL SWITCH, | |
| ... | C146 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP;2012 | | △ | IC110 | 0801-001156 | IC-CMOS LOGIC:74HC4066,BILATERAL SWITCH, | |
| ... | C147 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP;2012 | | △ | IC111 | 1001-000105 | IC-ANALOG SWITCH:CD4066BM,BILATERAL CMOS | |
| ... | C148 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GPTP;3216,- | | △ | IC112 | 1001-000105 | IC-ANALOG SWITCH:CD4066BM,BILATERAL CMOS | |
| ... | C149 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | △ | PCB | AA41-00188D | PCB-CONVERGENCE MODULE:VSP-43J4M,FR-4,4L | S.N.A |
| ... | C150 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | Q101 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
| ... | C151 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP;2012 | | ... | Q102 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| ... | C152 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GPTP;3216,- | | ... | Q103 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| ... | C153 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | Q104 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
| ... | C154 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP;2012 | | ... | Q105 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| ... | C155 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | Q106 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| ... | C156 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP;2012 | | ... | Q107 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| ... | C157 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP;2012 | | ... | Q108 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
| ... | C158 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GPTP;3216,- | | ... | Q109 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A |
| ... | C159 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | Q110 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A |
| ... | C160 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | Q111 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A |
| ... | C161 | 2404-000256 | C-TA,CHIP:47UF,20%,16V,GPTP;7343 | | ... | Q112 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A |
| ... | C162 | 2404-000256 | C-TA,CHIP:47UF,20%,16V,GPTP;7343 | | ... | Q113 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A |
| ... | C164 | 2404-001229 | C-TA,CHIP:4.7uF,20%,25V,GPTP;3528 | | ... | Q114 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A |
| ... | C165 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | R101 | 2007-000881 | R-CHIP:4.7OHM,5%,1/10W,DA,TP;2012 | |
| ... | C166 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | R102 | 2007-000881 | R-CHIP:4.7OHM,5%,1/10W,DA,TP;2012 | |
| ... | C167 | 2404-000123 | C-TA,CHIP:10uF,20%,16V,-,TP;6032,2.9mm | | ... | R103 | 2007-000881 | R-CHIP:4.7OHM,5%,1/10W,DA,TP;2012 | |
| ... | C168 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | R104 | 2007-000881 | R-CHIP:4.7OHM,5%,1/10W,DA,TP;2012 | |
| ... | C169 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | R105 | 2007-000415 | R-CHIP:15OHM,5%,1/10W,DA,TP;2012 | |
| ... | C170 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP;2012 | | ... | R106 | 2007-000947 | R-CHIP:47OHM,5%,1/10W,DA,TP;2012 | |
| ... | C171 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GPTP;3216,- | | ... | R107 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP;2012 | |
| ... | C172 | 2404-000256 | C-TA,CHIP:47UF,20%,16V,GPTP;7343 | | ... | R108 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP;2012 | |
| ... | C173 | 2404-000256 | C-TA,CHIP:47UF,20%,16V,GPTP;7343 | | ... | R109 | 2007-000493 | R-CHIP:2.2KOHM,5%,1/10W,DA,TP;2012 | |
| ... | C174 | 2404-000256 | C-TA,CHIP:47UF,20%,16V,GPTP;7343 | | ... | R110 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP;2012 | |
| ... | C201 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP;2012 | | ... | R111 | 2007-000380 | R-CHIP:13KOHM,5%,1/10W,DA,TP;2012 | |
| ... | C202 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP;2012 | | ... | R112 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP;2012 | |
| ... | C203 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP;2012 | | ... | R113 | 2007-001097 | R-CHIP:62KOHM,5%,1/10W,DA,TP;2012 | |
| ... | C204 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP;2012 | | ... | R114 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP;2012 | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|--------------------------|-------------|--|--|--------|
| ... | R116 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ASSY-PCB,TERMINAL | | | | |
| ... | R117 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | 1 | * | AA95-00219D | ASSY-PCB,TERMINAL-.SP43J5HF,J51A,-,-,1 | |
| ... | R118 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..2 | CNT01 | 3711-003630 | CONNECTOR-HEADER:BOX,32P2R,2.54mm,ANGLE | |
| ... | R119 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..2 | CNT02 | 3711-003630 | CONNECTOR-HEADER:BOX,32P2R,2.54mm,ANGLE | |
| ... | R120 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP2012 | | ..2 | CNT03 | 3711-003601 | CONNECTOR-HEADER:BOX,12P1R,2.5mm,ANGLE, | |
| ... | R121 | 2007-000023 | R-CHIP:1200HM,5%,1/10W,DA,TP2012 | | ..2 | IC703 | 0904-001121 | IC-I/O SUPPORT CHIP:8574,8BIT,DIP,16P,30 | |
| ... | R122 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | △ | IC704 | 1001-001022 | IC-ANALOG SWITCH:TDA8601,BLANKING,DIP,16 | |
| ... | R123 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP2012 | | △ | IC705 | 0801-000213 | IC-CMOS LOGIC:4052,MULTIPLEXER,DIP,16P3 | |
| ... | R124 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..2 | JKV01 | 3722-000498 | JACK-SCART:21P,-,SN,BLK,NO | |
| ... | R125 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP2012 | | ..2 | JKV02 | 3722-001039 | JACK-RCA:9P3.4mm,SN,BLK,#16-22 | |
| ... | R126 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP2012 | | ..2 | JKV03 | 3722-001382 | JACK-RCA:5P(9P),3.4MM,NI,R/W/G/BLUE,- | |
| ... | R127 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP2012 | | ..2 | JKV04 | 3722-001350 | JACK-RCA:7P/9P3.4MM,NI,BLK,- | |
| ... | R128 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | ..2 | JKV05 | 3701-001013 | CONNECTOR-DSUB:15P3R,FEMALE,STRAIGHT,AU | |
| ... | R129 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP2012 | | ..2 | JKV06 | 3701-001013 | CONNECTOR-DSUB:15P3R,FEMALE,STRAIGHT,AU | |
| ... | R130 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP2012 | | ..2 | JKV07 | 3722-000544 | JACK-VHS:4P,11.5mm,AG,BLK,N | |
| ... | R131 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP2012 | | ..2 | RN701 | 2011-000160 | R-NETWORK:10Kohm,5%,1/8VA,SIP,9P,TP | |
| ... | R132 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP2012 | | ..2 | AA65-30105A | CLAMP-WIRE:NYLON 66,V2,NTR,15MM,ALL MODE | S.N.A | |
| ... | R133 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP2012 | | ..2 | AA99-20079E | ASSY-PCB SUB,AUTO: AA95-00219D ,V | S.N.A | |
| ... | R134 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP2012 | | ..2 | C701 | 2401-002009 | C-AL:100uf,20%,16V,GPTP6.3x7,5 | |
| ... | R135 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | ..2 | C702 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP,2012 | |
| ... | R136 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | ..2 | C703 | 2401-002009 | C-AL:100uf,20%,16V,GPTP6.3x7,5 | |
| ... | R137 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP2012 | | ..3 | C704 | 2203-000818 | C-CERAMIC,CHIP:0.033nf,5%,50V,NP0,TP,201 | |
| ... | R138 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP2012 | | ..3 | C705 | 2203-000818 | C-CERAMIC,CHIP:0.033nf,5%,50V,NP0,TP,201 | |
| ... | R139 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP2012 | | ..3 | C706 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R140 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP2012 | | ..3 | C707 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R141 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP2012 | | ..3 | C708 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R142 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP2012 | | ..3 | C709 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R143 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | ..3 | C710 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R144 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | ..3 | C711 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R145 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP2012 | | ..3 | C712 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP,2012 | |
| ... | R146 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP2012 | | ..3 | C713 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R147 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP2012 | | ..3 | C714 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R148 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP2012 | | ..3 | C715 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R149 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP2012 | | ..3 | C716 | 2401-002009 | C-AL:100uf,20%,16V,GPTP6.3x7,5 | |
| ... | R150 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP2012 | | ..3 | C717 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP,2012 | |
| ... | R151 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | ..3 | C718 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R152 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP2012 | | ..3 | C719 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R153 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ..3 | C720 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R154 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP2012 | | ..3 | C721 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R155 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | | ..3 | C722 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R156 | 2007-001055 | R-CHIP:6.2KOHM,5%,1/10W,DA,TP2012 | | ..3 | C723 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP,2012 | |
| ... | R157 | 2007-000671 | R-CHIP:2KOHM,5%,1/10W,DA,TP2012 | | ..3 | C724 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R158 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C725 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP,2012 | |
| ... | R159 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | | ..3 | C726 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP,2012 | |
| ... | R160 | 2007-000766 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..3 | C727 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R161 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | ..3 | C730 | 2401-002299 | C-AL:4.7uf,20%,50V,GPTP5x7,5 | |
| ... | R162 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | ..3 | C731 | 2401-002299 | C-AL:4.7uf,20%,50V,GPTP5x7,5 | |
| ... | R163 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | ..3 | C732 | 2203-000444 | C-CERAMIC,CHIP:1nf,10%,50V,X7R,TP,2012,- | |
| ... | R164 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C733 | 2203-000444 | C-CERAMIC,CHIP:1nf,10%,50V,X7R,TP,2012,- | |
| ... | R165 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C734 | 2203-000444 | C-CERAMIC,CHIP:1nf,10%,50V,X7R,TP,2012,- | |
| ... | R166 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C735 | 2203-000444 | C-CERAMIC,CHIP:1nf,10%,50V,X7R,TP,2012,- | |
| ... | R167 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C736 | 2203-000444 | C-CERAMIC,CHIP:1nf,10%,50V,X7R,TP,2012,- | |
| ... | R168 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C737 | 2203-000444 | C-CERAMIC,CHIP:1nf,10%,50V,X7R,TP,2012,- | |
| ... | R169 | 2007-000703 | R-CHIP:3.6KOHM,5%,1/10W,DA,TP2012 | | ..3 | C740 | 2401-001840 | C-AL:100uf,20%,16V,GPTP6.3x11,5 | |
| ... | R170 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C741 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP,2012 | |
| ... | R171 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP2012 | | ..3 | C742 | 2401-001840 | C-AL:100uf,20%,16V,GPTP6.3x11,5 | |
| ... | R172 | 2007-000642 | R-CHIP:270OHM,5%,1/10W,DA,TP2012 | | ..3 | C743 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP,2012 | |
| ... | R173 | 2007-000030 | R-CHIP:560OHM,5%,1/10W,DA,TP2012 | | ..3 | C744 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |
| ... | R174 | 2007-000030 | R-CHIP:560OHM,5%,1/10W,DA,TP2012 | | ..3 | C745 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |
| ... | R175 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP2012 | | ..3 | C746 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |
| ... | R176 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ..3 | C747 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |
| ... | R177 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ..3 | C748 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |
| ... | R178 | 2007-000728 | R-CHIP:3000HM,5%,1/10W,DA,TP2012 | | ..3 | C749 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |
| ... | R179 | 2007-000728 | R-CHIP:3000HM,5%,1/10W,DA,TP2012 | | ..3 | C760 | 2401-000667 | C-AL:2.2uf,20%,50V,WT,TP5x11,5 | |
| ... | R180 | 2007-000728 | R-CHIP:3000HM,5%,1/10W,DA,TP2012 | | ..3 | C761 | 2401-000667 | C-AL:2.2uf,20%,50V,WT,TP5x11,5 | |
| ... | R181 | 2007-000728 | R-CHIP:3000HM,5%,1/10W,DA,TP2012 | | ..3 | C762 | 2401-000667 | C-AL:2.2uf,20%,50V,WT,TP5x11,5 | |
| ... | R182 | 2007-000728 | R-CHIP:3000HM,5%,1/10W,DA,TP2012 | | ..3 | C763 | 2401-000667 | C-AL:2.2uf,20%,50V,WT,TP5x11,5 | |
| ... | R183 | 2007-000728 | R-CHIP:3000HM,5%,1/10W,DA,TP2012 | | ..3 | C764 | 2401-000667 | C-AL:2.2uf,20%,50V,WT,TP5x11,5 | |
| ... | R184 | 2007-000830 | R-CHIP:39KOHM,5%,1/10W,DA,TP2012 | | ..3 | C765 | 2401-000667 | C-AL:2.2uf,20%,50V,WT,TP5x11,5 | |
| ... | R201 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP2012 | | ..3 | C766 | 2401-000667 | C-AL:2.2uf,20%,50V,WT,TP5x11,5 | |
| ... | R203 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP2012 | | ..3 | C767 | 2401-000667 | C-AL:2.2uf,20%,50V,WT,TP5x11,5 | |
| ... | R204 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP2012 | | ..3 | C768 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R205 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP2012 | | ..3 | C769 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP,2012 | |
| ... | R206 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP2012 | | ..3 | C770 | 2203-000683 | C-CERAMIC,CHIP:0.027nf,5%,50V,NP0,TP,201 | |
| ... | R207 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP2012 | | | | | | |
| ... | R208 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP2012 | | | | | | |
| ... | X101 | 2801-003860 | CRYSTAL-SMD:24MHz,30ppm,28-ABV,20pf,50oh | | | | | | |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|-------------|-----------------------------------|--------|
| ... | C771 | 2203-000683 | C-CERAMIC,CHIP:0.027nF,5%,50V,NPO,TP201 | | ... | R727 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | |
| ... | C772 | 2203-000683 | C-CERAMIC,CHIP:0.027nF,5%,50V,NPO,TP201 | | ... | R728 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | |
| ... | C773 | 2203-000239 | C-CERAMIC,CHIP:0.1nF,5%,50V,NPO,TP2012 | | ... | R729 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | |
| ... | C774 | 2203-000239 | C-CERAMIC,CHIP:0.1nF,5%,50V,NPO,TP2012 | | ... | R730 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP2012 | |
| ... | C775 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP2012,- | | ... | R731 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP2012 | |
| ... | C776 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP2012,- | | ... | R732 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP2012 | |
| ... | C777 | 2401-001496 | C-AL:47uF,20%,16V,GPTP;5x7,5 | | ... | R733 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP2012 | |
| ... | C780 | 2401-000360 | C-AL:100uF,20%,50V,GPTP;8x11,5,5 | | ... | R734 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP2012 | |
| ... | C782 | 2401-000471 | C-AL:10uF,20%,50V,BP;TP;5x11,5mm | | ... | R735 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP2012 | |
| ... | C783 | 2401-000471 | C-AL:10uF,20%,50V,BP;TP;5x11,5mm | | ... | R736 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | |
| ... | DZ701 | 0403-000314 | DIODE-ZENER:RLZJ9.1B,9.1V,8.80-9.30V,400 | | ... | R737 | 2007-000766 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | |
| ... | DZ702 | 0403-000314 | DIODE-ZENER:RLZJ9.1B,9.1V,8.80-9.30V,400 | | ... | R740 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | DZ703 | 0403-000314 | DIODE-ZENER:RLZJ9.1B,9.1V,8.80-9.30V,400 | | ... | R741 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | DZ704 | 0403-001117 | DIODE-ZENER:RLZ12B,5%,500mW,LL-34,TP | | ... | R742 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | DZ705 | 0403-000620 | DIODE-ZENER:RLZ5.6B,5.6V,5.45-5.73V,400m | | ... | R743 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ⚠ | IC701 | 1001-001030 | IC-VIDEO SWITCH:TDA6920X,-,SOP28P;300MI | | ... | R744 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ⚠ | IC702 | 1001-001030 | IC-VIDEO SWITCH:TDA6920X,-,SOP28P;300MI | | ... | R745 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | J701 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP2012 | | ... | R746 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | J702 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP2012 | | ... | R748 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | |
| ... | L701 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R749 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP2012 | |
| ... | L702 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R750 | 2007-000572 | R-CHIP:220OHM,5%,1/10W,DA,TP2012 | |
| ... | L703 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R751 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP2012 | |
| ... | L704 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R752 | 2007-000572 | R-CHIP:220OHM,5%,1/10W,DA,TP2012 | |
| ... | L705 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R753 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP2012 | |
| ... | L706 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R754 | 2007-000572 | R-CHIP:220OHM,5%,1/10W,DA,TP2012 | |
| ... | L707 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R755 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP2012 | |
| ... | L708 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R756 | 2007-000964 | R-CHIP:5.1KOHM,5%,1/10W,DA,TP2012 | |
| ... | L709 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R757 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | L710 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R758 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | |
| ... | L719 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R759 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | |
| ... | L720 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R760 | 2007-000290 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | L721 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R761 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP2012 | |
| ... | L722 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R762 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | L723 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R763 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | L724 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R764 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP2012 | |
| ... | L725 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R765 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | L726 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R766 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | PCB | AA41-00076B | PCB-AV TERMINAL:SP43J5HF;FR-4,2L,B,1,6T, | S.N.A | ... | R767 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | Q701 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R768 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | Q702 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R769 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | Q703 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R770 | 2007-000766 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | |
| ... | Q704 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R771 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | |
| ... | Q705 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R772 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | |
| ... | Q706 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R773 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | |
| ... | Q707 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R774 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | |
| ... | Q708 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R775 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | |
| ... | Q709 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R776 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | |
| ... | Q710 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R777 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | |
| ... | Q711 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R778 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | |
| ... | Q712 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R779 | 2007-001100 | R-CHIP:620HM,5%,1/10W,DA,TP2012 | |
| ... | Q713 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R780 | 2007-001100 | R-CHIP:620HM,5%,1/10W,DA,TP2012 | |
| ... | R701 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | ... | R781 | 2007-001100 | R-CHIP:620HM,5%,1/10W,DA,TP2012 | |
| ... | R702 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | | ... | R782 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | |
| ... | R703 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ... | R783 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | |
| ... | R704 | 2007-000511 | R-CHIP:2.4KOHM,5%,1/10W,DA,TP2012 | | ... | R784 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | |
| ... | R705 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | | ... | R785 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | |
| ... | R706 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | | ... | R786 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | R708 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ... | R787 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | R709 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ... | R788 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | R710 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ... | R791 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | R711 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | | ... | R792 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | R712 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ... | R793 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | R713 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ... | R794 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | R714 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ... | R795 | 2007-001155 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | |
| ... | R715 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ... | R796 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP2012 | |
| ... | R716 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | | ... | R797 | 2007-001155 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | |
| ... | R717 | 2007-000401 | R-CHIP:150OHM,5%,1/10W,DA,TP2012 | | ... | R798 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP2012 | |
| ... | R718 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | | ... | R799 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | R719 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ... | R800 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | |
| ... | R720 | 2007-000511 | R-CHIP:2.4KOHM,5%,1/10W,DA,TP2012 | | ... | R801 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | |
| ... | R721 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ... | R802 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | |
| ... | R722 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | | ... | R803 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP2012 | |
| ... | R723 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ... | R804 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP2012 | |
| ... | R724 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ... | R805 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP2012 | |
| ... | R725 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | | ... | R806 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP2012 | |
| ... | R726 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP2012 | | ... | R807 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP2012 | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|
| ... | R808 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R809 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R810 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R811 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R812 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R813 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R814 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R815 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R816 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R817 | 2007-000615 | R-CHIP:24KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R818 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R819 | 2007-000615 | R-CHIP:24KOHM,5%,1/10W,DA,TP,2012 | |
| .. | | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2,63Sn/37Pb | S.N.A |
| .. | | 0202-001004 | SOLDER-CREAM:SQ-2030M SZH-1,563A,D0.04,6 | S.N.A |

ASSY CABINET

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|---|--------|
| 1 | * | AA90-00185U | ASSY CABINET;43J5,SP43J5HFV/RAD | S.N.A |
| .. | AC+BCM | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A |
| .. | BCM+CM | 6006-001090 | SCREW-ASSY Y TAPP;WWW,HEX,+M6,L28,0,ZPC(Y | S.N.A |
| .. | BM+CBT | 6003-001026 | SCREW-TAPTITE:RH,+B,M4,L15,ZPC(BLK),SWR | S.N.A |
| .. | CBT+CM | 6005-001003 | SCREW-WOOD:HH,+M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| .. | CBW+CM | 6005-001003 | SCREW-WOOD:HH,+M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| .. | CBW+HC | 6005-001003 | SCREW-WOOD:HH,+M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| .. | CBW+TB | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A |
| .. | CV+CM | 6005-001003 | SCREW-WOOD:HH,+M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| .. | DB+CM | 6005-001003 | SCREW-WOOD:HH,+M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| .. | FOC+CM | 6003-001023 | SCREW-TAPTITE:RWH,+B,M3,L10,ZPC(YEL),SW | S.N.A |
| .. | HC+CM | 6005-001003 | SCREW-WOOD:HH,+M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| .. | HS+CM | AA60-00021A | SCREW-WOOD:RH,+M3.5,L22,ZPC(BLK),SWRCH1 | S.N.A |
| .. | HV+BCM | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A |
| .. | | AA26-30006E | TRANS-FLYBACK:-,FVZ-50A001B(S),50KV,- | |
| .. | | AA67-20025A | MIRROR-BACK SURFACE:43°,GLASS,3.0,-,BSM, | |
| .. | | AA67-00030A | SUN-SCREEN:-,43NEW,H/C,A/S,PMMA,T=93%,T2 | |
| .. | | AA67-00028A | SCREEN-TINT:-,43NEW,-,PMMA,TINT=10%,T3.0 | |
| .. | | AA65-30008A | CLAMP-CORD:PE,HB,BLK,-,-,- | S.N.A |
| .. | | AA91-00241A | ASSY-BRACKET:MAIN:-,-,SECC T1.6 7.5J3J5 | |
| ... | BMSBMM | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A |
| ... | | AA61-00152B | BRACKET-MAIN,M,-,7 PROJECTION,SECC,-,-,- | |
| ... | | AA61-00153B | BRACKET-MAIN,S,-,7 PROJECTION,SECC,-,-,- | |
| .. | | AA64-60449B | INLAY-COVER:SP-434JMF,PS,T0.5,149.3X69.5 | |
| .. | | AA61-20285A | HOLDER-BOX:-,3456,PPVO,WHT,- | S.N.A |
| .. | | AA61-11008A | BRACKET-MIRROR,S,-,SPT431J,SECC,T1.0,-,- | S.N.A |
| .. | | AA61-11007B | BRACKET-MIRROR:-,SVP-434JA,SECC,T1.0,BLK | |
| .. | | AA61-10361A | BRACKET-MIRROR:-,S5288,SECC-1,T1.0,-,-,- | S.N.A |
| .. | | AA61-00185J | HOLDER-SCREEN,15T,-,43J5,ABS,HB,BLK,- | |
| .. | | AA60-00036B | SPACER-COVER:DUST,SPONGE,T2,-,690X400,PJ | |
| .. | | AA63-00021E | SPACER-MIRROR:PVC,-,BLK,L870,SP-434JMF,- | |
| .. | | AA64-30433A | CABINET-BACK,T,-,S4388,-,HPS,HB,BLK,-,- | |
| .. | | AA64-00626C | CABINET-BACK:BOARD:-,53J5,-,HPS,VO,BLK, | |
| .. | | AA64-00579B | CABINET-FRONT:WOOD:-,43J5,-,MDF,-,-,T3,- | |
| .. | | AA63-60002W | SPACER-FELT:FELT,T0.5,BLK,30X10,-,-,- | S.N.A |
| .. | | AA63-10007C | BAND-PP:-,-,W18,-,CLEAR,1G,- | S.N.A |
| .. | | AA63-00021G | SPACER-MIRROR:PVC,-,BLK,L420,524J,434J,- | |
| .. | | AA63-00021F | SPACER-MIRROR:PVC,-,BLK,L612,SP-434JMF,- | |

ASSY CHASSIS PART

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|---|--------|
| 1 | * | AA90-00103F | ASSY CHASSIS PART;J51A ,43J5 | S.N.A |
| .. | CON+HC | 6003-001023 | SCREW-TAPTITE:RWH,+B,M3,L10,ZPC(YEL),SW | S.N.A |
| .. | DF+FBT | 6003-001023 | SCREW-TAPTITE:RWH,+B,M3,L10,ZPC(YEL),SW | S.N.A |
| .. | DF+HC | 6003-001023 | SCREW-TAPTITE:RWH,+B,M3,L10,ZPC(YEL),SW | S.N.A |
| .. | PM+HC | 6003-001023 | SCREW-TAPTITE:RWH,+B,M3,L10,ZPC(YEL),SW | S.N.A |
| .. | TBA+AV | 6003-001026 | SCREW-TAPTITE:RH,+B,M4,L15,ZPC(BLK),SWR | S.N.A |
| .. | TBA+HC | 6003-001023 | SCREW-TAPTITE:RWH,+B,M3,L10,ZPC(YEL),SW | S.N.A |
| .. | TBA+SC | 6003-001026 | SCREW-TAPTITE:RH,+B,M4,L15,ZPC(BLK),SWR | S.N.A |
| .. | | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A |
| .. | | AA61-00051B | HOLDER-CHASSIS:-,PC,J533R,ABS,VO,GRAY,E-2 | S.N.A |

ASSY-CRT-(B)

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|---|--------|
| 1 | * | AA94-00996A | ASSY-CRT-(B);P16LFM00BMB(U),+380MG,7,BA | |
| .. | | AA61-00057C | HOLDER-CAP:-,7 PROJECTION,PC,-,CLEAR,- | S.N.A |
| .. | | AA39-00018A | LEAD CONNECTOR-ASSY:-,YFH800-01,YRH187RH | S.N.A |
| .. | | AA67-10037A | LENS:43INCH,SSM-75RS-43,-,SEKINOS,C | |
| .. | | AA67-10036A | LENS-ASSY:43INCH,SSM-75RS-43,-,SEKINOS,C | |
| .. | | AA64-00208B | CASE-COUPLER:B,-,PROJECTION,7,ALDC,-,BL | S.N.A |
| .. | | AA91-00103C | ASSY-WIRE,CRT:-,-,7CRT,PROJECTION | S.N.A |
| .. | | AA61-00053B | BRACKET-WIRE:-,PROJECTION,SECC-1,T1.6,-,- | S.N.A |
| .. | | AA61-00054B | BRACKET-EARTH:-,PROJECTION,PBS,-,-,-,- | S.N.A |
| .. | | AA61-00055C | BRACKET-CRT,WIRE:-,PJT,SUS304 1/8H,-,-,- | S.N.A |
| .. | | AA26-30006F | TRANS-FLYBACK:-,FVZ-50A001C,55,30KV | |
| .. | | AA63-00061B | SPACER-CAP:EPDM,-,BLK,-,PROJECTION,- | |
| .. | | AA63-00091C | SPACER-CLENS:SILICON,-,GRAY,-,PROJECTION | S.N.A |
| .. | | AA63-00060C | SPACER-CRT:SILICON,-,GRAY,7,PROJECTION, | S.N.A |
| .. | | AA63-60025A | SPACER-DY:NEOPRENE,-,BLK,VO,S4388,- | S.N.A |
| .. | | AA27-50005C | DEFLECTION-YOKE:-,DPD-4392AL,43/PJTCRT, | |
| .. | | AA03-10021N | CRT-MONO-P16LFM00BMB(U)-,7,90deg,90 | |
| .. | | AA27-60003C | MAGNET-CONVERGENCE:-,JH92LTU-SC-20,29.1m | |
| .. | | AA63-10002A | BAND-TIE:-,NYLON66 V2,-,-,L100,NTR,-,- | S.N.A |
| .. | | AA63-00099A | SPACER-FELT:PJT,-,BLK,-,30X30 | S.N.A |
| .. | | AA63-00076A | SPACER-LENS:FELT ,T1.0,BROWN,7CRTPROJE | S.N.A |
| .. | | AA61-00056B | BRACKET-LENS:-,PROJECTION,SECC,T1.6,-,-,- | S.N.A |
| .. | | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A |

ASSY-CRT-(G)

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|---|--------|
| 1 | * | AA94-00995A | ASSY-CRT-(G);P16LFM00HA(AU),+380MG,7,B | |
| .. | | AA61-00057C | HOLDER-CAP:-,7 PROJECTION,PC,-,CLEAR,- | S.N.A |
| .. | | AA39-00018A | LEAD CONNECTOR-ASSY:-,YFH800-01,YRH187RH | S.N.A |
| .. | | AA67-10039A | LENS:-,SSM-75RS-43,-,GRN C-ELEMENT | |
| .. | | AA67-10036A | LENS-ASSY:43INCH,SSM-75RS-43,-,SEKINOS,C | |
| .. | | AA64-00207B | CASE-COUPLER:G,-,PROJECTION,7,ALDC8,-,B | S.N.A |
| .. | | AA91-00103C | ASSY-WIRE,CRT:-,-,7CRT,PROJECTION | S.N.A |
| .. | | AA61-00053B | BRACKET-WIRE:-,PROJECTION,SECC-1,T1.6,-,- | S.N.A |
| .. | | AA61-00054B | BRACKET-EARTH:-,PROJECTION,PBS,-,-,-,- | S.N.A |
| .. | | AA61-00055C | BRACKET-CRT,WIRE:-,PJT,SUS304 1/8H,-,-,- | S.N.A |
| .. | | AA26-30006F | TRANS-FLYBACK:-,FVZ-50A001C,55,30KV | |
| .. | | AA63-00061B | SPACER-CAP:EPDM,-,BLK,-,PROJECTION,- | |
| .. | | AA63-00060C | SPACER-CRT:SILICON,-,GRAY,7,PROJECTION, | S.N.A |
| .. | | AA63-00091C | SPACER-CLENS:SILICON,-,GRAY,-,PROJECTION | S.N.A |
| .. | | AA63-60025A | SPACER-DY:NEOPRENE,-,BLK,VO,S4388,- | S.N.A |
| .. | | AA27-50005C | DEFLECTION-YOKE:-,DPD-4392AL,43/PJTCRT, | |
| .. | | AA03-10021L | CRT-MONO:P16LFM00HA(AU)-,7 inch,-,-,- | |
| .. | | AA27-00003B | MAGNET-CONVERGENCE:-,JH92LT-029,29.1MM | |
| .. | | AA63-10002A | BAND-TIE:-,NYLON66 V2,-,-,L100,NTR,-,- | S.N.A |
| .. | | AA63-00099A | SPACER-FELT:PJT,-,BLK,-,30X30 | S.N.A |
| .. | | AA63-00076A | SPACER-LENS:FELT ,T1.0,BROWN,7CRTPROJE | S.N.A |
| .. | | AA61-00056B | BRACKET-LENS:-,PROJECTION,SECC,T1.6,-,-,- | S.N.A |
| .. | | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A |

ASSY-CRT-(R)

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|---|--------|
| 1 | * | AA94-00994A | ASSY-CRT-(R);P16LFM00RFA(AU),+380MG,7,B | |
| .. | | AA61-00057C | HOLDER-CAP:-,7 PROJECTION,PC,-,CLEAR,- | S.N.A |
| .. | | AA39-00018A | LEAD CONNECTOR-ASSY:-,YFH800-01,YRH187RH | S.N.A |
| .. | | AA67-10038A | LENS:43INCH,SSM-75RS-43,-,SEKINOS,R | |
| .. | | AA67-10036A | LENS-ASSY:43INCH,SSM-75RS-43,-,SEKINOS,C | |
| .. | | AA64-00206B | CASE-COUPLER:R,-,PROJECTION,-,ALDC8,-,BL | S.N.A |
| .. | | AA91-00103C | ASSY-WIRE,CRT:-,-,7CRT,PROJECTION | S.N.A |
| .. | | AA61-00053B | BRACKET-WIRE:-,PROJECTION,SECC-1,T1.6,-,- | S.N.A |
| .. | | AA61-00054B | BRACKET-EARTH:-,PROJECTION,PBS,-,-,-,- | S.N.A |
| .. | | AA61-00055C | BRACKET-CRT,WIRE:-,PJT,SUS304 1/8H,-,-,- | S.N.A |
| .. | | AA26-30006F | TRANS-FLYBACK:-,FVZ-50A001C,55,30KV | |
| .. | | AA63-00061B | SPACER-CAP:EPDM,-,BLK,-,PROJECTION,- | |
| .. | | AA63-00091C | SPACER-CLENS:SILICON,-,GRAY,-,PROJECTION | S.N.A |
| .. | | AA63-00060C | SPACER-CRT:SILICON,-,GRAY,7,PROJECTION, | S.N.A |
| .. | | AA63-60025A | SPACER-DY:NEOPRENE,-,BLK,VO,S4388,- | S.N.A |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|---|--------|-------|----------|-------------|--|--------|
| | | | | | | | | ASSY TERMINAL BOARD | |
| | | AA27-50005C | DEFLECTION-YOKE,-,DPD-4392AL,43/PJTCRT, | | 1 | * | AA91-00158X | ASSY TERMINAL BOARD,-,HIPS,VO,BLK,J51A P | |
| | | AA03-10021K | CRT-MONO,-,P16LFM00RFA(AU)-,7,90deg,9 | | | | | | |
| | | AA27-00003B | MAGNET-CONVERGENCE,-,JH92LT-029,29,11MM | | | | | | |
| | | AA63-10002A | BAND-TIE,-,NYLON66 V2,-,L100,NTR,-,- | S.N.A | | | | | |
| | | AA63-00099A | SPACER-FELT:PJT,-,BLK,-,30X30 | S.N.A | | | | | |
| | | AA63-00076A | SPACER-LENS:FELT,T1.0,BROWN,7CRTPROJE | S.N.A | | | AA63-00045B | TERMINAL-BOARD,ANT,-,HIPS,-,PCJ533R,- | S.N.A |
| | | AA61-00056B | BRACKET-LENS,-,PROJECTION,SECC,T1.6,-,- | S.N.A | | | AA64-00182X | INLAY BACK,SP53J5HF,J51A PAL,PS SHEET,TO | S.N.A |
| | | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A | | | | | |

ASSY-CABINET,MID

| | | | | |
|---|---|-------------|--|-------|
| 1 | * | AA91-00442A | ASSY-CABINET,MID,-,WOOD,KBM21-58 ,43J5 | |
| | | AA60-10051B | SCREW-WOOD:RH,+M3.5,L11,ZPC(YEL),SWRCH1 | S.N.A |
| | | AA60-10050X | SCREW-WOOD:FH,+M3.5,L32,ZPC(YEL),SWRCH1 | S.N.A |
| | | AA63-00105D | SPACER-FELT:FELT,T2.0,-,-,- | S.N.A |
| | | AA61-00097A | HOLDER-WIRE,-,NYLON 6/6,-,NTR,- | S.N.A |
| | | AA63-00105C | SPACER-FELT:FELT,T2.0,-,-,- | S.N.A |
| | | AA66-40011A | ROLLER-PAPER:PAPER,OD36,L80,T3,-,SP4388P | S.N.A |
| | | AA65-30115A | CLAMP-WIRE:FE,-,BLK,2X150,PRJT,- | |
| | | 6002-000214 | SCREW-TAPPING:TH,+1,M4.0,L16,ZPC(BLK),M | S.N.A |
| | | AA60-00043A | SPACER-SPEAKER:FELT,T2,-,43J5,- | |
| | | AA60-10051A | SCREW-WOOD:PH,+M4,L16,ZPC(BLK),SWRCH18A | S.N.A |
| | | AA61-20136A | HOLDER-MASK,PIN,-,S4388,NYLON,-,BLK,#066 | S.N.A |
| | | AA63-00066C | SPACER-DUAL,LOCK:#250,-,11X20,-,- | S.N.A |
| | | AA63-00193B | COVER-AIRVENT,-,533R,-,HIPS,VO,BLK,-,- | S.N.A |
| | | AA64-00467C | CABINET-LEG,B,-,43J5,SV704P,ABS,HB,BLK,T | |
| | | AA64-01279A | CABINET MIDDLE:43J5,KMB21-58 ,WOOD,-,- | |
| | | AA61-10387A | BRACKET-GRILLE,-,SVP-462J,SECC-1,T0.5,-, | S.N.A |
| | | 3001-000279 | SPEAKER:30W,8ohm,91dB,20Hz | |
| | | 3001-001107 | SPEAKER:20W,8ohm,95dB,1300Hz | |
| | | AA39-00042A | LEAD CONNECTOR-ASSY,-,-,-,-,-,-,-,RE | |
| | | AA39-20505U | LEAD CONNECTOR-ASSY,-,-,4P,-,-,YSH250 | |
| | | AA61-00094B | HOLDER-RAIL,-,PCJ533R,ABS,HB,BLK,240 | S.N.A |
| | | AA61-00185B | HOLDER-SCREEN,15T,-,43J2,43J5,ABS,HB,BLK | |
| | | AA61-00185C | HOLDER-SCREEN,15T,-,43J2,43J5,ABS,HB,BLK | |
| | | AA61-00458A | CASTER,-,-,TP4015-05 NYL,OH47,-,-,SR4 | S.N.A |

ASSY CABINET MASK

| | | | | |
|---|---|-------------|--|-------|
| 1 | * | AA91-00395A | ASSY CABINET MASK,-,HB,BLK,S704+B702 TAN | |
| | | AA64-01164B | CABINET-MASK,SIDE:43J5,S704+B702,ABS,HB, | |
| | | AA64-01164A | CABINET-MASK,SIDE:43J5,L653 APCHUL,ABS,H | S.N.A |
| | | AA64-01161E | CABINET-MASK,BOT:43J5HF,S704+B702 DOLBY, | |
| | | AA64-01161A | CABINET-MASK:43J5,L872 APCHUL,ABS,HB,BLK | S.N.A |
| | | AA64-01161D | CABINET-MASK,TOP:43J5HF,S704+B702 TANTUS | |
| | | AA64-01161A | CABINET-MASK:43J5,L872 APCHUL,ABS,HB,BLK | S.N.A |
| | | AA63-00063A | SPACER-DUAL,LOCK:#400,-,19X19,SVP-614J | S.N.A |
| | | AA61-00441B | HOLDER-CORNER:E2 ALL,ABS,BLK,HB,-,S704+B | S.N.A |

ASSY POWER CORD

| | | | | |
|---|---|-------------|--|-------|
| 1 | * | AA96-20115F | ASSY POWER CORD,-,AP2/YES,H/C50mm,KJP170 | |
| | | 3811-000401 | WIRE-PVC CU:BCWA,300V,ROLL,17/0.16mm,#22 | S.N.A |
| | | AA39-10005N | POWER-CORD,-,KKP-560A,KLCE-2F,2.59,3PAU | S.N.A |
| | | AA61-20284A | HOLDER,-,P-CORD,PP,VO,BLK,KE-002 | S.N.A |

ASSY CABINET BOT

| | | | | |
|---|---|-------------|--|-------|
| 1 | * | AA91-00232C | ASSY CABINET BOT,-,VO,JERSEY SP200G SAMS | |
| | | AA60-00064A | SPACER-JERSEY:43J5,JERSEY,-,-,-,GRAY,-,- | S.N.A |
| | | AA64-00673A | BADGE-BRAND:AL,SAMSUNG,-,L72,-,PJT,- | |
| | | AA64-00283B | CABINET-BOTTOM,-,43J5,JERSEY SP-200G D/G | S.N.A |
| | | AA61-20295A | HOLDER-PIN,-,SPT555JHD,ABS,HB,BLK,- | S.N.A |

7-3 SP53J5HFX/RAD

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|---------------------------|----------|-------------|---|--------|-------|----------|-------------|--|--------|
| ASSY PCB MAIN(OPT) | | | | | | | | | |
| 1 | * | AA94-02683A | ASSY PCB MAIN(OPT):SP53J5HFX/RAD,J51A,NE | | | | | | |
| ..2 | C664 | 2401-001068 | C-AL:3300uF,20%,50V,GPBK,22x40,10 | |4 | CP116 | 2203-000753 | C-CERAMIC,CHIP:330nF,+80-20%,50V,Y5V,TP, | |
| ..2 | C665 | 2401-000737 | C-AL:2200uF,20%,50V,GP,TP,18x35,5,7 | |4 | CP117 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP5x11,5 | |
| ..2 | CN201 | 3711-003051 | CONNECTOR-HEADER:BOX,8P,1R,2.5mm,STRAGHT | |4 | CP118 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |
| ..2 | CN202 | 3711-003052 | CONNECTOR-HEADER:BOX,10P,1R,2.5mm,STRAGHT | |4 | CP119 | 2201-000692 | C-CERAMIC,DISC:0.008nF,0.5pF,50V,UJ,TP,4 | |
| ..2 | CN501 | 3711-003051 | CONNECTOR-HEADER:BOX,8P,1R,2.5mm,STRAGHT | |4 | CP120 | 2203-000578 | C-CERAMIC,CHIP:220nF,20%,50V,Y5V,TP,3216 | |
| ..2 | CN801 | 3711-003974 | CONNECTOR-HEADER:BOX,12P,1R,2.5mm,STRAG | |4 | CP121 | 2401-000660 | C-AL:2.2uF,20%,50V,GP,TP5x11,5 | |
| ..2 | CNT01 | 3710-001208 | CONNECTOR-SOCKET:32P2R,2.54mm,STRAIGHT, | |4 | CP123 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |
| ..2 | CNT02 | 3710-001208 | CONNECTOR-SOCKET:32P2R,2.54mm,STRAIGHT, | |4 | CP124 | 2401-000660 | C-AL:2.2uF,20%,50V,GP,TP6.3x11,5 | |
| ..2 | CNY01 | 3711-003973 | CONNECTOR-HEADER:BOX,11P,1R,2.5mm,STRAG | |4 | CP125 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |
| ..2 | CS803 | 2401-003370 | C-AL:47uF,20%,450V,GPBK,16x35,5,7. | |4 | CP126 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP6.3x11,5 | |
| ..2 | DS801 | 0402-000102 | DIODE-BRIDGE:D2SB60,600V,1.5A,- | |4 | CP127 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |
| ..2 | H001 | AA40-10006S | TUNER-F/S:TECC2949PG30A(S),PAL-B/G,TR,18 | |4 | CP129 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |
| △ ..2 | IC101 | AA96-00110C | ASSY-H/S:-,AA62-30013K,SI-3050C,- | |4 | CP130 | 2203-000239 | C-CERAMIC,CHIP:0.1nF,5%,50V,NP0,TP,2012 | |
| ...3 | | 1203-000577 | IC-VOLTAGE REGULATOR:3090,ZIP5P,-PLASTI | |4 | CP131 | 2201-000692 | C-CERAMIC,DISC:0.008nF,0.5pF,50V,UJ,TP,4 | |
| ...3 | | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A |4 | CP132 | 2203-000239 | C-CERAMIC,CHIP:0.1nF,5%,50V,NP0,TP,2012 | |
| ...3 | | AA62-30013K | HEATSINK-ES:-,---,44/18,-,WHT,A6063 EX | |4 | CP133 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |
| △ ..2 | IC102 | AA96-00110A | ASSY-H/S:-,AA62-30013K,SI-3050C,- | |4 | CP134 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP6.3x11,5 | |
| ...3 | | 1203-000203 | IC-POS:ADJUST REG.:3050,TO-220,5P,-PLA | |4 | CP135 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP5x11,5 | |
| ...3 | | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A |4 | CP136 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |
| ...3 | | AA62-30013K | HEATSINK-ES:-,---,44/18,-,WHT,A6063 EX | |4 | CP137 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NP0,TP,2012 | |
| △ ..2 | IC103 | 1204-001276 | IC-SOUND PROCESSOR:TDA9810,DIP,24P,400M | |4 | CP142 | 2401-000199 | C-AL:1000uF,20%,6.3V,GP,TP,10x12.5, | |
| △ ..2 | IC502 | AA96-00110A | ASSY-H/S:-,AA62-30013K,SI-3050C,- | |4 | CP143 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP5x11,5 | |
| △ ..2 | IC503 | AA96-00110A | ASSY-H/S:-,AA62-30013K,SI-3050C,- | |4 | CP144 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |
| △ ..2 | IC504 | AA96-00110A | ASSY-H/S:-,AA62-30013K,SI-3050C,- | |4 | CP145 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |
| △ ..2 | IC665 | AA96-00038A | ASSY-H/S:-,SOUND AMP:AA62-30173E,TDA726 | |4 | CP201 | 2203-000325 | C-CERAMIC,CHIP:12nF,10%,50V,X7R,TP,3216, | |
| ...3 | | 0205-000129 | GREASE-SILICON:SC102,JAPAN | S.N.A |4 | CP203 | 2401-002144 | C-AL:47uF,20%,16V,GP,TP5x11,5 | |
| ...3 | | 1201-001026 | IC-POWER AMP:7265,ZIP11P,19.6MIL,DUAL,1 | |4 | CP204 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |
| ...3 | | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A |4 | CP205 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP6.3x11,5 | |
| ...3 | | AA62-30173E | HEAT-SINK,ES:-,T1.0,WHITE,SCREW-HOLE(1 | S.N.A |4 | CP206 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |
| ..2 | IF/CAB | AA39-30007B | IF-CABLE:-,T,150mm,1365#26 | |4 | CP207 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP6.3x11,5 | |
| ..2 | L201 | AA27-10001C | COIL-CHOKE:-,100uH,K,-,5.0A,ST,700UH-K(R | |4 | CP208 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |
| ..2 | L603 | AA29-00004A | FILTER-LINE NOISE:-,20UH,3A,AC80-260V,TO | |4 | CP209 | 2401-001914 | C-AL:1uF,20%,50V,BTP,TP5x11,5 | |
| ..2 | OZ107 | AA96-50162F | ASSY-H/S:-,POWER,AA62-30013E,2SA1011,30 | |4 | CP210 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP6.3x11,5 | |
| ...3 | | 0502-000131 | TR-POWER:2SA1011-D,PNP,1.2W,TO-220,-60 | |4 | CP211 | 2401-000603 | C-AL:1uF,20%,50V,GP,TP5x11,5 | |
| ...3 | | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A |4 | CP213 | 2401-000603 | C-AL:1uF,20%,50V,GP,TP5x11,5 | |
| ...3 | | AA62-30013E | HEAT-SINK,ES:-,A6063 EXTR,-,-,(30(21) T02 | S.N.A |4 | CP214 | 2203-000578 | C-CERAMIC,CHIP:220nF,20%,50V,Y5V,TP,3216 | |
| ..2 | OZ108 | AA96-50162G | ASSY-H/S:-,AMP,AA62-30013E,2SC2344,30MM | |4 | CP215 | 2401-000603 | C-AL:1uF,20%,50V,GP,TP5x11,5 | |
| ...3 | | 0502-000153 | TR-POWER:2SC2344-D,PNP,1.2W,TO-220,-60 | |4 | CP216 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |
| ...3 | | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A |4 | CP217 | 2203-000578 | C-CERAMIC,CHIP:220nF,20%,50V,Y5V,TP,3216 | |
| ...3 | | AA62-30013E | HEAT-SINK,ES:-,A6063 EXTR,-,-,(30(21) T02 | S.N.A |4 | CP218 | 2203-002085 | C-CERAMIC,CHIP:56nF,10%,50V,X7R,TP,2012, | |
| ..2 | R913 | 2001-000786 | R-CARBON:47KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | CP219 | 2203-000495 | C-CERAMIC,CHIP:2.2nF,10%,50V,X7R,TP,2012 | |
| ..2 | RL801 | 3501-001053 | RELAY-POWER:5VDC,530MW,10A,1FORMA,15MS,5 | |4 | CP220 | 2203-000578 | C-CERAMIC,CHIP:220nF,20%,50V,Y5V,TP,3216 | |
| ..2 | TS801 | AA26-00019A | TRANS-SWITCHING:-,AC80-260V,-,US,-,4MH,B | |4 | CP221 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |
| ..2 | X901 | 2801-003224 | CRYSTAL-UNIT:32.768KHZ,20PPM,28-AA,Y,12.5 | |4 | CP301 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP6.3x11,5 | |
| ..2 | | AA95-00529A | ASSY-PCB,PIP:-,SP43J5HP,J51A,-,-,- | |4 | CP302 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |
| ..3 | CNP01 | 3711-002709 | CONNECTOR-HEADER:NOWALL,12P,1R,2.5MM,ANG | |4 | CP303 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP6.3x11,5 | |
| ..3 | CNP03 | 3711-002709 | CONNECTOR-HEADER:NOWALL,12P,1R,2.5MM,ANG | |4 | CP304 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |
| △ ..3 | ICP101 | 1204-000530 | IC-PAL/NTSC DECODER:TDA9160A,DIP,32P,400 | |4 | CP305 | 2203-000389 | C-CERAMIC,CHIP:0.015nF,5%,50V,NP0,TP,201 | |
| △ ..3 | ICP102 | 1204-000560 | IC-DEMODULATOR:TDA9815,DIP,32P,400MIL,PL | |4 | CP306 | 2203-000389 | C-CERAMIC,CHIP:0.015nF,5%,50V,NP0,TP,201 | |
| ..3 | RP126 | 2103-000665 | VR-SEMI:20Kohm,25%,1/5W,SIDE | | △ ..4 | DP101 | 0401-000160 | DIODE-SWITCHING:ISS314,30V,100mA,USC,TP | |
| △ ..3 | TP101 | AA26-10004E | TRANS-IF:-,7MG,VIF:-,7mm,8pF,116.7MHz,S | | △ ..4 | DP105 | 0403-000720 | DIODE-ZENER:MTZJ9.1B,9.1V,8.57-9.01V,500 | |
| ...3 | ZP102 | 2904-000253 | FILTER-SAW AV:38.9MHz,DIP10K,ST,18dB,B/G | | △ ..4 | DP106 | 0401-000160 | DIODE-SWITCHING:ISS314,30V,100mA,USC,TP | |
| ...3 | | AA99-20066Z | ASSY-PCB SUB,AUTO: AA95-00529A /V | S.N.A |4 | DP201 | 0403-000334 | DIODE-ZENER:UZ2.7B5A,2.7V,2.54-2.75V,500 | |
| ...4 | CP101 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | ICP103 | AA13-20004A | IC-HYBRID:-,PAP102T,SIP,6P,PRE-AMP,TP | |
| ...4 | CP102 | 2401-000922 | C-AL:22uF,20%,16V,GP,TP,5x5,5 | | △ ..4 | ICP105 | 1204-000635 | IC-PICTURE PROCESS:SDA9189X,SOP,32P,350M | |
| ...4 | CP103 | 2203-000429 | C-CERAMIC,CHIP:0.018nF,5%,50V,NP0,TP,201 | | △ ..4 | ICP201 | 1002-000206 | IC-A/D CONVERTER:SDA9187-2X,6BIT,SOP,28P | |
| ...4 | CP104 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP102 | 2701-000219 | INDUCTOR-AXIAL:820nH,10%,2.5x3.4mm | |
| ...4 | CP105 | 2203-000717 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,3216 | |4 | LP103 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |
| ...4 | CP106 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | LP104 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |
| ...4 | CP107 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | LP105 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |
| ...4 | CP108 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | LP201 | 2701-000197 | INDUCTOR-AXIAL:5.6uH,10%,2.5x3.4mm | |
| ...4 | CP109 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP,6.3x11,5 | |4 | LP301 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |
| ...4 | CP110 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | PCB | AA41-11003A | PCB-PIP:SC153A,2L,FR-4,330x245x1.6T,A6 | S.N.A |
| ...4 | CP111 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,2012 | |4 | QP104 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| ...4 | CP112 | 2401-000660 | C-AL:2.2uF,20%,50V,GP,TP,5x11,5 | |4 | QP105 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| ...4 | CP114 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | QP106 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| ...4 | CP115 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | QP201 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| | | | | |4 | QP202 | 0501-000342 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
| | | | | |4 | QP203 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| | | | | |4 | QP204 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| | | | | |4 | QP205 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| | | | | |4 | QP206 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|-------------|--|--------|
|4 | CP504 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | CP629 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
|4 | CP505 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | CP630 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
|4 | CP506 | 2401-001496 | C-AL:47uF,20%,16V,GPTP,5x7,5 | |4 | CP631 | 2401-000598 | C-AL:1uF,20%,50V,GPTP,4x7,5 | |
|4 | CP507 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | CP901 | 2404-001229 | C-TA,CHIP:4.7uF,20%,25V,GPTP,3528 | |
|4 | CP508 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | CP902 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
|4 | CP509 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | CP904 | 2203-001088 | C-CERAMIC,CHIP:0.005nF,0.25pF,50V,NPO,TP | |
|4 | CP510 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | CP905 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |
|4 | CP511 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | CP906 | 2203-000495 | C-CERAMIC,CHIP:2.2nF,10%,50V,X7R,TP,2012 | |
|4 | CP512 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | DP501 | 0403-001117 | DIODE-ZENER,RLZ12B,5%,500mW,LL-34,TP | |
|4 | CP513 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | DP502 | 0403-001117 | DIODE-ZENER,RLZ12B,5%,500mW,LL-34,TP | |
|4 | CP514 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | DP503 | 0403-001117 | DIODE-ZENER,RLZ12B,5%,500mW,LL-34,TP | |
|4 | CP515 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | DP504 | 0403-000620 | DIODE-ZENER,RLZ5.6B,5.6V,5.45-5.73V,400m | |
|4 | CP516 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | DP505 | 0403-000620 | DIODE-ZENER,RLZ5.6B,5.6V,5.45-5.73V,400m | |
|4 | CP517 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | DP601 | 0401-000133 | DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8 | |
|4 | CP518 | 2401-000598 | C-AL:1uF,20%,50V,GPTP,4x7,5 | |4 | DP602 | 0403-000620 | DIODE-ZENER,RLZ5.6B,5.6V,5.45-5.73V,400m | |
|4 | CP519 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | DP603 | 0401-000133 | DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8 | |
|4 | CP520 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | DP604 | 0401-000160 | DIODE-SWITCHING;ISS314,30V,100mA,USC,TP | |
|4 | CP521 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | DP605 | 0401-000160 | DIODE-SWITCHING;ISS314,30V,100mA,USC,TP | |
|4 | CP522 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | DP606 | 0401-000133 | DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8 | |
|4 | CP523 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | DP607 | 0403-000620 | DIODE-ZENER,RLZ5.6B,5.6V,5.45-5.73V,400m | |
|4 | CP524 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | DP901 | 0401-000133 | DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8 | |
|4 | CP525 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | DP902 | 0401-000133 | DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8 | |
|4 | CP527 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | DP903 | 0401-000133 | DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8 | |
|4 | CP528 | 2401-001496 | C-AL:47uF,20%,16V,GPTP,5x7,5 | |4 | DP904 | 0401-000133 | DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8 | |
|4 | CP529 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |4 | FP101 | 2901-001120 | FILTER-EMI SMD:25V,100mA,-,3.2x1.6x1,T | |
|4 | CP530 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |4 | FP102 | 2901-001120 | FILTER-EMI SMD:25V,100mA,-,3.2x1.6x1,T | |
|4 | CP531 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |4 | FP301 | 2901-001120 | FILTER-EMI SMD:25V,100mA,-,3.2x1.6x1,T | |
|4 | CP532 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | FP901 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
|4 | CP533 | 2401-000486 | C-AL:10uF,20%,50V,GPTP,6.3x7mm,5 | |4 | FP902 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
|4 | CP534 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | FP903 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
|4 | CP535 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | FP904 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
|4 | CP536 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | FP905 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
|4 | CP537 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | FP906 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
|4 | CP538 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | FP907 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
|4 | CP539 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | FP908 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
|4 | CP540 | 2401-000486 | C-AL:10uF,20%,50V,GPTP,6.3x7mm,5 | | △ | ICP101 | 1204-001362 | IC-VIDEO PROCESS;VPC3215C-88,PLCC,43P,- | |
|4 | CP541 | 2203-001002 | C-CERAMIC,CHIP:0.047nF,5%,50V,NPO,TP,201 | | △ | ICP103 | 1205-001172 | IC-INTERFACE;CIP3250A-B1,PLCC,68P,-PLAS | |
|4 | CP542 | 2203-001002 | C-CERAMIC,CHIP:0.047nF,5%,50V,NPO,TP,201 | | △ | ICP301 | 1204-001623 | IC-VERTICAL PROCESS;SDA9400,0FP,64P,-P | |
|4 | CP545 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | | △ | ICP302 | 1203-001419 | IC-VOLTAGE REGULATOR;4931,TO-252,3P,6.6x | |
|4 | CP546 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | | △ | ICP401 | 1002-001045 | IC-D/A CONVERTER;9280,8BIT,PLCC,68P,- | |
|4 | CP547 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | | △ | ICP501 | 1204-001550 | IC-VIDEO PROCESS;CXA2101AQ,OFF,80P,-PLA | |
|4 | CP548 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | | △ | ICP601 | 1204-001372 | IC-HOR./VER.PROCESS;SDA9361,0FP,44P,-P | |
|4 | CP549 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | △ | ICP901 | 1202-000001 | IC-VOLTAGE COMP.;7533,TO-92,3P,-,SINGLE, | |
|4 | CP550 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP101 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP551 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP102 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP552 | 2401-001496 | C-AL:47uF,20%,16V,GPTP,5x7,5 | |4 | LP103 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP553 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP105 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP554 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP106 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP555 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP107 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP556 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP301 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP559 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP302 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP601 | 2203-001088 | C-CERAMIC,CHIP:0.005nF,0.25pF,50V,NPO,TP | |4 | LP303 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP602 | 2203-001088 | C-CERAMIC,CHIP:0.005nF,0.25pF,50V,NPO,TP | |4 | LP401 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP603 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | LP402 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP604 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NPO,TP,2012 | |4 | LP403 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP605 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | |4 | LP404 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP607 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP601 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP609 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP602 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP610 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP603 | 2703-001717 | INDUCTOR-SMD;1.2uH,5%,3.2x2.5x2.2mm | |
|4 | CP611 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | |4 | LP901 | 3301-001186 | CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m | S.N.A |
|4 | CP612 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | |4 | LP902 | 3301-001186 | CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m | S.N.A |
|4 | CP613 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | |4 | LP903 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP614 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP904 | 3301-001184 | CORE-FERRITE BEAD;AB,1.3kohm,4.5x3.2x1.3 | S.N.A |
|4 | CP615 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | LP905 | 3301-001184 | CORE-FERRITE BEAD;AB,1.3kohm,4.5x3.2x1.3 | S.N.A |
|4 | CP616 | 2203-001002 | C-CERAMIC,CHIP:0.047nF,5%,50V,NPO,TP,201 | |4 | LP906 | 3301-001184 | CORE-FERRITE BEAD;AB,1.3kohm,4.5x3.2x1.3 | S.N.A |
|4 | CP617 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | QP501 | 0501-000280 | TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23 | |
|4 | CP618 | 2203-000239 | C-CERAMIC,CHIP:0.1nF,5%,50V,NPO,TP,2012 | |4 | QP502 | 0501-000344 | TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT- | |
|4 | CP619 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | QP503 | 0501-000344 | TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT- | |
|4 | CP620 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | QP504 | 0501-000280 | TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23 | |
|4 | CP621 | 2203-000239 | C-CERAMIC,CHIP:0.1nF,5%,50V,NPO,TP,2012 | |4 | QP505 | 0501-000280 | TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23 | |
|4 | CP622 | 2203-000142 | C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP,2012 | |4 | QP506 | 0501-000280 | TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23 | |
|4 | CP623 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | QP508 | 0501-000344 | TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT- | |
|4 | CP624 | 2401-001496 | C-AL:47uF,20%,16V,GPTP,5x7,5 | |4 | QP602 | 0501-000344 | TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT- | |
|4 | CP625 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | QP902 | 0501-000280 | TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23 | |
|4 | CP626 | 2401-002009 | C-AL:100uF,20%,16V,GPTP,6.3x7,5 | |4 | RP101 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | CP627 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | RP102 | 2007-000947 | R-CHIP:470HM,5%,1/10W,DA,TP,2012 | |
|4 | CP628 | 2401-002009 | C-AL:100uF,20%,16V,GPTP,6.3x7,5 | |4 | RP106 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------------------------|-------------|---------------------------------|---|--------|
|4 | LF11 | 2701-000116 | INDUCTOR-AXIAL:10uH,10%,4.2x9.8mm | |4 | RF87 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
|4 | LF12 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm | |4 | RF88 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
|4 | LF13 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm | |4 | XTR02 | 2801-000152 | CRYSTAL-UNIT:14.31818MHz,40ppm,28-AAM,16 | |
|4 | LF14 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm | |4 | XTR04 | 2801-000724 | CRYSTAL-UNIT:6MHz,50ppm,28-AAM,20pf,40oh | |
|4 | LF15 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm | | ..2 | AA65-30109A | CLAMP-FBT:NYLON-66,V2,BLK,-,-,- | S.N.A | |
|4 | LF16 | 2701-000149 | INDUCTOR-AXIAL:2.7uH,10%,2.5x3.4mm | | ASSY-CABINET,MID | | | | |
|4 | LF17 | 2701-000149 | INDUCTOR-AXIAL:2.7uH,10%,2.5x3.4mm | | 1 | * | AA91-00430B | ASSY-CABINET,MID,-,WOOD,KBM21-58 DO,53J5 | |
|4 | LF18 | 2701-000149 | INDUCTOR-AXIAL:2.7uH,10%,2.5x3.4mm | | ..2 | BF+CM | AA60-10051A | SCREW-WOOD:PH,+M4,L16,ZPC(BLK),SWRCH18A | S.N.A |
|4 | PCB | AA41-10997B | PCB-FORMAT CONNERTER:KPM51A,4L,FR-4,245X | S.N.A | ..2 | CABMID | AA63-00105E | SPACER-FELT:FELT,T2.0,BLK,32*1160,PCJ533 | S.N.A |
|4 | RF11 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | ..2 | CABMID | AA63-00105F | SPACER-FELT:FELT,T2.0,BLK,32*850,PCJ533, | S.N.A |
|4 | RF13 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | ..2 | CABMID | AA66-40010A | ROLLER-PAPER:PAPER,OD50,L80,T3,-,SPT-521 | S.N.A |
|4 | RF15 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | ..2 | CABMID | AA60-10050X | SCREW-WOOD:FH,+M3.5,L32,ZPC(YEL),SWRCH1 | S.N.A |
|4 | RF16 | 2007-000477 | R-CHIP:1MOHM,5%,1/10W,DA,TP2012 | | ..2 | CAS+CM | 6002-000214 | SCREW-TAPPING:TH,+T,M4.0,L16,ZPC(BLK),M | S.N.A |
|4 | RF17 | 2007-000477 | R-CHIP:1MOHM,5%,1/10W,DA,TP2012 | | ..2 | SPK+CM | AA60-10051A | SCREW-WOOD:PH,+M4,L16,ZPC(BLK),SWRCH18A | S.N.A |
|4 | RF18 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ..2 | | AA61-10247A | BRACKET-FOCUS:-,S46DS,SECC,T1.0,-,-,- | S.N.A |
|4 | RF19 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ..2 | | AA61-10387A | BRACKET-GRILLE:-,SVP-462J,SECC-1,T0.5,-,- | S.N.A |
|4 | RF21 | 2007-000642 | R-CHIP:2700HM,5%,1/10W,DA,TP2012 | | ..2 | | AA61-20136A | HOLDER-MASK:PIN:-,S4388,NYLON,-,BLK,#066 | S.N.A |
|4 | RF22 | 2007-001118 | R-CHIP:680OHM,5%,1/10W,DA,TP2012 | | ..2 | | AA63-00066C | SPACER-DUAL:LOCK:#250,-,-,11X20,-,- | S.N.A |
|4 | RF23 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP2012 | | ..2 | | AA64-01263B | CABINET MIDDLE:53J5,KMB21-58 DO,WOOD,-,- | |
|4 | RF24 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP2012 | | ..2 | | AA64-00468C | CABINET-LEG:B,-,53J5,53J2,SV704P DO,ABS | |
|4 | RF25 | 2007-000518 | R-CHIP:2.7KOHM,5%,1/10W,DA,TP2012 | | ..2 | | AA63-60126D | SPACER-FELT:FELT,T2,-,400X15,PRJ61,- | S.N.A |
|4 | RF26 | 2007-000518 | R-CHIP:2.7KOHM,5%,1/10W,DA,TP2012 | | ..2 | | AA63-00193B | COVER-AIRVENT:-,533R,-,HIPS,VO,BLK,-,- | S.N.A |
|4 | RF27 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | ..2 | | AA39-20505U | LEAD CONNECTOR-ASSY:-,-,4P,-,-,-,YSH250 | |
|4 | RF29 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..2 | | AA39-00042A | LEAD CONNECTOR-ASSY:-,-,-,-,-,-,-,-,RE | |
|4 | RF30 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..2 | | 3001-001134 | SPEAKER:30W,8ohm,93dB,60Hz | |
|4 | RF31 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..2 | | 3001-001107 | SPEAKER:20W,8ohm,95dB,1300Hz | |
|4 | RF32 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..2 | | AA61-00094B | HOLDER-RAIL:-,PCJ533R,ABS,HB,BLK,240 | S.N.A |
|4 | RF33 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..2 | | AA61-00458A | CASTER:-,-,TP4015-05,NYL,OH47,-,-,SR4 | S.N.A |
|4 | RF34 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..2 | | AA61-00185E | HOLDER-SCREEN,15T:-,53J2,53J5,ABS,HB,BLK | |
|4 | RF35 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..2 | | AA61-00185D | HOLDER-SCREEN,15T:-,53J2,53J5,ABS,HB,BLK | |
|4 | RF36 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..2 | | AA61-00097A | HOLDER-WIRE:-,-,NYLON 6/6,-,NTR,- | S.N.A |
|4 | RF37 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..2 | | AA61-00094C | HOLDER-RAIL:-,PCJ533R,ABS,HB,BLK,480 | S.N.A |
|4 | RF38 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ASSY POWER CORD | | | | |
|4 | RF39 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | 1 | * | AA96-20115F | ASSY POWER CORD:-,AP2/YES,H/C50mm,KJP170 | |
|4 | RF40 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..2 | | 3811-000401 | WIRE-PVC CU:BCWA,300V,ROLL,17/0.16mm,#22 | S.N.A |
|4 | RF41 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..2 | △ | AA39-10005N | POWER-CORD:-,KKP-560A,KLCE-2F,2.59,3PAU | S.N.A |
|4 | RF42 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..2 | | AA61-20284A | HOLDER:-,P-CORD,PPVO,BLK,KE-002 | S.N.A |
|4 | RF43 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ASSY-DOOR,BODY | | | | |
|4 | RF44 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | 1 | * | AA95-00575A | ASSY-DOOR,BODY:-,SP53J5HF/MVT,J51A,-,-, | |
|4 | RF45 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..2 | AV+DB | 6006-001095 | SCREW-ASS'Y TAPT:WPBH,+M4,L12,ZPC(YEL) | S.N.A |
|4 | RF46 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..2 | CP+DB | 6002-000512 | SCREW-TAPPING:RH,+2,M4,L12,ZPC(BLK),SWR | S.N.A |
|4 | RF47 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..2 | PC+BM | 6003-001023 | SCREW-TAPTITE:RWH,+B,M3,L10,ZPC(YEL),SW | S.N.A |
|4 | RF48 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..2 | | AA91-00157P | ASSY-DOOR,BODY:-,HB,J51A PAL,SP43J5HF | |
|4 | RF49 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..3 | KC+DB | 6002-000512 | SCREW-TAPPING:RH,+2,M4,L12,ZPC(BLK),SWR | S.N.A |
|4 | RF51 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..3 | KNOPOW | AA61-60005A | SPRING-CS:-,SUS304,0.6,OD10.7,H10,N4,-,- | |
|4 | RF52 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..3 | WR+DB | 6002-000512 | SCREW-TAPPING:RH,+2,M4,L12,ZPC(BLK),SWR | S.N.A |
|4 | RF53 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..3 | | AA64-00290B | WINDOW-REMOCON:-,PCJ533R,SV-704PPC,-,VI | S.N.A |
|4 | RF54 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..3 | | AA64-00294B | DOOR-CONTROL:-,PCJ533R,GR-806P,ABS,HB,GR | |
|4 | RF55 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..3 | | AA64-00295H | DOOR-BODY:-,53J5HF,GR-806P P51A PAL,HIPS | |
|4 | RF56 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..3 | | AA64-00289B | INDICATOR-LED:-,PCJ533R,-,ACRYL,-,CLR,- | S.N.A |
|4 | RF57 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..3 | | AA64-00288C | KNOB-POWER:-,43J5,GR806P,MASTER,ABS,HB,G | S.N.A |
|4 | RF58 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | | AA64-00287B | KNOB-CHA,VOL:-,PCJ533R,S/METALLIC+UV,COA | S.N.A |
|4 | RF59 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | | AA64-00286B | KNOB-CONTROL:-,PCJ533R,GR-806P,ABS,HB,GR | S.N.A |
|4 | RF60 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | | AA61-30001A | LATCH-DOOR:-,-,KIFUCO LA701,- | S.N.A |
|4 | RF61 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..2 | | AA95-00262B | ASSY-PCB,CONTROL:-,SP43J5HP3S/XTT,CHINA, | |
|4 | RF62 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..3 | CNW01 | AA39-00120C | LEAD CONNECTOR-ASSY:-,-,11P,-,-,-,35155 | |
|4 | RF64 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | CNY01 | 3711-003973 | CONNECTOR-HEADER:BOX,11P1R,2.5mm,STRAIG | |
|4 | RF66 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | LEDY01 | 0601-001381 | LED ROUND,RED/GRN,5.0MM,650/563NM | |
|4 | RF67 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP2012 | | ..3 | PCB | AA41-00189A | PCB-CONTROL:J51A,1LFR,1.330x245x1.6T,4A | S.N.A |
|4 | RF68 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | ..3 | RMV01 | AA59-60002B | MODULE-REMOCON:-,ORC-50HF,38KHZ,940MM,ME | |
|4 | RF74 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | SWY03 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | |
|4 | RF75 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | SWY04 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | |
|4 | RF76 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | | | | | |
|4 | RF77 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | | | | | |
|4 | RF78 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | | | | | |
|4 | RF79 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | | | | | |
|4 | RF80 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | | | | | |
|4 | RF81 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | | | | | |
|4 | RF82 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP2012 | | | | | | |
|4 | RF83 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | | | | | |
|4 | RF84 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | | | | | |
|4 | RF85 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | | | | | |
|4 | RF86 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | | | | | | |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|-------------|------------------------------------|--------|
| ... | C174 | 2404-000256 | C-TA,CHIP:47UF,20%,16V,GP,TP,7343 | | ... | R110 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C201 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | | ... | R111 | 2007-000380 | R-CHIP:13KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C202 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | | ... | R112 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C203 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | | ... | R113 | 2007-001097 | R-CHIP:62KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C204 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | | ... | R114 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C205 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | | ... | R116 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C206 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | | ... | R117 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | D101 | 0401-000160 | DIODE-SWITCHING:ISS314,30V,100mA,USC,TP | | ... | R118 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | D102 | 0401-000160 | DIODE-SWITCHING:ISS314,30V,100mA,USC,TP | | ... | R119 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ101 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | | ... | R120 | 2007-000401 | R-CHIP:150OHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ102 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | | ... | R121 | 2007-000023 | R-CHIP:120OHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ104 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | | ... | R122 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ105 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | | ... | R123 | 2007-000401 | R-CHIP:150OHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ106 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | | ... | R124 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ107 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | | ... | R125 | 2007-000401 | R-CHIP:150OHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ108 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | | ... | R126 | 2007-000401 | R-CHIP:150OHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ109 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | | ... | R127 | 2007-000401 | R-CHIP:150OHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ110 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | | ... | R128 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ111 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | | ... | R129 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP,2012 | |
| ... | DZ112 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | | ... | R130 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP,2012 | |
| ... | DZ113 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | | ... | R131 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ114 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | | ... | R132 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP,2012 | |
| ... | DZ115 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | | ... | R133 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP,2012 | |
| ... | DZ116 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | | ... | R134 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ117 | 0403-001284 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | | ... | R135 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | EF101 | 2901-000229 | FILTER-EMI SMD:50V,0.3A,-,22000pF,4.5x3. | | ... | R136 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | EF102 | 2901-000229 | FILTER-EMI SMD:50V,0.3A,-,22000pF,4.5x3. | | ... | R137 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP,2012 | |
| ... | EF104 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | | ... | R138 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP,2012 | |
| ... | EF105 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | | ... | R139 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP,2012 | |
| ... | EF106 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | | ... | R140 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP,2012 | |
| ... | EF107 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | | ... | R141 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP,2012 | |
| ... | EF108 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | | ... | R142 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP,2012 | |
| ... | EF109 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | | ... | R143 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | EF110 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | | ... | R144 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | EF111 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | | ... | R145 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP,2012 | |
| ... | EF112 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | | ... | R146 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP,2012 | |
| ... | EF113 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | | ... | R147 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP,2012 | |
| ... | EF114 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | | ... | R148 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP,2012 | |
| ... | EF115 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | | ... | R149 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP,2012 | |
| ... | EF116 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | | ... | R150 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP,2012 | |
| △ | IC101 | AA13-00071A | IC-ASIC;SDC91,QFP,208P,CONV CONTROL | | ... | R151 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| △ | IC102 | 0801-001043 | IC-CMOS LOGIC:74HC4046,PHASE-LOCKED-LOOP | | ... | R152 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | |
| △ | IC103 | AA09-00032A | IC-MCU:TS87251G2D-OT,TS87251G2D-OT | | ... | R153 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
| △ | IC104 | 1103-001167 | IC-EEPROM:28C64,8KX8BIT,TSOP,28P; ,120NS | | ... | R154 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP,2012 | |
| △ | IC105 | 1201-001520 | IC-VIDEO AMP:2210,SOP8P,150MIL,DUAL,70dB | | ... | R155 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
| △ | IC106 | 1201-001504 | IC-OP AMP:072,SOP8P,150MIL,DUAL,-,PLAST | | ... | R156 | 2007-001055 | R-CHIP:6.2KOHM,5%,1/10W,DA,TP,2012 | |
| △ | IC107 | 1201-001504 | IC-OP AMP:072,SOP8P,150MIL,DUAL,-,PLAST | | ... | R157 | 2007-000671 | R-CHIP:2KOHM,5%,1/10W,DA,TP,2012 | |
| △ | IC108 | 1201-001504 | IC-OP AMP:072,SOP8P,150MIL,DUAL,-,PLAST | | ... | R158 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| △ | IC109 | 0801-001156 | IC-CMOS LOGIC:74HC4066,BILATERAL SWITCH, | | ... | R159 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP,2012 | |
| △ | IC110 | 0801-001156 | IC-CMOS LOGIC:74HC4066,BILATERAL SWITCH, | | ... | R160 | 2007-000766 | R-CHIP:330OHM,5%,1/10W,DA,TP,2012 | |
| △ | IC111 | 1001-000105 | IC-ANALOG SWITCH:CD4066BM,BILATERAL CMOS | | ... | R161 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| △ | IC112 | 1001-000105 | IC-ANALOG SWITCH:CD4066BM,BILATERAL CMOS | | ... | R162 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| △ | PCB | AA41-00188D | PCB-CONVERGENCE MODULE:SVP-43J4M,FR-4,4L | S.N.A | ... | R163 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q101 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | | ... | R164 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | Q102 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | | ... | R165 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | Q103 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | | ... | R166 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | Q104 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | | ... | R167 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | Q105 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | | ... | R168 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | Q106 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | | ... | R169 | 2007-000703 | R-CHIP:3.6KOHM,5%,1/10W,DA,TP,2012 | |
| ... | Q107 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | | ... | R170 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | Q108 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | | ... | R171 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP,2012 | |
| ... | Q109 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A | ... | R172 | 2007-000642 | R-CHIP:270OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q110 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A | ... | R173 | 2007-000030 | R-CHIP:560OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q111 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A | ... | R174 | 2007-000030 | R-CHIP:560OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q112 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A | ... | R175 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | |
| ... | Q113 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A | ... | R176 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
| ... | Q114 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A | ... | R177 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R101 | 2007-000881 | R-CHIP:4.7OHM,5%,1/10W,DA,TP,2012 | | ... | R178 | 2007-000728 | R-CHIP:300OHM,5%,1/10W,DA,TP,2012 | |
| ... | R102 | 2007-000881 | R-CHIP:4.7OHM,5%,1/10W,DA,TP,2012 | | ... | R179 | 2007-000728 | R-CHIP:300OHM,5%,1/10W,DA,TP,2012 | |
| ... | R103 | 2007-000881 | R-CHIP:4.7OHM,5%,1/10W,DA,TP,2012 | | ... | R180 | 2007-000728 | R-CHIP:300OHM,5%,1/10W,DA,TP,2012 | |
| ... | R104 | 2007-000881 | R-CHIP:4.7OHM,5%,1/10W,DA,TP,2012 | | ... | R181 | 2007-000728 | R-CHIP:300OHM,5%,1/10W,DA,TP,2012 | |
| ... | R105 | 2007-000415 | R-CHIP:150HM,5%,1/10W,DA,TP,2012 | | ... | R182 | 2007-000728 | R-CHIP:300OHM,5%,1/10W,DA,TP,2012 | |
| ... | R106 | 2007-000947 | R-CHIP:47OHM,5%,1/10W,DA,TP,2012 | | ... | R183 | 2007-000728 | R-CHIP:300OHM,5%,1/10W,DA,TP,2012 | |
| ... | R107 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | | ... | R184 | 2007-000830 | R-CHIP:39KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R108 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | | ... | R201 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP,2012 | |
| ... | R109 | 2007-000493 | R-CHIP:2.2KOHM,5%,1/10W,DA,TP,2012 | | ... | R203 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP,2012 | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|---------------------|-------------|---|--|--------|-------|----------|-------------|--|--------|
| ... | R204 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP2012 | | ... | D352 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | R205 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP2012 | | ... | D353 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | R206 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP2012 | | ... | D355 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| ... | R207 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP2012 | | ... | D363 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | R208 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP2012 | | ... | D364 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | X101 | 2801-003860 | CRYSTAL-SMD:24MHz,30ppm,28-ABV,20pf,50oh | | ... | D371 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ASSY-PCB,H/V | | | | | | | | | |
| 1 | * | AA95-00056C | ASSY-PCB,H/V,-,SP43J5HP3S/XTTJ51A,-,-,- | | ... | D372 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | BK01 | AA61-10068A | BRACKET-PCB,-M2160,SPT,E,T0.3,-,-,- | S.N.A | ... | D373 | 0402-000243 | DIODE-RECTIFIER:RC2-V1,2000V,0.2A,DO-201 | |
| ... | BK02 | AA61-10068A | BRACKET-PCB,-M2160,SPT,E,T0.3,-,-,- | S.N.A | ... | D384 | 0402-000132 | DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP | |
| ... | BK03 | AA61-10068A | BRACKET-PCB,-M2160,SPT,E,T0.3,-,-,- | S.N.A | ... | D385 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | CN401 | 3711-001049 | CONNECTOR-HEADER:BOX,6P,1R,2.5mm,ANGLE,- | | ... | D386 | 0403-001316 | DIODE-ZENER:MTZJ3.0A,2.85-3.07V,500mW,DO | |
| ... | CN402 | 3711-002709 | CONNECTOR-HEADER:NOWALL,12P,1R,2.5MM,ANG | | ... | D395 | 0403-001319 | DIODE-ZENER:MTZJ4.7C,4.68-4.93V,500mW,DO | |
| ... | CN403 | AA39-20052A | LEAD CONNECTOR-ASSY,-YBNH025-04,YSH025- | | ... | D442 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | CN404 | 3711-001283 | CONNECTOR-HEADER:NOWALL,14P,1R,2.5mm,ANG | | ... | D443 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | IC471 | 1203-000610 | IC-PWM CONTROLLER:494,DIP,16P,300MIL,PLA | | ... | D451 | 0402-000534 | DIODE-RECTIFIER:RG10V,400V,1.2A,DO-201,T | |
| ... | L351 | AA27-10003M | COIL-CHOKE:-6100uH,J,40,34mA,TPELO607R | | ... | D456 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | PCB | AA41-00199C | PCB-H/V MODULE:P53A,CEM-1,1L,C,1.6T,330x | S.N.A | ... | D457 | 0403-000714 | DIODE-ZENER:MTZJ3.3B,3.3V,3.32-3.53V,500 | |
| ... | Q371 | AA96-50291A | ASSY-H/S,-,-,AA62-30154B,ZSC4636,- | | ... | D474 | 0403-000734 | DIODE-ZENER:TZP15B,15V,14.7-16.5V,1W,DO | |
| ... | Q205-000129 | GREASE-SILICON:SC102,JAPAN | | S.N.A | ... | D475 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | Q502-000442 | TR-POWER:2SC4636RB,NPN,2W,T0-220,ST,10- | | S.N.A | ... | D476 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | | S.N.A | ... | D477 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | AA62-30154B | HEAT SINK-ES:-A6063,EXTR,-,-,SILVER ANO | | S.N.A | ... | D478 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | Q422 | 0505-000156 | FET-SILICON:IRF620,N,200V,5A,0.8ohm,50W, | S.N.A | ... | D479 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | R425 | 2003-000736 | R-METAL OXIDE(S):560ohm,5%,3W,AA,TP6x16 | | ... | D480 | 0402-000132 | DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP | |
| ... | R485 | 2008-001096 | R-FUSIBLE(S):3.30HM,5%,1/2W,AC,BK,2.5X6. | | ... | D483 | 0403-000720 | DIODE-ZENER:MTZJ9.1B,9.1V,8.57-9.01V,500 | |
| ... | AA99-20071J | ASSY-PCB SUB,AUTO: AA95-00056C ,V | | S.N.A | ... | D484 | 0402-000132 | DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP | |
| ... | C341 | 2401-001914 | C-AL:1uf,20%,50V,BP,TP5x11.5 | | ... | D491 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | C342 | 2401-000962 | C-AL:22uf,20%,50V,GP,TP5x11.5 | | ... | D492 | 0403-000716 | DIODE-ZENER:MTZJ4.7B,4.7V,4.55-4.8V,500m | |
| ... | C351 | 2301-000175 | C-FILM,PEF:15nf,5%,50V,TP7.1x3.5x13mm,5 | | ... | D493 | 0403-001325 | DIODE-ZENER:MTZJ15C,14.35-15.09V,500mW,D | |
| ... | C352 | 2401-000480 | C-AL:10uf,20%,50V,GP,TP5x11.5 | | ... | IC481 | 1203-001217 | IC-POSI.ADJUST REG.:431,T0-92,3P4,58MIL | |
| ... | C353 | 2301-000204 | C-FILM,PEF:2.7nf,5%,50V,TP7.4x3.9x13mm, | | ... | L341 | 2701-000116 | INDUCTOR-AXIAL:10uH,10%,4.2x9.8mm | |
| ... | C354 | 2301-000261 | C-FILM,PEF:4.7nf,5%,100V,TP10.5x12.5x6. | | ... | Q342 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C355 | 2401-000480 | C-AL:10uf,20%,50V,GP,TP5x11.5 | | ... | Q343 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C356 | 2201-000180 | C-CERAMIC,DISC:10nf,10%,50V,Y5V,TP7x3.5 | | ... | Q344 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,T0-92,T | |
| ... | C357 | 2401-001989 | C-AL:4.7uf,20%,50V,BP,TP5x11.5 | | ... | Q350 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C358 | 2401-000471 | C-AL:10uf,20%,50V,BP,TP5x11.5mm | | ... | Q351 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,T0-92,T | |
| ... | C360 | 2305-000289 | C-FILM,MPEF:220nf,5%,63V,TP,-,5mm | | ... | Q352 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C361 | 2306-000122 | C-FILM,MPPF:100nf,5%,50V,TP7.3x4.0x5.0m | | ... | Q353 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C362 | 2305-000149 | C-FILM,MPEF:100nf,5%,100V,TP12x12.5x6.5 | | ... | Q354 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,T0-92,T | |
| ... | C371 | 2401-000302 | C-AL:100uf,20%,25V,GP,TP6.3x11.5 | | ... | Q355 | 0501-000366 | TR-SMALL SIGNAL:KSC2330-Y,NPN,1V,T0-92L, | |
| ... | C372 | 2401-000480 | C-AL:10uf,20%,50V,GP,TP5x11.5 | | ... | Q381 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C373 | 2401-000302 | C-AL:100uf,20%,25V,GP,TP6.3x11.5 | | ... | Q382 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C374 | 2401-001621 | C-AL:6.8uf,20%,450V,GP,TP13x20.5 | | ... | Q401 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C405 | 2201-000558 | C-CERAMIC,DISC:0.47nf,10%,50V,Y5P,TP5x3 | | ... | Q402 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C406 | 2201-000370 | C-CERAMIC,DISC:0.22nf,10%,50V,Y5P,TP4x3 | | ... | Q421 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C421 | 2401-000302 | C-AL:100uf,20%,25V,GP,TP6.3x11.5 | | ... | Q451 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C429 | 2305-000704 | C-FILM,MPEF:100nf,5%,250V,TP16.5x10.3x5 | | ... | Q452 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C454 | 2303-000331 | C-FILM,PPF:4.7nf,5%,630V,TP19.5x12x7.7. | | ... | Q453 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C455 | 2401-001527 | C-AL:47uf,20%,250V,HR,TP13x25mm,5m | | ... | Q454 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,T0-92,T | |
| ... | C456 | 2201-000132 | C-CERAMIC,DISC:0.1nf,10%,500V,Y5P,TP6.5 | | ... | Q461 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C461 | 2201-000600 | C-CERAMIC,DISC:0.56nf,10%,50V,Y5P,TP5x3 | | ... | Q471 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C462 | 2301-000246 | C-FILM,PEF:33nf,5%,100V,TP7x5.0x9.5mm,5 | | ... | Q473 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C480 | 2306-000122 | C-FILM,MPPF:100nf,5%,50V,TP7.3x4.0x5.0m | | ... | Q481 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C481 | 2401-000914 | C-AL:22uf,20%,16V,GP,TP5x11.5 | | ... | Q482 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,T0-92,T | |
| ... | C482 | 2305-000178 | C-FILM,MPEF:10nf,5%,100V,TP,-,5mm | | ... | Q483 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,T0-92,T | |
| ... | C484 | 2401-001026 | C-AL:3.3UF,20%,50V,GP,TP5X11.5 | | ... | Q491 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,T0-92,T | |
| ... | C485 | 2201-000146 | C-CERAMIC,DISC:0.1nf,5%,50V,SL,TP5x3.5, | | ... | R339 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | C486 | 2201-000146 | C-CERAMIC,DISC:0.1nf,5%,50V,SL,TP5x3.5, | | ... | R340 | 2001-000241 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | C487 | 2401-001026 | C-AL:3.3UF,20%,50V,GP,TP5X11.5 | | ... | R341 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | C488 | 2401-002144 | C-AL:47uf,20%,16V,GP,TP5x11.5 | | ... | R342 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | C489 | 2401-001840 | C-AL:100uf,20%,16V,GP,TP6.3x11.5 | | ... | R343 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | C490 | 2201-000119 | C-CERAMIC,DISC:100nf,+80-20%,50V,Y5V,TP, | | ... | R344 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | C492 | 2401-002144 | C-AL:47uf,20%,16V,GP,TP5x11.5 | | ... | R345 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4M | |
| ... | C493 | 2201-000119 | C-CERAMIC,DISC:100nf,+80-20%,50V,Y5V,TP, | | ... | R345A | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | C494 | 2201-000471 | C-CERAMIC,DISC:0.33nf,10%,50V,Y5P,TP4x3 | | ... | R346 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | C495 | 2301-000192 | C-FILM,PEF:1nf,5%,50V,TP5.3x10mm,5mm | | ... | R347 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4M | |
| ... | C496 | 2401-000832 | C-AL:220uf,20%,25V,GP,TP8x11.5.5 | | ... | R348 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | D342 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R349 | 2001-000252 | R-CARBON:1.6KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | D343 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R351 | 2001-001178 | R-CARBON(S):680OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | D344 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R352 | 2001-000003 | R-CARBON:330ohm,5%,1/8W,AA,TP1.8x3.2mm | |
| ... | D345 | 0403-001325 | DIODE-ZENER:MTZJ15C,14.35-15.09V,500mW,D | | ... | R353 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | | | | | ... | R354 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | | | | | ... | R355 | 2001-000006 | R-CARBON:2.4KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | | | | | ... | R357 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | | | | | ... | R358 | 2001-000008 | R-CARBON:15KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | | | | | ... | R359 | 2001-000766 | R-CARBON:43KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | | | | | ... | R360 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|---|--------|-------|-------------|--|--|--------|
| ... | R361 | 2001-001191 | R-CARBON(S):820KOHM,5%,1/2W,AA,TP,2.4X6.4 | | ... | R484 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R362 | 2001-000660 | R-CARBON:33KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | ... | R487 | 2001-000924 | R-CARBON:680OHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R363 | 2001-000723 | R-CARBON:4.3KOHM,5%,1/8W,AA,TP,1.8X3.2M | | ... | R489 | 2001-000522 | R-CARBON:22KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R364 | 2001-000938 | R-CARBON:680OHM,5%,1/8W,AA,TP,1.8X3.2MM | | ... | R490 | 2001-000723 | R-CARBON:4.3KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R365 | 2001-001120 | R-CARBON(S):3.3OHM,5%,1/2W,AA,TP,2.4X6.4 | | ... | R491 | 2001-001178 | R-CARBON(S):680OHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | R366 | 2001-000109 | R-CARBON(S):470OHM,5%,1/2W,AA,TP,2.4X6.4 | | ... | R492 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | R367 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6.4 | | ... | R493 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R368 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6.4 | | ... | R494 | 2001-000066 | R-CARBON(S):10KOHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | R369 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6.4 | | ... | R495 | 2001-000037 | R-CARBON(S):330OHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | R369A | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6.4 | | ... | R496 | 2001-000347 | R-CARBON:13KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | R370 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6.4 | | ... | R497 | 2001-000003 | R-CARBON:330ohm,5%,1/8W,AA,TP,1.8x3.2mm | |
| ... | R371 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP,2.4X6.4 | | ... | R498 | 2001-001070 | R-CARBON(S):120OHM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | R372 | 2001-001110 | R-CARBON(S):240KOHM,5%,1/2W,AA,TP,2.4X6.4 | | ... | 2001-000262 | R-CARBON:1.8MOHM,5%,1/8W,AA,TP,1.8X3.2M | | |
| ... | R373 | 2001-001110 | R-CARBON(S):240KOHM,5%,1/2W,AA,TP,2.4X6.4 | | .. | 0202-000187 | SOLDER-WIRE FLUX;-RS60S,D1.2.63Sn/37Pb | S.N.A | |
| ... | R374 | 2001-001110 | R-CARBON(S):240KOHM,5%,1/2W,AA,TP,2.4X6.4 | | .. | AA65-30105C | CLAMP-WIRE:ALL MODEL,NYLON 66,V2,NTR,5MM | S.N.A | |
| ... | R375 | 2001-001113 | R-CARBON(S):270KOHM,5%,1/2W,AA,TP,2.4X6.4 | | | | | | |
| ... | R376 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M | | | | | | |
| ... | R377 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP,2.5x6.5 | | | | | | |
| ... | R378 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP,2.5x6.5 | | | | | | |
| ... | R379 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP,2.5x6.5 | | | | | | |
| ... | R380 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP,2.5x6.5 | | 1 | * | AA95-00055L | ASSY-PCB,CONV AMP;-SP5J5HF,J51A,-,,- | |
| ... | R381 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP,2.4X6.4M | | .. | C491 | 2306-000322 | C-FILM,MPPF:12nf5%,1.6KV,TP29x20.5x13, | |
| ... | R384 | 2001-001150 | R-CARBON(S):470KOHM,5%,1/2W,AA,TP,2.4X6.4 | | .. | CN203 | AA39-00115A | LEAD CONNECTOR-ASSY;-,-,10P,-,,-,YBNH2 | |
| ... | R385 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | CN401 | AA39-00128A | LEAD CONNECTOR-ASSY;-,-,8P,-,,-,YBNH25 | |
| ... | R386 | 2001-000786 | R-CARBON:47KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | CN402 | AA39-00116A | LEAD CONNECTOR-ASSY;-,-,12P,-,,-,YBNH2 | |
| ... | R387 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | CN802 | AA39-00128A | LEAD CONNECTOR-ASSY;-,-,8P,-,,-,YBNH25 | |
| ... | R388 | 2001-000522 | R-CARBON:22KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | ICZ101 | AA96-50152C | ASSY-H/S;-,-,TR,AA62-30012A,KA7806A,30MM | |
| ... | R389 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | 1203-000284 | IC-POSIFIXED REG.-7806,TO-220,3P,-,PLAS | | |
| ... | R395 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M | | .. | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A | |
| ... | R397 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | AA62-30012A | HEAT SINK-ES-;A6602 EXTR,-,,-,TO220,-,,- | S.N.A | |
| ... | R411 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M | | .. | 1203-000121 | IC-NEGA.FIXED REG.-7906,TO-220,3P,-,PLAS | | |
| ... | R412 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP,2.4X6.4M | | .. | ICZ102 | AA96-00034A | ASSY-H/S;-,-,CONVERGENCE,AA62-30173D,STK3 | |
| ... | R413 | 2001-000515 | R-CARBON:220OHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | ICZ103 | 0205-000129 | GREASE-SILICON:SC102,JAPAN | S.N.A |
| ... | R414 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | 1201-001225 | IC-VIDEO AMP:392,SIP,2P,-,THREE,-,PLAST | | |
| ... | R415 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M | | .. | 6003-001021 | SCREW-TAPTITE:RH,+B,M3,L15,ZPC(YEL),SWR | S.N.A | |
| ... | R416 | 2001-000006 | R-CARBON:2.4KOHM,5%,1/8W,AA,TP,1.8X3.2M | | .. | AA62-30173D | HEAT SINK-ES-;T1.0,WHITE,SCREW-HOLE[2 | S.N.A | |
| ... | R420 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | ICZ104 | AA96-00034A | ASSY-H/S;-,-,CONVERGENCE,AA62-30173D,STK3 | |
| ... | R421 | 2003-002159 | R-METAL OXIDE:1500OHM,5%,1W,AG,TP,4.3X12M | | .. | PCB | AA41-00135D | PCB-CONVERGENCE AMP:P51A,1L,CEM-1,330x24 | S.N.A |
| ... | R422 | 2001-000028 | R-CARBON(S):100OHM,5%,1/2W,AA,TP,2.4X6.4 | | .. | SG303 | 4715-001050 | SURGE ABSORBER:2.4KV,20%,1500A,-,DISC-RA | |
| ... | R423 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M | | .. | VR472 | 2103-001086 | VR-SEMI:100KOHM,25%,0.3W,TOP | |
| ... | R437 | 2008-001087 | R-FUSIBLE(S):1.8ohm,5%,2W,AG,TP,3.9x12mm | | .. | 0202-000187 | SOLDER-WIRE FLUX;-RS60S,D1.2.63Sn/37Pb | S.N.A | |
| ... | R438 | 2001-000085 | R-CARBON(S):100KOHM,5%,1/2W,AA,TP,2.4X6.4 | | .. | AA99-20071E | ASSY-PCB SUB,AUTO; AA95-00055L / | S.N.A | |
| ... | R439 | 2001-000085 | R-CARBON(S):100KOHM,5%,1/2W,AA,TP,2.4X6.4 | | .. | 3711-002643 | CONNECTOR-HEADER:BOX,4P,TR,2.5MM,STRAIGH | | |
| ... | R442 | 2008-000254 | R-FUSIBLE(S):0.68ohm,5%,2W,AF,TP,3.9x10m | | .. | CZ101 | 2401-001429 | C-AL:470uf,20%,50V,G/TP,13x20.5 | |
| ... | R442A | 2008-000254 | R-FUSIBLE(S):0.68ohm,5%,2W,AF,TP,3.9x10m | | .. | CZ102 | 2401-001429 | C-AL:470uf,20%,50V,G/TP,13x20.5 | |
| ... | R443 | 2003-002156 | R-METAL OXIDE:560OHM,5%,2W,AG,TP,6X16MM | | .. | CZ103 | 2401-000689 | C-AL:2200uf,20%,16V,G/TP,13x25.5 | |
| ... | R443A | 2003-002156 | R-METAL OXIDE:560OHM,5%,2W,AG,TP,6X16MM | | .. | CZ105 | 2401-000689 | C-AL:2200uf,20%,16V,G/TP,13x25.5 | |
| ... | R445 | 2001-000258 | R-CARBON:1.8KOHM,5%,1/8W,AA,TP,1.8X3.2M | | .. | CZ106 | 2201-000180 | C-CERAMIC,DISC:10nf,10%,50V,Y5V,TP,7x3.5 | |
| ... | R446 | 2001-000522 | R-CARBON:22KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | CZ107 | 2201-000180 | C-CERAMIC,DISC:0.10nf,10%,50V,Y5V,TP,7x3.5 | |
| ... | R447 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M | | .. | CZ108 | 2201-000499 | C-CERAMIC,DISC:0.39nf,5%,50V,SL,TP,8.5x3 | |
| ... | R448 | 2001-000411 | R-CARBON:18KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | CZ109 | 2201-000499 | C-CERAMIC,DISC:0.39nf,5%,50V,SL,TP,8.5x3 | |
| ... | R449 | 2001-000660 | R-CARBON:33KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | CZ110 | 2201-000499 | C-CERAMIC,DISC:0.39nf,5%,50V,SL,TP,8.5x3 | |
| ... | R450 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | CZ111 | 2201-000976 | C-CERAMIC,DISC:0.022nf,5%,50V,NP,TP,5x3 | |
| ... | R451 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP,1.8X3.2M | | .. | CZ112 | 2201-000863 | C-CERAMIC,DISC:0.68nf,10%,50V,Y5P,TP,5x3 | |
| ... | R452 | 2001-000241 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP,1.8X3.2M | | .. | CZ113 | 2201-000976 | C-CERAMIC,DISC:0.022nf,5%,50V,NP,TP,5x3 | |
| ... | R454 | 2001-000761 | R-CARBON:430OHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | CZ114 | 2201-000863 | C-CERAMIC,DISC:0.68nf,10%,50V,Y5P,TP,5x3 | |
| ... | R455 | 2001-000761 | R-CARBON:430OHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | CZ115 | 2201-000976 | C-CERAMIC,DISC:0.022nf,5%,50V,NP,TP,5x3 | |
| ... | R456 | 2001-000761 | R-CARBON:430OHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | CZ116 | 2201-000863 | C-CERAMIC,DISC:0.68nf,10%,50V,Y5P,TP,5x3 | |
| ... | R458 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | CZ117 | 2201-000327 | C-CERAMIC,DISC:2.2nf,10%,50V,Y5V,TP,6.5x | |
| ... | R459 | 2001-001192 | R-CARBON(S):820OHM,5%,1/2W,AA,TP,2.4X6.4 | | .. | CZ118 | 2201-000327 | C-CERAMIC,DISC:2.2nf,10%,50V,Y5V,TP,6.5x | |
| ... | R460 | 2003-002044 | R-METAL OXIDE(S):100ohm,5%,1W,AF,TP,2.5x | | .. | CZ119 | 2201-000119 | C-CERAMIC,DISC:100nf,+80-20%,50V,Y5V,TP, | |
| ... | R461 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP,1.8X3.2M | | .. | CZ120 | 2201-000119 | C-CERAMIC,DISC:100nf,+80-20%,50V,Y5V,TP, | |
| ... | R464 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M | | .. | CZ121 | 2201-000764 | C-CERAMIC,DISC:0.082nf,5%,50V,NP,TP,8x3 | |
| ... | R471 | 2001-001146 | R-CARBON(S):4.7OHM,5%,1/2W,AA,TP,2.4X6.4 | | .. | CZ126 | 2201-000499 | C-CERAMIC,DISC:0.39nf,5%,50V,SL,TP,8.5x3 | |
| ... | R472 | 2001-000800 | R-CARBON:5.1KOHM,5%,1/8W,AA,TP,1.8X3.2M | | .. | CZ127 | 2201-000499 | C-CERAMIC,DISC:0.39nf,5%,50V,SL,TP,8.5x3 | |
| ... | R473 | 2001-000800 | R-CARBON:5.1KOHM,5%,1/8W,AA,TP,1.8X3.2M | | .. | CZ128 | 2201-000499 | C-CERAMIC,DISC:0.39nf,5%,50V,SL,TP,8.5x3 | |
| ... | R474 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | CZ132 | 2201-000976 | C-CERAMIC,DISC:0.022nf,5%,50V,NP,TP,5x3 | |
| ... | R474A | 2001-000508 | R-CARBON:220KOHM,5%,1/8W,AA,TP,1.8X3.2M | | .. | CZ133 | 2201-000863 | C-CERAMIC,DISC:0.68nf,10%,50V,Y5P,TP,5x3 | |
| ... | R475 | 2004-001023 | R-METAL:5.6Kohm,1%,1/8W,AA,TP,1.8x3.2m | | .. | CZ134 | 2201-000976 | C-CERAMIC,DISC:0.022nf,5%,50V,NP,TP,5x3 | |
| ... | R475B | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP,1.8X3.2M | | .. | CZ135 | 2201-000863 | C-CERAMIC,DISC:0.68nf,10%,50V,Y5P,TP,5x3 | |
| ... | R477 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | CZ136 | 2201-000976 | C-CERAMIC,DISC:0.022nf,5%,50V,NP,TP,5x3 | |
| ... | R479 | 2001-000005 | R-CARBON:390ohm,5%,1/8W,AA,TP,1.8x3.2mm | | .. | CZ137 | 2201-000863 | C-CERAMIC,DISC:0.68nf,10%,50V,Y5P,TP,5x3 | |
| ... | R480 | 2001-000449 | R-CARBON:2.2KOHM,5%,1/8W,AA,TP,1.8X3.2M | | .. | CZ138 | 2201-000327 | C-CERAMIC,DISC:2.2nf,10%,50V,Y5V,TP,6.5x | |
| ... | R481 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | CZ139 | 2201-000327 | C-CERAMIC,DISC:2.2nf,10%,50V,Y5V,TP,6.5x | |
| ... | R482 | 2001-001031 | R-CARBON:91KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | CZ144 | 2401-0001840 | C-AL:100uf,20%,16V,G/TP,6.3x11.5 | |
| ... | R483 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | .. | CZ145 | 2201-000119 | C-CERAMIC,DISC:100nf,+80-20%,50V,Y5V,TP, | |

ASSY-PCB,CONV AMP

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|--------------|--|--------|-------|-------------|--|--|--------|
| ... | CZ146 | 2401-001840 | C-AL:100uF,20%,16V,GPTP6.3x11,5 | | ... | RZ131A | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | |
| ... | CZ147 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP | | ... | RZ132 | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | |
| ... | CZ151 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP3 | | ... | RZ132A | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | |
| ... | CZ152 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP3 | | ... | RZ133 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | CZ153 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP3 | | ... | RZ134 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | CZ154 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP3 | | ... | RZ135 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | CZ155 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP3 | | ... | RZ136 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | CZ156 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP3 | | ... | RZ137 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | D453 | 0402-001286 | DIODE-RECTIFIER:RP1H,2000V,1A,-,TP | | ... | RZ138 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | D501 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | RZ139 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | DZ120 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V5,96-6.27V,500 | | ... | RZ140 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | DZ121 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V5,96-6.27V,500 | | ... | RZ141 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | DZ122 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V5,96-6.27V,500 | | ... | RZ142 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | DZ126 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | | ... | RZ143 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | DZ127 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | | ... | RZ144 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | DZ128 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V5,96-6.27V,500 | | ... | RZ145 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | DZ129 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V5,96-6.27V,500 | | ... | RZ146 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | DZ130 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V5,96-6.27V,500 | | ... | RZ147 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | |
| ... | DZ131 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V5,96-6.27V,500 | | ... | RZ148 | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | |
| ... | LZ101 | 2701-001030 | INDUCTOR-AXIAL:43uH,10%,5x14mm | | ... | RZ148A | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | |
| ... | LZ102 | 2701-001030 | INDUCTOR-AXIAL:43uH,10%,5x14mm | | ... | RZ149 | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | |
| ... | LZ103 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | ... | RZ149A | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | |
| ... | LZ104 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | | | | | |
| ... | LZ107 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | | | | | |
| ... | LZ108 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | | | | | |
| ... | LZ109 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | | | | | |
| ... | LZ110 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | | | | | |
| ... | LZ111 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | 1 | * | AA95-00219D | ASSY-PCB,TERMINAL:,-SP43,J5H,J51A,-,-,1 | |
| ... | LZ112 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | | | | | | |
| ... | R382 | 2002-001006 | R-COMPOSITION:4.7Kohm,5%,1/2W,AA,TP3.7x | | ... | CNT01 | 3711-003630 | CONNECTOR-HEADER:BOX,32P2R,2.54mm,ANGLE | |
| ... | R476 | 2004-004046 | R-METAL(S):430Kohm,1%,1/2W,AA,TP2.5x6.5 | | ... | CNT02 | 3711-003630 | CONNECTOR-HEADER:BOX,32P2R,2.54mm,ANGLE | |
| ... | R476A | 2004-004001 | R-METAL(S):180Kohm,1%,1/2W,AA,TP2.5x6.5 | | ... | CNT03 | 3711-003601 | CONNECTOR-HEADER:BOX,12P1R,2.5mm,ANGLE, | |
| ... | R476B | 2004-0001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP2.5x6.5 | | | IC703 | 0904-001121 | IC-I/O SUPPORT CHIP:8574,8BIT,DIP,16P,30 | |
| ... | R476C | 2004-004046 | R-METAL(S):430Kohm,1%,1/2W,AA,TP2.5x6.5 | | | IC704 | 1001-001022 | IC-ANALOG SWITCH:TDAB601,BLANKING,DIP16 | |
| ... | R478 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP2.5x6.5 | | | IC705 | 0801-000213 | IC-CMOS LOGIC:4052,MULTIPLEXER,DIP,16P,3 | |
| ... | R501 | 2004-001376 | R-METAL(S):11Kohm,1%,1/2W,AA,TP2.4x6.4m | | | JKV01 | 3722-000498 | JACK-SCART:21P,-,SN,BLK,NO | |
| ... | R502 | 2004-004366 | R-METAL(S):1.3Kohm,1%,1/2W,AA,TP2.5x6.5 | | | JKV02 | 3722-001039 | JACK-RCA:9P:3.4mm,SN,BLK,#16-22 | |
| ... | RFZ19 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP3.9x10mm | | | JKV03 | 3722-001382 | JACK-RCA:5P(9P),3.4MM,NI,R/W/G/BLUE,- | |
| ... | RFZ20 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP3.9x10mm | | | JKV04 | 3722-001350 | JACK-RCA:7P/9P:3.4MM,NI,BLK,- | |
| ... | RFZ21 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP3.9x10mm | | | JKV05 | 3701-001013 | CONNECTOR-DSUB:15P:3R,FEMALE,STRAIGHT,AU | |
| ... | RFZ22 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP3.9x10mm | | | JKV06 | 3701-001013 | CONNECTOR-DSUB:15P:3R,FEMALE,STRAIGHT,AU | |
| ... | RFZ50 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP3.9x10mm | | | JKV07 | 3722-000544 | JACK-VHS:4P:11.5mm,AG,BLK,N | |
| ... | RFZ51 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP3.9x10mm | | | RN701 | 2011-000160 | R-NETWORK:10Kohm,5%,1/8W,A,SIP:9P,TP | |
| ... | RFZ52 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP3.9x10mm | | ... | AA65-30105A | CLAMP-WIRE-NYLON:66,V2,NTR,15MM,ALL MODE | S.N.A | |
| ... | RFZ53 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP3.9x10mm | | ... | AA99-20079E | ASSY-PCB SUB,AUTO: AA95-00219D ,V | S.N.A | |
| ... | RZ101 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | C701 | 2401-002009 | C-AL:100uF,20%,16V,GPTP6.3x7,5 | |
| ... | RZ102 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | C702 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ... | RZ103 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | C703 | 2401-002009 | C-AL:100uF,20%,16V,GPTP6.3x7,5 | |
| ... | RZ104 | 2001-001114 | R-CARBON(S):270OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | C704 | 2203-000818 | C-CERAMIC,CHIP:0.033nF,5%,50V,NP0,TP,201 | |
| ... | RZ105 | 2001-001114 | R-CARBON(S):270OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | C705 | 2203-000818 | C-CERAMIC,CHIP:0.033nF,5%,50V,NP0,TP,201 | |
| ... | RZ106 | 2001-001114 | R-CARBON(S):270OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | C706 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | |
| ... | RZ107 | 2001-001114 | R-CARBON(S):270OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | C707 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | |
| ... | RZ108 | 2001-001114 | R-CARBON(S):270OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | C708 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | |
| ... | RZ109 | 2001-001114 | R-CARBON(S):270OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | C709 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | |
| ... | RZ110 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | C710 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | |
| ... | RZ111 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | C711 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | |
| ... | RZ112 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | C712 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ... | RZ113 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | C713 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | |
| ... | RZ114 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | C714 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | |
| ... | RZ115 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | C715 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | |
| ... | RZ116 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | C716 | 2401-002009 | C-AL:100uF,20%,16V,GPTP6.3x7,5 | |
| ... | RZ117 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | C717 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ... | RZ118 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | C718 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | |
| ... | RZ120 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | C719 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | |
| ... | RZ121 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | C720 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | |
| ... | RZ122 | 2001-000003 | R-CARBON:330ohm,5%,1/8W,AA,TP1.8x3.2mm | | ... | C721 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | |
| ... | RZ123 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | C722 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | |
| ... | RZ124 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | C723 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ... | RZ125 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | C724 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | |
| ... | RZ126 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | C725 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ... | RZ127 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | C726 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ... | RZ128 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP3.9X10M | | ... | C727 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | |
| ... | RZ129 | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | | ... | C730 | 2401-002299 | C-AL:4.7uF,20%,50V,GPTP5x7,5 | |
| ... | RZ129A | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | | ... | C731 | 2401-002299 | C-AL:4.7uF,20%,50V,GPTP5x7,5 | |
| ... | RZ130 | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | | ... | C732 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | |
| ... | RZ130A | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP3.9x | | ... | C733 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | |
| ... | RZ131 | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | | ... | C734 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | |

ASSY-PCB,TERMINAL



Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|-------------|-----------------------------------|--------|
| ... | C735 | 2203-000444 | C-CERAMIC,CHIP:1nf,10%,50V,X7R,TP2012,- | | ... | R702 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | |
| ... | C736 | 2203-000444 | C-CERAMIC,CHIP:1nf,10%,50V,X7R,TP2012,- | | ... | R703 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | C737 | 2203-000444 | C-CERAMIC,CHIP:1nf,10%,50V,X7R,TP2012,- | | ... | R704 | 2007-000511 | R-CHIP:2.4KOHM,5%,1/10W,DA,TP2012 | |
| ... | C740 | 2401-001840 | C-AL:100uf,20%,16V,GPTP6.3x11,5 | | ... | R705 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
| ... | C741 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | | ... | R706 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
| ... | C742 | 2401-001840 | C-AL:100uf,20%,16V,GPTP6.3x11,5 | | ... | R708 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | C743 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP2012 | | ... | R709 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | C744 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP2012 | | ... | R710 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | C745 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP2012 | | ... | R711 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
| ... | C746 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP2012 | | ... | R712 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | C747 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP2012 | | ... | R713 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | C748 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP2012 | | ... | R714 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | C749 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP2012 | | ... | R715 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | C760 | 2401-000667 | C-AL:2.2uf,20%,50V,WT,TP5x11,5 | | ... | R716 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | |
| ... | C761 | 2401-000667 | C-AL:2.2uf,20%,50V,WT,TP5x11,5 | | ... | R717 | 2007-000401 | R-CHIP:150OHM,5%,1/10W,DA,TP2012 | |
| ... | C762 | 2401-000667 | C-AL:2.2uf,20%,50V,WT,TP5x11,5 | | ... | R718 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | |
| ... | C763 | 2401-000667 | C-AL:2.2uf,20%,50V,WT,TP5x11,5 | | ... | R719 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | C764 | 2401-000667 | C-AL:2.2uf,20%,50V,WT,TP5x11,5 | | ... | R720 | 2007-000511 | R-CHIP:2.4KOHM,5%,1/10W,DA,TP2012 | |
| ... | C765 | 2401-000667 | C-AL:2.2uf,20%,50V,WT,TP5x11,5 | | ... | R721 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | C766 | 2401-000667 | C-AL:2.2uf,20%,50V,WT,TP5x11,5 | | ... | R722 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
| ... | C767 | 2401-000667 | C-AL:2.2uf,20%,50V,WT,TP5x11,5 | | ... | R723 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | C768 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP2012 | | ... | R724 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | C769 | 2203-000979 | C-CERAMIC,CHIP:47nf,10%,50V,X7R,TP2012 | | ... | R725 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
| ... | C770 | 2203-000683 | C-CERAMIC,CHIP:0.027nf,5%,50V,NPO,TP201 | | ... | R726 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
| ... | C771 | 2203-000683 | C-CERAMIC,CHIP:0.027nf,5%,50V,NPO,TP201 | | ... | R727 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
| ... | C772 | 2203-000683 | C-CERAMIC,CHIP:0.027nf,5%,50V,NPO,TP201 | | ... | R728 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
| ... | C773 | 2203-000239 | C-CERAMIC,CHIP:0.1nf,5%,50V,NPO,TP2012 | | ... | R729 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
| ... | C774 | 2203-000239 | C-CERAMIC,CHIP:0.1nf,5%,50V,NPO,TP2012 | | ... | R730 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP2012 | |
| ... | C775 | 2203-000444 | C-CERAMIC,CHIP:1nf,10%,50V,X7R,TP2012,- | | ... | R731 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP2012 | |
| ... | C776 | 2203-000444 | C-CERAMIC,CHIP:1nf,10%,50V,X7R,TP2012,- | | ... | R732 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP2012 | |
| ... | C777 | 2401-001496 | C-AL:47uf,20%,16V,GPTP5x7,5 | | ... | R733 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP2012 | |
| ... | C780 | 2401-000360 | C-AL:100uf,20%,50V,GPTP8x11,5,5 | | ... | R734 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP2012 | |
| ... | C782 | 2401-000471 | C-AL:10uf,20%,50V,BPTP5x11,5mm | | ... | R735 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP2012 | |
| ... | C783 | 2401-000471 | C-AL:10uf,20%,50V,BPTP5x11,5mm | | ... | R736 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
| ... | DZ701 | 0403-000314 | DIODE-ZENER:RLZJ9.1B,9.1V,8.80-9.30V,400 | | ... | R737 | 2007-000766 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | |
| ... | DZ702 | 0403-000314 | DIODE-ZENER:RLZJ9.1B,9.1V,8.80-9.30V,400 | | ... | R740 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | DZ703 | 0403-000314 | DIODE-ZENER:RLZJ9.1B,9.1V,8.80-9.30V,400 | | ... | R741 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | DZ704 | 0403-001117 | DIODE-ZENER:RLZ12B,5%,500mW,LL-34,TP | | ... | R742 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | DZ705 | 0403-000620 | DIODE-ZENER:RLZ5.6B,5.6V,5.45-5.73V,400m | | ... | R743 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | IC701 | 1001-001030 | IC-VIDEO SWITCH:TDA6920X,-,SOP28P,300MI | | ... | R744 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | IC702 | 1001-001030 | IC-VIDEO SWITCH:TDA6920X,-,SOP28P,300MI | | ... | R745 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | J701 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP2012 | | ... | R746 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | J702 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP2012 | | ... | R748 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | |
| ... | L701 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R749 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP2012 | |
| ... | L702 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R750 | 2007-000572 | R-CHIP:220OHM,5%,1/10W,DA,TP2012 | |
| ... | L703 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R751 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP2012 | |
| ... | L704 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R752 | 2007-000572 | R-CHIP:220OHM,5%,1/10W,DA,TP2012 | |
| ... | L705 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R753 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP2012 | |
| ... | L706 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R754 | 2007-000572 | R-CHIP:220OHM,5%,1/10W,DA,TP2012 | |
| ... | L707 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R755 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP2012 | |
| ... | L708 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R756 | 2007-000964 | R-CHIP:5.1KOHM,5%,1/10W,DA,TP2012 | |
| ... | L709 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R757 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | |
| ... | L710 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R758 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | |
| ... | L719 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R759 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | |
| ... | L720 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R760 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | L721 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R761 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP2012 | |
| ... | L722 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R762 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | L723 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R763 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | L724 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R764 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP2012 | |
| ... | L725 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R765 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | L726 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R766 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | PCB | AA41-00076B | PCB-AV TERMINAL:SP43J5HF,FR 4,2LB,1.6T, | S.N.A | ... | R767 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | Q701 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R768 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | Q702 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R769 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | |
| ... | Q703 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R770 | 2007-000766 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | |
| ... | Q704 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R771 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
| ... | Q705 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R772 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
| ... | Q706 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R773 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
| ... | Q707 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R774 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
| ... | Q708 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R775 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
| ... | Q709 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R776 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | |
| ... | Q710 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R777 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | |
| ... | Q711 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R778 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | |
| ... | Q712 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R779 | 2007-001100 | R-CHIP:62OHM,5%,1/10W,DA,TP2012 | |
| ... | Q713 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R780 | 2007-001100 | R-CHIP:62OHM,5%,1/10W,DA,TP2012 | |
| ... | R701 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ... | R781 | 2007-001100 | R-CHIP:62OHM,5%,1/10W,DA,TP2012 | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|---------------------|-------------|--|---|--------|-------|-------------|-----------------------------------|--|--------|
| ... | R782 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | | ..2 | SG532 | AA27-00084A | COIL:S-23,-,-----,S-23,5000Mohm | |
| ... | R783 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | | ..2 | SG562 | AA27-00084A | COIL:S-23,-,-----,S-23,5000Mohm | |
| ... | R784 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | | △..2 | V501 | 3704-001019 | SOCKET-CRT:10P,29.1PI,35.5PI,AU30U | |
| ... | R785 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | △..2 | V531 | 3704-001019 | SOCKET-CRT:10P,29.1PI,35.5PI,AU30U | |
| ... | R786 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | △..2 | V561 | 3704-001019 | SOCKET-CRT:10P,29.1PI,35.5PI,AU30U | |
| ... | R787 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ..2 | VR501 | 2101-000321 | VR-ROTARY:1Mohm,-,0.6W,SIDE | |
| ... | R788 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..2 | VR531 | 2101-000321 | VR-ROTARY:1Mohm,-,0.6W,SIDE | |
| ... | R791 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ..2 | VR561 | 2101-000321 | VR-ROTARY:1Mohm,-,0.6W,SIDE | |
| ... | R792 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ..2 | AA99-20082X | ASSY-PCB SUB,AUTO: AA95-00129L ,/ | S.N.A | |
| ... | R793 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ...3 | C502 | 2401-000027 | C-AL:4.7uF,20%,50V,GP,TP,5x11,5 | |
| ... | R794 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP2012 | | ...3 | C503 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | |
| ... | R795 | 2007-001155 | R-CHIP:750OHM,5%,1/10W,DA,TP2012 | | ...3 | C504 | 2401-001537 | C-AL:47uF,20%,25V,GP,TP,6.3x7mm,5mm | |
| ... | R796 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP2012 | | ...3 | C505 | 2305-000149 | C-FILM,MPEF:100nF,5%,100V,TP,12x12.5x6.5 | |
| ... | R797 | 2007-001155 | R-CHIP:750OHM,5%,1/10W,DA,TP2012 | | ...3 | C506 | 2401-000430 | C-AL:10uF,20%,250V,GP,TP,10x16mm,5m | |
| ... | R798 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP2012 | | ...3 | C507 | 2305-000154 | C-FILM,MPEF:100nF,5%,400V,TP,21.5x6.5x11 | |
| ... | R799 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ...3 | C510 | 2401-000430 | C-AL:10uF,20%,250V,GP,TP,10x16mm,5m | |
| ... | R800 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP2012 | | ...3 | C512 | 2401-000133 | C-AL:1000uF,20%,16V,GP,TP,10x20.5 | |
| ... | R801 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP2012 | | ...3 | C513 | 2201-000983 | C-CERAMIC,DISC:1nF,10%,2kV,Y5P,TP9x5.7, | |
| ... | R802 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP2012 | | ...3 | C514 | 2201-000599 | C-CERAMIC,DISC:0.56nF,10%,500V,Y5P,TP5, | |
| ... | R803 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP2012 | | ...3 | C532 | 2401-000027 | C-AL:4.7uF,20%,50V,GP,TP,5x11,5 | |
| ... | R804 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP2012 | | ...3 | C533 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | |
| ... | R805 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP2012 | | ...3 | C534 | 2401-001537 | C-AL:47uF,20%,25V,GP,TP,6.3x7mm,5mm | |
| ... | R806 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP2012 | | ...3 | C535 | 2305-000149 | C-FILM,MPEF:100nF,5%,100V,TP,12x12.5x6.5 | |
| ... | R807 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP2012 | | ...3 | C536 | 2401-000430 | C-AL:10uF,20%,250V,GP,TP,10x16mm,5m | |
| ... | R808 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP2012 | | ...3 | C537 | 2305-000154 | C-FILM,MPEF:100nF,5%,400V,TP,21.5x6.5x11 | |
| ... | R809 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP2012 | | ...3 | C540 | 2401-000430 | C-AL:10uF,20%,250V,GP,TP,10x16mm,5m | |
| ... | R810 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP2012 | | ...3 | C542 | 2201-000983 | C-CERAMIC,DISC:1nF,10%,2kV,Y5P,TP9x5.7, | |
| ... | R811 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP2012 | | ...3 | C543 | 2201-000599 | C-CERAMIC,DISC:0.56nF,10%,500V,Y5P,TP5, | |
| ... | R812 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP2012 | | ...3 | C562 | 2401-000027 | C-AL:4.7uF,20%,50V,GP,TP,5x11,5 | |
| ... | R813 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | | ...3 | C563 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | |
| ... | R814 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | | ...3 | C564 | 2401-001537 | C-AL:47uF,20%,25V,GP,TP,6.3x7mm,5mm | |
| ... | R815 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | | ...3 | C565 | 2305-000149 | C-FILM,MPEF:100nF,5%,100V,TP,12x12.5x6.5 | |
| ... | R816 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP2012 | | ...3 | C566 | 2401-000430 | C-AL:10uF,20%,250V,GP,TP,10x16mm,5m | |
| ... | R817 | 2007-000615 | R-CHIP:24KOHM,5%,1/10W,DA,TP2012 | | ...3 | C567 | 2305-000154 | C-FILM,MPEF:100nF,5%,400V,TP,21.5x6.5x11 | |
| ... | R818 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP2012 | | ...3 | C570 | 2401-000430 | C-AL:10uF,20%,250V,GP,TP,10x16mm,5m | |
| ... | R819 | 2007-000615 | R-CHIP:24KOHM,5%,1/10W,DA,TP2012 | | ...3 | C572 | 2201-000983 | C-CERAMIC,DISC:1nF,10%,2kV,Y5P,TP9x5.7, | |
| ..2 | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1,2.63Sn/37Pb | S.N.A | ..2 | ..3 | C573 | 2201-000599 | C-CERAMIC,DISC:0.56nF,10%,500V,Y5P,TP5, | |
| ..2 | 0202-001004 | SOLDER-CREAM:SQ-2030M SZH-1,S63A,DO,04,6 | S.N.A | ..2 | ..3 | CN401 | 3711-002645 | CONNECTOR-HEADER:BOX,6P,1R,2.5MM,STRAIGH | |
| ASSY PCB CRT | | | | | ..3 | D501 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| 1 | * | AA95-00129L | ASSY PCB CRT:-,J51A,43.53,PAL,- | | ..3 | D502 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| ..2 | BDW-GN | AA39-20009G | LEAD CONNECTOR-ASSY:-,YFH800-01,-,1P,700 | | ..3 | D503 | 0402-000493 | DIODE-RECTIFIER:1R5GU41,400V,1.5A,DO-15L | |
| ..2 | C511 | 2201-000969 | C-CERAMIC,DISC:10nF,+80-20%,3.15KV,Y5V,T | | ..3 | D504 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ..2 | C541 | 2201-000969 | C-CERAMIC,DISC:10nF,+80-20%,3.15KV,Y5V,T | | ..3 | D509 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ..2 | C571 | 2201-000969 | C-CERAMIC,DISC:10nF,+80-20%,3.15KV,Y5V,T | | ..3 | D510 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ..2 | CN501 | 3711-003051 | CONNECTOR-HEADER:BOX,8P,1R,2.5mm,STRAIGHT | | ..3 | D531 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| ..2 | CN502 | 3711-003052 | CONNECTOR-HEADER:BOX,10P,1R,2.5mm,STRAIGH | | ..3 | D532 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| ..2 | CN502B | 3711-003052 | CONNECTOR-HEADER:BOX,10P,1R,2.5mm,STRAIGH | | ..3 | D533 | 0402-000493 | DIODE-RECTIFIER:1R5GU41,400V,1.5A,DO-15L | |
| ..2 | CN503 | 3711-003052 | CONNECTOR-HEADER:BOX,10P,1R,2.5mm,STRAIGH | | ..3 | D561 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| ..2 | CN503B | 3711-003052 | CONNECTOR-HEADER:BOX,10P,1R,2.5mm,STRAIGH | | ..3 | D562 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| ..2 | CNW401 | AA39-20027B | LEAD CONNECTOR-ASSY:-,67096-006,S,6P,400 | | ..3 | D563 | 0402-000493 | DIODE-RECTIFIER:1R5GU41,400V,1.5A,DO-15L | |
| ..2 | CNW501 | AA39-00127A | LEAD CONNECTOR-ASSY:-,8P,-,35155- | | ..3 | DZ501 | 0403-001317 | DIODE-ZENER:MTZJ3.0B,3.01-3.22V,500mW,DO | |
| ..2 | CNW502 | AA39-00112A | LEAD CONNECTOR-ASSY:-,10P,-,35155 | | ..3 | DZ502 | 0403-000508 | DIODE-ZENER:MTZJ5.6B,5.6V,5.45-5.73V,500 | |
| ..2 | CNW503 | AA39-00112A | LEAD CONNECTOR-ASSY:-,10P,-,35155 | | ..3 | DZ503 | 0403-000708 | DIODE-ZENER:MTZJ13B,13V,12.55-13.21V,500 | |
| ..2 | FOCUS- | AA39-20115A | LEAD CONNECTOR-ASSY:-,BUSHING,-,1P,500,3 | | ..3 | DZ531 | 0403-001317 | DIODE-ZENER:MTZJ3.0B,3.01-3.22V,500mW,DO | |
| ..2 | FOCUS- | AA39-20115A | LEAD CONNECTOR-ASSY:-,BUSHING,-,1P,500,3 | | ..3 | DZ532 | 0403-000508 | DIODE-ZENER:MTZJ5.6B,5.6V,5.45-5.73V,500 | |
| ..2 | FOCUS- | AA39-20115B | LEAD CONNECTOR-ASSY:-,BUSHING,-,1P,700MM | | ..3 | DZ533 | 0403-000708 | DIODE-ZENER:MTZJ13B,13V,12.55-13.21V,500 | |
| ..2 | GBW-GN | 3811-000446 | WIRE-PVC CU:TCWA,600V,ROLL,17/0.16mm,#22 | S.N.A | ..3 | DZ561 | 0403-001317 | DIODE-ZENER:MTZJ3.0B,3.01-3.22V,500mW,DO | |
| ..2 | GBW-SC | 3811-000480 | WIRE-PVC CU:BCWA,1KV,ROLL,17/0.16mm,#22, | S.N.A | ..3 | DZ562 | 0403-000508 | DIODE-ZENER:MTZJ5.6B,5.6V,5.45-5.73V,500 | |
| ..2 | GDW-GN | AA39-20009D | LEAD CONNECTOR-ASSY:-,YFH800-01,-,1P,500 | | ..3 | DZ563 | 0403-000708 | DIODE-ZENER:MTZJ13B,13V,12.55-13.21V,500 | |
| ..2 | GRW-GN | 3811-000446 | WIRE-PVC CU:TCWA,600V,ROLL,17/0.16mm,#22 | S.N.A | ..3 | L501 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |
| ..2 | GRW-SC | 3811-000480 | WIRE-PVC CU:BCWA,1KV,ROLL,17/0.16mm,#22, | S.N.A | ..3 | L531 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |
| △..2 | IC501 | AA96-50151B | ASSY-H/S:-,AMPAA61-10060A,TD6111Q,- | | ..3 | L561 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |
| ..3 | | 1201-001131 | IC-VIDEO AMP:6111,SIP9P,-,SINGLE,-,PLAS | | ..3 | Q501 | 0502-000006 | TR-POWER:KSC1507,NPN,15W,TO-220,TP,120- | |
| ..3 | | 6001-000057 | SCREW-MACHINE RH,+M3,L6,ZPC(BLK),SWRCH1 | S.N.A | ..3 | Q502 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |
| ..3 | | 6021-000222 | NUT-HEXAGON:2C,M3,ZPC(YEL),SM20C 1 | S.N.A | ..3 | Q531 | 0502-000006 | TR-POWER:KSC1507,NPN,15W,TO-220,TP,120- | |
| ..3 | | AA61-10060A | BRACKET-TR:-,CUS-1 1/2H,TO.5,-,- | S.N.A | ..3 | Q561 | 0502-000006 | TR-POWER:KSC1507,NPN,15W,TO-220,TP,120- | |
| △..2 | IC531 | AA96-50151B | ASSY-H/S:-,AMPAA61-10060A,TD6111Q,- | | ..3 | R500 | 2001-000221 | R-CARBON:1.2KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| △..2 | IC561 | AA96-50151B | ASSY-H/S:-,AMPAA61-10060A,TD6111Q,- | | ..3 | R502 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ..2 | PCB | AA41-10998C | PCB-CRT:P51A,1L,FR-1,330x245x1.6T,3A,M | S.N.A | ..3 | R503 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ..2 | R506 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP,2.4X6.4M | | ..3 | R507 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ..2 | RDW-GN | AA39-20009F | LEAD CONNECTOR-ASSY:-,YFH800-01,-,1P,200 | | ..3 | R508 | 2003-000706 | R-METAL OXIDE(S):47Kohm,5%,2W,AA,TP,4.3x | |
| ..2 | SG502 | AA27-00084A | COIL:S-23,-,-----,S-23,5000Mohm | | ..3 | R511 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| | | | | | ..3 | R513 | 2008-000252 | R-FUSIBLE(S):0.47ohm,10%,1/2W,AF,TP,2.5x | |
| | | | | | ..3 | R514 | 2001-001122 | R-CARBON(S):3.9KOHM,5%,1/2W,AA,TP,2.4X6. | |
| | | | | | ..3 | R515 | 2002-001017 | R-COMPOSITION:1Kohm,10%,1/2W,AA,TP,3.7x9 | |
| | | | | | ..3 | R516 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| | | | | | ..3 | R517 | 2001-000085 | R-CARBON(S):100KOHM,5%,1/2W,AA,TP,2.4X6. | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|-------------|---|---|--------|--------------------------|-------------|---|---|--------|
| ... | R518 | 2002-001021 | R-COMPOSITION:560KOHM,10%,1/2W,AA,TP3.7 | | ..2 | AA64-00284B | CABINET-BOTTOM,-,PCJ533R,JERSEY SP-200G | S.N.A | |
| ... | R519 | 2002-001021 | R-COMPOSITION:560KOHM,10%,1/2W,AA,TP3.7 | | ..2 | AA61-20295A | HOLDER-PIN,-,SPT555JHD,ABS,HB,BLK,- | S.N.A | |
| ... | R520 | 2001-000066 | R-CARBON(S):10KOHM,5%,1/2W,AA,TP2.4X6.4 | | ASSY CABINET | | | | |
| ... | R521 | 2001-001052 | R-CARBON(S):1.5MOHM,5%,1/2W,AA,TP2.4X6. | | 1 | * | AA90-00319C | ASSY CABINET:53J5,SP53J5HFX/RAD | S.N.A |
| ... | R522 | 2002-001006 | R-COMPOSITION:4.7Kohm,5%,1/2W,AA,TP3.7x | | ..2 | AC+BCM | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A |
| ... | R523 | 2002-001006 | R-COMPOSITION:4.7Kohm,5%,1/2W,AA,TP3.7x | | ..2 | BCM+CM | 6006-001090 | SCREW-ASSY TAPP:WWW,HEX,+M6,L28.0,ZPC(Y | S.N.A |
| ... | R524 | 2001-000028 | R-CARBON(S):100OHM,5%,1/2W,AA,TP2.4X6.4 | | ..2 | BM+CBT | 6003-001026 | SCREW-TAPTITE:RH,+B,M4,L15,ZPC(BLK),SWR | S.N.A |
| ... | R526 | 2001-000539 | R-CARBON:24KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ..2 | CBT+CM | 6005-001003 | SCREW-WOOD:HH,+M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| ... | R527 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ..2 | CBW+CM | 6005-001003 | SCREW-WOOD:HH,+M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| ... | R528 | 2001-001015 | R-CARBON:9.1KOHM,5%,1/8W,AA,TP1.8X3.2M | | ..2 | CBW+HC | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A |
| ... | R529 | 2002-001021 | R-COMPOSITION:560KOHM,10%,1/2W,AA,TP3.7 | | ..2 | CBW+TB | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A |
| ... | R532 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ..2 | CFW+CM | 6005-001003 | SCREW-WOOD:HH,+M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| ... | R533 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ..2 | DB+CM | 6005-001003 | SCREW-WOOD:HH,+M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| ... | R536 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4M | | ..2 | HC+CM | 6005-001003 | SCREW-WOOD:HH,+M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| ... | R537 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ..2 | HS+CM | AA60-00021A | SCREW-WOOD:RH,+M3.5,L22,ZPC(BLK),SWRCH1 | S.N.A |
| ... | R538 | 2003-000706 | R-METAL OXIDE(S):47Kohm,5%,2W,AA,TP4.3x | | ..2 | AA26-30006E | TRANS-FLYBACK:-,FWZ-50A001B(S),50KV,- | | |
| ... | R540 | 2001-001000 | R-CARBON:82KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ..2 | AA69-30032L | BAG-SHEET:HDPE+PE FOAM,-,1600,1650,-,-,S | S.N.A | |
| ... | R541 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ..2 | AA91-00241A | ASSY-BRACKET,MAIN,-,-,SECC T1.6 7,53J5 | | |
| ... | R543 | 2008-000252 | R-FUSIBLE(S):0.47ohm,10%,1/2W,AF,TP2.5x | | ..3 | BMSBMM | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A |
| ... | R544 | 2001-001122 | R-CARBON(S):3.9KOHM,5%,1/2W,AA,TP2.4X6. | | ..3 | AA61-00152B | BRACKET-MAIN,M,-,7 PROJECTION,SECC,-,-, | | |
| ... | R545 | 2002-001017 | R-COMPOSITION:1Kohm,10%,1/2W,AA,TP3.7x9 | | ..3 | AA61-00153B | BRACKET-MAIN,S,-,7 PROJECTION,SECC,-,-, | | |
| ... | R546 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ..2 | AA64-00626C | CABINET-BACK,BOARD,-,53J5,-,HIPS,VO,BLK, | | |
| ... | R547 | 2001-000085 | R-CARBON(S):100KOHM,5%,1/2W,AA,TP2.4X6. | | ..2 | AA67-20026A | MIRROR-BACK SURFACE:52',GLASS,3.0,BSM,-, | | |
| ... | R548 | 2002-001021 | R-COMPOSITION:560KOHM,10%,1/2W,AA,TP3.7 | | ..2 | AA63-00021D | SPACER-MIRROR:PVC,-,BLK,L678,SP-524JMF,- | | |
| ... | R549 | 2002-001021 | R-COMPOSITION:560KOHM,10%,1/2W,AA,TP3.7 | | ..2 | AA63-00021C | SPACER-MIRROR:PVC,-,BLK,L970,SP-524JMF,- | | |
| ... | R550 | 2001-000066 | R-CARBON(S):10KOHM,5%,1/2W,AA,TP2.4X6.4 | | ..2 | AA61-20285A | HOLDER-BOX,-,3456,PPVO,WHT,- | S.N.A | |
| ... | R551 | 2001-001052 | R-CARBON(S):1.5MOHM,5%,1/2W,AA,TP2.4X6. | | ..2 | AA61-10361A | BRACKET-MIRROR,-,S5288,SECC-1,T1.0,-,-, | S.N.A | |
| ... | R552 | 2002-001006 | R-COMPOSITION:4.7Kohm,5%,1/2W,AA,TP3.7x | | ..2 | AA61-10242A | BRACKET-MIRROR,C,-,S5288,SECC-1,T1.0,-,- | S.N.A | |
| ... | R553 | 2002-001006 | R-COMPOSITION:4.7Kohm,5%,1/2W,AA,TP3.7x | | ..2 | AA61-00185H | HOLDER-SCREEN,15T:53J5,ABS,BLK,HB,-,L740 | | |
| ... | R554 | 2001-000028 | R-CARBON(S):100OHM,5%,1/2W,AA,TP2.4X6.4 | | ..2 | AA60-00036B | SPACER-COVER,DUST:SPONGE,T2,-,690X400,PJ | | |
| ... | R559 | 2002-001015 | R-COMPOSITION:47Kohm,5%,1/2W,AA,TP3.7x9 | | ..2 | AA63-00021G | SPACER-MIRROR:PVC,-,BLK,L420,524J,434J,- | | |
| ... | R562 | 2001-000221 | R-CARBON:1.2KOHM,5%,1/8W,AA,TP1.8X3.2M | | ..2 | AA67-00027A | SCREEN-TINT:-,53,-,PMMA,TINT=10%,T3.0,1 | | |
| ... | R563 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ..2 | AA67-00023A | SUN-SCREEN,-,53,HC,A/S,PMMA,T=93%,T2.0 | | |
| ... | R564 | 2001-000837 | R-CARBON:51KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ..2 | AA65-30008A | CLAMP-CORD,PE,HB,BLK,-,-,- | S.N.A | |
| ... | R566 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4M | | ..2 | AA64-60449B | INLAY-COVER:SP-434JMF,PS,T0.5,149.3X69.5 | | |
| ... | R567 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ..2 | AA64-30714A | CABINET-BACK, TOP,-,HIPS,HB,-,BLK,-,SVP52 | | |
| ... | R571 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | | ..2 | AA64-00397B | CABINET-FRONT,WOOD:-,53J5,-,MDF,-,-,T3,- | | |
| ... | R572 | 2003-000706 | R-METAL OXIDE(S):47Kohm,5%,2W,AA,TP4.3x | | ..2 | AA63-10007C | BAND-PP,-,-,-,W18,-,CLEAR,1G,- | S.N.A | |
| ... | R573 | 2008-000252 | R-FUSIBLE(S):0.47ohm,10%,1/2W,AF,TP2.5x | | ASSY CHASSIS PART | | | | |
| ... | R574 | 2001-001122 | R-CARBON(S):3.9KOHM,5%,1/2W,AA,TP2.4X6. | | 1 | * | AA90-00103F | ASSY CHASSIS PART:J51A, 43J5 | S.N.A |
| ... | R575 | 2002-001017 | R-COMPOSITION:1Kohm,10%,1/2W,AA,TP3.7x9 | | ..2 | CON+HC | 6003-001023 | SCREW-TAPTITE:RWH,+B,M3,L10,ZPC(YEL),SW | S.N.A |
| ... | R576 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ..2 | DF+FBT | 6003-001023 | SCREW-TAPTITE:RWH,+B,M3,L10,ZPC(YEL),SW | S.N.A |
| ... | R577 | 2001-000085 | R-CARBON(S):100KOHM,5%,1/2W,AA,TP2.4X6. | | ..2 | DF+HC | 6003-001023 | SCREW-TAPTITE:RWH,+B,M3,L10,ZPC(YEL),SW | S.N.A |
| ... | R578 | 2002-001021 | R-COMPOSITION:560KOHM,10%,1/2W,AA,TP3.7 | | ..2 | PM+HC | 6003-001023 | SCREW-TAPTITE:RWH,+B,M3,L10,ZPC(YEL),SW | S.N.A |
| ... | R579 | 2002-001021 | R-COMPOSITION:560KOHM,10%,1/2W,AA,TP3.7 | | ..2 | TBA+AV | 6003-001026 | SCREW-TAPTITE:RH,+B,M4,L15,ZPC(BLK),SWR | S.N.A |
| ... | R580 | 2001-000066 | R-CARBON(S):10KOHM,5%,1/2W,AA,TP2.4X6.4 | | ..2 | TBA+HC | 6003-001023 | SCREW-TAPTITE:RWH,+B,M3,L10,ZPC(YEL),SW | S.N.A |
| ... | R581 | 2001-001052 | R-CARBON(S):1.5MOHM,5%,1/2W,AA,TP2.4X6. | | ..2 | TBA+SC | 6003-001026 | SCREW-TAPTITE:RH,+B,M4,L15,ZPC(BLK),SWR | S.N.A |
| ... | R582 | 2002-001006 | R-COMPOSITION:4.7Kohm,5%,1/2W,AA,TP3.7x | | ..2 | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A | |
| ... | R583 | 2002-001006 | R-COMPOSITION:4.7Kohm,5%,1/2W,AA,TP3.7x | | ..2 | AA61-00051B | HOLDER-CHASSIS:-,PCJ533R,ABS,VO,GRAY,E-2 | S.N.A | |
| ... | R584 | 2001-000028 | R-CARBON(S):100OHM,5%,1/2W,AA,TP2.4X6.4 | | ASSY CRT-(G) | | | | |
| ... | R589 | 2002-001015 | R-COMPOSITION:47Kohm,5%,1/2W,AA,TP3.7x9 | | 1 | * | AA94-00980A | ASSY-CRT-(G):P16LNM07HKA,+380MG,7,BARE, | |
| ... | SG351 | 4715-001036 | SURGE ABSORBER:350V,20%,-,-,TP | | ..2 | AA61-00057C | HOLDER-CAP,-,7 PROJECTION,PC,-,CLEAR,- | S.N.A | |
| ... | SG501 | 4715-001036 | SURGE ABSORBER:350V,20%,-,-,TP | | ..2 | AA27-50005C | DEFLECTION-YOKE,-,DPD-4392AL,43/PJTCRT, | | |
| ... | SG503 | 4715-001036 | SURGE ABSORBER:350V,20%,-,-,TP | | ..2 | AA39-00018A | LEAD CONNECTOR-ASSY:-,YFH800-01,YRH187RH | S.N.A | |
| ... | SG533 | 4715-001036 | SURGE ABSORBER:350V,20%,-,-,TP | | ..2 | AA67-10080A | LENS-ASSY:52INCH,SSM-75RS-52,-,SEKINOS,C | | |
| ... | SG561 | 4715-001036 | SURGE ABSORBER:350V,20%,-,-,TP | | ..2 | AA67-10039A | LENS:-,SSM-75RS-43,-,GRN C-ELEMENT | | |
| ... | SG563 | 4715-001036 | SURGE ABSORBER:350V,20%,-,-,TP | | ..2 | AA91-00103C | ASSY-WIRE, CRT,-,-,7CRT,PROJECTION | S.N.A | |
| ..2 | AA63-10002A | BAND-TIE:-,NYLON66 V2,-,-,L100,NTR,-,- | S.N.A | | ..3 | AA61-00053B | BRACKET-WIRE:-,PROJECTION,SECC-1,T1.6,-, | S.N.A | |
| ..2 | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2,63Sn/37Pb | S.N.A | | ..3 | AA61-00054B | BRACKET-EARTH:-,PROJECTION,PBS,-,-,-, | S.N.A | |
| | | | | | ..3 | AA61-00055C | BRACKET-CRT,WIRE:-,PUT,SUS304 1/8H,-,-,- | S.N.A | |
| | | | | | ..2 | AA26-30006F | TRANS-FLYBACK:-,FWZ-50A001C,55,30KV | | |
| | | | | | ..2 | AA63-00061B | SPACER-CAP:EPDM,-,BLK,-,PROJECTION,- | | |

ASSY TERMINAL BOARD

| | | | | |
|-----|---|-------------|---|-------|
| 1 | * | AA91-00158X | ASSY TERMINAL BOARD:-,HIPS,VO,BLK,J51A P | |
| ..2 | | AA63-00045B | TERMINAL-BOARD,ANT:-,HIPS,-,PCJ533R,- | S.N.A |
| ..2 | | AA64-00182X | INLAY BACK:SP53J5HFX,J51A PAL,PS SHEET,T0 | S.N.A |

ASSY CABINET BOT

| | | | | |
|-----|---|-------------|--|-------|
| 1 | * | AA91-00155C | ASSY CABINET BOT:-,VO,JER SP200G D/GRY S | |
| ..2 | | AA60-00065A | SPACER-JERSEY:53J5,JERSEY,-,-,-,GRAY,-,- | S.N.A |
| ..2 | | AA64-00673A | BADGE-BRAND:AL,SAMSUNG,-,L72,-,PJT,- | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|
| ..2 | | AA63-00091C | SPACER-CLENS:SILICON,-,GRAY,-,PROJECTION | S.N.A |
| ..2 | | AA63-00060C | SPACER-CRT:SILICON,-,GRAY,7,PROJECTION, | S.N.A |
| ..2 | | AA64-00207B | CASE-COUPLER,G,-,PROJECTION,7,ALDC8,-,B | S.N.A |
| ..2 | | AA27-00003B | MAGNET-CONVERGENCE,-,JH92LT-029,29.1MM | S.N.A |
| △ | ..2 | AA03-10026V | CRT-MONO,-,P16LNM07HKA,-,7INCH,90deg,90 | S.N.A |
| ..2 | | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A |
| ..2 | | AA63-60025A | SPACER-DY:NEOPRENE,-,BLK,VO,S4388,- | S.N.A |
| ..2 | | AA63-10002A | BAND-TIE,-,NYLON66 V2,-,L100,NTR,-,- | S.N.A |
| ..2 | | AA63-00099A | SPACER-FELT:PJT,-,BLK,-,30X30 | S.N.A |
| ..2 | | AA63-00076A | SPACER-LENS:FELT,T1.0,BROWN,7CRT,PROJE | S.N.A |
| ..2 | | AA61-00056B | BRACKET-LENS,-,PROJECTION,SECC,T1.6,-,- | S.N.A |

ASSY-CRT-(B)

| | | | | |
|------|-----|-------------|--|-------|
| 1 | * | AA94-00976A | ASSY-CRT-(B);P16LNM07BMB,+380MG,7,BARE, | |
| ..2 | | AA61-00057C | HOLDER-CAP,-,7 PROJECTION,PC,-,CLEAR,- | S.N.A |
| △ | ..2 | AA27-50005C | DEFLECTION-YOKE,-,DPD-4392AL,43/PJTCRT, | |
| ..2 | | AA39-00018A | LEAD CONNECTOR-ASSY,-,YFH800-01,YRH187RH | S.N.A |
| ..2 | | AA67-10080A | LENS-ASSY:52INCH,SSM-75RS-52,-,SEKINOS,C | |
| ..2 | | AA67-10037A | LENS:43INCH,SSM-75RS-43,-,SEKINOS,C | |
| ..2 | | AA91-00103C | ASSY-WIRE,CRT,-,7CRT,PROJECTION | S.N.A |
| ...3 | | AA61-00053B | BRACKET-WIRE,-,PROJECTION,SECC-1,T1.6,-, | S.N.A |
| ...3 | | AA61-00054B | BRACKET-EARTH,-,PROJECTION,PBS,-,-,-,- | S.N.A |
| ...3 | | AA61-00055C | BRACKET-CRT,WIRE,-,PJT,SUS304 1/8H,-,-,- | S.N.A |
| △ | ..2 | AA26-30006F | TRANS-FLYBACK,-,FVZ-50A001C,55,30KV | |
| ..2 | | AA63-00061B | SPACER-CAP:EPDM,-,BLK,-,PROJECTION,- | |
| ..2 | | AA63-00091C | SPACER-CLENS:SILICON,-,GRAY,-,PROJECTION | S.N.A |
| ..2 | | AA63-00060C | SPACER-CRT:SILICON,-,GRAY,7,PROJECTION, | S.N.A |
| ..2 | | AA64-00208B | CASE-COUPLER,B,-,PROJECTION,7,ALDC,-,BL | S.N.A |
| ..2 | | AA27-60003C | MAGNET-CONVERGENCE,-,JH92LTU-SC-20,29.1m | |
| △ | ..2 | AA03-10026V | CRT-MONO,-,P16LNM07BMB,-,7INCH,90deg,90 | S.N.A |
| ..2 | | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A |
| ..2 | | AA63-60025A | SPACER-DY:NEOPRENE,-,BLK,VO,S4388,- | S.N.A |
| ..2 | | AA63-10002A | BAND-TIE,-,NYLON66 V2,-,L100,NTR,-,- | S.N.A |
| ..2 | | AA63-00099A | SPACER-FELT:PJT,-,BLK,-,30X30 | S.N.A |
| ..2 | | AA63-00076A | SPACER-LENS:FELT,T1.0,BROWN,7CRT,PROJE | S.N.A |
| ..2 | | AA61-00056B | BRACKET-LENS,-,PROJECTION,SECC,T1.6,-,- | S.N.A |

ASSY-CRT-(R)

| | | | | |
|------|-----|-------------|--|-------|
| 1 | * | AA94-00971A | ASSY-CRT-(R);P16LNM07RJA,+380MG,7,BARE, | |
| ..2 | | AA61-00057C | HOLDER-CAP,-,7 PROJECTION,PC,-,CLEAR,- | S.N.A |
| △ | ..2 | AA27-50005C | DEFLECTION-YOKE,-,DPD-4392AL,43/PJTCRT, | |
| ..2 | | AA39-00018A | LEAD CONNECTOR-ASSY,-,YFH800-01,YRH187RH | S.N.A |
| ..2 | | AA67-10080A | LENS-ASSY:52INCH,SSM-75RS-52,-,SEKINOS,C | |
| ..2 | | AA67-10038A | LENS:43INCH,SSM-75RS-43,-,SEKINOS,R | |
| ..2 | | AA91-00103C | ASSY-WIRE,CRT,-,7CRT,PROJECTION | S.N.A |
| ...3 | | AA61-00053B | BRACKET-WIRE,-,PROJECTION,SECC-1,T1.6,-, | S.N.A |
| ...3 | | AA61-00054B | BRACKET-EARTH,-,PROJECTION,PBS,-,-,-,- | S.N.A |
| ...3 | | AA61-00055C | BRACKET-CRT,WIRE,-,PJT,SUS304 1/8H,-,-,- | S.N.A |
| △ | ..2 | AA26-30006F | TRANS-FLYBACK,-,FVZ-50A001C,55,30KV | |
| ..2 | | AA63-00061B | SPACER-CAP:EPDM,-,BLK,-,PROJECTION,- | |
| ..2 | | AA63-00091C | SPACER-CLENS:SILICON,-,GRAY,-,PROJECTION | S.N.A |
| ..2 | | AA63-00060C | SPACER-CRT:SILICON,-,GRAY,7,PROJECTION, | S.N.A |
| ..2 | | AA64-00206B | CASE-COUPLER,R,-,PROJECTION,-,ALDC8,-,BL | S.N.A |
| ..2 | | AA27-00003B | MAGNET-CONVERGENCE,-,JH92LT-029,29.1MM | |
| △ | ..2 | AA03-10026U | CRT-MONO,-,P16LNM07RJA,-,7INCH,90deg,90 | S.N.A |
| ..2 | | AA60-10011A | SCREW-TAPTITE:HH,+PC,M4,L12,ZPC(BLK),SW | S.N.A |
| ..2 | | AA63-60025A | SPACER-DY:NEOPRENE,-,BLK,VO,S4388,- | S.N.A |
| ..2 | | AA63-10002A | BAND-TIE,-,NYLON66 V2,-,L100,NTR,-,- | S.N.A |
| ..2 | | AA63-00099A | SPACER-FELT:PJT,-,BLK,-,30X30 | S.N.A |
| ..2 | | AA63-00076A | SPACER-LENS:FELT,T1.0,BROWN,7CRT,PROJE | S.N.A |
| ..2 | | AA61-00056B | BRACKET-LENS,-,PROJECTION,SECC,T1.6,-,- | S.N.A |

ASSY CABINET MASK

| | | | | |
|-----|---|-------------|--|--|
| 1 | * | AA91-00394A | ASSY CABINET MASK,-,HB,BLK,S704+B702 TAN | |
| ..2 | | AA64-01163B | CABINET-MASK,SIDE:53J5,S704+B702 ,ABS,HB | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|
| ...3 | | AA64-01163A | CABINET-MASK,SIDE:53J5,L815 APCHUL,ABS,H | S.N.A |
| ..2 | | AA64-01160E | CABINET-MASK,BOT:53J5HF,S704+B702 DOLBY, | |
| ...3 | | AA64-01160A | CABINET-MASK:53J5,L1087 APCHUL,ABS,HB,BL | S.N.A |
| ..2 | | AA64-01160D | CABINET-MASK,TOP:53J5HF,S704+B702 TANTUS | |
| ...3 | | AA64-01160A | CABINET-MASK:53J5,L1087 APCHUL,ABS,HB,BL | S.N.A |
| ..2 | | AA63-00063A | SPACER-DUAL,LOCK:#400,-,-,19X19,SVP-614J | S.N.A |
| ..2 | | AA61-00441B | HOLDER-CORNER:E2 ALL,ABS,BLK,HB,-,S704+B | S.N.A |

ASSY ACCESSORY

| | | | | |
|-----|---|-------------|--|-------|
| 1 | * | AA94-02563A | ASSY ACCESSORY:SP53J5HF/RAD,J51A,NEWZEA | S.N.A |
| ..2 | | AA69-30009C | BAG-SHEET:LDPE,TO.08,W150,L120,-,-,- | S.N.A |
| ..2 | | AA68-00856A | MANUAL USERS:J51A,W/P100(G),44PB5,1,ENG | S.N.A |
| ..2 | | AA68-00711A | CARD WARRANTY:ALL,W/P100G,-,-,-,-,- | S.N.A |
| ..2 | | AA61-20126A | HOLDER-LEG,-,-,ABS,HB,BLK,- | S.N.A |
| ..2 | | AA39-40001B | CABLE-RCA,-,RCA,1500mm,0.12/10,RED/WHT/Y | |

REMOCON

| | | | | |
|---|---|-------------|--|--|
| 1 | * | AA59-00100A | REMOCON,-,TM57,KS88P0416S,53,L/GRAY,S/ | |
|---|---|-------------|--|--|

7-4 SP61J5HFX/RAD

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|---------------------------|----------|-------------|--|--------|-------|----------|-------------|--|--------|
| ASSY PCB MAIN(OPT) | | | | | | | | | |
| 1 | * | AA94-03113P | ASSY PCB MAIN(OPT):SP61J5HFX/RAD,J51A,NE | | | CP120 | 2203-001002 | C-CERAMIC,CHIP:0.047nF,5%,50V,NPO,TP,201 | |
| ..2 | C664 | 2401-001068 | C-AL:3300uF,20%,50V,GPBK,22x40,10 | | | CP121 | 2203-001002 | C-CERAMIC,CHIP:0.047nF,5%,50V,NPO,TP,201 | |
| ..2 | C665 | 2401-000737 | C-AL:2200uF,20%,50V,GP,TP,18x35.5,7 | | | CP122 | 2203-000761 | C-CERAMIC,CHIP:330nF,10%,16V,X7R,TP,2012 | |
| ..2 | CN201 | 3711-003051 | CONNECTOR-HEADER:BOX,8P,1R,2.5mm,STRAGHT | | | CP126 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..2 | CN202 | 3711-003052 | CONNECTOR-HEADER:BOX,10P,1R,2.5mm,STRAGHT | | | CP127 | 2401-002009 | C-AL:100uF,20%,16V,GP,TP6.3x7,5 | |
| ..2 | CN501 | 3711-003051 | CONNECTOR-HEADER:BOX,8P,1R,2.5mm,STRAGHT | | | CP128 | 2401-002009 | C-AL:100uF,20%,16V,GP,TP6.3x7,5 | |
| ..2 | CN801 | 3711-003974 | CONNECTOR-HEADER:BOX,12P,1R,2.5mm,STRAIG | | | CP129 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..2 | CNT01 | 3710-001208 | CONNECTOR-SOCKET:32P,2R,2.54mm,STRAIGHT, | | | CP130 | 2401-002009 | C-AL:100uF,20%,16V,GP,TP6.3x7,5 | |
| ..2 | CNT02 | 3710-001208 | CONNECTOR-SOCKET:32P,2R,2.54mm,STRAIGHT, | | | CP131 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..2 | CNY01 | 3711-003973 | CONNECTOR-HEADER:BOX,11P,1R,2.5mm,STRAIG | | | CP132 | 2401-000486 | C-AL:10uF,20%,50V,GP,TP6.3x7mm,5 | |
| ..2 | CS803 | 2401-003370 | C-AL:47uF,20%,450V,GPBK,16x35.5,7. | | | CP133 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..2 | DS801 | 0402-000102 | DIODE-BRIDGE:D2SB60,600V,1.5A,- | | | CP135 | 2203-000575 | C-CERAMIC,CHIP:100nF,10%,25V,X7R,TP,2012 | |
| ..2 | H001 | AA40-10006S | TUNER-F/S:TECC2949PG30A(S),PAL-B/G,TR,18 | | | CP137 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| △ | IC101 | AA96-00110C | ASSY-H/S:-,AA62-30013K,SI-3090C,- 1203-000577 IC-VOLTAGE REGULATOR:3090,ZIP5P,-PLASTI | S.N.A | | CP139 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |
| ..3 | | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A | | CP141 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..3 | | AA62-30013K | HEATSINK-ES:-,44/18,-,WHT,A6063 EX | | | CP142 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NPO,TP,2012 | |
| △ | IC102 | AA96-00110A | ASSY-H/S:-,AA62-30013K,SI-3050C,- 1203-000203 IC-POSI.ADJUST REG.:3050,TO-220,5P,-PLA | S.N.A | | CP144 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NPO,TP,2012 | |
| ..3 | | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A | | CP145 | 2203-000761 | C-CERAMIC,CHIP:330nF,10%,16V,X7R,TP,2012 | |
| ..3 | | AA62-30013K | HEATSINK-ES:-,44/18,-,WHT,A6063 EX | | | CP301 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| △ | IC103 | 1204-001276 | IC-SOUND PROCESSOR:TDA9810,DIP,24P,4000MI | | | CP302 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| △ | IC502 | AA96-00110A | ASSY-H/S:-,AA62-30013K,SI-3050C,- | | | CP303 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| △ | IC503 | AA96-00110A | ASSY-H/S:-,AA62-30013K,SI-3050C,- | | | CP304 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| △ | IC504 | AA96-00110A | ASSY-H/S:-,AA62-30013K,SI-3050C,- | | | CP305 | 2401-001496 | C-AL:47uF,20%,16V,GP,TP,5x7,5 | |
| △ | IC665 | AA96-00038A | ASSY-H/S:-,SOUND AMP,AA62-30173E,TDA726 0205-000129 GREASE-SILICON:SC102,JAPAN | S.N.A | | CP306 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..3 | | 1201-001026 | IC-POWER AMP:7265,ZIP,11P,19.6MIL,DUAL,1 | | | CP307 | 2401-001496 | C-AL:47uF,20%,16V,GP,TP,5x7,5 | |
| ..3 | | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A | | CP308 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..3 | | AA62-30173E | HEAT-SINK,ES:-,T1.0,WHITE,SCREW-HOLE(1 | S.N.A | | CP309 | 2401-001496 | C-AL:47uF,20%,16V,GP,TP,5x7,5 | |
| ..2 | IF/CAB | AA39-30007B | IF-CABLE:-,T,150mm,1365#26 | | | CP310 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..2 | L201 | AA27-10001C | COIL-CHOKE:-,100uH,K,-,5.0A,ST,700UH-K(R | | | CP311 | 2401-001496 | C-AL:47uF,20%,16V,GP,TP,5x7,5 | |
| ..2 | L603 | AA29-00004A | FILTER-LINE NOISE:-,20UH,3A,AC80-260V,TO | | | CP312 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..2 | OZ107 | AA96-50162F | ASSY-H/S:-,POWER,AA62-30013E,2SA1011,30 0502-000131 TR-POWER:2SA1011-D,PNP,1.2W,TO-220,-,60 | | | CP313 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..3 | | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A | | CP314 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..3 | | AA62-30013E | HEAT-SINK,ES:-,A6063 EXTR,-,30(21) T02 | S.N.A | | CP316 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..2 | OZ108 | AA96-50162G | ASSY-H/S:-,AMP,AA62-30013E,2SC2344,30MM 0502-000153 TR-POWER:2SC2344-D,PNP,1.2W,TO-220,-,60 | | | CP317 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..3 | | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A | | CP401 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..3 | | AA62-30013E | HEAT-SINK,ES:-,A6063 EXTR,-,30(21) T02 | S.N.A | | CP402 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..2 | R913 | 2001-000786 | R-CARBON:47KOHM,5%,1/8W,AA,TP,1.8X3.2MM | | | CP403 | 2401-002009 | C-AL:100uF,20%,16V,GP,TP6.3x7,5 | |
| ..2 | RL801 | 3501-001053 | RELAY-POWER:5VDC,530MMW,10A,1FORMA,15MS,5 | | | CP404 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..2 | TS801 | AA26-00019A | TRANS-SWITCHING:-,AC80-260V,-,US,-,4MH,6 | | | CP405 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..2 | X901 | 2801-003224 | CRYSTAL-UNIT:32.768KHZ,20PPM,28-AAV,12.5 | | | CP407 | 2203-000239 | C-CERAMIC,CHIP:0.1nF,5%,50V,NPO,TP,2012 | |
| ..2 | | AA95-00519E | ASSY-PCB,PROSCAN:-,SP53J5HFX,J51A,-,- | | | CP408 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..3 | CNP901 | 3711-003543 | CONNECTOR-HEADER:NOWALL,16P,1R,2.54MM,AN | | | CP409 | 2203-000555 | C-CERAMIC,CHIP:0.02nF,5%,50V,NPO,TP,2012 | |
| ..3 | CNP902 | 3711-001283 | CONNECTOR-HEADER:NOWALL,14P,1R,2.5mm,ANG | | | CP410 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..3 | CNP903 | 3711-001283 | CONNECTOR-HEADER:NOWALL,14P,1R,2.5mm,ANG | | | CP411 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ..3 | CNP904 | 3711-001283 | CONNECTOR-HEADER:NOWALL,14P,1R,2.5mm,ANG | | | CP412 | 2203-000555 | C-CERAMIC,CHIP:0.02nF,5%,50V,NPO,TP,2012 | |
| ..3 | XP601 | 2801-003811 | CRYSTAL-UNIT:24.576MHZ,20PPM,28-AAM,30PF | | | CP413 | 2203-000555 | C-CERAMIC,CHIP:0.02nF,5%,50V,NPO,TP,2012 | |
| ..3 | | AA99-20079H | ASSY-PCB SUB,AUTO: AA95-00519E /V | S.N.A | | CP414 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
|4 | CP101 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NPO,TP,2012 | | | CP415 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
|4 | CP102 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NPO,TP,2012 | | | CP416 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
|4 | CP103 | 2203-000761 | C-CERAMIC,CHIP:330nF,10%,16V,X7R,TP,2012 | | | CP417 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
|4 | CP104 | 2203-000761 | C-CERAMIC,CHIP:330nF,10%,16V,X7R,TP,2012 | | | CP418 | 2404-001020 | C-TA,CHIP:10uF,20%,10V,GP,TP,3216,3.2 | |
|4 | CP106 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | | | CP419 | 2404-001020 | C-TA,CHIP:10uF,20%,10V,GP,TP,3216,3.2 | |
|4 | CP109 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | | CP420 | 2404-001020 | C-TA,CHIP:10uF,20%,10V,GP,TP,3216,3.2 | |
|4 | CP110 | 2401-001496 | C-AL:47uF,20%,16V,GP,TP,5x7,5 | | | CP501 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%.50V,Y5V,TP, | |
|4 | CP111 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | | | CP502 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%.50V,Y5V,TP, | |
|4 | CP112 | 2401-000486 | C-AL:10uF,20%,50V,GP,TP6.3x7mm,5 | | | CP503 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%.50V,Y5V,TP, | |
|4 | CP113 | 2203-001172 | C-CERAMIC,CHIP:0.006nF,0.25pF,50V,NPO,TP | | | CP504 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%.50V,Y5V,TP, | |
|4 | CP114 | 2203-001172 | C-CERAMIC,CHIP:0.006nF,0.25pF,50V,NPO,TP | | | CP505 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%.50V,Y5V,TP, | |
|4 | CP115 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | | CP506 | 2401-001496 | C-AL:47uF,20%,16V,GP,TP,5x7,5 | |
|4 | CP116 | 2401-002009 | C-AL:100uF,20%,16V,GP,TP6.3x7,5 | | | CP507 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
|4 | CP117 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | | CP508 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%.50V,Y5V,TP, | |
|4 | CP118 | 2401-002009 | C-AL:100uF,20%,16V,GP,TP6.3x7,5 | | | CP509 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%.50V,Y5V,TP, | |
|4 | CP119 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | | CP510 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%.50V,Y5V,TP, | |
| | | | | | | CP511 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%.50V,Y5V,TP, | |
| | | | | | | CP512 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%.50V,Y5V,TP, | |
| | | | | | | CP513 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%.50V,Y5V,TP, | |
| | | | | | | CP514 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%.50V,Y5V,TP, | |
| | | | | | | CP515 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%.50V,Y5V,TP, | |
| | | | | | | CP516 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%.50V,Y5V,TP, | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|-------------|--|--------|
|4 | CP517 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | DP601 | 0401-000133 | DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8 | |
|4 | CP518 | 2401-000598 | C-AL:1uf,20%,50V,GPTP:4x7,5 | |4 | DP602 | 0403-000620 | DIODE-ZENER;RLZ5.6B,5.6V,5.45-5.73V,400m | |
|4 | CP519 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | DP603 | 0401-000133 | DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8 | |
|4 | CP520 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | DP604 | 0401-000160 | DIODE-SWITCHING;ISS314,30V,100mA,USC,TP | |
|4 | CP521 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | DP605 | 0401-000160 | DIODE-SWITCHING;ISS314,30V,100mA,USC,TP | |
|4 | CP522 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | DP606 | 0401-000133 | DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8 | |
|4 | CP523 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | DP607 | 0403-000620 | DIODE-ZENER;RLZ5.6B,5.6V,5.45-5.73V,400m | |
|4 | CP524 | 2203-000260 | C-CERAMIC,CHIP:10nf,10%,50V,X7R,TP:2012 | |4 | DP901 | 0401-000133 | DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8 | |
|4 | CP525 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | DP902 | 0401-000133 | DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8 | |
|4 | CP527 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | DP903 | 0401-000133 | DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8 | |
|4 | CP528 | 2401-001496 | C-AL:47uf,20%,16V,GPTP:5x7,5 | |4 | DP904 | 0401-000133 | DIODE-SWITCHING;RLS4148,100V,200mA,SOD-8 | |
|4 | CP529 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP:2012 | |4 | FP101 | 2901-001120 | FILTER-EMI SMD:25V,100mA,-,3.2x1.6x1,T | |
|4 | CP530 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP:2012 | |4 | FP102 | 2901-001120 | FILTER-EMI SMD:25V,100mA,-,3.2x1.6x1,T | |
|4 | CP531 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP:2012 | |4 | FP301 | 2901-001120 | FILTER-EMI SMD:25V,100mA,-,3.2x1.6x1,T | |
|4 | CP532 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | FP901 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
|4 | CP533 | 2401-000486 | C-AL:10uf,20%,50V,GPTP:6.3x7mm,5 | |4 | FP902 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
|4 | CP534 | 2203-000260 | C-CERAMIC,CHIP:10nf,10%,50V,X7R,TP:2012 | |4 | FP903 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
|4 | CP535 | 2203-000260 | C-CERAMIC,CHIP:10nf,10%,50V,X7R,TP:2012 | |4 | FP904 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
|4 | CP536 | 2203-000260 | C-CERAMIC,CHIP:10nf,10%,50V,X7R,TP:2012 | |4 | FP905 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
|4 | CP537 | 2203-000260 | C-CERAMIC,CHIP:10nf,10%,50V,X7R,TP:2012 | |4 | FP906 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
|4 | CP538 | 2203-000260 | C-CERAMIC,CHIP:10nf,10%,50V,X7R,TP:2012 | |4 | FP907 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
|4 | CP539 | 2203-000260 | C-CERAMIC,CHIP:10nf,10%,50V,X7R,TP:2012 | |4 | FP908 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
|4 | CP540 | 2401-000486 | C-AL:10uf,20%,50V,GPTP:6.3x7mm,5 | |4 | ICP101 | 1204-001362 | IC-VIDEO PROCESS;VPC3215C-BB,PLCC,43P,- | |
|4 | CP541 | 2203-001002 | C-CERAMIC,CHIP:0.047nf,5%,50V,NPO,TP:201 | |4 | ICP103 | 1205-001172 | IC-INTERFACE;CIP3250A-B1,PLCC,68P,3AS | |
|4 | CP542 | 2203-001002 | C-CERAMIC,CHIP:0.047nf,5%,50V,NPO,TP:201 | |4 | ICP301 | 1204-001623 | IC-VERTICAL PROCESS;SDA9400,0FP,64P,-P | |
|4 | CP545 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | ICP302 | 1203-001419 | IC-VOLTAGE REGULATOR:4931,TO-252,3P,6.6x | |
|4 | CP546 | 2203-000260 | C-CERAMIC,CHIP:10nf,10%,50V,X7R,TP:2012 | |4 | ICP401 | 1002-001045 | IC-D/A CONVERTER:9280,8BIT,PLCC,68P,- | |
|4 | CP547 | 2203-000260 | C-CERAMIC,CHIP:10nf,10%,50V,X7R,TP:2012 | |4 | ICP501 | 1204-001550 | IC-VIDEO PROCESS;CXA2101AQ,0FP,80P,-PLA | |
|4 | CP548 | 2203-000260 | C-CERAMIC,CHIP:10nf,10%,50V,X7R,TP:2012 | |4 | ICP601 | 1204-001372 | IC-HOR./VER.PROCESS;SDA9361,0FP,44P,-P | |
|4 | CP549 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | ICP901 | 1202-000001 | IC-VOLTAGE COMP:7533,TO-92,3P,-SINGLE, | |
|4 | CP550 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | LP101 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP551 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | LP102 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP552 | 2401-001496 | C-AL:47uf,20%,16V,GPTP:5x7,5 | |4 | LP103 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP553 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | LP105 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP554 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | LP106 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP555 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | LP107 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP556 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | LP301 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP559 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | LP302 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP601 | 2203-001088 | C-CERAMIC,CHIP:0.005nf,0.25pf,50V,NPO,TP | |4 | LP303 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP602 | 2203-001088 | C-CERAMIC,CHIP:0.005nf,0.25pf,50V,NPO,TP | |4 | LP401 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP603 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | LP402 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP604 | 2203-000938 | C-CERAMIC,CHIP:0.47nf,5%,50V,NPO,TP:2012 | |4 | LP403 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP605 | 2203-000444 | C-CERAMIC,CHIP:1nf,10%,50V,X7R,TP:2012,- | |4 | LP404 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP607 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | LP601 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP609 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | LP602 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP610 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | LP603 | 2703-001717 | INDUCTOR-SMD:1.2uH,5%,3.2x2.5x2.2mm | |
|4 | CP611 | 2203-000444 | C-CERAMIC,CHIP:1nf,10%,50V,X7R,TP:2012,- | |4 | LP901 | 3301-001186 | CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m | S.N.A |
|4 | CP612 | 2203-000444 | C-CERAMIC,CHIP:1nf,10%,50V,X7R,TP:2012,- | |4 | LP902 | 3301-001186 | CORE-FERRITE BEAD;AB,600ohm,3.2x1.6x1.3m | S.N.A |
|4 | CP613 | 2203-000444 | C-CERAMIC,CHIP:1nf,10%,50V,X7R,TP:2012,- | |4 | LP903 | 3301-001324 | CORE-FERRITE BEAD;AB,150HM,2X1.25X0.9MM, | S.N.A |
|4 | CP614 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | LP904 | 3301-001184 | CORE-FERRITE BEAD;AB,1.3kohm,4.5x3.2x1.3 | S.N.A |
|4 | CP615 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | LP905 | 3301-001184 | CORE-FERRITE BEAD;AB,1.3kohm,4.5x3.2x1.3 | S.N.A |
|4 | CP616 | 2203-001002 | C-CERAMIC,CHIP:0.047nf,5%,50V,NPO,TP:201 | |4 | LP906 | 3301-001184 | CORE-FERRITE BEAD;AB,1.3kohm,4.5x3.2x1.3 | S.N.A |
|4 | CP617 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | QP501 | 0501-000280 | TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23 | |
|4 | CP618 | 2203-000239 | C-CERAMIC,CHIP:0.1nf,5%,50V,NPO,TP:2012 | |4 | QP502 | 0501-000344 | TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT- | |
|4 | CP619 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | QP503 | 0501-000344 | TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT- | |
|4 | CP620 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | QP504 | 0501-000280 | TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23 | |
|4 | CP621 | 2203-000239 | C-CERAMIC,CHIP:0.1nf,5%,50V,NPO,TP:2012 | |4 | QP505 | 0501-000280 | TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23 | |
|4 | CP622 | 2203-000142 | C-CERAMIC,CHIP:1.5nf,10%,50V,X7R,TP:2012 | |4 | QP506 | 0501-000280 | TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23 | |
|4 | CP623 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | QP508 | 0501-000344 | TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT- | |
|4 | CP624 | 2401-001496 | C-AL:47uf,20%,16V,GPTP:5x7,5 | |4 | QP602 | 0501-000344 | TR-SMALL SIGNAL;KSC1623-G,NPN,200mW,SOT- | |
|4 | CP625 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | QP902 | 0501-000280 | TR-SMALL SIGNAL;KSA1182,PNP,150mW,SOT-23 | |
|4 | CP626 | 2401-002009 | C-AL:100uf,20%,16V,GPTP:6.3x7,5 | |4 | RP101 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP:2012 | |
|4 | CP627 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | RP102 | 2007-000947 | R-CHIP:470OHM,5%,1/10W,DA,TP:2012 | |
|4 | CP628 | 2401-002009 | C-AL:100uf,20%,16V,GPTP:6.3x7,5 | |4 | RP106 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP:2012 | |
|4 | CP629 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | RP112 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP:2012 | |
|4 | CP630 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | RP113 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP:2012 | |
|4 | CP631 | 2401-000598 | C-AL:1uf,20%,50V,GPTP:4x7,5 | |4 | RP114 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP:2012 | |
|4 | CP901 | 2404-001229 | C-TA,CHIP:4.7uf,20%,25V,GPTP:3528 | |4 | RP115 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP:2012 | |
|4 | CP902 | 2203-000218 | C-CERAMIC,CHIP:100nf,20%,50V,Y5V,TP:2012 | |4 | RP117 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP:2012 | |
|4 | CP904 | 2203-001088 | C-CERAMIC,CHIP:0.005nf,0.25pf,50V,NPO,TP | |4 | RP134 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP:2012 | |
|4 | CP905 | 2203-000925 | C-CERAMIC,CHIP:470NF,+80-20%,50V,Y5V,TP, | |4 | RP135 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP:2012 | |
|4 | CP906 | 2203-000495 | C-CERAMIC,CHIP:2.2nf,10%,50V,X7R,TP:2012 | |4 | RP136 | 2011-000585 | R-NETWORK:47ohm,5%,63mW/L,CHIP,8P,TP | |
|4 | DP501 | 0403-001117 | DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP | |4 | RP137 | 2011-000585 | R-NETWORK:47ohm,5%,63mW/L,CHIP,8P,TP | |
|4 | DP502 | 0403-001117 | DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP | |4 | RP138 | 2011-000585 | R-NETWORK:47ohm,5%,63mW/L,CHIP,8P,TP | |
|4 | DP503 | 0403-001117 | DIODE-ZENER;RLZ12B,5%,500mW,LL-34,TP | |4 | RP139 | 2011-000585 | R-NETWORK:47ohm,5%,63mW/L,CHIP,8P,TP | |
|4 | DP504 | 0403-000620 | DIODE-ZENER;RLZ5.6B,5.6V,5.45-5.73V,400m | |4 | RP140 | 2011-000585 | R-NETWORK:47ohm,5%,63mW/L,CHIP,8P,TP | |
|4 | DP505 | 0403-000620 | DIODE-ZENER;RLZ5.6B,5.6V,5.45-5.73V,400m | |4 | RP141 | 2011-000585 | R-NETWORK:47ohm,5%,63mW/L,CHIP,8P,TP | |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|------------------------------------|--------|-------|-------------|---|--|--------|
|4 | RP142 | 2011-000585 | R-NETWORK:47ohm,5%,63mWL,CHIP8P,TP | |4 | RP567 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP143 | 2011-000585 | R-NETWORK:47ohm,5%,63mWL,CHIP8P,TP | |4 | RP568 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP153 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP,2012 | |4 | RP569 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP154 | 2007-000308 | R-CHIP:100HM,5%,1/10W,DA,TP,2012 | |4 | RP570 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP155 | 2007-000947 | R-CHIP:470HM,5%,1/10W,DA,TP,2012 | |4 | RP571 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP156 | 2007-000947 | R-CHIP:470HM,5%,1/10W,DA,TP,2012 | |4 | RP601 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP157 | 2007-000947 | R-CHIP:470HM,5%,1/10W,DA,TP,2012 | |4 | RP602 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP159 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |4 | RP603 | 2007-001208 | R-CHIP:82KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP161 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP604 | 2007-000947 | R-CHIP:470HM,5%,1/10W,DA,TP,2012 | |
|4 | RP301 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP605 | 2007-000518 | R-CHIP:2.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP302 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP606 | 2007-000518 | R-CHIP:2.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP303 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP609 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP304 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP611 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP305 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP613 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP401 | 2011-000585 | R-NETWORK:47ohm,5%,63mWL,CHIP8P,TP | |4 | RP614 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP402 | 2011-000585 | R-NETWORK:47ohm,5%,63mWL,CHIP8P,TP | |4 | RP619 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP403 | 2011-000585 | R-NETWORK:47ohm,5%,63mWL,CHIP8P,TP | |4 | RP620 | 2007-000947 | R-CHIP:470HM,5%,1/10W,DA,TP,2012 | |
|4 | RP404 | 2011-000585 | R-NETWORK:47ohm,5%,63mWL,CHIP8P,TP | |4 | RP621 | 2007-000947 | R-CHIP:470HM,5%,1/10W,DA,TP,2012 | |
|4 | RP405 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP622 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP406 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP623 | 2007-000822 | R-CHIP:390OHM,5%,1/10W,DA,TP,2012 | |
|4 | RP407 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP624 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP408 | 2007-001055 | R-CHIP:6.2KOHM,5%,1/10W,DA,TP,2012 | |4 | RP625 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP409 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP,2012 | |4 | RP626 | 2007-000931 | R-CHIP:470OHM,5%,1/10W,DA,TP,2012 | |
|4 | RP411 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |4 | RP627 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP412 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |4 | RP628 | 2007-000267 | R-CHIP:1.8KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP413 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP,2012 | |4 | RP629 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP415 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |4 | RP630 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP416 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |4 | RP631 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP417 | 2007-000380 | R-CHIP:13KOHM,5%,1/10W,DA,TP,2012 | |4 | RP709 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP418 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP,2012 | |4 | RP719 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP419 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |4 | RP727 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP421 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |4 | RP735 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP422 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |4 | RP736 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP423 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP,2012 | |4 | RP737 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP501 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |4 | RP738 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP502 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |4 | RP901 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP503 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |4 | RP904 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP504 | 2007-000030 | R-CHIP:560OHM,5%,1/10W,DA,TP,2012 | |4 | RP907 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP505 | 2007-000572 | R-CHIP:220OHM,5%,1/10W,DA,TP,2012 | |4 | RP908 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP506 | 2007-000493 | R-CHIP:2.2KOHM,5%,1/10W,DA,TP,2012 | |4 | RP912 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP507 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |4 | RP913 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP509 | 2007-000931 | R-CHIP:4700HM,5%,1/10W,DA,TP,2012 | |4 | RP914 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP510 | 2007-000938 | R-CHIP:47KOHM,1%,1/10W,DA,TP,2012 | |4 | RP915 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP513 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP916 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP514 | 2007-000210 | R-CHIP:1.1KOHM,5%,1/10W,DA,TP,2012 | |4 | RP917 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP515 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |4 | RP918 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP516 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |4 | RP920 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP517 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP921 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP518 | 2007-000210 | R-CHIP:1.1KOHM,5%,1/10W,DA,TP,2012 | |4 | RP924 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP519 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP925 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP521 | 2007-000210 | R-CHIP:1.1KOHM,5%,1/10W,DA,TP,2012 | |4 | RP926 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP522 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP927 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP523 | 2007-000210 | R-CHIP:1.1KOHM,5%,1/10W,DA,TP,2012 | |4 | RP929 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP524 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP931 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP525 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP933 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP526 | 2007-000210 | R-CHIP:1.1KOHM,5%,1/10W,DA,TP,2012 | |4 | RP935 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP527 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP936 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP528 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP943 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP529 | 2007-000210 | R-CHIP:1.1KOHM,5%,1/10W,DA,TP,2012 | |4 | RP944 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RP530 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | RP945 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RP537 | 2007-000689 | R-CHIP:3.3MOHM,5%,1/10W,DA,TP,2012 | |4 | RP980 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
|4 | RP542 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | XP101 | 2801-003432 | CRYSTAL-UNIT:20.25MHZ,30PPM,28-AAM,13PF, | |
|4 | RP543 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |4 | AA41-00233B | PCB-PROSCAN-SVP-53J5PFR-4,4L,B,1.6T,245 | S.N.A | |
|4 | RP544 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |3 | AA63-40272A | SHIELD-CASE-,SPT,TO.5-,CX724AH | S.N.A | |
|4 | RP546 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | | ..2 | AA95-00529A | ASSY-PCB,PIP-,SP43J5HP,J51A,-,-,- | | |
|4 | RP547 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |3 | CNP01 | 3711-002709 | CONNECTOR-HEADER:NOWALL,12P,1R,2.5MM,ANG | |
|4 | RP549 | 2007-000671 | R-CHIP:2KOHM,5%,1/10W,DA,TP,2012 | |3 | CNP03 | 3711-002709 | CONNECTOR-HEADER:NOWALL,12P,1R,2.5MM,ANG | |
|4 | RP550 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | | △...3 | ICP101 | 1204-000530 | IC-PAL/NTSC DECODER:TDA9160A,DIP:32P,400 | |
|4 | RP553 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | | △...3 | ICP102 | 1204-000560 | IC-DEMODULATOR:TDA9815,DIP:32P,400MIL,PL | |
|4 | RP554 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |3 | RP126 | 2103-000665 | VR-SEMI:20Kohm,25%,1/5W,SIDE | |
|4 | RP555 | 2007-000582 | R-CHIP:22KOHM,1%,1/10W,DA,TP,2012 | | △...3 | TP101 | AA26-10004E | TRANS-IF-,7MG,VIF-,7mm,8Pf,116.7MHz,S | |
|4 | RP556 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |3 | ZP102 | 2904-000253 | FILTER-SAW AV:38.9MHz,DIP10K,ST,18dB,B/G | |
|4 | RP560 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |3 | AA99-200662 | ASSY-PCB SUB,AUTO: AA95-00529A _V | S.N.A | |
|4 | RP562 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |4 | CP101 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP:3216 | |
|4 | RP565 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |4 | CP102 | 2401-000922 | C-AL:22uF,20%,16V,GPT,TP:5x5 | |
|4 | RP566 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |4 | CP103 | 2203-000429 | C-CERAMIC,CHIP:018nF,5%,50V,NP,TP,201 | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|-------------|---|--------|
|4 | CP104 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |4 | QP201 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
|4 | CP105 | 2203-000717 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,3216 | |4 | QP202 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
|4 | CP106 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | QP203 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
|4 | CP107 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | QP204 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
|4 | CP108 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | QP205 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
|4 | CP109 | 2401-001840 | C-AL:100uF,20%,16V,GPTP,6.3x11,5 | |4 | QP206 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
|4 | CP110 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | QP302 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
|4 | CP111 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,2012 | |4 | QP303 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
|4 | CP112 | 2401-000660 | C-AL:2.2uF,20%,50V,GPT,5x11,5 | |4 | QP304 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
|4 | CP114 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | QP305 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
|4 | CP115 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RC129 | 2007-000586 | R-CHIP:22KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP116 | 2203-000753 | C-CERAMIC,CHIP:330nF,+80-20%,50V,Y5V,TP, | |4 | RP101 | 2007-001208 | R-CHIP:82KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP117 | 2401-002144 | C-AL:47uF,20%,16V,GPT,5x11,5 | |4 | RP104 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP118 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP105 | 2007-000328 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP119 | 2201-000692 | C-CERAMIC,DISC:0.008nF,0.5pF,50V,UJ,TP,4 | |4 | RP106 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP120 | 2203-000578 | C-CERAMIC,CHIP:220nF,20%,50V,Y5V,TP,3216 | |4 | RP107 | 2007-000409 | R-CHIP:15KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP121 | 2401-000660 | C-AL:2.2uF,20%,50V,GPT,5x11,5 | |4 | RP108 | 2007-000493 | R-CHIP:2.2KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP123 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | RP109 | 2007-000830 | R-CHIP:39KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP124 | 2401-000660 | C-AL:2.2uF,20%,50V,GPT,5x11,5 | |4 | RP110 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP125 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | RP111 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP126 | 2401-001840 | C-AL:100uF,20%,16V,GPT,6.3x11,5 | |4 | RP112 | 2007-000931 | R-CHIP:470OHM,5%,1/10W,DA,TP,2012 | |
|4 | CP127 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP113 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP129 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | RP114 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
|4 | CP130 | 2203-000239 | C-CERAMIC,CHIP:0.1nF,5%,50V,NPO,TP,2012 | |4 | RP115 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
|4 | CP131 | 2201-000692 | C-CERAMIC,DISC:0.008nF,0.5pF,50V,UJ,TP,4 | |4 | RP116 | 2007-000493 | R-CHIP:2.2KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP132 | 2203-000239 | C-CERAMIC,CHIP:0.1nF,5%,50V,NPO,TP,2012 | |4 | RP118 | 2001-000117 | R-CARBON(S):680HM,5%,1/2W,AA,TP,2.4X6.4M | |
|4 | CP133 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP119 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP134 | 2401-001840 | C-AL:100uF,20%,16V,GPT,6.3x11,5 | |4 | RP122 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP135 | 2401-002144 | C-AL:47uF,20%,16V,GPT,5x11,5 | |4 | RP123 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP136 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |4 | RP124 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP137 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NPO,TP,2012 | |4 | RP125 | 2007-000401 | R-CHIP:150OHM,5%,1/10W,DA,TP,2012 | |
|4 | CP142 | 2401-000199 | C-AL:1000uF,20%,6.3V,GPT,10x12.5, | |4 | RP127 | 2007-000030 | R-CHIP:560OHM,5%,1/10W,DA,TP,2012 | |
|4 | CP143 | 2401-002144 | C-AL:47uF,20%,16V,GPT,5x11,5 | |4 | RP128 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP144 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP130 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP145 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP131 | 2007-000586 | R-CHIP:22KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP201 | 2203-000325 | C-CERAMIC,CHIP:12nF,10%,50V,X7R,TP,3216, | |4 | RP132 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP203 | 2401-002144 | C-AL:47uF,20%,16V,GPT,5x11,5 | |4 | RP135 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP204 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP136 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP205 | 2401-001840 | C-AL:100uF,20%,16V,GPT,6.3x11,5 | |4 | RP137 | 2007-001039 | R-CHIP:56KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP206 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP138 | 2007-000586 | R-CHIP:22KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP207 | 2401-001840 | C-AL:100uF,20%,16V,GPT,6.3x11,5 | |4 | RP140 | 2007-000029 | R-CHIP:00OHM,5%,1/10W,DA,TP,2012 | |
|4 | CP208 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP201 | 2007-001039 | R-CHIP:56KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP209 | 2401-001914 | C-AL:1uF,20%,50V,BPT,5x11,5 | |4 | RP202 | 2007-000401 | R-CHIP:150OHM,5%,1/10W,DA,TP,2012 | |
|4 | CP210 | 2401-001840 | C-AL:100uF,20%,16V,GPT,6.3x11,5 | |4 | RP203 | 2007-000703 | R-CHIP:3.6KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP211 | 2401-000603 | C-AL:1uF,20%,50V,GPT,5x11,5 | |4 | RP204 | 2007-000593 | R-CHIP:22OHM,5%,1/10W,DA,TP,2012 | |
|4 | CP213 | 2401-000603 | C-AL:1uF,20%,50V,GPT,5x11,5 | |4 | RP205 | 2007-000477 | R-CHIP:1MOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP214 | 2203-000578 | C-CERAMIC,CHIP:220nF,20%,50V,Y5V,TP,3216 | |4 | RP206 | 2007-000931 | R-CHIP:470OHM,5%,1/10W,DA,TP,2012 | |
|4 | CP215 | 2401-000603 | C-AL:1uF,20%,50V,GPT,5x11,5 | |4 | RP207 | 2007-001009 | R-CHIP:51KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP216 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP208 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP217 | 2203-000578 | C-CERAMIC,CHIP:220nF,20%,50V,Y5V,TP,3216 | |4 | RP209 | 2007-000401 | R-CHIP:150OHM,5%,1/10W,DA,TP,2012 | |
|4 | CP218 | 2203-002085 | C-CERAMIC,CHIP:56nF,10%,50V,X7R,TP,2012, | |4 | RP210 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP219 | 2203-000495 | C-CERAMIC,CHIP:2.2nF,10%,50V,X7R,TP,2012 | |4 | RP211 | 2007-001001 | R-CHIP:510OHM,5%,1/10W,DA,TP,2012 | |
|4 | CP220 | 2203-000578 | C-CERAMIC,CHIP:220nF,20%,50V,Y5V,TP,3216 | |4 | RP212 | 2007-000931 | R-CHIP:470OHM,5%,1/10W,DA,TP,2012 | |
|4 | CP221 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP213 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP301 | 2401-001840 | C-AL:100uF,20%,16V,GPT,6.3x11,5 | |4 | RP215 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP302 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP216 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP303 | 2401-001840 | C-AL:100uF,20%,16V,GPT,6.3x11,5 | |4 | RP217 | 2007-000409 | R-CHIP:15KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP304 | 2203-000221 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,3216 | |4 | RP301 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
|4 | CP305 | 2203-000389 | C-CERAMIC,CHIP:0.015nF,5%,50V,NPO,TP,201 | |4 | RP303 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | CP306 | 2203-000389 | C-CERAMIC,CHIP:0.015nF,5%,50V,NPO,TP,201 | |4 | RP304 | 2007-000290 | R-CHIP:100OHM,5%,1/10W,DA,TP,2012 | |
|4 | DP101 | 0401-000160 | DIODE-SWITCHING:ISS314,30V,100mA,USC,TP | |4 | RP307 | 2007-000518 | R-CHIP:2.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | DP103 | 0403-000720 | DIODE-ZENER:MTZJ9,1B,9,1V8,57-9.01V,500 | |4 | RP308 | 2007-000401 | R-CHIP:150OHM,5%,1/10W,DA,TP,2012 | |
|4 | DP105 | 0401-000160 | DIODE-SWITCHING:ISS314,30V,100mA,USC,TP | |4 | RP309 | 2007-000931 | R-CHIP:470OHM,5%,1/10W,DA,TP,2012 | |
|4 | DP201 | 0403-000334 | DIODE-ZENER:UZ2,7BSA,2.7V,2.54-2.75V,500 | |4 | RP310 | 2007-000931 | R-CHIP:470OHM,5%,1/10W,DA,TP,2012 | |
|4 | ICP103 | AA13-20004A | IC-HYBRID:-,PAP102T,SIP,6PP,PRE-AMP,TP | |4 | RP311 | 2007-000931 | R-CHIP:470OHM,5%,1/10W,DA,TP,2012 | |
|4 | ICP105 | 1204-000635 | IC-PICTURE PROCESS:SDA9189X,SOP,32P,350M | |4 | RP312 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
|4 | ICP201 | 1002-000206 | IC-A/D CONVERTER:SDA9187-2X,6BIT,SOP,28P | |4 | RP313 | 2007-001155 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
|4 | LP102 | 2701-000219 | INDUCTOR-AXIAL:820nH,10%,2.5x3.4mm | |4 | RP314 | 2007-001155 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
|4 | LP103 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |4 | RP315 | 2007-001155 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
|4 | LP104 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |4 | RP316 | 2001-001146 | R-CARBON(S):4.7OHM,5%,1/2W,AA,TP,2.4X6.4 | |
|4 | LP105 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |4 | RP317 | 2001-001146 | R-CARBON(S):4.7OHM,5%,1/2W,AA,TP,2.4X6.4 | |
|4 | LP201 | 2701-000197 | INDUCTOR-AXIAL:5.6uH,10%,2.5x3.4mm | |4 | XP101 | 2801-000235 | CRYSTAL-UNIT:3.579545MHZ,40ppm,28-AAM,S, | |
|4 | LP301 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |4 | XP102 | 2801-000274 | CRYSTAL-UNIT:4.433619MHZ,30PPM,28-AAM,SO | |
|4 | PCB | AA41-11003A | PCB-PIP:SCIT53A,2L,FR-4,330x245x1.6T,A6 | S.N.A |4 | XP301 | 2802-000121 | RESONATOR-CERAMIC:20.48MHz,0.5%,TP,10.0x | |
|4 | QP104 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |3 | | AA63-40013A | SHIELD-CASE:-,SPT,E,TO.5, SCT51A,WZ74,- | S.N.A |
|4 | QP105 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |3 | | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1,2.63Sn/37Pb | S.N.A |
|4 | QP106 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |2 | | AA95-00644A | ASSY-PCB,TTX:-,SP43J,5HF,J51A,-,-,ENG VER | |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|-------------|--|--|--------|
| ... | CNT01 | 3711-002709 | CONNECTOR-HEADER:NOWALL,12P1R,2.5MM,ANG | |
| ... | CNT02 | 3711-002707 | CONNECTOR-HEADER:NOWALL,9P,1R,2.5mm,ANGL | |
| △ | ICT01 | AA13-00046A | IC-MCU:SDA545x-OTP 13B,OTP:ST,64K,-,D | |
| △ | ICT02 | 1103-001197 | IC-EEPROM:24C04-PC C,256X8Bit,DIP,8P,300 | |
| △ | ICT04 | 1001-000223 | IC-VIDEO SWITCH:TEA5114A,-,DIP,16P,334MI | |
| ... | XT01 | 2801-000724 | CRYSTAL-UNIT:6MHz,50ppm,28-AAAM,20pF,40oh | |
| ... | AA99-20079Q | ASSY-PCB SUB,AUTO: AA99-30187G _V | S.N.A | |
| ... | CT01 | 2401-002009 | C-AL:100uf,20%,16V,GPTP,6.3x7,5 | |
| ... | CT02 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ... | CT03 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ... | CT04 | 2203-000818 | C-CERAMIC,CHIP:0.033nF,5%,50V,NPO,TP,201 | |
| ... | CT05 | 2203-000818 | C-CERAMIC,CHIP:0.033nF,5%,50V,NPO,TP,201 | |
| ... | CT06 | 2401-000486 | C-AL:10uf,20%,50V,GPTP,6.3x7mm,5 | |
| ... | CT07 | 2203-000802 | C-CERAMIC,CHIP:33nF,10%,50V,X7R,TP,2012 | |
| ... | CT08 | 2401-002009 | C-AL:100uf,20%,16V,GPTP,6.3x7,5 | |
| ... | CT09 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ... | CT10 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP,2012 | |
| ... | CT12 | 2203-000802 | C-CERAMIC,CHIP:33nF,10%,50V,X7R,TP,2012 | |
| ... | CT13 | 2401-002009 | C-AL:100uf,20%,16V,GPTP,6.3x7,5 | |
| ... | CT14 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ... | CT15 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |
| ... | CT16 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |
| ... | CT17 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |
| ... | CT18 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |
| ... | CT19 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |
| ... | CT20 | 2203-000575 | C-CERAMIC,CHIP:220NF,10%,25V,X7R,TP,2012 | |
| ... | CT21 | 2401-000302 | C-AL:100uf,20%,25V,GPTP,6.3x11,5 | |
| ... | CT22 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ... | CT23 | 2401-002009 | C-AL:100uf,20%,16V,GPTP,6.3x7,5 | |
| ... | CT24 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | |
| ... | DZT01 | 0403-001016 | DIODE-ZENER:RLZ,6.2B,6.2V5,96-6.27V,400m | |
| ... | DZT02 | 0403-001117 | DIODE-ZENER:RLZ12B,5%,500mW,LL-34,TP | |
| △ | ICT03 | 1203-000515 | IC-VOL. DETECTOR:7042,TO-92,3P17MM,PLP,150 | |
| △ | ICT05 | 0801-000410 | IC-CMOS LOGIC:74HC32,OR GATE,SOP,14P,150 | |
| ... | JT03 | 2007-000029 | R-CHIP:00HM,5%,1/10W,DA,TP,2012 | |
| ... | LT01 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | |
| ... | LT02 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | |
| ... | LT03 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | |
| ... | LT04 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | |
| ... | LT05 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | |
| ... | PCB | AA41-00276A | PCB-TX:SP43J5MFFR-4,2LA,1.6T,180x24 | S.N.A |
| ... | RT01 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
| ... | RT02 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
| ... | RT03 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
| ... | RT04 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
| ... | RT05 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
| ... | RT06 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
| ... | RT07 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
| ... | RT08 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
| ... | RT09 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
| ... | RT10 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
| ... | RT11 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
| ... | RT12 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | |
| ... | RT13 | 2007-000518 | R-CHIP:2.7KOHM,5%,1/10W,DA,TP,2012 | |
| ... | RT14 | 2007-000653 | R-CHIP:27KOHM,5%,1/10W,DA,TP,2012 | |
| ... | RT15 | 2007-000477 | R-CHIP:1MOMH,5%,1/10W,DA,TP,2012 | |
| ... | RT16 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
| ... | RT18 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
| ... | RT22 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
| ... | RT26 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
| ... | RT27 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
| ... | RT28 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
| ... | RT29 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
| ... | RT30 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
| ... | RT31 | 2007-000572 | R-CHIP:220OHM,5%,1/10W,DA,TP,2012 | |
| ... | RT32 | 2007-000728 | R-CHIP:300OHM,5%,1/10W,DA,TP,2012 | |
| ... | RT33 | 2007-000572 | R-CHIP:220OHM,5%,1/10W,DA,TP,2012 | |
| ... | RT34 | 2007-000728 | R-CHIP:300OHM,5%,1/10W,DA,TP,2012 | |
| ... | RT35 | 2007-000572 | R-CHIP:220OHM,5%,1/10W,DA,TP,2012 | |
| ... | RT36 | 2007-000728 | R-CHIP:300OHM,5%,1/10W,DA,TP,2012 | |
| ... | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1 2.63Sn/37Pb | S.N.A | |
| ... | 0202-001004 | SOLDER-CREAM:SQ-2030M SZH-1,S63A,D0,04,6 | S.N.A | |
| ... | AA63-40014A | SHIELD-CASE,T,-,SPTE,TO.5,SC151A,-, | S.N.A | |
| ... | AA99-30200Y | ASSY-PCB ROBOT: AA94-03113P_ER | S.N.A | |
| ... | CS810 | 2201-000446 | C-CERAMIC,DISC:3.3nF,20%,400V,Y5U,TP,15x | |
| ... | CS811 | 2201-000446 | C-CERAMIC,DISC:3.3nF,20%,400V,Y5U,TP,15x | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|-------------|--|--|--------|
| ... | F1101 | 2904-000253 | FILTER-SAW AV:38.9MHz,DIP10K,ST,18dB,B/G | |
| ... | F1102 | 2904-001010 | FILTER-SAW AV:32.9-33.4MHz,SIP5P,ST,14.4 | |
| ... | H002 | AA40-10006T | TUNER-F/S:TECC2849PG29A(S),PAL-B/G,TR,18 | |
| △ | IC501 | AA96-00111L | ASSY-H/S,-,AA62-30013L,KA78R12,- | |
| ... | 1203-000165 | IC-POS:ADJUST REG.:78R12,TO-220,3P,-,- | | |
| ... | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A | |
| ... | AA62-30013L | HEATSINK-ES,-,-,44/22,-,WHT,-,-,- | S.N.A | |
| △ | IC807 | AA96-50147A | ASSY-H/S,-,TR,AA62-30012B,KA7805A,- | S.N.A |
| ... | 1203-000274 | IC-POS:FIXED REG.:7805,TO-220,3P,-,PLAS | | |
| ... | 6003-000333 | SCREW-TAPTITE:RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A | |
| ... | AA62-30012B | HEAT SINK-ES:-,A6063 EXTR,-,-,45(16) T02 | S.N.A | |
| △ | IC901 | AA09-00093A | IC MICOM:Z9035612PSC-R50P3,SP43J5HF,52P | |
| △ | IC902 | 1103-001106 | IC-EEPROM:C81DC,1028x8Bit,DIP,8P,300MIL, | |
| △ | ICS801 | AA13-00024A | IC-HYBRID:-,TNY253P,-,8PIN,-,- | |
| △ | ICS802 | 0604-001032 | PHOTO-COUPLER:TR,170-260%,300mW,DIP-4,ST | |
| ... | AA99-10195Z | ASSY-PCB MAIN,AUTO: AA99-30200Y _V | S.N.A | |
| ... | C103 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | |
| ... | C104 | 2401-001840 | C-AL:100uf,20%,16V,GPTP,6.3x11,5 | |
| ... | C105 | 2401-000302 | C-AL:100uf,20%,25V,GPTP,6.3x11,5 | |
| ... | C107 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C109 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | |
| ... | C110 | 2401-001840 | C-AL:100uf,20%,16V,GPTP,6.3x11,5 | |
| ... | C119 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | |
| ... | C121 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C125 | 2401-000603 | C-AL:1uf,20%,50V,GPTP,5x11,5 | |
| ... | C126 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | |
| ... | C130 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | |
| ... | C131 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C132 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C133 | 2401-001363 | C-AL:470uf,20%,16V,GPTP,10x12.5,5 | |
| ... | C134 | 2401-002273 | C-AL:220uf,20%,25V,VHR,TP,10x20mm,5m | |
| ... | C135 | 2401-000287 | C-AL:100uf,20%,16V,WT,TP,6.3x11,5 | |
| ... | C136 | 2401-000027 | C-AL:4.7uf,20%,50V,GPTP,5x11,5 | |
| ... | C137 | 2401-002212 | C-AL:10uf,20%,25V,WT,TP,5x11,5 | |
| ... | C138 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C139 | 2201-000180 | C-CERAMIC,DISC:10nF,10%,50V,Y5V,TP,7x3,5 | |
| ... | C140 | 2201-000292 | C-CERAMIC,DISC:1nF,10%,50V,Y5P,TP,5x3,5, | |
| ... | C141 | 2201-000292 | C-CERAMIC,DISC:1nF,10%,50V,Y5P,TP,5x3,5, | |
| ... | C142 | 2305-000289 | C-FILM,MPEF:220nF,5%,63V,TP,-,5mm | |
| ... | C143 | 2401-000667 | C-AL:2.2uf,20%,50V,WT,TP,5x11,5 | |
| ... | C144 | 2201-000180 | C-CERAMIC,DISC:10nF,10%,50V,Y5V,TP,7x3,5 | |
| ... | C145 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C146 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C147 | 2401-000660 | C-AL:2.2uf,20%,50V,GPTP,5x11,5 | |
| ... | C148 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C149 | 2401-000947 | C-AL:22uf,20%,35V,GPTP,5x11,5 | |
| ... | C180 | 2401-002300 | C-AL:47uf,20%,50V,GPTP,6.3x11,5 | |
| ... | C185 | 2401-001363 | C-AL:470uf,20%,16V,GPTP,10x12.5,5 | |
| ... | C191 | 2401-002619 | C-AL:47uf,20%,25V,GPTP,5x11,5 | |
| ... | C501 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C502 | 2401-001397 | C-AL:470uf,20%,25V,GPTP,10x16,5 | |
| ... | C503 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C504 | 2401-000832 | C-AL:220uf,20%,25V,GPTP,8x11,5,5 | |
| ... | C505 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C506 | 2401-002594 | C-AL:220uf,20%,16V,GPTP,8x11,5,5 | |
| ... | C507 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C508 | 2401-002286 | C-AL:470uf,20%,16V,WT,TP,10x12.5,5 | |
| ... | C509 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C510 | 2401-000133 | C-AL:1000uf,20%,16V,GPTP,10x20,5 | |
| ... | C511 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C512 | 2401-000689 | C-AL:2200uf,20%,16V,GPTP,13x25,5 | |
| ... | C519 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C520 | 2401-001397 | C-AL:470uf,20%,25V,GPTP,10x16,5 | |
| ... | C521 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C522 | 2401-002286 | C-AL:470uf,20%,16V,WT,TP,10x12.5,5 | |
| ... | C523 | 2201-000292 | C-CERAMIC,DISC:1nF,10%,50V,Y5P,TP,5x3,5, | |
| ... | C537 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C538 | 2401-001840 | C-AL:100uf,20%,16V,GPTP,6.3x11,5 | |
| ... | C539 | 2401-001840 | C-AL:100uf,20%,16V,GPTP,6.3x11,5 | |
| ... | C540 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C543 | 2201-000144 | C-CERAMIC,DISC:0.1nF,5%,50V,NPO,TP,8.5x3 | |
| ... | C544 | 2401-002144 | C-AL:47uf,20%,16V,GPTP,5x11,5 | |
| ... | C601 | 2401-002299 | C-AL:4.7uf,20%,50V,GPTP,5x7,5 | |
| ... | C602 | 2401-002299 | C-AL:4.7uf,20%,50V,GPTP,5x7,5 | |
| ... | C666 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | |
| ... | C667 | 2401-000603 | C-AL:1uf,20%,50V,GPTP,5x11,5 | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|---------------------------------|-------|----------|----------|-----------------------------|---|
|4 | C668 | 2401-000603 | C-AL:1uf,20%,50V,GP,TP,5x11,5 | | △ |4 | DS803 | 0403-001322 | DIODE-ZENER:MTZJ8.2B,7.78-8.19V,500mW,DO |
|4 | C669 | 2401-000962 | C-AL:22uf,20%,50V,GP,TP,5x11,5 | | △ |4 | DS804 | 0403-001318 | DIODE-ZENER:MTZJ4.3B,4.17-4.43V,500mW,DO |
|4 | C670 | 2401-000603 | C-AL:1uf,20%,50V,GP,TP,5x11,5 | | △ |4 | DS805 | 0402-000534 | DIODE-RECTIFIER:RG10V,400V,1.2A,DO-201,T |
|4 | C671 | 2401-001537 | C-AL:47uf,20%,25V,GP,TP,6.3x7mm,5mm | | △ |4 | DS806 | 1405-001030 | VARISTOR:120V,2500A,14x8.5mm,TP |
|4 | C676 | 2401-001192 | C-AL:33uf,20%,50V,GP,TP,6.3x11,5 | | △ |4 | DS807 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T |
|4 | C686 | 2201-000411 | C-CERAMIC,DISC:0.27nF,10%,50V,Y5P,TP,4x3 | | △ |4 | DS808 | 1405-000152 | VARISTOR:560V,2500A,14x8.5mm,TP |
|4 | C687 | 2201-000411 | C-CERAMIC,DISC:0.27nF,10%,50V,Y5P,TP,4x3 | | △ |4 | DS809 | 0404-001056 | DIODE-SCHOTTKY:RK16.60V,1.5A,DO-204AC,TP |
|4 | C688 | 2401-000192 | C-AL:1000uf,20%,50V,GP,TP,16x25,7.5 | | △ |4 | DS810 | 1405-000152 | VARISTOR:560V,2500A,14x8.5mm,TP |
|4 | C689 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | | |4 | DZ116 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, |
|4 | C690 | 2305-000665 | C-FILM,MPEF:100nF,5%,63V,TP,7.5x4.0x5.0m | | |4 | DZ117 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, |
|4 | C691 | 2401-000192 | C-AL:1000uf,20%,50V,GP,TP,16x25,7.5 | | |4 | DZ118 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T |
|4 | C701 | 2401-000027 | C-AL:4.7uf,20%,50V,GP,TP,5x11,5 | | |4 | DZ119 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, |
|4 | C801 | 2401-002300 | C-AL:47uf,20%,50V,GP,TP,6.3x11,5 | | |4 | DZ120 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T |
|4 | C901 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3 | | |4 | DZ121 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T |
|4 | C905 | 2401-001496 | C-AL:47uf,20%,16V,GP,TP,5x7,5 | | |4 | DZ501 | 0403-000508 | DIODE-ZENER:MTZJ5.6B,5.6V,5.45-5.73V,500 |
|4 | C906 | 2305-000149 | C-FILM,MPEF:100nF,5%,100V,TP,12x12.5x6.5 | | |4 | DZ502 | 0403-000508 | DIODE-ZENER:MTZJ5.6B,5.6V,5.45-5.73V,500 |
|4 | C908 | 2201-000292 | C-CERAMIC,DISC:1nF,10%,50V,Y5P,TP,5x3,5 | | |4 | DZ503 | 0403-000720 | DIODE-ZENER:MTZJ9.1B,9.1V,8.57-9.01V,500 |
|4 | C909 | 2201-000292 | C-CERAMIC,DISC:1nF,10%,50V,Y5P,TP,5x3,5 | | |4 | DZ504 | 0403-000720 | DIODE-ZENER:MTZJ9.1B,9.1V,8.57-9.01V,500 |
|4 | C912 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP | | |4 | DZ505 | 0403-000720 | DIODE-ZENER:MTZJ9.1B,9.1V,8.57-9.01V,500 |
|4 | C913 | 2201-000193 | C-CERAMIC,DISC:0.01nF,0.25pF,50V,NP0,TP | | |4 | DZ506 | 0403-000508 | DIODE-ZENER:MTZJ5.6B,5.6V,5.45-5.73V,500 |
|4 | C914 | 2201-000573 | C-CERAMIC,DISC:0.047nF,5%,50V,NP0,TP,5x3 | | |4 | DZ507 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 |
|4 | C915 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP | | |4 | DZ508 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 |
|4 | C916 | 2401-002042 | C-AL:220uf,20%,10V,GP,TP,6.3x11,5 | | |4 | DZ665 | 0403-001039 | DIODE-ZENER:MA2560,56V,52-60V,1W,DO-41,T |
|4 | C917 | 2401-002144 | C-AL:47uf,20%,16V,GP,TP,5x11,5 | | |4 | DZ666 | 0403-001325 | DIODE-ZENER:MTZJ15C,14.35-15.09V,500mW,DO |
|4 | C918 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP | | |4 | DZ667 | 0403-001319 | DIODE-ZENER:MTZJ4.7C,4.68-4.93V,500mW,DO |
|4 | C919 | 2401-000480 | C-AL:10uf,20%,50V,GP,TP,5x11,5 | | |4 | DZ701 | 0403-001140 | DIODE-ZENER:RD10ESAB-T4,10V,9.19-10.30V, |
|4 | C920 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP | | |4 | DZ801 | 0403-000700 | DIODE-ZENER:TZP33A,33V,31-35V,1W,DO-41,T |
|4 | C925 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP | | |4 | DZ901 | 0403-000508 | DIODE-ZENER:MTZJ5.6B,5.6V,5.45-5.73V,500 |
|4 | C926 | 2401-000480 | C-AL:10uf,20%,50V,GP,TP,5x11,5 | | |4 | DZ902 | 0403-000508 | DIODE-ZENER:MTZJ5.6B,5.6V,5.45-5.73V,500 |
|4 | C927 | 2202-000231 | C-CERAMIC,MLC-AXIAL:330pF,10%,50V,Y5P,TP | | |4 | DZ903 | 0403-000508 | DIODE-ZENER:MTZJ5.6B,5.6V,5.45-5.73V,500 |
|4 | C928 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3 | | |4 | DZ904 | 0403-000508 | DIODE-ZENER:MTZJ5.6B,5.6V,5.45-5.73V,500 |
|4 | CN003 | 3711-002642 | CONNECTOR-HEADER:BOX,3P,1R,2.5MM,STRAIGH | | |4 | DZ905 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 |
|4 | CN402 | 3711-002642 | CONNECTOR-HEADER:BOX,3P,1R,2.5MM,STRAIGH | | |4 | DZ906 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 |
|4 | CN403 | 3711-002642 | CONNECTOR-HEADER:BOX,3P,1R,2.5MM,STRAIGH | | |4 | DZ907 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 |
|4 | CN404 | 3711-002642 | CONNECTOR-HEADER:BOX,3P,1R,2.5MM,STRAIGH | | |4 | DZ911 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V,5.96-6.27V,500 |
|4 | CN601 | 3711-002643 | CONNECTOR-HEADER:BOX,4P,1R,2.5MM,STRAIGH | | |4 | DZ912 | 0403-000508 | DIODE-ZENER:MTZJ5.6B,5.6V,5.45-5.73V,500 |
|4 | CS801 | 2201-000332 | C-CERAMIC,DISC:2.2nF,20%,250V,Y5U,TP,9x4 | | |4 | DZ914 | 0403-000508 | DIODE-ZENER:MTZJ5.6B,5.6V,5.45-5.73V,500 |
|4 | CS802 | 2201-000332 | C-CERAMIC,DISC:2.2nF,20%,250V,Y5U,TP,9x4 | | |4 | DZ915 | 0403-000508 | DIODE-ZENER:MTZJ5.6B,5.6V,5.45-5.73V,500 |
|4 | CS804 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP | | |4 | F901 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP- |
|4 | CS805 | 2401-002286 | C-AL:470uf,20%,16V,WT,TP,10x12.5,5 | | |4 | F103 | 2903-000181 | FILTER-CERAMIC:BR,5.5MHz,-,-,TP,TPSS.5 |
|4 | CS807 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP | | |4 | F104 | 2903-000129 | FILTER-CERAMIC:BR,4.5MHz,-,-,TP- |
|4 | CS808 | 2401-002286 | C-AL:470uf,20%,16V,WT,TP,10x12.5,5 | | △ |4 | IC506 | 1203-000293 | IC-POSI.FIXED REG.:7808,TO-220,3P,-,PLAS |
|4 | CS809 | 2201-000556 | C-CERAMIC,DISC:0.47nF,10%,500V,Y5P,TP,5 | | △ |4 | IC904 | 1203-000515 | IC-VOL. DETECTOR:7042,TO-92,3P,177MIL,PL |
|4 | CS812 | 2201-002076 | C-CERAMIC,DISC:0.068nF,5%,1kV,SL,TP,8x4m | | |4 | L101 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm |
|4 | CZ144 | 2401-000480 | C-AL:10uf,20%,50V,GP,TP,5x11,5 | | |4 | L103 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm |
|4 | CZ146 | 2401-000832 | C-AL:220uf,20%,25V,GP,TP,8x11,5,5 | | |4 | L106 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm |
|4 | CZ147 | 2201-000193 | C-CERAMIC,DISC:0.01nF,0.25pF,50V,NP0,TP | | |4 | L107 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm |
|4 | CZ148 | 2201-000193 | C-CERAMIC,DISC:0.01nF,0.25pF,50V,NP0,TP | | |4 | L108 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm |
|4 | CZ149 | 2201-000516 | C-CERAMIC,DISC:4.7nF,+100-0%,500V,Y5U,TP | | |4 | L109 | 2701-000101 | INDUCTOR-AXIAL:1.2uH,10%,2.5x3.4mm |
|4 | CZ150 | 2201-000516 | C-CERAMIC,DISC:4.7nF,+100-0%,500V,Y5U,TP | | |4 | L110 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm |
|4 | CZ151 | 2401-001513 | C-AL:47uf,20%,16V,WT,TP,5x11,5 | | |4 | L111 | 2701-000120 | INDUCTOR-AXIAL:12uH,10%,2.5x3.4mm |
|4 | CZ152 | 2401-001157 | C-AL:33uf,20%,16V,GP,TP,12.5x20,5 | | |4 | L112 | 2701-000299 | INDUCTOR-AXIAL:13uH,10%,2.5x3.4MM |
|4 | CZ153 | 2401-001513 | C-AL:47uf,20%,16V,WT,TP,5x11,5 | | |4 | L113 | AA26-10006G | TRANS-IF:-,7mG,VIF-,7mm,8pF,77.8MHz,ST |
|4 | CZ155 | 2201-000604 | C-CERAMIC,DISC:0.056nF,+100-0%,500V,SL,T | | |4 | L114 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm |
|4 | CZ167 | 2401-001220 | C-AL:4.7uf,20%,16V,GP,TP,8x11.5,5 | | |4 | L115 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm |
|4 | CZ167A | 2401-001220 | C-AL:4.7uf,20%,16V,GP,TP,8x11.5,5 | | |4 | L116 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm |
|4 | D101 | 0401-001088 | DIODE-SWITCHING:BAW76,50V,300mA,DO-35,TP | | |4 | L117 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm |
|4 | D102 | 0401-001088 | DIODE-SWITCHING:BAW76,50V,300mA,DO-35,TP | | |4 | L118 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm |
|4 | D103 | 0401-001088 | DIODE-SWITCHING:BAW76,50V,300mA,DO-35,TP | | |4 | L501 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm |
|4 | D501 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | |4 | L502 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm |
|4 | D664 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | | |4 | L503 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm |
|4 | D665 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | |4 | L504 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm |
|4 | D666 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | |4 | L505 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP- |
|4 | D667 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | |4 | L506 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, |
|4 | D668 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | |4 | L507 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, |
|4 | D669 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | |4 | L514 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, |
|4 | D701 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | |4 | L515 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, |
|4 | D702 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | |4 | L601 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm |
|4 | D703 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | |4 | L602 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm |
|4 | D901 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | |4 | L604 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, |
|4 | D902 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | |4 | L901 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP- |
|4 | D903 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | |4 | L902 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm |
|4 | D904 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | |4 | L903 | 2701-001040 | INDUCTOR-AXIAL:10uH,10%,4.5x14mm |
|4 | D905 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | |4 | L907 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, |
|4 | D906 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | |4 | L909 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm |
|4 | D907 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | |4 | L910 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm |
| △ |4 | DS802 | 1405-000152 | VARISTOR:560V,2500A,14x8.5mm,TP | |4 | L911 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|-------------|--|--------|
|4 | L912 | 2701-000114 | INDUCTOR-AXIAL:10uH,10%,2.5x3.4mm | |4 | R665 | 2001-001188 | R-CARBON(S):8.2KOHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | LD901 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm | |4 | R666 | 2001-001188 | R-CARBON(S):8.2KOHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | LS801 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- | |4 | R668 | 2001-000028 | R-CARBON(S):100OHHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | LS802 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- | |4 | R669 | 2001-001144 | R-CARBON(S):4.7KOHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | LS803 | 3301-000287 | CORE-FERRITE BEAD-AA,3.5x1.0x6.0mm,1500, | |4 | R670 | 2001-000085 | R-CARBON(S):100KOHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | LZ112 | 2701-000002 | INDUCTOR-AXIAL:100uH,10%,4.2x9.8mm | |4 | R671 | 2001-000066 | R-CARBON(S):10KOHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | PCB | AA41-00075A | PCB-MAIN:J51A,1L,FR-1,330X245X1.6T,1A,- | S.N.A |4 | R672 | 2001-000066 | R-CARBON(S):10KOHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | Q101 | 0504-000137 | TR-DIGITAL:KSR1202,NPN,300mW,10K/10K,TO- | |4 | R673 | 2001-000411 | R-CARBON:18KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | Q102 | 0504-000123 | TR-DIGITAL:KSR1010,NPN,300mW,10K,TO-92,T | |4 | R674 | 2001-000780 | R-CARBON:470OHHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | Q103 | 0501-000245 | TR-SMALL SIGNAL:BC548C,NPN,500mW,TO-92,T | |4 | R675 | 2001-000066 | R-CARBON(S):10KOHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | Q104 | 0504-000123 | TR-DIGITAL:KSR1010,NPN,300mW,10K,TO-92,T | |4 | R676 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | Q105 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |4 | R677 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | Q106 | 0504-000150 | TR-DIGITAL:KSR2010,PNP,300mW,10K,TO-92,T | |4 | R678 | 2001-000008 | R-CARBON:15KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | Q107 | 0504-000123 | TR-DIGITAL:KSR1010,NPN,300mW,10K,TO-92,T | |4 | R679 | 2001-001071 | R-CARBON(S):12KOHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | Q665 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |4 | R680 | 2001-001000 | R-CARBON:8.2KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | Q666 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |4 | R681 | 2001-001093 | R-CARBON(S):2.2KOHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | Q667 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |4 | R682 | 2004-001897 | R-METAL(S):43.2Kohm,1%,1/2W,AA,TP2.5x6.6 | |
|4 | Q701 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |4 | R683 | 2004-001897 | R-METAL(S):43.2Kohm,1%,1/2W,AA,TP2.5x6.6 | |
|4 | Q702 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |4 | R684 | 2001-001093 | R-CARBON(S):2.2KOHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | Q901 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |4 | R685 | 2004-001390 | R-METAL(S):1Kohm,2%,1/2W,AA,TP2.4x6.4mm | |
|4 | Q902 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |4 | R686 | 2004-001390 | R-METAL(S):1Kohm,2%,1/2W,AA,TP2.4x6.4mm | |
|4 | Q903 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |4 | R687 | 2001-001146 | R-CARBON(S):4.7OHHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | Q909 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | |4 | R689 | 2001-001146 | R-CARBON(S):4.7OHHM,5%,1/2W,AA,TP2.4X6.4 | |
|4 | Q910 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |4 | R690 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | QS801 | 0501-000369 | TR-SMALL SIGNAL:KSC2331-Y,NPN,1W,TO-92L, | |4 | R701 | 2001-000786 | R-CARBON:47KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | QZ103 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |4 | R702 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | QZ104 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |4 | R703 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | QZ105 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | |4 | R704 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | QZ106 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | |4 | R801 | 2003-001098 | R-METAL OXIDE(S):22Kohm,5%,3W,AA,TP6x16 | |
|4 | R123 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R901 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R131 | 2001-000739 | R-CARBON:4.7MOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | R903 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R132 | 2001-000739 | R-CARBON:4.7MOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | R904 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R142 | 2001-000281 | R-CARBON:100OHHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R905 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R145 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | R906 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R146 | 2001-000362 | R-CARBON:150OHHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R907 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R148 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R908 | 2001-000281 | R-CARBON:100OHHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R149 | 2001-000331 | R-CARBON:12KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R909 | 2001-000281 | R-CARBON:100OHHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R150 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R910 | 2001-000281 | R-CARBON:100OHHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R151 | 2001-000313 | R-CARBON:11KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R912 | 2001-000003 | R-CARBON:330ohm,5%,1/8W,AA,TP1.8x3.2mm | |
|4 | R152 | 2001-000449 | R-CARBON:2.2KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | R914 | 2001-000281 | R-CARBON:100OHHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R153 | 2001-000449 | R-CARBON:2.2KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | R915 | 2001-000281 | R-CARBON:100OHHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R154 | 2001-000449 | R-CARBON:2.2KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | R916 | 2001-000472 | R-CARBON:2.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R155 | 2001-000522 | R-CARBON:22KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R917 | 2001-000472 | R-CARBON:2.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R156 | 2001-000241 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | R918 | 2001-000832 | R-CARBON:510OHHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R157 | 2001-000241 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | R919 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R158 | 2001-000857 | R-CARBON:560OHHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R921 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R159 | 2001-000864 | R-CARBON:56KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R922 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R160 | 2001-000786 | R-CARBON:47KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R923 | 2001-000786 | R-CARBON:47KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R161 | 2001-000005 | R-CARBON:390ohm,5%,1/8W,AA,TP1.8x3.2mm | |4 | R924 | 2001-000786 | R-CARBON:47KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R162 | 2001-000969 | R-CARBON:750OHHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R925 | 2001-000241 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R163 | 2001-000515 | R-CARBON:220OHHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R926 | 2001-000241 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R164 | 2001-000490 | R-CARBON:200OHHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R930 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R165 | 2001-000515 | R-CARBON:220OHHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R931 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R166 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R932 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R167 | 2001-000522 | R-CARBON:22KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R945 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R168 | 2001-000522 | R-CARBON:22KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R946 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R169 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | R947 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R501 | 2001-000066 | R-CARBON(S):10KOHM,5%,1/2W,AA,TP2.4X6.4 | |4 | R948 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R502 | 2001-000281 | R-CARBON:100OHHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R949 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R503 | 2001-000281 | R-CARBON:100OHHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R950 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R504 | 2001-000405 | R-CARBON:180OHHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | R951 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R509 | 2008-000266 | R-FUSIBLE(S):1ohm,5%,2W,AF,TP3.9x10mm | |4 | R952 | 2001-000281 | R-CARBON:100OHHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R510 | 2008-000266 | R-FUSIBLE(S):1ohm,5%,2W,AF,TP3.9x10mm | |4 | R953 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R511 | 2008-001116 | R-FUSIBLE(S):0.68ohm,10%,2W,AG,TP3.9x12 | |4 | R954 | 2001-000281 | R-CARBON:100OHHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R512 | 2001-000003 | R-CARBON:330ohm,5%,1/8W,AA,TP1.8x3.2mm | |4 | R955 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R524 | 2001-000739 | R-CARBON:4.7MOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | R958 | 2001-000281 | R-CARBON:100OHHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R525 | 2001-000739 | R-CARBON:4.7MOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | R959 | 2001-000281 | R-CARBON:100OHHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R526 | 2001-000739 | R-CARBON:4.7MOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | R960 | 2001-000281 | R-CARBON:100OHHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R531 | 2001-000739 | R-CARBON:4.7MOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | R961 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R532 | 2001-000037 | R-CARBON(S):330OHHM,5%,1/2W,AA,TP2.4X6.4 | |4 | R962 | 2001-000864 | R-CARBON:56KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R533 | 2001-000739 | R-CARBON:4.7MOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | R967 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R601 | 2001-000109 | R-CARBON(S):470OHHM,5%,1/2W,AA,TP2.4X6.4 | |4 | R968 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R602 | 2001-000605 | R-CARBON:3.6KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | R970 | 2001-000472 | R-CARBON:2.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R603 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | R971 | 2001-000780 | R-CARBON:47KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
|4 | R661 | 2001-001093 | R-CARBON(S):2.2KOHM,5%,1/2W,AA,TP2.4X6.4 | |4 | R974 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |
|4 | R662 | 2001-001093 | R-CARBON(S):2.2KOHM,5%,1/2W,AA,TP2.4X6.4 | |4 | R977 | 2001-001062 | R-CARBON(S):10MOHM,5%,1/2W,AA,TP2.4X6.4 | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|-------------|--|--------|
|4 | R979 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C635 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NP0,TP2012 | |
|4 | R980 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C636 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | |
|4 | R981 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C637 | 2401-000027 | C-AL:4.7uF,20%,50V,GP,TP5x11,5 | |
|4 | R982 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C638 | 2401-002235 | C-AL:10uF,20%,16V,GP,TP5x11mm,5mm | |
|4 | R983 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C639 | 2401-002235 | C-AL:10uF,20%,16V,GP,TP5x11mm,5mm | |
|4 | R984 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C640 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NP0,TP2012 | |
|4 | R985 | 2001-000786 | R-CARBON:47KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C641 | 2203-000142 | C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP2012 | |
|4 | R986 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C642 | 2401-000480 | C-AL:10uF,20%,50V,GP,TP5x11,5 | |
|4 | R987 | 2001-000780 | R-CARBON:470OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C643 | 2401-000027 | C-AL:4.7uF,20%,50V,GP,TP5x11,5 | |
|4 | R988 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C644 | 2401-000027 | C-AL:4.7uF,20%,50V,GP,TP5x11,5 | |
|4 | R989 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C645 | 2401-000027 | C-AL:4.7uF,20%,50V,GP,TP5x11,5 | |
|4 | R990 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C646 | 2401-000027 | C-AL:4.7uF,20%,50V,GP,TP5x11,5 | |
|4 | R991 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C649 | 2401-002300 | C-AL:47uF,20%,50V,GP,TP6.3x11,5 | |
|4 | R992 | 2001-000472 | R-CARBON:2.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | C650 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP2012 | |
|4 | R993 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C651 | 2401-000365 | C-AL:100uF,20%,50V,WT,TP10x12.5mm, | |
|4 | R994 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C653 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NP0,TP2012 | |
|4 | RD901 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C654 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |
|4 | RD903 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | C655 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NP0,TP2012 | |
|4 | RF802 | 2008-000294 | R-FUSIBLE(S):1.8ohm,5%,2W,AF,TP3.9x10mm | |4 | C656 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |
|4 | RS801 | 2003-002194 | R-METAL OXIDE(S):1.8kohm,5%,1W,AF,TP2.5 | |4 | C657 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |
|4 | RS802 | 2001-001192 | R-CARBON(S):820OHM,5%,1/2W,AA,TP2.4X6.4 | |4 | C658 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NP0,TP2012 | |
|4 | RS803 | 2001-001159 | R-CARBON(S):510OHM,5%,1/2W,AA,TP2.4X6.4 | |4 | C661 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NP0,TP2012 | |
|4 | RS804 | 2001-001182 | R-CARBON(S):7.5KOHM,5%,1/2W,AA,TP2.4X6.4 | |4 | C662 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |
|4 | RS805 | 2001-001107 | R-CARBON(S):220ohm,5%,1/2W,AA,TP2.4x6.4 | |4 | C663 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |
|4 | RS806 | 2001-001159 | R-CARBON(S):510OHM,5%,1/2W,AA,TP2.4X6.4 | |4 | C664 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NP0,TP2012 | |
|4 | RS807 | 2001-000739 | R-CARBON:4.7MOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | C667 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NP0,TP2012 | |
|4 | RZ153 | 2008-001086 | R-FUSIBLE(S):3.3ohm,5%,2W,AG,TP3.9x12mm | |4 | C668 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |
|4 | RZ154 | 2003-000532 | R-METAL OXIDE(S):18ohm,5%,2W,AF,TP4x12m | |4 | C669 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |
|4 | RZ156 | 2001-001159 | R-CARBON(S):510OHM,5%,1/2W,AA,TP2.4X6.4 | |4 | C670 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NP0,TP2012 | |
|4 | RZ165 | 2001-000331 | R-CARBON:12KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C684 | 2401-000480 | C-AL:10uF,20%,50V,GP,TP5x11,5 | |
|4 | RZ166 | 2001-000258 | R-CARBON:1.8KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | C688 | 2401-000962 | C-AL:22uF,20%,50V,GP,TP5x11,5 | |
|4 | RZ167 | 2001-000258 | R-CARBON:1.8KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | C691 | 2401-000962 | C-AL:22uF,20%,50V,GP,TP5x11,5 | |
|4 | RZ167A | 2001-000554 | R-CARBON:270OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C692 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP2012 | |
|4 | RZ168 | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | |4 | C695 | 2203-000761 | C-CERAMIC,CHIP:330nF,10%,16V,X7R,TP2012 | |
|4 | RZ169 | 2001-000019 | R-CARBON(S):10OHM,5%,1/2W,AA,TP2.4X6.4M | |4 | C696 | 2203-000170 | C-CERAMIC,CHIP:1.8nF,10%,50V,X7R,TP2012 | |
|4 | RZ170 | 2001-000666 | R-CARBON:330OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | C697 | 2203-000170 | C-CERAMIC,CHIP:1.8nF,10%,50V,X7R,TP2012 | |
|4 | RZ171 | 2001-000666 | R-CARBON:330OHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | CB1 | 2401-000365 | C-AL:100uF,20%,50V,WT,TP10x12.5mm, | |
|4 | RZ172 | 2001-000241 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | CD601 | 2203-000260 | C-CERAMIC,CHIP:0.22nF,5%,50V,NP0,TP2012 | |
|4 | RZ173 | 2001-001139 | R-CARBON(S):39KOHM,5%,1/2W,AA,TP2.4X6.4 | |4 | CD602 | 2203-000142 | C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP2012 | |
|4 | RZ174 | 2001-001139 | R-CARBON(S):39KOHM,5%,1/2W,AA,TP2.4X6.4 | |4 | CD603 | 2401-000962 | C-AL:22uF,20%,50V,GP,TP5x11,5 | |
|4 | RZ175 | 2001-000241 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | CD604 | 2203-000595 | C-CERAMIC,CHIP:0.22nF,5%,50V,NP0,TP2012 | |
|4 | RZ176 | 2001-000221 | R-CARBON:1.2KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | CD605 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NP0,TP2012 | |
|4 | RZ177 | 2001-000331 | R-CARBON:12KOHM,5%,1/8W,AA,TP1.8X3.2MM | |4 | CD606 | 2401-000962 | C-AL:22uF,20%,50V,GP,TP5x11,5 | |
|4 | RZ178 | 2001-000221 | R-CARBON:1.2KOHM,5%,1/8W,AA,TP1.8X3.2M | |4 | CD607 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NP0,TP2012 | |
|4 | RZ179 | 2003-000713 | R-METAL OXIDE(S):47ohm,5%,2W,AF,TP4x12m | |4 | CD608 | 2203-000142 | C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP2012 | |
|4 | RZ180 | 2001-001100 | R-CARBON(S):2.7OHM,5%,1/2W,AA,TP2.4X6.4 | |4 | CD609 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | |
|4 | RZ181 | 2001-001100 | R-CARBON(S):2.7OHM,5%,1/2W,AA,TP2.4X6.4 | |4 | CD610 | 2401-000480 | C-AL:10uF,20%,50V,GP,TP5x11,5 | |
|4 | RZ182 | 2003-000713 | R-METAL OXIDE(S):47ohm,5%,2W,AF,TP4x12m | |4 | CD611 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | |
|4 | RZ183 | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | |4 | CD612 | 2401-000027 | C-AL:4.7uF,20%,50V,GP,TP5x11,5 | |
|4 | RZ184 | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP6X16MM | |4 | CD613 | 2401-000660 | C-AL:2.2uF,20%,50V,GP,TP5x11,5 | |
|4 | VR101 | 2103-000672 | VR-SEMI:20Kohm,25%,1/5W,TP | |4 | CD615 | 2401-000660 | C-AL:2.2uF,20%,50V,GP,TP5x11,5 | |
| ..2 | | AA95-00427A | ASSY-SOUND - SP4J3P3S/XTT,J51A,-,-,CHIN | |4 | CD616 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP2012,- | |
|3 | CN601A | 3711-003626 | CONNECTOR-HEADER:NOWALL,20P,1R,2.5mm,ANG | |4 | CD618 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP2012,- | |
|3 | CN602A | 3711-003626 | CONNECTOR-HEADER:NOWALL,20P,1R,2.5mm,ANG | |4 | CD619 | 2401-002235 | C-AL:10uF,20%,16V,GP,TP5x11mm,5mm | |
|3 | LD603 | 2701-000170 | INDUCTOR-AXIAL:3.9uH,10%,3x7mm | |4 | CD620 | 2401-002235 | C-AL:10uF,20%,16V,GP,TP5x11mm,5mm | |
|3 | | AA99-20060M | ASSY-PCB SUB,AUTO: AA95-00427A /V | S.N.A |4 | CD621 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NP0,TP2012 | |
|4 | C614 | 2401-000962 | C-AL:22uF,20%,50V,GP,TP5x11,5 | |4 | CD622 | 2203-000142 | C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP2012 | |
|4 | C615 | 2203-000595 | C-CERAMIC,CHIP:0.22nF,5%,50V,NP0,TP2012 | |4 | CD623 | 2401-000480 | C-AL:10uF,20%,50V,GP,TP5x11,5 | |
|4 | C616 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NP0,TP2012 | |4 | CD624 | 2203-000495 | C-CERAMIC,CHIP:2.2nF,10%,50V,X7R,TP2012 | |
|4 | C617 | 2203-000142 | C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP2012 | |4 | CD625 | 2401-000962 | C-AL:22uF,20%,50V,GP,TP5x11,5 | |
|4 | C618 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP2012,- | |4 | CD626 | 2203-000495 | C-CERAMIC,CHIP:2.2nF,10%,50V,X7R,TP2012 | |
|4 | C619 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP2012,- | |4 | CD627 | 2401-000962 | C-AL:22uF,20%,50V,GP,TP5x11,5 | |
|4 | C620 | 2401-000660 | C-AL:2.2uF,20%,50V,GP,TP5x11,5 | |4 | CD628 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP2012 | |
|4 | C621 | 2401-000660 | C-AL:2.2uF,20%,50V,GP,TP5x11,5 | |4 | CD629 | 2401-000365 | C-AL:100uF,20%,50V,WT,TP10x12.5mm, | |
|4 | C622 | 2203-000701 | C-CERAMIC,CHIP:0.002nF,0.25pF,50V,NP0,TP | |4 | CD630 | 2203-000761 | C-CERAMIC,CHIP:330nF,10%,16V,X7R,TP2012 | |
|4 | C623 | 2203-000701 | C-CERAMIC,CHIP:0.002nF,0.25pF,50V,NP0,TP | |4 | IC601 | 1204-001689 | IC-SOUND PROCESSOR:MSP3410D-C5,PLCC,68P, | |
|4 | C624 | 2203-001077 | C-CERAMIC,CHIP:0.056nF,5%,50V,NP0,TP201 | |4 | IC604 | 1201-000541 | IC-OP AMP:062,SOP,8P;153MIL,DUAL,6V/mVP | |
|4 | C625 | 2203-001077 | C-CERAMIC,CHIP:0.056nF,5%,50V,NP0,TP201 | |4 | ICD601 | 1204-001198 | IC-DECODER:DPL3519A-A2,PLCC,68P,-,PLASTI | |
|4 | C626 | 2401-000962 | C-AL:22uF,20%,50V,GP,TP5x11,5 | |4 | ICD602 | 1201-000541 | IC-OP AMP:062,SOP,8P;153MIL,DUAL,6V/mVP | |
|4 | C627 | 2203-000938 | C-CERAMIC,CHIP:0.47nF,5%,50V,NP0,TP2012 | |4 | L601 | 2701-000170 | INDUCTOR-AXIAL:3.9uH,10%,3x7mm | |
|4 | C628 | 2203-000142 | C-CERAMIC,CHIP:1.5nF,10%,50V,X7R,TP2012 | |4 | L602 | 2701-000170 | INDUCTOR-AXIAL:3.9uH,10%,3x7mm | |
|4 | C629 | 2203-001077 | C-CERAMIC,CHIP:0.056nF,5%,50V,NP0,TP201 | |4 | L603 | 2701-000112 | INDUCTOR-AXIAL:100uH,10%,3x7mm | |
|4 | C630 | 2401-000480 | C-AL:10uF,20%,50V,GP,TP5x11,5 | |4 | LD601 | 2701-000170 | INDUCTOR-AXIAL:3.9uH,10%,3x7mm | |
|4 | C631 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | |4 | LD602 | 2701-000112 | INDUCTOR-AXIAL:100uH,10%,3x7mm | |
|4 | C632 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |4 | PCB | AA41-00087A | PCB-AUDIO:PLT51A,2L,FR,4,180X245X1.6T,3A | S.N.A |
|4 | C633 | 2401-002229 | C-AL:470nF,20%,50V,WT,TP5x11,5 | |4 | O606 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | |
|4 | C634 | 2203-000784 | C-CERAMIC,CHIP:0.33nF,5%,50V,NP0,TP2012 | | | | | | |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark | |
|-------|----------|-------------|--|--|-------|----------|----------|-----------------------------|---|---|
| ... | 4 | O607 | 0501-000727 | TR-SMALL SIGNAL-BC848C,NPN,310mW,SOT-23, | | ... | 4 | CF18 | 2203-000683 | C-CERAMIC,CHIP:0.027nF,5%,50V,NPO,TP201 |
| ... | 4 | R601 | 2007-000029 | R-CHIP:00HMM,5%,1/10W,DA,TP2012 | | ... | 4 | CF19 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R602 | 2007-000029 | R-CHIP:00HMM,5%,1/10W,DA,TP2012 | | ... | 4 | CF21 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R610 | 2007-000290 | R-CHIP:1000HMM,5%,1/10W,DA,TP2012 | | ... | 4 | CF22 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R611 | 2007-000290 | R-CHIP:1000HMM,5%,1/10W,DA,TP2012 | | ... | 4 | CF23 | 2401-001513 | C-AL:47uF,20%,16V,WVT,TP5x11.5 |
| ... | 4 | R614 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF24 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R617 | 2007-000931 | R-CHIP:4700HMM,5%,1/10W,DA,TP2012 | | ... | 4 | CF25 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R618 | 2007-000931 | R-CHIP:4700HMM,5%,1/10W,DA,TP2012 | | ... | 4 | CF26 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R619 | 2007-000290 | R-CHIP:1000HMM,5%,1/10W,DA,TP2012 | | ... | 4 | CF27 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R620 | 2007-000290 | R-CHIP:1000HMM,5%,1/10W,DA,TP2012 | | ... | 4 | CF28 | 2401-001513 | C-AL:47uF,20%,16V,WVT,TP5x11.5 |
| ... | 4 | R621 | 2007-000290 | R-CHIP:1000HMM,5%,1/10W,DA,TP2012 | | ... | 4 | CF29 | 2401-001513 | C-AL:47uF,20%,16V,WVT,TP5x11.5 |
| ... | 4 | R622 | 2007-000290 | R-CHIP:1000HMM,5%,1/10W,DA,TP2012 | | ... | 4 | CF30 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R623 | 2007-000477 | R-CHIP:1MOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF31 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R624 | 2007-000477 | R-CHIP:1MOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF32 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R625 | 2007-000477 | R-CHIP:1MOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF33 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R626 | 2007-000477 | R-CHIP:1MOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF34 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R632 | 2007-000931 | R-CHIP:4700HMM,5%,1/10W,DA,TP2012 | | ... | 4 | CF35 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R633 | 2007-000931 | R-CHIP:4700HMM,5%,1/10W,DA,TP2012 | | ... | 4 | CF37 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R634 | 2007-000931 | R-CHIP:4700HMM,5%,1/10W,DA,TP2012 | | ... | 4 | CF38 | 2401-001513 | C-AL:47uF,20%,16V,WVT,TP5x11.5 |
| ... | 4 | R635 | 2007-000931 | R-CHIP:4700HMM,5%,1/10W,DA,TP2012 | | ... | 4 | CF39 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R636 | 2007-000931 | R-CHIP:4700HMM,5%,1/10W,DA,TP2012 | | ... | 4 | CF40 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R637 | 2007-000931 | R-CHIP:4700HMM,5%,1/10W,DA,TP2012 | | ... | 4 | CF41 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R638 | 2007-000931 | R-CHIP:4700HMM,5%,1/10W,DA,TP2012 | | ... | 4 | CF42 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R660 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF44 | 2404-000151 | C-TA,CHIP:1uF,20%,16V,-,TP3216,- |
| ... | 4 | R661 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF45 | 2203-001158 | C-CERAMIC,CHIP:0.068nF,5%,50V,NPO,TP201 |
| ... | 4 | R664 | 2007-001177 | R-CHIP:8.2KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF46 | 2404-000151 | C-TA,CHIP:1uF,20%,16V,-,TP3216,- |
| ... | 4 | R665 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF47 | 2203-001158 | C-CERAMIC,CHIP:0.068nF,5%,50V,NPO,TP201 |
| ... | 4 | R666 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF48 | 2404-000151 | C-TA,CHIP:1uF,20%,16V,-,TP3216,- |
| ... | 4 | R669 | 2007-001177 | R-CHIP:8.2KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF49 | 2203-001158 | C-CERAMIC,CHIP:0.068nF,5%,50V,NPO,TP201 |
| ... | 4 | R670 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF50 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R672 | 2007-000586 | R-CHIP:22KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF51 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | R673 | 2007-000586 | R-CHIP:22KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF52 | 2203-000316 | C-CERAMIC,CHIP:0.12nF,5%,50V,NPO,TP2012 |
| ... | 4 | R674 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF53 | 2203-000316 | C-CERAMIC,CHIP:0.12nF,5%,50V,NPO,TP2012 |
| ... | 4 | R675 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF54 | 2404-001229 | C-TA,CHIP:4.7uF,20%,25V,GP,TP3528 |
| ... | 4 | RB1 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF55 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | RB2 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF56 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP2012 |
| ... | 4 | RB3 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF57 | 2404-001229 | C-TA,CHIP:4.7uF,20%,25V,GP,TP3528 |
| ... | 4 | RB4 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF58 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | RD601 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF60 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP6.3x11.5 |
| ... | 4 | RD602 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF61 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | RD604 | 2007-001177 | R-CHIP:8.2KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF62 | 2401-001513 | C-AL:47uF,20%,16V,WVT,TP5x11.5 |
| ... | 4 | RD605 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF63 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | RD610 | 2007-001177 | R-CHIP:8.2KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF64 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | RD611 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF65 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | RD627 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF66 | 2401-001513 | C-AL:47uF,20%,16V,WVT,TP5x11.5 |
| ... | 4 | RDB1 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF67 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | RDB2 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF68 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | RDB3 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF69 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | RDB4 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP2012 | | ... | 4 | CF70 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 4 | X601 | 2801-000186 | CRYSTAL-UNIT:18.432MHz,25ppm,28-AAM,8pF, | | ... | 4 | CF71 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 |
| ... | 3 | AA63-40273A | SHIELD-CASE:-,SPT,TO.5,-,CX724AHD | | ... | 4 | CF72 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | |
| ... | 3 | O202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1,2.63Sn/37Pb | S.N.A | ... | 4 | CF75 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP6.3x11.5 | |
| ... | 2 | O202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1,2.63Sn/37Pb | S.N.A | ... | 4 | CF76 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | |
| ... | 2 | AA65-30104B | CLAMP-WIRE-NYLON 66,V2,BLK,W2 Z5,ALL MOD | S.N.A | ... | 4 | CF77 | 2203-000429 | C-CERAMIC,CHIP:0.018nF,5%,50V,NPO,TP201 | |
| ... | 2 | AA65-30013A | CLAMP-WIRE-NYLON-66,V0,NTR,DAWH-45N,-,- | S.N.A | ... | 4 | CF78 | 2203-000429 | C-CERAMIC,CHIP:0.018nF,5%,50V,NPO,TP201 | |
| ... | 2 | AA59-40003P | MODULE-FOCUS,PACK:-,F300,NTSC,43,64x62, | | ... | 4 | CF79 | 2401-000027 | C-AL:4.7uF,20%,50V,GP,TP5x11.5 | |
| ... | 2 | 3301-001201 | CORE-FERRITE:AE,230.5x10.25x36mm,1500,28 | | ... | 4 | CF80 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | |
| ... | 2 | AA39-20577A | LEAD CONNECTOR-ASSY:-,6(3)P,-,YF | | ... | 4 | CF81 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | |
| ... | 2 | AA39-20010C | LEAD CONNECTOR-ASSY:-,YFH800-01,S,1P,600 | | ... | 4 | CF84 | 2203-000858 | C-CERAMIC,CHIP:0.039nF,5%,50V,NPO,TP201 | |
| ... | 2 | AA65-30105A | CLAMP-WIRE-NYLON 66,V2,NTR,15MM,ALL MODE | S.N.A | ... | 4 | CF85 | 2203-000839 | C-CERAMIC,CHIP:0.39nF,5%,50V,NPO,TP2012 | |
| ... | 2 | AA95-00007A | ASSY-F/CONVERTER:-,SVP-434JM,KPT51A,NTSC | | ... | 4 | CF86 | 2203-000858 | C-CERAMIC,CHIP:0.039nF,5%,50V,NPO,TP201 | |
| ... | 3 | CON01 | 3711-002709 | CONNECTOR-HEADER:NOWALL,12P1R,2.5MM,ANG | | ... | 4 | CF87 | 2203-000839 | C-CERAMIC,CHIP:0.39nF,5%,50V,NPO,TP2012 |
| ... | 3 | CON02 | 3711-002703 | CONNECTOR-HEADER:NOWALL,5P1R,2.5mm,ANGL | | ... | 4 | CF88 | 2203-000858 | C-CERAMIC,CHIP:0.039nF,5%,50V,NPO,TP201 |
| ... | 3 | IC03 | AA13-30021E | IC-MCU:Z90234-R3911,SZM-374FC,ST,24K, | | ... | 4 | CF89 | 2203-000839 | C-CERAMIC,CHIP:0.39nF,5%,50V,NPO,TP2012 |
| ... | 3 | IC04 | 1103-001208 | IC-EEPROM:AT24C02-PC27 C,256x8BIT,DIP8P | | ... | 4 | DF01 | 0401-000008 | DIODE-SWITCHING: DAN217,80V,100mA,SOT-23, |
| ... | 3 | S/CASE | AA63-40037A | SHIELD-CASE:-,SPT,TO.5,SCT12A,- | S.N.A | ... | 4 | DF02 | 0401-000008 | DIODE-SWITCHING: DAN217,80V,100mA,SOT-23, |
| ... | 3 | XTR01 | 2804-001213 | OSCILLATOR-CLOCK:80MHz,100ppm,10TTL & CM | | ... | 4 | DF03 | 0401-000008 | DIODE-SWITCHING: DAN217,80V,100mA,SOT-23, |
| ... | 3 | AA99-20043V | ASSY-PCB SUB,AUTO: AA95-00007A ,J | S.N.A | ... | 4 | FF13 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 | |
| ... | 4 | CF10 | 2203-000260 | C-CERAMIC,CHIP:10nF,10%,50V,X7R,TP2012 | | ... | 4 | FF14 | 2901-000226 | FILTER-EMI SMD:25V0.3A,-,100pF,3.2x1.25 |
| ... | 4 | CF11 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP6.3x11.5 | | ... | 4 | FF15 | 2901-000233 | FILTER-EMI SMD:50V0.3A,-,330pF,4.5x3.2x |
| ... | 4 | CF12 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | 4 | FF16 | 2901-000233 | FILTER-EMI SMD:50V0.3A,-,330pF,4.5x3.2x |
| ... | 4 | CF13 | 2401-001513 | C-AL:47uF,20%,16V,WVT,TP5x11.5 | | ... | 4 | FF17 | 2901-000233 | FILTER-EMI SMD:50V0.3A,-,330pF,4.5x3.2x |
| ... | 4 | CF14 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP2012 | | ... | 4 | IC01 | 1204-001406 | IC-VIDEO PROCESS:FS310KBC,OFF,128P,1100M |
| ... | 4 | CF15 | 2203-000429 | C-CERAMIC,CHIP:0.018nF,5%,50V,NPO,TP201 | | ... | 4 | IC02 | 1105-001270 | IC-DRAM:72V16I621,2x524Kx16BITBit,TSOP |
| ... | 4 | CF16 | 2203-000634 | C-CERAMIC,CHIP:0.022nF,5%,50V,NPO,TP201 | | ... | 4 | IC05 | 1203-001419 | IC-VOLTAGE REGULATOR:4931,TO-252,3P6.6x |
| ... | 4 | CF17 | 2203-000429 | C-CERAMIC,CHIP:0.018nF,5%,50V,NPO,TP201 | | ... | 4 | LF10 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,-,3.5x5,TP- |

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|
|4 | LF11 | 2701-000116 | INDUCTOR-AXIAL:10uH,10%,4.2x9.8mm | |
|4 | LF12 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm | |
|4 | LF13 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm | |
|4 | LF14 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm | |
|4 | LF15 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm | |
|4 | LF16 | 2701-000149 | INDUCTOR-AXIAL:2.7uH,10%,2.5x3.4mm | |
|4 | LF17 | 2701-000149 | INDUCTOR-AXIAL:2.7uH,10%,2.5x3.4mm | |
|4 | LF18 | 2701-000149 | INDUCTOR-AXIAL:2.7uH,10%,2.5x3.4mm | |
|4 | PCB | AA41-10997B | PCB-FORMAT CONNERTER:KPM51A,4L,FR-4,245X | S.N.A |
|4 | RF11 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RF13 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RF15 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RF16 | 2007-000477 | R-CHIP:1MOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF17 | 2007-000477 | R-CHIP:1MOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF18 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF19 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF21 | 2007-000642 | R-CHIP:2700HM,5%,1/10W,DA,TP,2012 | |
|4 | RF22 | 2007-001118 | R-CHIP:6800HM,5%,1/10W,DA,TP,2012 | |
|4 | RF23 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP,2012 | |
|4 | RF24 | 2007-000401 | R-CHIP:1500HM,5%,1/10W,DA,TP,2012 | |
|4 | RF25 | 2007-000518 | R-CHIP:2.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF26 | 2007-000518 | R-CHIP:2.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF27 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RF29 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF30 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF31 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF32 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF33 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF34 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF35 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF36 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF37 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF38 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF39 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF40 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF41 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF42 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF43 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF44 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF45 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF46 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF47 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF48 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF49 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF51 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF52 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF53 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF54 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF55 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF56 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF57 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF58 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF59 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF60 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF61 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF62 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF64 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RF66 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF67 | 2007-000781 | R-CHIP:330HM,5%,1/10W,DA,TP,2012 | |
|4 | RF68 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RF70 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF71 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF72 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF73 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF74 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF75 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF76 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF78 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF79 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF80 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF81 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF82 | 2007-000290 | R-CHIP:1000HM,5%,1/10W,DA,TP,2012 | |
|4 | RF83 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF84 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF85 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
|4 | RF86 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |
|4 | RF87 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|
|4 | RF88 | 2007-001166 | R-CHIP:750HM,5%,1/10W,DA,TP,2012 | |
|4 | XTR02 | 2801-000152 | CRYSTAL-UNIT;14.31818MHz,40ppm,28-AAM,16 | |
|4 | XTR04 | 2801-000724 | CRYSTAL-UNIT:6MHz,50ppm,28-AAM,20PF,40oh | |
| ..2 | | AA65-30109A | CLAMP-FBT:NYLON-66,V2,BLK,,-,- | S.N.A |

ASSY PCB CRT

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|
| 1 | * | AA95-00129M | ASSY PCB CRT,-,J51A,61,PAL,- | |
| ..2 | BDW-GN | AA39-20009K | LEAD CONNECTOR-ASSY:-,-,-,1P,-,-,-,YFH80 | |
| ..2 | C511 | 2201-000969 | C-CERAMIC,DISC:10nF,+80-20%,3.15kV,Y5V,T | |
| ..2 | C541 | 2201-000969 | C-CERAMIC,DISC:10nF,+80-20%,3.15kV,Y5V,T | |
| ..2 | C571 | 2201-000969 | C-CERAMIC,DISC:10nF,+80-20%,3.15kV,Y5V,T | |
| ..2 | CN501 | 3711-003051 | CONNECTOR-HEADER:BOX,8P1R,2.5mm,STRAGHT | |
| ..2 | CN502 | 3711-003052 | CONNECTOR-HEADER:BOX,10P1R,2.5mm,STRAGH | |
| ..2 | CN502B | 3711-003052 | CONNECTOR-HEADER:BOX,10P1R,2.5mm,STRAGH | |
| ..2 | CN503 | 3711-003052 | CONNECTOR-HEADER:BOX,10P1R,2.5mm,STRAGH | |
| ..2 | CN503B | 3711-003052 | CONNECTOR-HEADER:BOX,10P1R,2.5mm,STRAGH | |
| ..2 | CNW401 | AA39-20027B | LEAD CONNECTOR-ASSY:-,67096-006,S,6P,400 | |
| ..2 | CNW501 | AA39-00127A | LEAD CONNECTOR-ASSY:-,-,8P,-,-,-,35155 | |
| ..2 | CNW502 | AA39-00112A | LEAD CONNECTOR-ASSY:-,-,10P,-,-,-,35155 | |
| ..2 | CNW503 | AA39-00112A | LEAD CONNECTOR-ASSY:-,-,10P,-,-,-,35155 | |
| ..2 | FOCUS- | AA39-20115A | LEAD CONNECTOR-ASSY:-,BUSHING,-,1P500,3 | |
| ..2 | FOCUS- | AA39-20115A | LEAD CONNECTOR-ASSY:-,BUSHING,-,1P500,3 | |
| ..2 | FOCUS- | AA39-20115B | LEAD CONNECTOR-ASSY:-,BUSHING,-,1P700MM | |
| ..2 | GBW-GN | 3811-000446 | WIRE-PVC CU;TCWA,600V,ROLL,17/0.16mm,#22 | S.N.A |
| ..2 | GBW-SC | 3811-000480 | WIRE-PVC CU;BCVA,1KV,ROLL,17/0.16mm,#22 | S.N.A |
| ..2 | GDW-GN | AA39-20009G | LEAD CONNECTOR-ASSY:-,YFH800-01,-,1P,700 | |
| ..2 | GRW-GN | 3811-000446 | WIRE-PVC CU;TCWA,600V,ROLL,17/0.16mm,#22 | S.N.A |
| ..2 | GRW-SC | 3811-000480 | WIRE-PVC CU;BCVA,1KV,ROLL,17/0.16mm,#22 | S.N.A |
| △ | IC501 | AA96-50151B | ASSY-H/S:-,AMP,AA61-10060A,TDA6111Q,- | |
| ..3 | | 1201-001131 | IC-VIDEO AMP:6111,SIP9P,-,SINGLE,-,PLAS | |
| ..3 | | 6001-000057 | SCREW-MACHINE:RH,+M3,L6,ZPC(BLK),SWRCH1 | S.N.A |
| ..3 | | 6021-000222 | NUT-HEXAGON:2C,M3,ZPC(YEL),SM20C 1 | S.N.A |
| ..3 | | AA61-10060A | BRACKET:TR,-,-,CUS-1 1/2H,T0.5,-,- | S.N.A |
| △ | IC531 | AA96-50151B | ASSY-H/S:-,AMP,AA61-10060A,TDA6111Q,- | |
| △ | IC561 | AA96-50151B | ASSY-H/S:-,AMP,AA61-10060A,TDA6111Q,- | |
| ..2 | PCB | AA41-10998C | PCB-CRT:P51A,1L,FR-1,330x245x1.6T,3A,M | S.N.A |
| ..2 | R506 | 2001-001088 | R-CARBON(S);1KOHM,5%,1/2W,AA,TP.2,4X6.4M | |
| ..2 | RDW-GN | AA39-20009C | LEAD CONNECTOR-ASSY:-,YFH800-01,-,1P,400 | |
| ..2 | SG502 | AA27-00084A | COIL:S-23,-,-,-,-,-,S-23,5000Mohm | |
| ..2 | SG532 | AA27-00084A | COIL:S-23,-,-,-,-,-,S-23,5000Mohm | |
| ..2 | SG562 | AA27-00084A | COIL:S-23,-,-,-,-,-,S-23,5000Mohm | |
| △ | V501 | 3704-001019 | SOCKET-CRT:10P,29.1PI,35.5PI,AU30U | |
| △ | V531 | 3704-001019 | SOCKET-CRT:10P,29.1PI,35.5PI,AU30U | |
| △ | V561 | 3704-001019 | SOCKET-CRT:10P,29.1PI,35.5PI,AU30U | |
| ..2 | VR501 | 2101-000321 | VR-ROTARY:1Mohm,-,0.6W,SIDE | |
| ..2 | VR531 | 2101-000321 | VR-ROTARY:1Mohm,-,0.6W,SIDE | |
| ..2 | VR561 | 2101-000321 | VR-ROTARY:1Mohm,-,0.6W,SIDE | |
| ..2 | | AA99-20079J | ASSY-PCB SUB,AUTO: AA95-00129M /V | S.N.A |
| ..3 | C502 | 2401-000027 | C-AL:4.7uF,20%,50V,GPTP;5x11.5 | |
| ..3 | C503 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP | |
| ..3 | C504 | 2401-001537 | C-AL:47uF,20%,25V,GPTP;6.3x7mm,5mm | |
| ..3 | C505 | 2305-000149 | C-FILM,MPEF:100nF,5%,100V,TP;12x12.5x6.5 | |
| ..3 | C506 | 2401-000430 | C-AL:10uF,20%,250V,GPTP;10x16mm,5m | |
| ..3 | C507 | 2305-000154 | C-FILM,MPEF:100nF,5%,400V,TP;21.5x6.5x11 | |
| ..3 | C510 | 2401-000430 | C-AL:10uF,20%,250V,GPTP;10x16mm,5m | |
| ..3 | C512 | 2401-000133 | C-AL:1000uF,20%,16V,GPTP;10x20.5 | |
| ..3 | C513 | 2201-000983 | C-CERAMIC,DISC:1nF,10%,2kV,Y5P;TP;9x5.7. | |
| ..3 | C514 | 2201-000599 | C-CERAMIC,DISC:0.56nF,10%,500V,Y5P;TP5. | |
| ..3 | C532 | 2401-000027 | C-AL:4.7uF,20%,50V,GPTP;5x11.5 | |
| ..3 | C533 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP | |
| ..3 | C534 | 2401-001537 | C-AL:47uF,20%,25V,GPTP;6.3x7mm,5mm | |
| ..3 | C535 | 2305-000149 | C-FILM,MPEF:100nF,5%,100V,TP;12x12.5x6.5 | |
| ..3 | C536 | 2401-000430 | C-AL:10uF,20%,250V,GPTP;10x16mm,5m | |
| ..3 | C537 | 2305-000154 | C-FILM,MPEF:100nF,5%,400V,TP;21.5x6.5x11 | |
| ..3 | C540 | 2401-000430 | C-AL:10uF,20%,250V,GPTP;10x16mm,5m | |
| ..3 | C542 | 2201-000983 | C-CERAMIC,DISC:1nF,10%,2kV,Y5P;TP;9x5.7. | |
| ..3 | C543 | 2201-000599 | C-CERAMIC,DISC:0.56nF,10%,500V,Y5P;TP5. | |
| ..3 | C562 | 2401-000027 | C-AL:4.7uF,20%,50V,GPTP;5x11.5 | |
| ..3 | C563 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP | |
| ..3 | C564 | 2401-001537 | C-AL:47uF,20%,25V,GPTP;6.3x7mm,5mm | |
| ..3 | C565 | 2305-000149 | C-FILM,MPEF:100nF,5%,100V,TP;12x12.5x6.5 | |
| ..3 | C566 | 2401-000430 | C-AL:10uF,20%,250V,GPTP;10x16mm,5m | |
| ..3 | C567 | 2305-000154 | C-FILM,MPEF:100nF,5%,400V,TP;21.5x6.5x11 | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|-------------|--|--------|
| ... | C462 | 2301-000246 | C-FILM,PEF:33nF,5%,100V,TP7x5.0x9.5mm,5 | | ... | R340 | 2001-000241 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | C480 | 2306-000122 | C-FILM,MPPF:100nF,5%,50V,TP7.3x4.0x5.0m | | ... | R341 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | C481 | 2401-000914 | C-AL:22uF,20%,16V,GPTP5x11,5 | | ... | R342 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | C482 | 2305-000178 | C-FILM,MPEF:10nF,5%,100V,TP:,5mm | | ... | R343 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | C484 | 2401-001026 | C-AL:3.3UF,20%,50V,GPTP5X11,5 | | ... | R344 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | C485 | 2201-000146 | C-CERAMIC,DISC:0.1nF,5%,50V,SL,TP5x3.5, | | ... | R345 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4MM | |
| ... | C486 | 2201-000146 | C-CERAMIC,DISC:0.1nF,5%,50V,SL,TP5x3.5, | | ... | R345A | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | C487 | 2401-001026 | C-AL:3.3UF,20%,50V,GPTP5X11,5 | | ... | R346 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | C488 | 2401-002144 | C-AL:47uF,20%,16V,GPTP5x11,5 | | ... | R347 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4MM | |
| ... | C489 | 2401-001840 | C-AL:100uF,20%,16V,GPTP6.3x11,5 | | ... | R348 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | C490 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | | ... | R349 | 2001-000252 | R-CARBON:1.6KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | C492 | 2401-002144 | C-AL:47uF,20%,16V,GPTP5x11,5 | | ... | R351 | 2001-001178 | R-CARBON(S):680OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | C493 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | | ... | R352 | 2001-000003 | R-CARBON:330ohm,5%,1/8W,AA,TP1.8x3.2mm | |
| ... | C494 | 2201-000471 | C-CERAMIC,DISC:0.33nF,10%,50V,Y5P,TP4x3 | | ... | R353 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | C495 | 2301-000192 | C-FILM,PEF:1nF,5%,50V,TP5.3x10mm,5mm | | ... | R354 | 2001-000890 | R-CARBON:6.8KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | C496 | 2401-000832 | C-AL:220uF,20%,25V,GPTP8x11,5,5 | | ... | R355 | 2001-000006 | R-CARBON:2.4KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | D342 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R357 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | D343 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R358 | 2001-000008 | R-CARBON:15KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | D344 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R359 | 2001-000766 | R-CARBON:43KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | D345 | 0403-001325 | DIODE-ZENER:MTZJ15C,14.35-15.09V,500mW,D | | ... | R360 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | D352 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R361 | 2001-001191 | R-CARBON(S):820KOHM,5%,1/2W,AA,TP2.4X6. | |
| ... | D353 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R362 | 2001-000660 | R-CARBON:33KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | D355 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | | ... | R363 | 2001-000723 | R-CARBON:4.3KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | D363 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R364 | 2001-000938 | R-CARBON:680OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | D364 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R365 | 2001-001120 | R-CARBON(S):3.3OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | D371 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R366 | 2001-000109 | R-CARBON(S):470OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | D372 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R367 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP2.4X6. | |
| ... | D373 | 0402-000243 | DIODE-RECTIFIER:RC2-V1,2000V,0.2A,DO-201 | | ... | R368 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP2.4X6. | |
| ... | D384 | 0402-000132 | DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP | | ... | R369 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP2.4X6. | |
| ... | D385 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R369A | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP2.4X6. | |
| ... | D386 | 0403-001316 | DIODE-ZENER:MTZJ3.0A,2.85-3.07V,500mW,DO | | ... | R370 | 2001-001065 | R-CARBON(S):120KOHM,5%,1/2W,AA,TP2.4X6. | |
| ... | D395 | 0403-001319 | DIODE-ZENER:MTZJ4.7C,4.68-4.93V,500mW,DO | | ... | R371 | 2001-001065 | R-CARBON(S):110KOHM,5%,1/2W,AA,TP2.4X6. | |
| ⚠ | D442 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R372 | 2001-001110 | R-CARBON(S):240KOHM,5%,1/2W,AA,TP2.4X6. | |
| ⚠ | D443 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R373 | 2001-001110 | R-CARBON(S):240KOHM,5%,1/2W,AA,TP2.4X6. | |
| ⚠ | D451 | 0402-000534 | DIODE-RECTIFIER:RG10V,400V,1.2A,DO-201,T | | ... | R374 | 2001-001110 | R-CARBON(S):240KOHM,5%,1/2W,AA,TP2.4X6. | |
| ⚠ | D456 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R375 | 2001-001113 | R-CARBON(S):270KOHM,5%,1/2W,AA,TP2.4X6. | |
| ⚠ | D457 | 0403-000714 | DIODE-ZENER:MTZJ3.3B,3.3V,3.32-3.53V,500 | | ... | R376 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ⚠ | D474 | 0403-000734 | DIODE-ZENER:TZP15B,15V,14.7-16.5V,1W,DO- | | ... | R377 | 2004-001892 | R-METAL(S):162Kohm,5%,1/2W,AA,TP2.5x6.5 | |
| ⚠ | D475 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R378 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP2.5x6.5 | |
| ⚠ | D476 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R379 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP2.5x6.5 | |
| ⚠ | D477 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R380 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP2.5x6.5 | |
| ⚠ | D478 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R381 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4MM | |
| ⚠ | D479 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R384 | 2001-001150 | R-CARBON(S):470KOHM,5%,1/2W,AA,TP2.4X6. | |
| ⚠ | D480 | 0402-000132 | DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP | | ... | R385 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ⚠ | D483 | 0403-000720 | DIODE-ZENER:MTZJ9.1B,9.1V,8.57-9.01V,500 | | ... | R386 | 2001-000786 | R-CARBON:47KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ⚠ | D484 | 0402-000132 | DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP | | ... | R387 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ⚠ | D491 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R388 | 2001-000522 | R-CARBON:22KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ⚠ | D492 | 0403-000716 | DIODE-ZENER:MTZJ4.7B,4.7V,4.55-4.8V,500m | | ... | R389 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ⚠ | D493 | 0403-001325 | DIODE-ZENER:MTZJ15C,14.35-15.09V,500mW,D | | ... | R395 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | IC481 | 1203-001217 | IC-POSIAJUST REG: 431,TO-92,3P,4.58MIL | | ... | R397 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | L341 | 2701-000116 | INDUCTOR-AXIAL:10uH,10%,4.2x9.8mm | | ... | R411 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | Q342 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R412 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP2.4X6.4MM | |
| ... | Q343 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R413 | 2001-000515 | R-CARBON:220OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | Q344 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | | ... | R414 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | Q350 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R415 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | Q351 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | | ... | R416 | 2001-000006 | R-CARBON:2.4KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | Q352 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R420 | 2001-000281 | R-CARBON:100OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | Q353 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R421 | 2003-002159 | R-METAL OXIDE:150OHM,5%,1W,AG,TP4.3X12MM | |
| ... | Q354 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | | ... | R422 | 2001-000028 | R-CARBON(S):100OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | Q355 | 0501-000366 | TR-SMALL SIGNAL:KSC2330-Y,NPN,1W,TO-92L, | | ... | R423 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | Q381 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R437 | 2008-001087 | R-FUSIBLE(S):1.8ohm,5%,2W,AG,TP3.9x12mm | |
| ... | Q382 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R438 | 2001-000085 | R-CARBON(S):100KOHM,5%,1/2W,AA,TP2.4X6. | |
| ⚠ | Q401 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R439 | 2001-000085 | R-CARBON(S):100KOHM,5%,1/2W,AA,TP2.4X6. | |
| ⚠ | Q402 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R442 | 2008-000254 | R-FUSIBLE(S):0.68ohm,5%,2W,AF,TP3.9x10m | |
| ⚠ | Q421 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R442A | 2008-000254 | R-FUSIBLE(S):0.68ohm,5%,2W,AF,TP3.9x10m | |
| ⚠ | Q451 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R443 | 2003-002156 | R-METAL OXIDE:560OHM,5%,2W,AG,TP6X16MM | |
| ⚠ | Q452 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R443A | 2003-002156 | R-METAL OXIDE:560OHM,5%,2W,AG,TP6X16MM | |
| ⚠ | Q453 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R445 | 2001-000258 | R-CARBON:1.8KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ⚠ | Q454 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | | ... | R446 | 2001-000522 | R-CARBON:22KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ⚠ | Q461 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R447 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ⚠ | Q471 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R448 | 2001-000411 | R-CARBON:18KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ⚠ | Q473 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R449 | 2001-000660 | R-CARBON:33KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ⚠ | Q481 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R450 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ⚠ | Q482 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | | ... | R451 | 2001-000812 | R-CARBON:5.6KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ⚠ | Q483 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | | ... | R452 | 2001-000241 | R-CARBON:1.5KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ⚠ | Q491 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | ... | R454 | 2001-000761 | R-CARBON:430OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | R339 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | R455 | 2001-000761 | R-CARBON:430OHM,5%,1/8W,AA,TP1.8X3.2MM | |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|--------------------------|----------|-------------|--|--------|-------|----------|-------------|--|--------|
| ... | R456 | 2001-000761 | R-CARBON:430OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ116 | 2201-000863 | C-CERAMIC,DISC:0.68nF,10%,50V,Y5P,TP5x3 | |
| ... | R458 | 2001-000577 | R-CARBON:2KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ117 | 2201-000327 | C-CERAMIC,DISC:2.2nF,10%,50V,Y5V,TP6.5x | |
| ... | R459 | 2001-001192 | R-CARBON(S):820OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | CZ118 | 2201-000327 | C-CERAMIC,DISC:2.2nF,10%,50V,Y5V,TP6.5x | |
| ... | R460 | 2003-002044 | R-METAL OXIDE(S):100ohm,5%,1W,AF,TP2.5x | | ... | CZ119 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | |
| ... | R461 | 2001-000613 | R-CARBON:3.9KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ120 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | |
| ... | R464 | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ121 | 2201-000764 | C-CERAMIC,DISC:0.082nF,5%,50V,NPO,TP8x3 | |
| ... | R471 | 2001-001146 | R-CARBON(S):4.7OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | CZ126 | 2201-000499 | C-CERAMIC,DISC:0.39nF,5%,50V,SL,TP8.5x3 | |
| ... | R472 | 2001-000800 | R-CARBON:5.1KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ127 | 2201-000499 | C-CERAMIC,DISC:0.39nF,5%,50V,SL,TP8.5x3 | |
| ... | R473 | 2001-000800 | R-CARBON:5.1KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ128 | 2201-000499 | C-CERAMIC,DISC:0.39nF,5%,50V,SL,TP8.5x3 | |
| ... | R474 | 2001-000009 | R-CARBON:20KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ132 | 2201-000976 | C-CERAMIC,DISC:0.022nF,5%,50V,NPO,TP5x3 | |
| ... | R474A | 2001-000508 | R-CARBON:22KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ133 | 2201-000863 | C-CERAMIC,DISC:0.39nF,5%,50V,SL,TP8.5x3 | |
| ... | R475 | 2004-001023 | R-METAL:5.6Kohm,1%,1/8W,AA,TP1.8x3.2m | | ... | CZ134 | 2201-000976 | C-CERAMIC,DISC:0.022nF,5%,50V,NPO,TP5x3 | |
| ... | R475B | 2001-000734 | R-CARBON:4.7KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ135 | 2201-000863 | C-CERAMIC,DISC:0.68nF,10%,50V,Y5P,TP5x3 | |
| ... | R477 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ136 | 2201-000976 | C-CERAMIC,DISC:0.022nF,5%,50V,NPO,TP5x3 | |
| ... | R479 | 2001-000005 | R-CARBON:390ohm,5%,1/8W,AA,TP1.8x3.2mm | | ... | CZ137 | 2201-000863 | C-CERAMIC,DISC:0.68nF,10%,50V,Y5P,TP5x3 | |
| ... | R480 | 2001-000449 | R-CARBON:2.2KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ138 | 2201-000327 | C-CERAMIC,DISC:2.2nF,10%,50V,Y5V,TP6.5x | |
| ... | R481 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ139 | 2201-000327 | C-CERAMIC,DISC:2.2nF,10%,50V,Y5V,TP6.5x | |
| ... | R482 | 2001-001031 | R-CARBON:91KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ144 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP6.3x11.5 | |
| ... | R483 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ145 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | |
| ... | R484 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ146 | 2401-001840 | C-AL:100uF,20%,16V,GP,TP6.3x11.5 | |
| ... | R487 | 2001-000924 | R-CARBON:680OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ147 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20%,50V,Y5V,TP, | |
| ... | R489 | 2001-000522 | R-CARBON:22KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ151 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,3 | |
| ... | R490 | 2001-000723 | R-CARBON:4.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ152 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,3 | |
| ... | R491 | 2001-001178 | R-CARBON(S):680OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | CZ153 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,3 | |
| ... | R492 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CZ154 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,3 | |
| ... | R493 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | CZ155 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,3 | |
| ... | R494 | 2001-000066 | R-CARBON(S):10KOHM,5%,1/2W,AA,TP2.4X6.4 | | ... | CZ156 | 2202-000796 | C-CERAMIC,MLC-AXIAL:1NF,10%,50V,Y5P,TP,3 | |
| ... | R495 | 2001-000037 | R-CARBON(S):330OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | D453 | 0402-001286 | DIODE-RECTIFIER:RPT1H,2000V,1A,-,TP | |
| ... | R496 | 2001-000347 | R-CARBON:13KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | D501 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | |
| ... | R497 | 2001-000003 | R-CARBON:330ohm,5%,1/8W,AA,TP1.8x3.2mm | | ... | DZ120 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V5.96-6.27V,500 | |
| ... | R498 | 2001-001070 | R-CARBON(S):120OHM,5%,1/2W,AA,TP2.4X6.4 | | ... | DZ121 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V5.96-6.27V,500 | |
| .. | | 2001-000262 | R-CARBON:1.8MOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | DZ122 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V5.96-6.27V,500 | |
| .. | | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2.63Sn/37Pb | S.N.A | ... | DZ126 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| .. | | AA65-30105C | CLAMP-WIRE:ALL MODEL,NYLON 66,2V,NTR,5MM | S.N.A | ... | DZ127 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | |
| ASSY-PCB,CONV AMP | | | | | | | | | |
| 1 | * | AA95-00055L | ASSY-PCB,CONV AMP,-,SP53J5HF,J51A,-,-,- | | ... | DZ128 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V5.96-6.27V,500 | |
| .. | C491 | 2306-000322 | C-FILM,MPPF:12nF5%,1.6KV,TP:29x20.5x13 | | ... | DZ129 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V5.96-6.27V,500 | |
| .. | CN203 | AA39-00115A | LEAD CONNECTOR-ASSY,-,-,10P,-,-,-,YBNH2 | | ... | DZ130 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V5.96-6.27V,500 | |
| .. | CN401 | AA39-00128A | LEAD CONNECTOR-ASSY,-,-,8P,-,-,-,YBNH25 | | ... | DZ131 | 0403-000510 | DIODE-ZENER:MTZJ6.2B,6.2V5.96-6.27V,500 | |
| .. | CN402 | AA39-00116A | LEAD CONNECTOR-ASSY,-,-,12P,-,-,-,YBNH2 | | ... | LZ101 | 2701-001030 | INDUCTOR-AXIAL:43uH,10%,5x14mm | |
| .. | CN802 | AA39-00128A | LEAD CONNECTOR-ASSY,-,-,8P,-,-,-,YBNH25 | | ... | LZ102 | 2701-001030 | INDUCTOR-AXIAL:43uH,10%,5x14mm | |
| △ | ICZ101 | AA96-50152C | ASSY-H/S,-,TR,AA62-30012A,KA7806A,30MM | | ... | LZ103 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ... | | 1203-000284 | IC-POSI.FIXED REG:-,7806,TO-220,3P,-,PLAS | | ... | LZ104 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ... | | 6003-000333 | SCREW-TAPTITE,RH,+2S,M3,L10,ZPC(YEL),SW | S.N.A | ... | LZ107 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ... | | AA62-30012A | HEAT SINK-ES,-,A6063 EXTR,-,-,T0220,-,- | S.N.A | ... | LZ108 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| △ | ICZ102 | 1203-000121 | IC-NEGA.FIXED REG:-,7906,TO-220,3P,-,PLAS | | ... | LZ109 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| △ | ICZ103 | AA96-00034A | ASSY-H/S,-,CONVERGENCE,AA62-30173D,STK3 | | ... | LZ110 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ... | | 0205-000129 | GREASE-SILICON:SC102,JAPAN | S.N.A | ... | LZ111 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ... | | 1201-001225 | IC-VIDEO AMP:392,SIP,22P,-,THREE,-,PLAST | | ... | LZ112 | 2701-000142 | INDUCTOR-AXIAL:1uH,10%,2.5x3.4mm | |
| ... | | 6003-001021 | SCREW-TAPTITE,RH,+B,M3,L15,ZPC(YEL),SWR | S.N.A | ... | R382 | 2002-001006 | R-COMPOSITION:4.7Kohm,5%,1/2W,AA,TP,3.7x | |
| ... | | AA62-30173D | HEAT SINK-ES,-,-,T1.0,WHITE,SCREW-HOLE(2 | S.N.A | ... | R476 | 2004-004046 | R-METAL(S):430Kohm,1%,1/2W,AA,TP,2.5x6.5 | |
| △ | ICZ104 | AA96-00034A | ASSY-H/S,-,CONVERGENCE,AA62-30173D,STK3 | | ... | R476A | 2004-004001 | R-METAL(S):180Kohm,1%,1/2W,AA,TP,2.5x6.5 | |
| .. | PCB | AA41-00135D | PCB-CONVERGENCE AMP:P51A,1L,CEM-1,1.330x24 | S.N.A | ... | R476B | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP,2.5x6.5 | |
| .. | SG303 | 4715-001050 | SURGE ABSORBER:2.4KV,20%,1500A,-,DISC-RA | | ... | R476C | 2004-004046 | R-METAL(S):430Kohm,1%,1/2W,AA,TP,2.5x6.5 | |
| .. | VR472 | 2103-001086 | VR-SEMI:100KOHM,25%,0.3W,TOP | | ... | R478 | 2004-001892 | R-METAL(S):162Kohm,1%,1/2W,AA,TP,2.5x6.5 | |
| .. | | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2.63Sn/37Pb | S.N.A | ... | R501 | 2004-001376 | R-METAL(S):11Kohm,1%,1/2W,AA,TP,2.4x6.4m | |
| .. | | AA99-20071E | ASSY-PCB SUB,AUTO: AA95-00055L ,\ | S.N.A | ... | R502 | 2004-004366 | R-METAL(S):1.3Kohm,1%,1/2W,AA,TP,2.5x6.5 | |
| ... | CN403 | 3711-002643 | CONNECTOR-HEADER:BOX,4P,1R,2.5MM,STRAIGH | | ... | RFZ19 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP,3.9x10mm | |
| ... | CZ101 | 2401-001429 | C-AL:470uF,20%,50V,GP,TP,13x20.5 | | ... | RFZ20 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP,3.9x10mm | |
| ... | CZ102 | 2401-001429 | C-AL:470uF,20%,50V,GP,TP,13x20.5 | | ... | RFZ21 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP,3.9x10mm | |
| ... | CZ103 | 2401-000689 | C-AL:2200uF,20%,16V,GP,TP,13x25.5 | | ... | RFZ22 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP,3.9x10mm | |
| ... | CZ105 | 2401-000689 | C-AL:2200uF,20%,16V,GP,TP,13x25.5 | | ... | RFZ50 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP,3.9x10mm | |
| ... | CZ106 | 2201-000180 | C-CERAMIC,DISC:10nF,10%,50V,Y5V,TP7x3.5 | | ... | RFZ51 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP,3.9x10mm | |
| ... | CZ107 | 2201-000180 | C-CERAMIC,DISC:10nF,10%,50V,Y5V,TP7x3.5 | | ... | RFZ52 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP,3.9x10mm | |
| ... | CZ108 | 2201-000499 | C-CERAMIC,DISC:0.39nF,5%,50V,SL,TP8.5x3 | | ... | RFZ53 | 2008-000261 | R-FUSIBLE(S):150ohm,5%,1W,AF,TP,3.9x10mm | |
| ... | CZ109 | 2201-000499 | C-CERAMIC,DISC:0.39nF,5%,50V,SL,TP8.5x3 | | ... | RZ101 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | CZ110 | 2201-000499 | C-CERAMIC,DISC:0.39nF,5%,50V,SL,TP8.5x3 | | ... | RZ102 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | CZ111 | 2201-000976 | C-CERAMIC,DISC:0.022nF,5%,50V,NPO,TP5x3 | | ... | RZ103 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | CZ112 | 2201-000863 | C-CERAMIC,DISC:0.68nF,10%,50V,Y5P,TP5x3 | | ... | RZ104 | 2001-001114 | R-CARBON(S):2700OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | CZ113 | 2201-000976 | C-CERAMIC,DISC:0.022nF,5%,50V,NPO,TP5x3 | | ... | RZ105 | 2001-001114 | R-CARBON(S):2700OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | CZ114 | 2201-000863 | C-CERAMIC,DISC:0.68nF,10%,50V,Y5P,TP5x3 | | ... | RZ106 | 2001-001114 | R-CARBON(S):2700OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | CZ115 | 2201-000976 | C-CERAMIC,DISC:0.022nF,5%,50V,NPO,TP5x3 | | ... | RZ107 | 2001-001114 | R-CARBON(S):2700OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | | | | | ... | RZ108 | 2001-001114 | R-CARBON(S):2700OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | | | | | ... | RZ109 | 2001-001114 | R-CARBON(S):2700OHM,5%,1/2W,AA,TP2.4X6.4 | |
| ... | | | | | ... | RZ110 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | | | | | ... | RZ111 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | | | | | ... | RZ112 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark | |
|-----------------------|----------|-------------|---|--------|-------|----------|-------------|--|---|-------|
| ... | RZ113 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | | 0202-000187 | SOLDER-WIRE FLUX:-RS60S,D1.2,63Sn/37Pb | S.N.A | |
| ... | RZ114 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | | 3301-001201 | CORE-FERRITE:AE,230.5x10.25x36mm,1500,28 | | |
| ... | RZ115 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | | AA63-10002B | BAND-TIE:-,NYLON66 V2,-,L140,NTR,-,- | S.N.A | |
| ... | RZ116 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | | AA99-20061Y | ASSY-PCB SUB,AUTO: AA95-00262B ,V | S.N.A | |
| ... | RZ117 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | CY01 | 2401-001496 | C-AL:47uf,20%,16V,GPTP,5x7.5 | | |
| ... | RZ118 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | QY01 | 0504-000123 | TR-DIGITAL:KSR1010,NPN,300mW,10K,TO-92,T | | |
| ... | RZ120 | 2001-000281 | R-CARBON:1000OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | QY02 | 0504-000123 | TR-DIGITAL:KSR1010,NPN,300mW,10K,TO-92,T | | |
| ... | RZ121 | 2001-000281 | R-CARBON:1000OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | RY01 | 2001-000109 | R-CARBON(S):4700HM,5%,1/2W,AA,TP2.4X6.4 | | |
| ... | RZ122 | 2001-000003 | R-CARBON:330ohm,5%,1/8W,AA,TP1.8x3.2mm | | ... | RY02 | 2001-000924 | R-CARBON:680OHM,5%,1/8W,AA,TP1.8X3.2MM | | |
| ... | RZ123 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP,3.9X10M | | ... | RY03 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | |
| ... | RZ124 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP,3.9X10M | | ... | RY04 | 2001-000449 | R-CARBON:2.2KOHM,5%,1/8W,AA,TP1.8X3.2M | | |
| ... | RZ125 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP,3.9X10M | | ... | RY05 | 2001-000924 | R-CARBON:680OHM,5%,1/8W,AA,TP1.8X3.2MM | | |
| ... | RZ126 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP,3.9X10M | | ... | RY06 | 2001-000429 | R-CARBON:1KOHM,5%,1/8W,AA,TP1.8X3.2MM | | |
| ... | RZ127 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP,3.9X10M | | ... | RY07 | 2001-000020 | R-CARBON(S):220HM,5%,1/2W,AA,TP2.4X6.4M | | |
| ... | RZ128 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP,3.9X10M | | ... | RY08 | 2001-001108 | R-CARBON(S):22KOHM,5%,1/2W,AA,TP2.4X6.4 | | |
| ... | RZ129 | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP,3.9x | | ... | RY09 | 2001-000109 | R-CARBON(S):4700HM,5%,1/2W,AA,TP2.4X6.4 | | |
| ... | RZ129A | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP,3.9x | | ... | .. | AA95-00098D | ASSY-PCB,POWER S/W:-,SP43J5HP3S/XTT,J51A | | |
| ... | RZ130 | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP,3.9x | | ... | 3 | CNP01 | AA39-20176G | LEAD CONNECTOR-ASSY:-,-,3(2)P,-,-,YFH | |
| ... | RZ130A | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP,3.9x | | ... | 3 | CNP02 | AA39-20176G | LEAD CONNECTOR-ASSY:-,-,3(2)P,-,-,YFH | |
| ... | RZ131 | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP,6X16MM | | ... | 3 | PCB | AA41-00035A | PCB-POWER S/W:J51A,1L,CEM-1,245x245x1.6T | S.N.A |
| ... | RZ131A | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP,6X16MM | | ... | 3 | SWP01 | 3403-000179 | SWITCH-PUSH:250V5A,DPST,-,JPW-2104B | |
| ... | RZ132 | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP,6X16MM | | ... | 3 | | AA63-10002B | BAND-TIE:-,NYLON66 V2,-,L140,NTR,-,- | S.N.A |
| ... | RZ132A | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP,6X16MM | | ... | 3 | | AA99-20067C | ASSY-PCB SUB,AUTO: AA95-00098D ,V | S.N.A |
| ... | RZ133 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | 3 | | AA61-00110B | BRACKET-MASTER:-,PCJ533R,SECC-1,T11.0,NTR | S.N.A |
| ... | RZ134 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | 3 | | 0202-000187 | SOLDER-WIRE FLUX:-RS60S,D1.2,63Sn/37Pb | S.N.A |
| ... | RZ135 | 2001-000563 | R-CARBON:27KOHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | 3 | | 6003-000334 | SCREW-TAPTITE:RH,+2S,M3,L6,ZPC(YEL),SWR | S.N.A |
| ... | RZ136 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | 2 | | AA95-00046D | ASSY-AV SIDE:-,SP43J5HP3C/XTT,J51A,-,- | |
| ... | RZ137 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | 3 | CNW02 | AA39-20032J | LEAD CONNECTOR-ASSY:-,-,3(2)P,-,-,YFH | |
| ... | RZ138 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | 3 | CNY02 | 3711-003641 | CONNECTOR-HEADER:BOX,12P1R,2.5mm,STRAIG | |
| ... | RZ139 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | 3 | JK101 | 3722-001163 | JACK-VHS:4P12mm,AU,BLK,N | |
| ... | RZ140 | 2001-000591 | R-CARBON:3.3KOHM,5%,1/8W,AA,TP1.8X3.2M | | ... | 3 | JK102 | 3722-001031 | JACK-RCA:3P3.6MM,#18,AU | |
| ... | RZ141 | 2001-000857 | R-CARBON:560OHM,5%,1/8W,AA,TP1.8X3.2MM | | ... | 3 | PCB | AA41-10969B | PCB-A/V SIDE:KPT51A/52A,1L,FR-1,245X245X | S.N.A |
| ... | RZ142 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP,3.9X10M | | ... | 3 | | AA63-10002A | BAND-TIE:-,NYLON66 V2,-,L100,NTR,-,- | S.N.A |
| ... | RZ143 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP,3.9X10M | | ... | 3 | | AA98-60004J | ASSY-SUB,PART:APT51A,A/V,-,ALL | S.N.A |
| ... | RZ144 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP,3.9X10M | | ... | 4 | | 0202-000187 | SOLDER-WIRE FLUX:-RS60S,D1.2,63Sn/37Pb | S.N.A |
| ... | RZ145 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP,3.9X10M | | ... | 3 | | AA99-20066X | ASSY-PCB SUB,AUTO: AA95-00046D ,V | S.N.A |
| ... | RZ146 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP,3.9X10M | | ... | 4 | CP01 | 2202-000263 | C-CERAMIC,MLC-AXIAL:470pF,10%,50V,Y5P,TP | |
| ... | RZ147 | 2003-002148 | R-METAL OXIDE:3.9OHM,2%,2W,AF,TP,3.9X10M | | ... | 4 | CP02 | 2202-000263 | C-CERAMIC,MLC-AXIAL:470pF,10%,50V,Y5P,TP | |
| ... | RZ148 | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP,6X16MM | | ... | 4 | CP03 | 2202-000263 | C-CERAMIC,MLC-AXIAL:470pF,10%,50V,Y5P,TP | |
| ... | RZ148A | 2003-002157 | R-METAL OXIDE:220OHM,5%,2W,AG,TP,6X16MM | | ... | 4 | CP04 | 2401-000302 | C-AL:100uf,20%,25V,GPTP,6.3x11,5 | |
| ... | RZ149 | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP,3.9x | | ... | 4 | CP05 | 2401-000302 | C-AL:100uf,20%,25V,GPTP,6.3x11,5 | |
| ... | RZ149A | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP,3.9x | | ... | 4 | CP06 | 2401-000302 | C-AL:100uf,20%,25V,GPTP,6.3x11,5 | |
| ... | | | | | ... | 4 | CP07 | 2401-000302 | C-AL:100uf,20%,25V,GPTP,6.3x11,5 | |
| ... | | | | | ... | 4 | CP08 | 2401-000302 | C-AL:100uf,20%,25V,GPTP,6.3x11,5 | |
| ... | | | | | ... | 4 | CP09 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP | |
| ... | | | | | ... | 4 | CP10 | 2202-000121 | C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP | |
| ... | | | | | ... | 4 | RP01 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | | | | | ... | 4 | RP02 | 2001-000969 | R-CARBON:75OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | | | | | ... | 4 | RP03 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP1.8X3.2M | |
| ... | | | | | ... | 4 | RP04 | 2001-000969 | R-CARBON:75OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | | | | | ... | 4 | RP05 | 2001-000969 | R-CARBON:75OHM,5%,1/8W,AA,TP1.8X3.2MM | |
| ... | | | | | ... | 3 | | 3301-001201 | CORE-FERRITE:AE,230.5x10.25x36mm,1500,28 | |
| ASSY-DOOR,BODY | | | | | | | | | | |
| 1 | * | AA95-00575A | ASSY-DOOR,BODY:-,SP53J5HFH/MVT,J51A,-,- | | | | | | | |
| .. | AV+DB | 6006-001095 | SCREW-ASS'Y TAPT:WPBH,+M4,L12,ZPC(YEL) | S.N.A | | | | | | |
| .. | CP+DB | 6002-000512 | SCREW-TAPPING:RH,+2,M4,L12,ZPC(BLK),SWR | S.N.A | | | | | | |
| .. | PC+BM | 6003-001023 | SCREW-TAPTITE:RW,H,+B,M3,L10,ZPC(YEL),SW | S.N.A | | | | | | |
| .. | | AA91-00157P | ASSY-DOOR,BODY:-,HB,J51A PAL,SP43J5HF | | | | | | | |
| ... | KC+DB | 6002-000512 | SCREW-TAPPING:RH,+2,M4,L12,ZPC(BLK),SWR | S.N.A | | | | | | |
| ... | KNOPOV | AA61-60005A | SPRING-CS:-,SUS304,0.6,OD10.7,H10,N4,-,- | | | | | | | |
| ... | WR+DB | 6002-000512 | SCREW-TAPPING:RH,+2,M4,L12,ZPC(BLK),SWR | S.N.A | | | | | | |
| ... | | AA64-00290B | WINDUW-REMOCOON:-,PCJ533R,SV-704PPC,-,VI | S.N.A | | | | | | |
| ... | | AA64-00294B | DOOR-CONTROL:-,PCJ533R,GR-806PABS,HB,GR | | | | | | | |
| ... | | AA64-00295H | DOOR-BODY:-,53J5HF,GR-806P P51A PAL,HIPS | | | | | | | |
| ... | | AA64-00289B | INDICATOR-LED:-,PCJ533R,-,ACRYL,-,CLR- | S.N.A | | .. | C430 | 2301-001219 | C-FILM,MPE-PPF:3.9nf,5%,1.6KV,TP29x8.5x | |
| ... | | AA64-00288C | KNOB-POWER:-,43J5,GR806P MASTER,ABS,HB,G | S.N.A | | .. | C431 | 2306-000326 | C-FILM,MPPF:4.7nf,5%,1.6KV,TP28.5x16x9m | |
| ... | | AA64-00287B | KNOB-CHA,VOL:-,PCJ533R,S/METALLIC+UV COA | S.N.A | | .. | C432 | 2306-000267 | C-FILM,MPPF:8.2nf,5%,1.6KV,TP28.5x18.5x | |
| ... | | AA64-00286B | KNOB-CONTROL:-,PCJ533R,GR-806PABS,HB,GR | S.N.A | | .. | C436 | 2306-000235 | C-FILM,MPPF:560nf,5%,400V,TP26*22.5*14 | |
| ... | | AA61-30001A | LATCH-DOOR:-,KIFUCO LA701,- | S.N.A | | .. | C438 | 2306-000267 | C-FILM,MPPF:8.2nf,5%,1.6KV,TP28.5x18.5x | |
| .. | | AA95-00262B | ASSY-PCB,CONTROL:-,SP43J5HP3S/XTT,CHINA, | | | .. | C471 | 2301-001091 | C-FILM,MPPF:470nf,5%,400V,TP26x21.5x14 | |
| .. | CNW01 | AA39-00120C | LEAD CONNECTOR-ASSY:-,-,11P,-,-,35155 | | | .. | C473 | 2306-000322 | C-FILM,MPPF:12nf,5%,1.6KV,TP29x20.5x13 | |
| ... | CNY01 | 3711-003973 | CONNECTOR-HEADER:BOX,11P1R,2.5mm,STRAIG | | | .. | C474 | 2306-000326 | C-FILM,MPPF:4.7nf,5%,1.6KV,TP28.5x16x9m | |
| ... | LEDY01 | 0601-001381 | LED-ROUND,RED/GRN,5.0MM,650/563NM | | | .. | C477 | 2301-000213 | C-FILM,PEE:220nf,5%,250V,TP21.5x11,7.5 | |
| ... | PCB | AA41-00189A | PCB-CONTROL:J51A,1L,FR-1,330x245x1.6T,4A | S.N.A | | .. | C801 | 2306-000321 | C-FILM,MPPF:470NF,5%,275V,TP,-,22.5 | |
| ... | RMV01 | AA59-60002B | MODULE-REMOCOON:-,ORC-50HF,38KHZ,940MM,ME | | | .. | C802 | 2306-000321 | C-FILM,MPPF:470NF,5%,275V,TP,-,22.5 | |
| ... | SWY03 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | | | .. | C812 | 2401-003465 | C-AL:680UF,20%,450V,GP,BK,35X60MM,2 | |
| ... | SWY04 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | | | .. | C831 | 2306-000323 | C-FILM,MPPF:2.2nf,5%,1.6KV,TP28.5x15.5x | |
| ... | SWY05 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | | | .. | C862 | 2401-002225 | C-AL:3300uf,20%,50V,WT,BK,22x41,7.5 | |
| ... | SWY06 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | | | .. | C865 | 2401-000737 | C-AL:2200uf,20%,50V,GPTP,18x35,5,7 | |
| ... | SWY07 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | | | .. | C868 | 2401-000737 | C-AL:2200uf,20%,50V,GPTP,18x35,5,7 | |
| ... | SWY08 | 3404-000176 | SWITCH-TACT:12V,50mA,120gf,6x6mm,SPST | | | .. | C875 | 2401-002251 | C-AL:470uf,20%,200V,GP,BK,25x40mm,1 | |
| ... | | AA61-20069A | HOLDER-WIRE:-,-,NYLON-66,VO,NTR,PAWH-5NA | S.N.A | | .. | C876 | 2401-000787 | C-AL:220uf,20%,160V,GPTP,16x31.5mm | |
| ASSY-PCB,SUB | | | | | | | | | | |
| 1 | * | AA95-00425B | ASSY-PCB,SUB:-,SP53J5HF,J51A,PAL,-,- | | | | | | | |
| .. | C430 | 2301-001219 | C-FILM,MPE-PPF:3.9nf,5%,1.6KV,TP29x8.5x | | | | | | | |
| .. | C431 | 2306-000326 | C-FILM,MPPF:4.7nf,5%,1.6KV,TP28.5x16x9m | | | | | | | |
| .. | C432 | 2306-000267 | C-FILM,MPPF:8.2nf,5%,1.6KV,TP28.5x18.5x | | | | | | | |
| .. | C436 | 2306-000235 | C-FILM,MPPF:560nf,5%,400V,TP26*22.5*14 | | | | | | | |
| .. | C438 | 2306-000267 | C-FILM,MPPF:8.2nf,5%,1.6KV,TP28.5x18.5x | | | | | | | |
| .. | C471 | 2301-001091 | C-FILM,MPPF:470nf,5%,400V,TP26x21.5x14 | | | | | | | |
| .. | C473 | 2306-000322 | C-FILM,MPPF:12nf,5%,1.6KV,TP29x20.5x13 | | | | | | | |
| .. | C474 | 2306-000326 | C-FILM,MPPF:4.7nf,5%,1.6KV,TP28.5x16x9m | | | | | | | |
| .. | C477 | 2301-000213 | C-FILM,PEE:220nf,5%,250V,TP21.5x11,7.5 | | | | | | | |
| .. | C801 | 2306-000321 | C-FILM,MPPF:470NF,5%,275V,TP,-,22.5 | | | | | | | |
| .. | C802 | 2306-000321 | C-FILM,MPPF:470NF,5%,275V,TP,-,22.5 | | | | | | | |
| .. | C812 | 2401-003465 | C-AL:680UF,20%,450V,GP,BK,35X60MM,2 | | | | | | | |
| .. | C831 | 2306-000323 | C-FILM,MPPF:2.2nf,5%,1.6KV,TP28.5x15.5x | | | | | | | |
| .. | C862 | 2401-002225 | C-AL:3300uf,20%,50V,WT,BK,22x41,7.5 | | | | | | | |
| .. | C865 | 2401-000737 | C-AL:2200uf,20%,50V,GPTP,18x35,5,7 | | | | | | | |
| .. | C868 | 2401-000737 | C-AL:2200uf,20%,50V,GPTP,18x35,5,7 | | | | | | | |
| .. | C875 | 2401-002251 | C-AL:470uf,20%,200V,GP,BK,25x40mm,1 | | | | | | | |
| .. | C876 | 2401-000787 | C-AL:220uf,20%,160V,GPTP,16x31.5mm | | | | | | | |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|-------------|--|--------|
| ..2 | C891 | 2201-000987 | C-CERAMIC,DISC:2.2nF,20%,400V,Y5U,TP12. | | ...3 | | AA62-30180D | HEAT SINK-ES-,A6063 EXTR.,2,WHT,50mm,-, | S.N.A |
| ..2 | C892 | 2201-000987 | C-CERAMIC,DISC:2.2nF,20%,400V,Y5U,TP12. | | △..2 | Q472 | 0505-000156 | FET-SILICON:IRF620,N,200V,5A,0.8ohm,50W, | S.N.A |
| ..2 | CN201 | AA39-00128A | LEAD CONNECTOR-ASSY,-,8P,-,YBNH25 | | △..2 | Q473 | AA96-00037A | ASSY-H/S,-,AA62-30181N,2SC4125, IRFS6 | |
| ..2 | CN202 | AA39-00115A | LEAD CONNECTOR-ASSY,-,10P,-,YBNH2 | | ...3 | | 0502-001100 | TR-POWER:2SC4125,NPN,70W,TO-3PML,BK,8- | |
| ..2 | CN203 | 3711-003052 | CONNECTOR-HEADER:BOX,10P1R,2.5mm,STRAGH | | ...3 | | AA62-30181N | HEAT-SINK,ES,-,T1.0,WHITE,SCREW-HOLE(2) | S.N.A |
| ..2 | CN401 | 3711-003051 | CONNECTOR-HEADER:BOX,8P1R,2.5mm,STRAGHT | | ...3 | | AA60-30001A | WASHER-PLATE:M3,ID3.5,15X8.5,T1.0,-,SBHG | S.N.A |
| ..2 | CN402 | 3711-003974 | CONNECTOR-HEADER:BOX,12P1R,2.5mm,STRAIG | | ...3 | | 6003-000333 | SCREW-TAPTITE:RH,+,2S,M3,L10,ZPC(YEL),SW | S.N.A |
| ..2 | CN801 | AA39-00116A | LEAD CONNECTOR-ASSY,-,12P,-,YBNH2 | | ...3 | | 0505-001202 | FET-SILICON:IRFS640A,N,200V,9.8A,0.18ohm | S.N.A |
| ..2 | CN802 | 3711-003051 | CONNECTOR-HEADER:BOX,8P1R,2.5mm,STRAGHT | | ...3 | | 0205-000129 | GREASE-SILICON:SC102,JAPAN | S.N.A |
| ..2 | CNW406 | AA39-00009A | LEAD CONNECTOR-ASSY,-,YFH800-03,S,3(2)P, | | ..2 | R440 | 2008-001091 | R-FUSIBLE(S):0.47OHM,10%,1/2W,AC,BK,2.5X | |
| ..2 | CNW809 | AA39-20061G | LEAD CONNECTOR-ASSY,-,YFH800-03,S,3P,100 | | ..2 | R442 | 2008-000189 | R-FUSIBLE:0.47ohm,10%,2W,BLK,TP,6x15.5mm | |
| △..2 | D464 | 0402-000236 | DIODE-RECTIFIER:G1824,400V,5A,-,TP | | ..2 | R445 | 2008-001091 | R-FUSIBLE(S):0.47OHM,10%,1/2W,AC,BK,2.5X | |
| △..2 | D804 | AA96-50310A | ASSY-H/S,-,POWER,AA62-30150C,RBV606,- | | ..2 | R803 | 1404-001195 | THERMISTOR:NTC:5.1ohm,15%,2900,27mW/C,BK | |
| ...3 | | AA62-30150C | HEAT SINK-ES-,A6063 EXTR.,-WHT,40(24.5) | S.N.A | ..2 | R815 | 2003-002162 | R-METAL OXIDE(S):15KOHM,5%,3W,AG,TP,6X16 | |
| ...3 | | AA60-30003A | WASHER,-,T1.5,-,SBHG-1,- | S.N.A | ..2 | R815A | 2003-002162 | R-METAL OXIDE(S):15KOHM,5%,3W,AG,TP,6X16 | |
| ...3 | | 6003-000333 | SCREW-TAPTITE:RH,+,2S,M3,L10,ZPC(YEL),SW | S.N.A | ..2 | R817 | 2009-001096 | R-METAL PLATE:0.07ohm,5%,5W,CLBK,5x14x1 | |
| ...3 | | 0402-000549 | DIODE-BRIDGE:RBV606,600V,6A,-,BK | | ..2 | R841 | 2008-001096 | R-FUSIBLE(S):3.30HM,5%,1/2W,AC,BK,2.5X6 | |
| ...3 | | 0205-000129 | GREASE-SILICON:SC102,JAPAN | S.N.A | △..2 | T431 | AA26-50001U | TRANS-HORIZ.DRIVE:-,28mH,105uH,4uH,ER28x | |
| △..2 | D810 | 0402-000250 | DIODE-RECTIFIER:RG4C,1000V,1A,- | | △..2 | T432 | AA26-00053A | TRANS:-,1.2mH,-,EER4445,BK,1.2mH,- | |
| △..2 | D854 | AA96-00111C | ASSY-H/S,-,AA62-30013L,FML-G12S,- | | △..2 | T444 | AA26-30005A | TRANS-FLYBACK:-,FVZ-50A001,50,108V | |
| ...3 | | 0402-000233 | DIODE-RECTIFIER:FML-G12S,200V,5A,- | | △..2 | T461 | AA26-50001V | TRANS-HORIZ.DRIVE:-,6.0mH,113uH,4uH,EI19 | |
| ...3 | | 6003-000333 | SCREW-TAPTITE:RH,+,2S,M3,L10,ZPC(YEL),SW | S.N.A | △..2 | T481 | AA26-50001W | TRANS-HORIZ.DRIVE:-,830uH,23uH,4uH,EI-30 | |
| ...3 | | AA62-30013L | HEATSINK-ES,-,44/22,-,WHT,-,,- | S.N.A | △..2 | T802 | AA26-00006A | TRANS-SWITCHING:-,90-260V,110V/34V/+30V | |
| △..2 | D871 | AA96-00032A | ASSY-H/S,-,AA62-30173B,FMLG12, FMG26 | | ..2 | | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,DI.2.63Sn/37Pb | S.N.A |
| ...3 | | 0402-000233 | DIODE-RECTIFIER:FML-G12S,200V,5A,- | | ..2 | | AA65-30110A | CLAMP-WIRE:NYLON 66,V2,BLK,PAL TVI,ALL M | S.N.A |
| ...3 | | 0402-000231 | DIODE-RECTIFIER:FMG-G26S,600V,4A,TO-220F | | ..2 | | 0403-001325 | DIODE-ZENER:MTZJ15C,14.35-15.09V,500mW,D | |
| ...3 | | AA62-30173B | HEAT-SINK-ES,-,T1.0,WHT,-,ALL,-,88X2 | S.N.A | ..2 | | AA65-30109A | CLAMP-FBT:NYLON-66,V2,BLK,-,- | S.N.A |
| ...3 | | 6003-000333 | SCREW-TAPTITE:RH,+,2S,M3,L10,ZPC(YEL),SW | S.N.A | ..2 | | AA62-00010A | HEAT SINK,-,T1.0,SILVER,H/SINK & SHIEL | S.N.A |
| ...3 | | 0205-000129 | GREASE-SILICON:SC102,JAPAN | S.N.A | ..2 | | AA99-20069B | ASSY-PCB SUB,AUTO; AA95-00425B ,V | S.N.A |
| △..2 | DZ481 | 0403-001327 | DIODE-ZENER:MTZJ18A,16.22-17.06V,500mW,D | | ...3 | C301 | 2305-000149 | C-FILM,MPEF-100nF,5%,100V,TP,12x12.5x6.5 | |
| △..2 | F801 | 3601-001007 | FUSE-CARTRIDGE:250V6.3A,TIME-LAG,GLASS, | | ...3 | C302 | 2201-000292 | C-CERAMIC,DISC:1nF,10%,50V,Y5P,TP5x3.5, | |
| △..2 | F802 | 3601-001137 | FUSE-AXIAL LEAD:250V6A,SLOW-BLOW,GLASS, | | ...3 | C303 | 2305-000149 | C-FILM,MPEF-100nF,5%,100V,TP,12x12.5x6.5 | |
| △..2 | F804 | 3601-001007 | FUSE-CARTRIDGE:250V6.3A,TIME-LAG,GLASS, | | ...3 | C304 | 2201-000292 | C-CERAMIC,DISC:1nF,10%,50V,Y5P,TP5x3.5, | |
| △..2 | IC301 | AA96-50381A | ASSY-H/S,-,AA62-30180B,LA7845,- | | ...3 | C305 | 2201-002022 | C-CERAMIC,DISC:0.005nF,0.25pF,500V,NP0,T | |
| ...3 | | 0205-000129 | GREASE-SILICON:SC102,JAPAN | S.N.A | ...3 | C307 | 2401-000365 | C-AL:100uF,20%,50V,WT,TP,10x12.5mm, | |
| ...3 | | 1204-000517 | IC-VERTICAL DEF:LA7845,SIP7P,-,PLASTIC | | ...3 | C308 | 2401-000365 | C-AL:100uF,20%,50V,WT,TP,10x12.5mm, | |
| ...3 | | 6003-000333 | SCREW-TAPTITE:RH,+,2S,M3,L10,ZPC(YEL),SW | S.N.A | ...3 | C309 | 2305-000285 | C-FILM,MPEF-220NF,5%,100V,TP,10.5X5.5X15 | |
| ...3 | | AA62-30180B | HEAT SINK-ES-,A6063 EXTR.,2,WHT,70MM,-, | S.N.A | ...3 | C311 | 2305-000149 | C-FILM,MPEF-100nF,5%,100V,TP,12x12.5x6.5 | |
| △..2 | IC421 | 1203-000165 | IC-POSI,ADJUST REG.:78R12,TO-220,3P,-, | | ...3 | C412 | 2301-000383 | C-FILM,PEF:10nF,5%,50V,TP,6x7x3.2mm,5mm | |
| △..2 | IC430 | 1203-000162 | IC-POSI,ADJUST REG.:317,TO-220,3P,-,PLAS | | ...3 | C413 | 2401-000360 | C-AL:100uF,20%,50V,GPTP,8x11.5,5 | |
| △..2 | IC431 | 1201-000191 | IC-OP AMP:4558,DIP8P,300MIL,DUAL,20V/mV | | ...3 | C417 | 2401-001397 | C-AL:470uF,20%,25V,GPTP,10x16,5 | |
| △..2 | IC801 | AA96-00035A | ASSY-H/S,-,POWER,AA62-30181P,STR-F6656, | | ...3 | C418 | 2401-000360 | C-AL:100uF,20%,50V,GPTP,8x11.5,5 | |
| ...3 | | 0205-000129 | GREASE-SILICON:SC102,JAPAN | S.N.A | ...3 | C419 | 2201-000180 | C-CERAMIC,DISC:10nF,10%,50V,Y5V,TP,7x3.5 | |
| ...3 | | 6003-000333 | SCREW-TAPTITE:RH,+,2S,M3,L10,ZPC(YEL),SW | S.N.A | ...3 | C426 | 2401-000360 | C-AL:100uF,20%,50V,GPTP,8x11.5,5 | |
| ...3 | | AA13-00018A | IC-HYBRID,-,STR-F6656,LF1351,5PIN,-,- | | ...3 | C427 | 2401-002300 | C-AL:47uF,20%,50V,GPTP,6.3x11,5 | |
| ...3 | | AA62-30181P | HEAT-SINK,ES,-,T1.0,WHITE,SCREW-HOLE(2) | S.N.A | ...3 | C428 | 2306-000122 | C-FILM,MPEF-100nF,5%,50V,TP,7.3x4.0x5.0m | |
| △..2 | IC804 | 1203-001400 | IC-POWER PRESCALER:SE110N,TO-220(SIP),3P | | ...3 | C437 | 2401-003114 | C-AL:4.7uF,20%,250V,WT,TP,10x16,5 | |
| △..2 | IC806 | 0604-001032 | PHOTO-COUPLER:TR,170-260%,300mW,DIP-4,ST | | ...3 | C441 | 2401-000262 | C-AL:100uF,20%,160V,HR,TP,16x25,7,5 | |
| ..2 | L431 | AA27-30003M | COIL-LINEARLITY:-,5uH,OWA14x15,USRCO.1x6 | | ...3 | C445 | 2401-001622 | C-AL:6.8uF,20%,50V,BP,TP,16x25mm,7. | |
| ..2 | L432 | AA27-40001U | COIL-HORIZ.WIDTH:-,220UH,DR1420,0.10,PI2X1 | | ...3 | C450 | 2401-000262 | C-AL:100uF,20%,160V,HR,TP,16x25,7,5 | |
| ..2 | L482 | 2701-001033 | INDUCTOR-AXIAL:-,1uH,10%,5x14mm | | ...3 | C451 | 2401-001160 | C-AL:33uF,20%,160V,GP,-,16x35mm,7,5 | |
| ..2 | L800 | AA29-30002L | FILTER-LINE NOISE:-,10mHMIN,5A,AC90-260V | | ...3 | C452 | 2201-000132 | C-CERAMIC,DISC:0.1nF,10%,500V,Y5P,TP,6.5 | |
| ..2 | L801 | AA29-30002F | FILTER-LINE NOISE:-,6mH,2.45A,-,- | | ...3 | C453 | 2401-002288 | C-AL:470uF,20%,25V,WT,TP,10x20,5 | |
| ..2 | L803 | AA29-00008A | FILTER-LINE NOISE:35-6MH 3A,-,6MHMIN,3A, | | ...3 | C454 | 2401-001429 | C-AL:470uF,20%,50V,GPTP,13x20,5 | |
| ..2 | L854 | AA27-10001C | COIL-CHOKE:-,100uH,K,-,5.0A,ST,700UH-K(R | | ...3 | C455 | 2201-000132 | C-CERAMIC,DISC:0.1nF,10%,500V,Y5P,TP,6.5 | |
| ..2 | L860 | AA27-10001C | COIL-CHOKE:-,100uH,K,-,5.0A,ST,700UH-K(R | | ...3 | C457 | 2201-000132 | C-CERAMIC,DISC:0.1nF,10%,500V,Y5P,TP,6.5 | |
| ..2 | L862 | AA27-10001C | COIL-CHOKE:-,100uH,K,-,5.0A,ST,700UH-K(R | | ...3 | C458 | 2401-002288 | C-AL:470uF,20%,25V,WT,TP,10x20,5 | |
| ..2 | L872 | AA27-10001C | COIL-CHOKE:-,100uH,K,-,5.0A,ST,700UH-K(R | | ...3 | C467 | 2401-000360 | C-AL:100uF,20%,50V,GPTP,8x11.5,5 | |
| ..2 | L874 | AA27-10002L | COIL-CHOKE:-,24UH,K,-,2A,-,24UH,K,10X10M | | ...3 | C468 | 2201-000119 | C-CERAMIC,DISC:100nF,+80-20% 50V,Y5V,TP, | |
| ..2 | PCB | AA41-00197B | PCB-SUB:P51A,1L,CEM-1,330x245x1.6T,1A, | | ...3 | C469 | 2201-000180 | C-CERAMIC,DISC:10nF,10%,50V,Y5V,TP,7x3.5 | |
| △..2 | Q431 | AA96-00033C | ASSY H/S,-,H-OUT,AA62-30173C,2SC5144, F | | ...3 | C472 | 2401-000262 | C-AL:100uF,20%,160V,HR,TP,16x25,7,5 | |
| ...3 | | AA60-30001A | WASHER-PLATE:M3,ID3.5,15X8.5,T1.0,-,SBHG | S.N.A | ...3 | C476 | 2401-000647 | C-AL:2.2uF,20%,50V,BP,TP,5x11,5 | |
| ...3 | | AA62-30173C | HEAT SINK-ES,-,T1.0,WHITE,SCREW-HOLE(2) | S.N.A | ...3 | C478 | 2301-000020 | C-FILM,PEF:27nF,5%,100V,TP,7.3x4x12.5mm, | |
| ...3 | | 6003-000333 | SCREW-TAPTITE:RH,+,2S,M3,L10,ZPC(YEL),SW | S.N.A | ...3 | C479 | 2301-000200 | C-FILM,PEF:2.2nF,5%,200V,TP,11.0x6.0x9.0 | |
| ...3 | | 0502-001121 | TR-POWER:2SC5144,NPN,200W,TO-3PL,BK,10- | | ...3 | C483 | 2401-000660 | C-AL:2.2uF,20%,50V,GPTP,5x11,5 | |
| ...3 | | 0402-001296 | DIODE-RECTIFIER:FMP-3FU,1.5KV,5A,TO-3PF, | | ...3 | C484 | 2201-000132 | C-CERAMIC,DISC:0.1nF,10%,500V,Y5P,TP,6.5 | |
| ...3 | | 0205-000129 | GREASE-SILICON:SC102,JAPAN | S.N.A | ...3 | C809 | 2201-000551 | C-CERAMIC,DISC:0.47nF,10%,1KV,Y5P,TP,6.3 | |
| △..2 | Q433 | AA96-50407A | ASSY-H/S,-,AA62-30154G,KSD73Y,- | | ...3 | C814 | 2201-002041 | C-CERAMIC,DISC:0.82nF,10%,2KV,Y5P,TP,9x5 | |
| ...3 | | 0205-000129 | GREASE-SILICON:SC102,JAPAN | S.N.A | ...3 | C815 | 2201-000406 | C-CERAMIC,DISC:0.27nF,10%,2KV,Y5P,TP,6.3 | |
| ...3 | | 0502-000298 | TR-POWER:KSD73,NPN,30W,TO-220,-,120-240 | | ...3 | C816 | 2201-000332 | C-CERAMIC,DISC:2.2nF,20%,250V,Y5U,TP,9x4 | |
| ...3 | | 6003-000333 | SCREW-TAPTITE:RH,+,2S,M3,L10,ZPC(YEL),SW | S.N.A | ...3 | C817 | 2201-000332 | C-CERAMIC,DISC:2.2nF,20%,250V,Y5U,TP,9x4 | |
| ...3 | | AA62-30154G | HEAT SINK-ES-,A6063 EXTR.,-WHT,50/16,-, | S.N.A | ...3 | C818 | 2301-001216 | C-FILM,PPF:47nF,5%,630V,TP,20x14.5x22,7 | |
| △..2 | Q441 | AA96-50383F | ASSY-H/S,-,AA62-30180D,2SD921,- | | ...3 | C819 | 2201-000332 | C-CERAMIC,DISC:2.2nF,20%,250V,Y5U,TP,9x4 | |
| ...3 | | 0205-000129 | GREASE-SILICON:SC102,JAPAN | S.N.A | ...3 | C833 | 2201-000292 | C-CERAMIC,DISC:1nF,10%,50V,Y5P,TP,5x3.5, | |
| ...3 | | 0502-001104 | TR-POWER:2SD921,NPN,80W,TO-3PBK,700- | | ...3 | C834 | 2401-003028 | C-AL:100uF,20%,25V,WT,TP,6.3x11,5 | |
| ...3 | | 6003-000333 | SCREW-TAPTITE:RH,+,2S,M3,L10,ZPC(YEL),SW | S.N.A | ...3 | C851 | 2201-000551 | C-CERAMIC,DISC:0.47nF,10%,1KV,Y5P,TP,6.3 | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|-------------|--|--|--------|
| ... | C852 | 2401-000133 | C-AL:1000uF,20%,16V,GP,TP,10x20,5 | | ... | R310 | 2003-002150 | R-METAL OXIDE:2700HM,5%,2W,AG,TP,6X16MM | |
| ... | C854 | 2201-000551 | C-CERAMIC,DISC:0.47nF,10%,1kV,Y5P,TP,6.3 | | ... | R312 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | C855 | 2401-003141 | C-AL:2200uF,20%,25V,WVT,TP,13x25,5mm | | ... | R313 | 2001-000761 | R-CARBON:4300HM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | C857 | 2401-000133 | C-AL:1000uF,20%,16V,GP,TP,10x20,5 | | ... | R314 | 2001-000761 | R-CARBON:4300HM,5%,1/8W,AA,TP,1.8X3.2MM | |
| ... | C861 | 2201-000551 | C-CERAMIC,DISC:0.47nF,10%,1kV,Y5P,TP,6.3 | | ... | R332 | 2001-001107 | R-CARBON(S):220ohm,5%,1/2W,AA,TP,2.4x6.4 | |
| ... | C864 | 2201-000551 | C-CERAMIC,DISC:0.47nF,10%,1kV,Y5P,TP,6.3 | | ... | R333 | 2001-001107 | R-CARBON(S):220ohm,5%,1/2W,AA,TP,2.4x6.4 | |
| ... | C866 | 2401-000192 | C-AL:1000uF,20%,50V,GP,TP,16x25,7.5 | | ... | R334 | 2001-001107 | R-CARBON(S):220ohm,5%,1/2W,AA,TP,2.4x6.4 | |
| ... | C869 | 2401-000192 | C-AL:1000uF,20%,50V,GP,TP,16x25,7.5 | | ... | R405 | 2009-001109 | R-TEMPERATURE:240ohm,5%,1/4W,AA,TP,2.3x6 | |
| ... | C871 | 2201-000551 | C-CERAMIC,DISC:0.47nF,10%,1kV,Y5P,TP,6.3 | | ... | R406 | 2004-001983 | R-METAL(S):2.49Kohm,1%,1/2W,AA,TP,2.4x6. | |
| ... | C872 | 2401-000703 | C-AL:2200uF,20%,25V,GP,TP,12.5x25mm, | | ... | R407 | 2004-001897 | R-METAL(S):43.2Kohm,1%,1/2W,AA,TP,2.5x6. | |
| ... | C873 | 2401-001998 | C-AL:1000uF,20%,25V,GP,TP,10x20,5mm | | ... | R408 | 2004-001402 | R-METAL(S):6.8Kohm,1%,1/2W,AA,TP,2.4x6.4 | |
| ... | C874 | 2201-000551 | C-CERAMIC,DISC:0.47nF,10%,1kV,Y5P,TP,6.3 | | ... | R409 | 2001-001178 | R-CARBON(S):6800HM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | C877 | 2305-000427 | C-FILM,MPEF:47nF,5%,100V,TP,7.5x12.5x3.5 | | ... | R410 | 2001-000052 | R-CARBON(S):3.3KOHM,5%,1/2W,AA,TP,2.4X6. | |
| △ | D302 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | | ... | R412 | 2001-000362 | R-CARBON:1500HM,5%,1/8W,AA,TP,1.8X3.2MM | |
| △ | D433 | 0402-000537 | DIODE-RECTIFIER:RH1A,600V,0.6A,DO-204AC | | ... | R419 | 2001-000290 | R-CARBON:10KOHM,5%,1/8W,AA,TP,1.8X3.2MM | |
| △ | D435 | 0402-000132 | DIODE-RECTIFIER:1N4004,400V,1A,DO-41,TP | | ... | R424 | 2008-000299 | R-FUSIBLE(S):47ohm,5%,2W,AF,TP,3.9x10mm | |
| △ | D436 | 0401-000005 | DIODE-SWITCHING:1N4148,100V,200MA,DO-35, | | ... | R426 | 2003-002153 | R-METAL OXIDE:4.70HM,5%,2W,AG,TP,6X16MM | |
| △ | D438 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | | ... | R427 | 2003-002152 | R-METAL OXIDE:10HM,5%,2W,AG,TP,6X16MM | |
| △ | D440 | 0402-000534 | DIODE-RECTIFIER:RG10V,400V,1.2A,DO-201,T | | ... | R427A | 2003-002152 | R-METAL OXIDE:10HM,5%,2W,AG,TP,6X16MM | |
| △ | D441 | 0402-000534 | DIODE-RECTIFIER:RG10V,400V,1.2A,DO-201,T | | ... | R428 | 2002-001017 | R-COMPOSITION:1Kohm,10%,1/2W,AA,TP,3.7x9 | |
| △ | D444 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | | ... | R428A | 2002-001017 | R-COMPOSITION:1Kohm,10%,1/2W,AA,TP,3.7x9 | |
| △ | D445 | 0402-000534 | DIODE-RECTIFIER:RG10V,400V,1.2A,DO-201,T | | ... | R429 | 2003-000586 | R-METAL OXIDE(S):22Kohm,5%,2W,AF,TP,4x12 | |
| △ | D472 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | | ... | R430 | 2003-000586 | R-METAL OXIDE(S):22Kohm,5%,2W,AF,TP,4x12 | |
| △ | D474 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | | ... | R433 | 2001-001155 | R-CARBON(S):5.6KOHM,5%,1/2W,AA,TP,2.4X6. | |
| △ | D801 | 1405-000187 | VARISTOR:750V,1250A,12.5x7mm,TP | | ... | R434 | 2001-001093 | R-CARBON(S):2.2KOHM,5%,1/2W,AA,TP,2.4X6. | |
| △ | D802 | 1405-000187 | VARISTOR:750V,1250A,12.5x7mm,TP | | ... | R441 | 2008-000189 | R-FUSIBLE:0.47ohm,10%,2W,AA,TP,6x15.5mm | |
| △ | D834 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | | ... | R444 | 2003-000995 | R-METAL OXIDE(S):3.3Kohm,5%,2W,AF,TP,3.9 | |
| △ | D843 | 0402-000546 | DIODE-RECTIFIER:TVR10G,400V,1.0A,DO-41,T | | ... | R462 | 2003-002026 | R-METAL OXIDE(S):4.7ohm,5%,1W,AF,TP,2.5x | |
| △ | D851 | 0402-000493 | DIODE-RECTIFIER:1R5GU41,400V,1.5A,DO-15L | | ... | R463 | 2003-001024 | R-METAL OXIDE(S):150ohm,5%,2W,AF,TP,3.9x | |
| ... | DZ301 | 0403-001328 | DIODE-ZENER:MTZJ22A,20.15-21.20V,500mW,D | | ... | R464 | 2003-002158 | R-METAL OXIDE:0.680HM,5%,1W,AG,TP,4.3X12 | |
| ... | DZ304 | 0403-001327 | DIODE-ZENER:MTZJ18A,16.22-17.06V,500mW,D | | ... | R465 | 2001-001043 | R-CARBON(S):00HM,5%,1/2W,AA,TP,2.4X6.4MM | |
| ... | DZ305 | 0403-001329 | DIODE-ZENER:MTZJ24B,22.61-23.77V,500mW,D | | ... | R466 | 2004-001386 | R-METAL(S):16.9Kohm,1%,1/2W,AA,TP,2.4x6. | |
| ... | DZ306 | 0403-001167 | DIODE-ZENER:MTZJ30D,30V,29.02-30.51V,500 | | ... | R467 | 2004-001986 | R-METAL(S):35.7Kohm,1%,1/2W,AA,TP,2.4x6. | |
| ... | DZ307 | 0403-001329 | DIODE-ZENER:MTZJ24B,22.61-23.77V,500mW,D | | ... | R468 | 2001-001122 | R-CARBON(S):3.9KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | DZ413 | 0403-001319 | DIODE-ZENER:MTZJ4.7C,4.68-4.93V,500mW,DO | | ... | R469 | 2004-001390 | R-METAL(S):1Kohm,2%,1/2W,AA,TP,2.4x6.4mm | |
| ... | DZ473 | 0403-000720 | DIODE-ZENER:MTZJ9.1B,9.1V,8.57-9.01V,500 | | ... | R470 | 2001-000028 | R-CARBON(S):1000HM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | DZ842 | 0403-000700 | DIODE-ZENER:TZP33A,33V,31-35V,1W,DO-41,T | | ... | R471 | 2004-002011 | R-METAL(S):110Kohm,1%,1/2W,AA,TP,2.4x6.4 | |
| ... | DZ858 | 0403-001325 | DIODE-ZENER:MTZJ15C,14.35-15.09V,500mW,D | | ... | R472 | 2008-000252 | R-FUSIBLE(S):0.47ohm,10%,1/2W,AF,TP,2.5x | |
| ... | F801A | 3602-000114 | FUSE-HOLDER:-,30mohm | S.N.A | ... | R473 | 2004-001395 | R-METAL(S):330Kohm,2%,1/2W,AA,TP,2.4x6.4 | |
| ... | F801B | 3602-000114 | FUSE-HOLDER:-,30mohm | S.N.A | ... | R486 | 2003-002014 | R-METAL OXIDE(S):0.60HM,5%,2W,AF,TP,3.9X | |
| ... | F804A | 3602-000114 | FUSE-HOLDER:-,30mohm | S.N.A | ... | R488 | 2001-000273 | R-CARBON:100KOHM,5%,1/8W,AA,TP,1.8X3.2M | |
| ... | F804B | 3602-000114 | FUSE-HOLDER:-,30mohm | S.N.A | ... | R808 | 2001-000002 | R-CARBON(S):200KOHM,5%,1/2W,AA,TP,6.4X2. | |
| ... | F805 | 3601-001086 | FUSE-AXIAL LEAD:125V,5A,FAST-ACTING,GLAS | | ... | R808A | 2001-000002 | R-CARBON(S):200KOHM,5%,1/2W,AA,TP,6.4X2. | |
| ... | F806 | 3601-001065 | FUSE-AXIAL LEAD:125V,3.5A,FAST-ACTING,CE | | ... | R810 | 2002-001010 | R-COMPOSITION:1.8Mohm,5%,1/2W,AA,TP,3.7x | |
| △ | F854 | 3601-001086 | FUSE-AXIAL LEAD:125V,5A,FAST-ACTING,GLAS | | ... | R812 | 2003-002151 | R-METAL OXIDE:18KOHM,5%,2W,AG,TP,6X16MM | |
| △ | F855 | 3601-001086 | FUSE-AXIAL LEAD:125V,5A,FAST-ACTING,GLAS | | ... | R814 | 2003-002151 | R-METAL OXIDE:18KOHM,5%,2W,AG,TP,6X16MM | |
| △ | F871 | 3601-001086 | FUSE-AXIAL LEAD:125V,5A,FAST-ACTING,GLAS | | ... | R816 | 2004-004029 | R-METAL(S):10Kohm,1%,1/2W,AA,TP,2.5x6.5m | |
| ... | L481 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | R825 | 2002-001010 | R-COMPOSITION:1.8Mohm,5%,1/2W,AA,TP,3.7x | |
| ... | L483 | 2901-000299 | FILTER-EMI ON BOARD:-,6A,UL/CSA,-,9x7.5, | | ... | R832 | 2001-001178 | R-CARBON(S):6800HM,5%,1/2W,AA,TP,2.4X6.4 | |
| ... | L492 | 2701-000115 | INDUCTOR-AXIAL:10uH,10%,3x7mm | | ... | R834 | 2001-001097 | R-CARBON(S):2.4KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | L493 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP- | | ... | R837 | 2001-001097 | R-CARBON(S):2.4KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | L494 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | R838 | 2001-001097 | R-CARBON(S):2.4KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | L495 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP- | | ... | R855 | 2001-001196 | R-CARBON(S):9.1KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | L806 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP- | | ... | R856 | 2001-001155 | R-CARBON(S):5.6KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | L807 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP- | | ... | R857 | 2001-001155 | R-CARBON(S):5.6KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | L808 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | ... | R871 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP,2.4X6.4M | |
| ... | L810 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP- | | ... | R872 | 2001-001088 | R-CARBON(S):1KOHM,5%,1/2W,AA,TP,2.4X6.4M | |
| ... | L811 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP- | | ... | R873 | 2001-001097 | R-CARBON(S):2.4KOHM,5%,1/2W,AA,TP,2.4X6. | |
| ... | L812 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP- | | ... | R891 | 2002-001012 | R-COMPOSITION:8.2Mohm,5%,1/2W,AA,TP,3.7x | |
| ... | L813 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP- | | ... | VR471 | 2103-001024 | VR-SEMI:50Kohm,25%,0.3W,TOP | |
| ... | L814 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | .. | AA65-30105B | CLAMP-WIRE-NYLON 66,V2,NTR,25MM,ALL MODE | S.N.A | |
| ... | L815 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP- | | .. | 6003-001023 | SCREW-TAPTITE:RWH,+B,M3,L10,ZPC(YEL),SW | S.N.A | |
| ... | L816 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP- | | | | | | |
| ... | L831 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | | | | | |
| ... | L832 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | | | | | |
| ... | L851 | 2901-000297 | FILTER-EMI ON BOARD:-,3A,-,3.5x5,TP- | | | | | | |
| ... | L857 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | | | | | |
| ... | L859 | 3301-000287 | CORE-FERRITE BEAD:AA,3.5x1.0x6.0mm,1500, | | | | | | |
| ... | Q301 | 0501-000389 | TR-SMALL SIGNAL:KSC815,NPN,400mW,TO-92,T | | 1 | * | AA95-00422B | ASSY-PCB,CONV MDL:-,SP43J5HP,J51A,-,-,- | |
| ... | Q432 | 0501-000283 | TR-SMALL SIGNAL:KSA539,PNP,400mW,TO-92,T | | .. | C163 | 2305-000289 | C-FILM,MPEF:220nF,5%,63V,TP,-,5mm | |
| ... | R301 | 2004-001897 | R-METAL(S):43.2Kohm,1%,1/2W,AA,TP,2.5x6. | | .. | CN101 | 3711-002709 | CONNECTOR-HEADER:NOWALL,12P1R,2.5MM,ANG | |
| ... | R302 | 2004-001897 | R-METAL(S):43.2Kohm,1%,1/2W,AA,TP,2.5x6. | | .. | CN102 | 3711-002709 | CONNECTOR-HEADER:NOWALL,12P1R,2.5MM,ANG | |
| ... | R303 | 2004-001984 | R-METAL(S):26.7Kohm,1%,1/2W,AA,TP,2.4x6. | | △ | IC113 | 1203-000641 | IC-RESET:7442,TO-92,3P,-,PLASTIC,-0.3/7 | |
| ... | R305 | 2004-001984 | R-METAL(S):26.7Kohm,1%,1/2W,AA,TP,2.4x6. | | .. | 0202-001004 | SOLDER-CREAM:SQ-2030M SZH-1,S63A,DO,04.6 | S.N.A | |
| ... | R306 | 2003-001036 | R-METAL OXIDE(S):3.3ohm,5%,2W,AF,TP,3.9x | | .. | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1.2,63Sn/37Pb | S.N.A | |
| ... | R307 | 2003-001036 | R-METAL OXIDE(S):3.3ohm,5%,2W,AF,TP,3.9x | | .. | AA63-00143A | SHIELD-CASE:-,SPT0.5,T0.5,ALLMIGHT,CO | S.N.A | |
| ... | R308 | 2001-000016 | R-CARBON(S):10HM,5%,1/2W,AA,TP,2.4X6.4MM | | .. | AA99-20068A | ASSY-PCB SUB,AUTO: AA95-00422B ,\V | S.N.A | |

ASSY-PCB,CONV MDL

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|-------------|---|--------|
| ... | C101 | 2404-000275 | C-TA,CHIP:100UF,10%,10V,GP,TP,7343 | | ... | C204 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | |
| ... | C102 | 2404-000275 | C-TA,CHIP:100UF,10%,10V,GP,TP,7343 | | ... | C205 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | |
| ... | C103 | 2404-000256 | C-TA,CHIP:47UF,20%,16V,GP,TP,7343 | | ... | C206 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | |
| ... | C104 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | D101 | 0401-000160 | DIODE-SWITCHING:ISS314,30V,100mA,USC,TP | |
| ... | C105 | 2203-000858 | C-CERAMIC,CHIP:0.039nF,5%,50V,NPO,TP,201 | | ... | D102 | 0401-000160 | DIODE-SWITCHING:ISS314,30V,100mA,USC,TP | |
| ... | C106 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | DZ101 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C107 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,2012 | | ... | DZ102 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C108 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | DZ104 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C109 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | DZ105 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C110 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | | ... | DZ106 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C111 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | DZ107 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C112 | 2203-000683 | C-CERAMIC,CHIP:0.027nF,5%,50V,NPO,TP,201 | | ... | DZ108 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C113 | 2203-000683 | C-CERAMIC,CHIP:0.027nF,5%,50V,NPO,TP,201 | | ... | DZ109 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C114 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | DZ110 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C115 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | DZ111 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C116 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | DZ112 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C117 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | DZ113 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C118 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | DZ114 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C119 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | DZ115 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C120 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | DZ116 | 0403-001016 | DIODE-ZENER:RLZ6.2B,6.2V,5.96-6.27V,400m | |
| ... | C121 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | DZ117 | 0403-001284 | DIODE-ZENER:RLZ3.3A,3.16-3.38V,500MW,LL- | |
| ... | C122 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | EF101 | 2901-000229 | FILTER-EMI SMD:50V,0.3A,-,22000pF,4.5x3. | |
| ... | C123 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | EF102 | 2901-000229 | FILTER-EMI SMD:50V,0.3A,-,22000pF,4.5x3. | |
| ... | C124 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | EF104 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C125 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | EF105 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C126 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | EF106 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C127 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | EF107 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C128 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | EF108 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C129 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | EF109 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C130 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | EF110 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C131 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | EF111 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C132 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | | ... | EF112 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C133 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GP,TP,3216,- | | ... | EF113 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C134 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | EF114 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C135 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,2012 | | ... | EF115 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C136 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | EF116 | 2901-000226 | FILTER-EMI SMD:25V,0.3A,-,100pF,3.2x1.25 | |
| ... | C137 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,2012 | | ... | IC101 | AA13-00071A | IC-ASIC,-,SDC91,QFP,208P,CONV CONTROL | |
| ... | C138 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | | ... | IC102 | 0801-001043 | IC-CMOS LOGIC:74HC4046,PHASE-LOCKED-LOOP | |
| ... | C139 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | IC103 | AA09-00032A | IC-MCU:TSC87251G2D-OTP,TSC87251G2D-OT | |
| ... | C140 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GP,TP,3216,- | | ... | IC104 | 1103-001167 | IC-EEPROM:28C64,8KX8BIT,TSONP,28P,-,120NS | |
| ... | C141 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | | ... | IC105 | 1201-001520 | IC-VIDEO AMP:2210,SOP,8P,150MIL,DUAL,7dB | |
| ... | C142 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GP,TP,3216,- | | ... | IC106 | 1201-001504 | IC-OP AMP:072,SOP,8P,150MIL,DUAL,-,PLAST | |
| ... | C143 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | IC107 | 1201-001504 | IC-OP AMP:072,SOP,8P,150MIL,DUAL,-,PLAST | |
| ... | C144 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,2012 | | ... | IC108 | 1201-001504 | IC-OP AMP:072,SOP,8P,150MIL,DUAL,-,PLAST | |
| ... | C145 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | IC109 | 0801-001156 | IC-CMOS LOGIC:74HC4066,BILATERAL SWITCH, | |
| ... | C146 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,2012 | | ... | IC110 | 0801-001156 | IC-CMOS LOGIC:74HC4066,BILATERAL SWITCH, | |
| ... | C147 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | | ... | IC111 | 1001-000105 | IC-ANALOG SWITCH:CD4066BM,BILATERAL CMOS | |
| ... | C148 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GP,TP,3216,- | | ... | IC112 | 1001-000105 | IC-ANALOG SWITCH:CD4066BM,BILATERAL CMOS | |
| ... | C149 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | PCB | AA41-00188D | PCB-CONVERGENCE MODULE:SVP-43,14M,FR-4,4L | S.N.A |
| ... | C150 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | Q101 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
| ... | C151 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | | ... | Q102 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| ... | C152 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GP,TP,3216,- | | ... | Q103 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| ... | C153 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | Q104 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
| ... | C154 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,2012 | | ... | Q105 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| ... | C155 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | Q106 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| ... | C156 | 2203-000716 | C-CERAMIC,CHIP:3.3nF,10%,50V,X7R,TP,2012 | | ... | Q107 | 0501-000342 | TR-SMALL SIGNAL:KSC1623-Y,NPN,200mW,SOT- | |
| ... | C157 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | | ... | Q108 | 0501-000280 | TR-SMALL SIGNAL:KSA1182,PNP,150mW,SOT-23 | |
| ... | C158 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GP,TP,3216,- | | ... | Q109 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A |
| ... | C159 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | Q110 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A |
| ... | C160 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | Q111 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A |
| ... | C161 | 2404-000256 | C-TA,CHIP:47UF,20%,16V,GP,TP,7343 | | ... | Q112 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A |
| ... | C162 | 2404-000256 | C-TA,CHIP:47UF,20%,16V,GP,TP,7343 | | ... | Q113 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A |
| ... | C164 | 2404-001229 | C-TA,CHIP:4.7uF,20%,25V,GP,TP,3528 | | ... | Q114 | 0505-000257 | FET-SILICON:2SK217,N,-,20mA,-,150mW,SOT- | S.N.A |
| ... | C165 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | R101 | 2007-000881 | R-CHIP:4.7OHM,5%,1/10W,DA,TP,2012 | |
| ... | C166 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | R102 | 2007-000881 | R-CHIP:4.7OHM,5%,1/10W,DA,TP,2012 | |
| ... | C167 | 2404-000123 | C-TA,CHIP:10uF,20%,16V,-,TP,6032,2.9mm | | ... | R103 | 2007-000881 | R-CHIP:4.7OHM,5%,1/10W,DA,TP,2012 | |
| ... | C168 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | R104 | 2007-000881 | R-CHIP:4.7OHM,5%,1/10W,DA,TP,2012 | |
| ... | C169 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | R105 | 2007-000415 | R-CHIP:15OHM,5%,1/10W,DA,TP,2012 | |
| ... | C170 | 2203-000218 | C-CERAMIC,CHIP:100nF,20%,50V,Y5V,TP,2012 | | ... | R106 | 2007-000947 | R-CHIP:47OHM,5%,1/10W,DA,TP,2012 | |
| ... | C171 | 2404-001098 | C-TA,CHIP:1uF,20%,25V,GP,TP,3216,- | | ... | R107 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C172 | 2404-000256 | C-TA,CHIP:47UF,20%,16V,GP,TP,7343 | | ... | R108 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C173 | 2404-000256 | C-TA,CHIP:47UF,20%,16V,GP,TP,7343 | | ... | R109 | 2007-000493 | R-CHIP:2.2KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C174 | 2404-000256 | C-TA,CHIP:47UF,20%,16V,GP,TP,7343 | | ... | R110 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C201 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | | ... | R111 | 2007-000380 | R-CHIP:13KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C202 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | | ... | R112 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C203 | 2203-000408 | C-CERAMIC,CHIP:0.18nF,5%,50V,NPO,TP,2012 | | ... | R113 | 2007-001097 | R-CHIP:62KOHM,5%,1/10W,DA,TP,2012 | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|-----------------------------------|--------|--------------------------|-------------|--|--|--------|
| ... | R114 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ... | X101 | 2801-003860 | CRYSTAL-SMD;24MHz,30ppm,28-ABV,20pF,50oh | |
| ... | R116 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ASSY-PCB,TERMINAL | | | | |
| ... | R117 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | 1 | * | AA95-00219D | ASSY-PCB,TERMINAL-;SP43J5HF,J51A,-,1 | |
| ... | R118 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..2 | CNT01 | 3711-003630 | CONNECTOR-HEADER;BOX,32P2R,2.54mm,ANGLE | |
| ... | R119 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..2 | CNT02 | 3711-003630 | CONNECTOR-HEADER;BOX,32P2R,2.54mm,ANGLE | |
| ... | R120 | 2007-000401 | R-CHIP:1500OHM,5%,1/10W,DA,TP2012 | | ..2 | CNT03 | 3711-003601 | CONNECTOR-HEADER;BOX,12P1R,2.5mm,ANGLE, | |
| ... | R121 | 2007-000023 | R-CHIP:1200OHM,5%,1/10W,DA,TP2012 | | ..2 | IC703 | 0904-001121 | IC-I/O SUPPORT CHIP;8574,8BIT,DIP;16P;30 | |
| ... | R122 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..2 | IC704 | 1001-001022 | IC-ANALOG SWITCH;TDA8601,BLANKING,DIP;16 | |
| ... | R123 | 2007-000401 | R-CHIP:1500OHM,5%,1/10W,DA,TP2012 | | ..2 | IC705 | 0801-000213 | IC-CMOS LOGIC;4052,MULTIPLEXER,DIP;16P3 | |
| ... | R124 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..2 | JKV01 | 3722-000498 | JACK-SCART;21P,-,SN,BLK,NO | |
| ... | R125 | 2007-000401 | R-CHIP:1500OHM,5%,1/10W,DA,TP2012 | | ..2 | JKV02 | 3722-001039 | JACK-RCA;9P;3.4mm,SN,BLK,16-22 | |
| ... | R126 | 2007-000401 | R-CHIP:1500OHM,5%,1/10W,DA,TP2012 | | ..2 | JKV03 | 3722-001382 | JACK-RCA;5P(9P);3.4MM,NI,R/W/G/BLUE,- | |
| ... | R127 | 2007-000401 | R-CHIP:1500OHM,5%,1/10W,DA,TP2012 | | ..2 | JKV04 | 3722-001350 | JACK-RCA;7P;9P;3.4MM,NI,BLK,- | |
| ... | R128 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP2012 | | ..2 | JKV05 | 3701-001013 | CONNECTOR-DSUB;15P;3R,FEMALE,STRAIGHT,AU | |
| ... | R129 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP2012 | | ..2 | JKV06 | 3701-001013 | CONNECTOR-DSUB;15P;3R,FEMALE,STRAIGHT,AU | |
| ... | R130 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP2012 | | ..2 | JKV07 | 3722-000544 | JACK-VHS;4P;11.5mm,AG,BLK,N | |
| ... | R131 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP2012 | | ..2 | RN701 | 2011-000160 | R-NETWORK;10Kohm,5%,1/8WVA,SIP;9P,TP | |
| ... | R132 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP2012 | | ..2 | AA65-30105A | CLAMP-WIRE;NYLON 66,V2,NTR,15MM,ALL MODE | S.N.A | |
| ... | R133 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP2012 | | ..2 | AA99-20079E | ASSY-PCB SUB,AUTO: AA95-00219D ,V | S.N.A | |
| ... | R134 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP2012 | | ..3 | C701 | 2401-002009 | C-AL;100uF,20%,16V,GP,TP6.3x7.5 | |
| ... | R135 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP2012 | | ..3 | C702 | 2203-000218 | C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP2012 | |
| ... | R136 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP2012 | | ..3 | C703 | 2401-002009 | C-AL;100uF,20%,16V,GP,TP6.3x7.5 | |
| ... | R137 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP2012 | | ..3 | C704 | 2203-000818 | C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP201 | |
| ... | R138 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP2012 | | ..3 | C705 | 2203-000818 | C-CERAMIC,CHIP;0.033nF,5%,50V,NP0,TP201 | |
| ... | R139 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP2012 | | ..3 | C706 | 2203-000979 | C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012 | |
| ... | R140 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP2012 | | ..3 | C707 | 2203-000979 | C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012 | |
| ... | R141 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP2012 | | ..3 | C708 | 2203-000979 | C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012 | |
| ... | R142 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP2012 | | ..3 | C709 | 2203-000979 | C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012 | |
| ... | R143 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP2012 | | ..3 | C710 | 2203-000979 | C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012 | |
| ... | R144 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP2012 | | ..3 | C711 | 2203-000979 | C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012 | |
| ... | R145 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP2012 | | ..3 | C712 | 2203-000218 | C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP2012 | |
| ... | R146 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP2012 | | ..3 | C713 | 2203-000979 | C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012 | |
| ... | R147 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP2012 | | ..3 | C714 | 2203-000979 | C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012 | |
| ... | R148 | 2007-000465 | R-CHIP:1KOHM,1%,1/10W,DA,TP2012 | | ..3 | C715 | 2203-000979 | C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012 | |
| ... | R149 | 2007-000868 | R-CHIP:4.7KOHM,1%,1/10W,DA,TP2012 | | ..3 | C716 | 2401-002009 | C-AL;100uF,20%,16V,GP,TP6.3x7.5 | |
| ... | R150 | 2007-000981 | R-CHIP:5.6KOHM,5%,1/10W,DA,TP2012 | | ..3 | C717 | 2203-000218 | C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP2012 | |
| ... | R151 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP2012 | | ..3 | C718 | 2203-000979 | C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012 | |
| ... | R152 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP2012 | | ..3 | C719 | 2203-000979 | C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012 | |
| ... | R153 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ..3 | C720 | 2203-000979 | C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012 | |
| ... | R154 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP2012 | | ..3 | C721 | 2203-000979 | C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012 | |
| ... | R155 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP2012 | | ..3 | C722 | 2203-000979 | C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012 | |
| ... | R156 | 2007-001055 | R-CHIP:6.2KOHM,5%,1/10W,DA,TP2012 | | ..3 | C723 | 2203-000218 | C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP2012 | |
| ... | R157 | 2007-000671 | R-CHIP:2KOHM,5%,1/10W,DA,TP2012 | | ..3 | C724 | 2203-000979 | C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012 | |
| ... | R158 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C725 | 2203-000218 | C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP2012 | |
| ... | R159 | 2007-001166 | R-CHIP:75OHM,5%,1/10W,DA,TP2012 | | ..3 | C726 | 2203-000218 | C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP2012 | |
| ... | R160 | 2007-000766 | R-CHIP:330OHM,5%,1/10W,DA,TP2012 | | ..3 | C727 | 2203-000979 | C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP2012 | |
| ... | R161 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP2012 | | ..3 | C730 | 2401-002299 | C-AL;4.7uF,20%,50V,GP,TP5x7.5 | |
| ... | R162 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP2012 | | ..3 | C731 | 2401-002299 | C-AL;4.7uF,20%,50V,GP,TP5x7.5 | |
| ... | R163 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP2012 | | ..3 | C732 | 2203-000444 | C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012,- | |
| ... | R164 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C733 | 2203-000444 | C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012,- | |
| ... | R165 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C734 | 2203-000444 | C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012,- | |
| ... | R166 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C735 | 2203-000444 | C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012,- | |
| ... | R167 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C736 | 2203-000444 | C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012,- | |
| ... | R168 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C737 | 2203-000444 | C-CERAMIC,CHIP;1nF,10%,50V,X7R,TP2012,- | |
| ... | R169 | 2007-000703 | R-CHIP:3.6KOHM,5%,1/10W,DA,TP2012 | | ..3 | C740 | 2401-001840 | C-AL;100uF,20%,16V,GP,TP6.3x11.5 | |
| ... | R170 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP2012 | | ..3 | C741 | 2203-000218 | C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP2012 | |
| ... | R171 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP2012 | | ..3 | C742 | 2401-001840 | C-AL;100uF,20%,16V,GP,TP6.3x11.5 | |
| ... | R172 | 2007-000642 | R-CHIP:2700OHM,5%,1/10W,DA,TP2012 | | ..3 | C743 | 2203-000218 | C-CERAMIC,CHIP;100nF,20%,50V,Y5V,TP2012 | |
| ... | R173 | 2007-000030 | R-CHIP:560OHM,5%,1/10W,DA,TP2012 | | ..3 | C744 | 2203-000575 | C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012 | |
| ... | R174 | 2007-000030 | R-CHIP:560OHM,5%,1/10W,DA,TP2012 | | ..3 | C745 | 2203-000575 | C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012 | |
| ... | R175 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP2012 | | ..3 | C746 | 2203-000575 | C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012 | |
| ... | R176 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ..3 | C747 | 2203-000575 | C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012 | |
| ... | R177 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP2012 | | ..3 | C748 | 2203-000575 | C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012 | |
| ... | R178 | 2007-000728 | R-CHIP:3000OHM,5%,1/10W,DA,TP2012 | | ..3 | C749 | 2203-000575 | C-CERAMIC,CHIP;220NF,10%,25V,X7R,TP2012 | |
| ... | R179 | 2007-000728 | R-CHIP:3000OHM,5%,1/10W,DA,TP2012 | | ..3 | C760 | 2401-000667 | C-AL;2.2uF,20%,50V,WT,TP5x11.5 | |
| ... | R180 | 2007-000728 | R-CHIP:3000OHM,5%,1/10W,DA,TP2012 | | ..3 | C761 | 2401-000667 | C-AL;2.2uF,20%,50V,WT,TP5x11.5 | |
| ... | R181 | 2007-000728 | R-CHIP:3000OHM,5%,1/10W,DA,TP2012 | | ..3 | C762 | 2401-000667 | C-AL;2.2uF,20%,50V,WT,TP5x11.5 | |
| ... | R182 | 2007-000728 | R-CHIP:3000OHM,5%,1/10W,DA,TP2012 | | ..3 | C763 | 2401-000667 | C-AL;2.2uF,20%,50V,WT,TP5x11.5 | |
| ... | R183 | 2007-000728 | R-CHIP:3000OHM,5%,1/10W,DA,TP2012 | | ..3 | C764 | 2401-000667 | C-AL;2.2uF,20%,50V,WT,TP5x11.5 | |
| ... | R184 | 2007-000830 | R-CHIP:39KOHM,5%,1/10W,DA,TP2012 | | ..3 | C765 | 2401-000667 | C-AL;2.2uF,20%,50V,WT,TP5x11.5 | |
| ... | R201 | 2007-000029 | R-CHIP:0OHM,5%,1/10W,DA,TP2012 | | ..3 | C766 | 2401-000667 | C-AL;2.2uF,20%,50V,WT,TP5x11.5 | |
| ... | R203 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP2012 | | ..3 | C767 | 2401-000667 | C-AL;2.2uF,20%,50V,WT,TP5x11.5 | |
| ... | R204 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP2012 | | ..3 | | | | |
| ... | R205 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP2012 | | ..3 | | | | |
| ... | R206 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP2012 | | ..3 | | | | |
| ... | R207 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP2012 | | ..3 | | | | |
| ... | R208 | 2007-000565 | R-CHIP:220KOHM,5%,1/10W,DA,TP2012 | | ..3 | | | | |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|-------------|------------------------------------|--------|
| ... | C768 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | | ... | R724 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | |
| ... | C769 | 2203-000979 | C-CERAMIC,CHIP:47nF,10%,50V,X7R,TP,2012 | | ... | R725 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
| ... | C770 | 2203-000683 | C-CERAMIC,CHIP:0.027nF,5%,50V,NP0,TP,201 | | ... | R726 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
| ... | C771 | 2203-000683 | C-CERAMIC,CHIP:0.027nF,5%,50V,NP0,TP,201 | | ... | R727 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
| ... | C772 | 2203-000683 | C-CERAMIC,CHIP:0.027nF,5%,50V,NP0,TP,201 | | ... | R728 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
| ... | C773 | 2203-000239 | C-CERAMIC,CHIP:0.1nF,5%,50V,NP0,TP,2012 | | ... | R729 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
| ... | C774 | 2203-000239 | C-CERAMIC,CHIP:0.1nF,5%,50V,NP0,TP,2012 | | ... | R730 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C775 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | | ... | R731 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C776 | 2203-000444 | C-CERAMIC,CHIP:1nF,10%,50V,X7R,TP,2012,- | | ... | R732 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C777 | 2401-001496 | C-AL:47uF,20%,16V,GPTP5x7,5 | | ... | R733 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C780 | 2401-000360 | C-AL:100uF,20%,50V,GPTP8x11,5,5 | | ... | R734 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C782 | 2401-000471 | C-AL:10uF,20%,50V,BPTP5x11,5mm | | ... | R735 | 2007-000941 | R-CHIP:47KOHM,5%,1/10W,DA,TP,2012 | |
| ... | C783 | 2401-000471 | C-AL:10uF,20%,50V,BPTP5x11,5mm | | ... | R736 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ701 | 0403-000314 | DIODE-ZENER:RLZJ9.1B,9.1V,8.80-9.30V,400 | | ... | R737 | 2007-000766 | R-CHIP:330OHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ702 | 0403-000314 | DIODE-ZENER:RLZJ9.1B,9.1V,8.80-9.30V,400 | | ... | R740 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ703 | 0403-000314 | DIODE-ZENER:RLZJ9.1B,9.1V,8.80-9.30V,400 | | ... | R741 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ704 | 0403-001117 | DIODE-ZENER:RLZ12B,5%,500mW,LL-34,TP | | ... | R742 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | DZ705 | 0403-000620 | DIODE-ZENER:RLZ5.6B,5.6V,5.45-5.73V,400m | | ... | R743 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | IC701 | 1001-001030 | IC-VIDEO SWITCH:TDA6920X,-,SOP,28P,300MI | | ... | R744 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | IC702 | 1001-001030 | IC-VIDEO SWITCH:TDA6920X,-,SOP,28P,300MI | | ... | R745 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | J701 | 2007-000029 | R-CHIP:00OHM,5%,1/10W,DA,TP,2012 | | ... | R746 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | J702 | 2007-000029 | R-CHIP:00OHM,5%,1/10W,DA,TP,2012 | | ... | R748 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
| ... | L701 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R749 | 2007-000029 | R-CHIP:00OHM,5%,1/10W,DA,TP,2012 | |
| ... | L702 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R750 | 2007-000572 | R-CHIP:220OHM,5%,1/10W,DA,TP,2012 | |
| ... | L703 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R751 | 2007-000029 | R-CHIP:00OHM,5%,1/10W,DA,TP,2012 | |
| ... | L704 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R752 | 2007-000572 | R-CHIP:220OHM,5%,1/10W,DA,TP,2012 | |
| ... | L705 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R753 | 2007-000029 | R-CHIP:00OHM,5%,1/10W,DA,TP,2012 | |
| ... | L706 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R754 | 2007-000572 | R-CHIP:220OHM,5%,1/10W,DA,TP,2012 | |
| ... | L707 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R755 | 2007-000029 | R-CHIP:00OHM,5%,1/10W,DA,TP,2012 | |
| ... | L708 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R756 | 2007-000964 | R-CHIP:5.1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | L709 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R757 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | L710 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R758 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
| ... | L719 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R759 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
| ... | L720 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R760 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | |
| ... | L721 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R761 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP,2012 | |
| ... | L722 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R762 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | |
| ... | L723 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R763 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | |
| ... | L724 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R764 | 2007-000221 | R-CHIP:1.2KOHM,5%,1/10W,DA,TP,2012 | |
| ... | L725 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R765 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | |
| ... | L726 | 2702-001094 | INDUCTOR-RADIAL:10uH,10%,6x4mm | | ... | R766 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | |
| ... | PCB | AA41-00076B | PCB-AV TERMINAL:SP43J5HF,FR-4,2L,B,1.6T, | S.N.A | ... | R767 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q701 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R768 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q702 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R769 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q703 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R770 | 2007-000766 | R-CHIP:330OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q704 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R771 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q705 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R772 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q706 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R773 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q707 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R774 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q708 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R775 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q709 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R776 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q710 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R777 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q711 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R778 | 2007-000781 | R-CHIP:330OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q712 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R779 | 2007-001100 | R-CHIP:620OHM,5%,1/10W,DA,TP,2012 | |
| ... | Q713 | 0501-000727 | TR-SMALL SIGNAL:BC848C,NPN,310mW,SOT-23, | | ... | R780 | 2007-001100 | R-CHIP:620OHM,5%,1/10W,DA,TP,2012 | |
| ... | R701 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | | ... | R781 | 2007-001100 | R-CHIP:620OHM,5%,1/10W,DA,TP,2012 | |
| ... | R702 | 2007-000300 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | | ... | R782 | 2007-000300 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R703 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | | ... | R783 | 2007-000300 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R704 | 2007-000511 | R-CHIP:2.4KOHM,5%,1/10W,DA,TP,2012 | | ... | R784 | 2007-000300 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R705 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | | ... | R785 | 2007-000872 | R-CHIP:4.7KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R706 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | | ... | R786 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | |
| ... | R708 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | | ... | R787 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | |
| ... | R709 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | | ... | R788 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R710 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | | ... | R791 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | |
| ... | R711 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | | ... | R792 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | |
| ... | R712 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | | ... | R793 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | |
| ... | R713 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | | ... | R794 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | |
| ... | R714 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | | ... | R795 | 2007-001155 | R-CHIP:7500OHM,5%,1/10W,DA,TP,2012 | |
| ... | R715 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | | ... | R796 | 2007-000282 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R716 | 2007-000300 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | | ... | R797 | 2007-001155 | R-CHIP:7500OHM,5%,1/10W,DA,TP,2012 | |
| ... | R717 | 2007-000401 | R-CHIP:1500OHM,5%,1/10W,DA,TP,2012 | | ... | R798 | 2007-000282 | R-CHIP:100KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R718 | 2007-000300 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | | ... | R799 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R719 | 2007-000468 | R-CHIP:1KOHM,5%,1/10W,DA,TP,2012 | | ... | R800 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
| ... | R720 | 2007-000511 | R-CHIP:2.4KOHM,5%,1/10W,DA,TP,2012 | | ... | R801 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
| ... | R721 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | | ... | R802 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | |
| ... | R722 | 2007-001166 | R-CHIP:750OHM,5%,1/10W,DA,TP,2012 | | ... | R803 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP,2012 | |
| ... | R723 | 2007-000290 | R-CHIP:1000OHM,5%,1/10W,DA,TP,2012 | | ... | R804 | 2007-000328 | R-CHIP:11KOHM,5%,1/10W,DA,TP,2012 | |

| Level | Loc. No. | Code No. | Description ; Specification | Remark | Level | Loc. No. | Code No. | Description ; Specification | Remark |
|-------|----------|-------------|--|--------|-------|----------|-------------|---|--------|
| ... | R805 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | | ... | BMSBMM | AA60-10011A | SCREW-TAPTITE:HH,+,PC,M4,L12,ZPC(BLK),SW | S.N.A |
| ... | R806 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | | ... | | AA61-00152B | BRACKET-MAIN,M,-,7 PROJECTION,SECC,-,-, | |
| ... | R807 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | | ... | | AA61-00153B | BRACKET-MAIN,S,-,7 PROJECTION,SECC,-,-, | |
| ... | R808 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | | ... | ... | AA63-10007C | BAND-PP,-,-,-,W18,-,CLEAR,1G,- | S.N.A |
| ... | R809 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | | ... | ... | AA63-00332A | COVER-MIRROR,WOOD:61J5,PB,T12,-,-,ASSY,- | |
| ... | R810 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | | ... | ... | AA60-10051A | SCREW-WOOD:PH,+,M4,L16,ZPC(BLK),SWRCH18A | S.N.A |
| ... | R811 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | | ... | ... | AA61-00357C | HOLDER-MIRROR,-,PC,J612R,ABS,HB,BLK,L730 | |
| ... | R812 | 2007-000001 | R-CHIP:68KOHM,5%,1/10W,DA,TP,2012 | | ... | ... | AA63-00333A | COVER-MIRROR,WOOD:61J5,PB,T12,-,-,- | |
| ... | R813 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | | ... | ... | AA61-20285A | HOLDER-BOX,-,3456,PPVO,WHT,- | S.N.A |
| ... | R814 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | | ... | ... | AA61-00464G | HOLDER-SCREEN,16T:61J5,ABS,BLK,HB,-,L865 | S.N.A |
| ... | R815 | 2007-000300 | R-CHIP:10KOHM,5%,1/10W,DA,TP,2012 | | ... | ... | AA61-00357B | HOLDER-MIRROR,-,PC,J612R,ABS,HB,BLK,L1170 | S.N.A |
| ... | R816 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP,2012 | | ... | ... | AA60-00034A | SPACER-COVER,DUST:SPONGE,T2,0,-,-,61J5,- | S.N.A |
| ... | R817 | 2007-000615 | R-CHIP:24KOHM,5%,1/10W,DA,TP,2012 | | ... | ... | AA67-70056A | SCREEN-TINT:0.515,61,-,DNP896-985,TINT10 | |
| ... | R818 | 2007-000774 | R-CHIP:33KOHM,5%,1/10W,DA,TP,2012 | | ... | ... | AA67-00022A | SUN-SCREEN,-,61,H/C,A/S,PMMA,T=82%,T2,0 | |
| ... | R819 | 2007-000615 | R-CHIP:24KOHM,5%,1/10W,DA,TP,2012 | | ... | ... | AA67-00020A | MIRROR-BACK:613,GLASS,T3,0,-,-,1160*754* | |
| ... | | 0202-000187 | SOLDER-WIRE FLUX:-,RS60S,D1,2.63Sn/37Pb | S.N.A | ... | ... | AA65-30008A | CLAMP-CORD,PE,HB,BLK,-,-,- | S.N.A |
| ... | | 0202-001004 | SOLDER-CREAM:SO-2030M SZH-1,S63A,D0,04,6 | S.N.A | ... | ... | AA64-31213B | CABINET-BACK-TOP,-,555J,-,HIPS,HB,BLK,-, | |
| ... | | | | | ... | ... | AA64-00501B | CABINET-BACK,BOT,-,524J,NO-F.C.C,HIPS,VO | |
| ... | | | | | ... | ... | AA64-00398B | CABINET-FRONT,WOOD,-,61J5,-,MDF,-,-,T3,- | |

ASSY CABINET BOT

| | | | | |
|-----|---|-------------|---|-------|
| 1 | * | AA91-00167B | ASSY CABINET BOT,-,VO,Jersey SP-200G SAM | |
| ... | | AA60-00066A | SPACER-JERSEY:61J5,Jersey,-,-,-,GRAY,-,- | S.N.A |
| ... | | AA64-00673A | BADGE-BRAND:AL,SAMSUNG,-,L72,-,PJT,- | |
| ... | | AA64-00285B | CABINET-FRONT,B,-,PC,J613R,Jersey SP-200G | |
| ... | | AA61-20295A | HOLDER-PIN,-,SPT555JHD,ABS,HB,BLK,- | S.N.A |

ASSY TERMINAL BOARD

| | | | | |
|-----|---|-------------|--|-------|
| 1 | * | AA91-00158X | ASSY TERMINAL BOARD,-,HIPS,VO,BLK,J51A P | |
| ... | | AA63-00045B | TERMINAL-BOARD,ANT,-,HIPS,-,PC,J533R,- | S.N.A |
| ... | | AA64-00182X | INLAY BACK:SP53J5HF,J51A PAL,PS SHEET,T0 | S.N.A |

ASSY CHASSIS PART

| | | | | |
|-----|--------|-------------|---|-------|
| 1 | * | AA90-00108D | ASSY CHASSIS PART:J51A E2,SP61J5HF | S.N.A |
| ... | CON+HC | 6003-001023 | SCREW-TAPTITE:RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A |
| ... | DF+FBT | 6003-001023 | SCREW-TAPTITE:RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A |
| ... | DF+HC | 6003-001023 | SCREW-TAPTITE:RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A |
| ... | PM+HC | 6003-001023 | SCREW-TAPTITE:RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A |
| ... | TBA+AV | 6003-001026 | SCREW-TAPTITE:RH,+,B,M4,L15,ZPC(BLK),SWR | S.N.A |
| ... | TBA+HC | 6003-001023 | SCREW-TAPTITE:RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A |
| ... | TBA+SC | 6003-001026 | SCREW-TAPTITE:RH,+,B,M4,L15,ZPC(BLK),SWR | S.N.A |
| ... | | AA60-10011A | SCREW-TAPTITE:HH,+,PC,M4,L12,ZPC(BLK),SW | S.N.A |
| ... | | AA61-00051B | HOLDER-CHASSIS,-,PC,J533R,ABS,VO,GRAY,E-2 | S.N.A |

ASSY CABINET

| | | | | |
|-----|--------|-------------|--|-------|
| 1 | * | AA90-00107Y | ASSY CABINET:61J5,SP61J5HF/RAD | S.N.A |
| ... | AC+BCM | AA60-10011A | SCREW-TAPTITE:HH,+,PC,M4,L12,ZPC(BLK),SW | S.N.A |
| ... | ADB+CM | 6005-001003 | SCREW-WOOD:HH,+,M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| ... | BCM+CM | 6006-001090 | SCREW-ASSY TAPP:WWW,HEX,+,M6,L28,0,ZPC(Y | S.N.A |
| ... | CBT+CM | 6005-001003 | SCREW-WOOD:HH,+,M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| ... | CBW+CM | 6005-001003 | SCREW-WOOD:HH,+,M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| ... | CFW+CM | 6005-001003 | SCREW-WOOD:HH,+,M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| ... | CMVW | 6005-001003 | SCREW-WOOD:HH,+,M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| ... | CMW+CM | 6005-001001 | SCREW-WOOD:TH,+,M4,L28,BLK,SWRCH18A | S.N.A |
| ... | CP+CM | 6005-001003 | SCREW-WOOD:HH,+,M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| ... | FP+BF | 6003-001023 | SCREW-TAPTITE:RWH,+,B,M3,L10,ZPC(YEL),SW | S.N.A |
| ... | HC+CBW | 6005-001003 | SCREW-WOOD:HH,+,M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| ... | HC+CM | 6005-001003 | SCREW-WOOD:HH,+,M4,L20,ZPC(BLK),SWRCH18A | S.N.A |
| ... | HS+CM | AA60-00021A | SCREW-WOOD:RH,+,M3,5,L22,ZPC(BLK),SWRCH1 | S.N.A |
| ... | HV+BCM | AA60-10011A | SCREW-TAPTITE:HH,+,PC,M4,L12,ZPC(BLK),SW | S.N.A |
| ... | TBACBW | AA60-10011A | SCREW-TAPTITE:HH,+,PC,M4,L12,ZPC(BLK),SW | S.N.A |
| ... | | AA26-30006E | TRANS-FLYBACK:-,FWZ-50A001B(S),50KV,- | |
| ... | | AA69-30036A | BAG-PE:HDPE,TO,02,2000,1800,-,-,555J, | S.N.A |
| ... | | AA91-00241A | ASSY-BRACKET,MAIN:-,-,SECC T1.6,7.53J5 | |

ASSY-CRT-(B)

| | | | | |
|-----|---|-------------|--|-------|
| 1 | * | AA94-01289A | ASSY-CRT-(B):P16LNM07BMB,+380MG,7,BARE, | |
| ... | | AA61-00057C | HOLDER-CAP,-,7 PROJECTION,PC,-,CLEAR,- | S.N.A |
| ... | | AA39-00018A | LEAD CONNECTOR-ASSY:-,YFH800-01,YRH187RH | S.N.A |
| ... | | AA67-10066A | LENS-ASSY:DELTA 37,-,-,CLEAR A/B,-,-,- | |
| ... | | AA67-10007A | LENS,-,DELTA,CLEAR,PJT,-,77,79,- | |
| ... | | AA91-00103C | ASSY-WIRE,CRT,-,-,7CRT,PROJECTION | S.N.A |
| ... | | AA61-00053B | BRACKET-WIRE,-,PROJECTION,SECC-1,T1.6,-, | S.N.A |
| ... | | AA61-00054B | BRACKET-EARTH,-,PROJECTION,PBS,-,-,-,- | S.N.A |
| ... | | AA61-00055C | BRACKET-CRT,WIRE,-,PJT,SUS304 1/8H,-,-,- | S.N.A |
| ... | | AA26-30006F | TRANS-FLYBACK:-,FWZ-50A001C,55,30KV | |
| ... | | AA63-00061B | SPACER-CAP:EPDM,-,BLK,-,PROJECTION,- | |
| ... | | AA63-00060C | SPACER-CRT:SILICON,-,GRAY,7,PROJECTION, | S.N.A |
| ... | | AA63-00091C | SPACER-CLENS:SILICON,-,GRAY,-,PROJECTION | S.N.A |
| ... | | AA64-00208B | CASE-COUPLER,B,-,PROJECTION,7,ALDC,-,BL | S.N.A |
| ... | | AA27-50005C | DEFLECTION-YOKE:-,DPD-4392AL,43/PJTCRT, | |
| ... | | AA03-10026V | CRT-MONO:-,P16LNM07BMB,-,7INCH,90deg,90 | S.N.A |
| ... | | AA27-60003C | MAGNET-CONVERGENCE:-,JH92LTU-SC-20,29.1m | |
| ... | | AA63-60025A | SPACER-DY:NEOPRENE,-,BLK,VO,54388,- | S.N.A |
| ... | | AA63-00099A | SPACER-FELT:PJT,-,BLK,-,30X30 | S.N.A |
| ... | | AA63-00076A | SPACER-LENS:FELT ,T1,0,BROWN,7CRT,PROJE | S.N.A |
| ... | | AA61-00056B | BRACKET-LENS,-,PROJECTION,SECC,T1.6,-,-, | S.N.A |
| ... | | AA60-10011A | SCREW-TAPTITE:HH,+,PC,M4,L12,ZPC(BLK),SW | S.N.A |

ASSY-CRT-(G)

| | | | | |
|-----|---|-------------|--|-------|
| 1 | * | AA94-01288A | ASSY-CRT-(G):P16LNM07HKA,+380MG,7,BARE, | |
| ... | | AA61-00057C | HOLDER-CAP,-,7 PROJECTION,PC,-,CLEAR,- | S.N.A |
| ... | | AA39-00018A | LEAD CONNECTOR-ASSY:-,YFH800-01,YRH187RH | S.N.A |
| ... | | AA67-10071A | LENS:DELTA 77 79,-,-,GREEN,C ELEMENT, | |
| ... | | AA67-10066A | LENS-ASSY:DELTA 37,-,-,CLEAR A/B,-,-,- | |
| ... | | AA91-00103C | ASSY-WIRE,CRT,-,-,7CRT,PROJECTION | S.N.A |
| ... | | AA61-00053B | BRACKET-WIRE,-,PROJECTION,SECC-1,T1.6,-, | S.N.A |
| ... | | AA61-00054B | BRACKET-EARTH,-,PROJECTION,PBS,-,-,-,- | S.N.A |
| ... | | AA61-00055C | BRACKET-CRT,WIRE,-,PJT,SUS304 1/8H,-,-,- | S.N.A |
| ... | | AA26-30006F | TRANS-FLYBACK:-,FWZ-50A001C,55,30KV | |
| ... | | AA63-00061B | SPACER-CAP:EPDM,-,BLK,-,PROJECTION,- | |
| ... | | AA63-00060C | SPACER-CRT:SILICON,-,GRAY,7,PROJECTION, | S.N.A |
| ... | | AA63-00091C | SPACER-CLENS:SILICON,-,GRAY,-,PROJECTION | S.N.A |
| ... | | AA64-00207B | CASE-COUPLER,G,-,PROJECTION,7,ALDC8,-,B | S.N.A |
| ... | | AA27-50005C | DEFLECTION-YOKE:-,DPD-4392AL,43/PJTCRT, | |
| ... | | AA03-10026V | CRT-MONO:-,P16LNM07HKA,-,7INCH,90deg,90 | S.N.A |
| ... | | AA27-00003B | MAGNET-CONVERGENCE:-,JH92LTU-029,29.1MM | |
| ... | | AA63-60025A | SPACER-DY:NEOPRENE,-,BLK,VO,54388,- | S.N.A |
| ... | | AA63-00099A | SPACER-FELT:PJT,-,BLK,-,30X30 | S.N.A |
| ... | | AA63-00076A | SPACER-LENS:FELT ,T1,0,BROWN,7CRT,PROJE | S.N.A |
| ... | | AA61-00056B | BRACKET-LENS,-,PROJECTION,SECC,T1.6,-,-, | S.N.A |
| ... | | AA60-10011A | SCREW-TAPTITE:HH,+,PC,M4,L12,ZPC(BLK),SW | S.N.A |

Electrical Parts List

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|---------------------|----------|-------------|--|--------|
| ASSY-CRT-(R) | | | | |
| 1 | * | AA94-01287A | ASSY-CRT-(R);P16LNM07RJA,+380MG,7,BARE, | |
| ..2 | | AA61-00057C | HOLDER-CAP;-7 PROJECTION,PC,-,CLEAR,- | S.N.A |
| ..2 | | AA67-10008A | LENS;-DELTA,RED,PJT,-,77,79,- | |
| ..2 | | AA39-00018A | LEAD CONNECTOR-ASSY;-YFH800-01,YRH187RH | S.N.A |
| ..2 | | AA67-10066A | LENS-ASSY,DELTA 37,-,CLEAR A/B,-,-,- | |
| ..2 | | AA91-00103C | ASSY-WIRE,CRT;-,-,7CRT,PROJECTION | S.N.A |
| ...3 | | AA61-00053B | BRACKET-WIRE;-PROJECTION,SECC-1,T1.6,-, | S.N.A |
| ...3 | | AA61-00054B | BRACKET-EARTH;-PROJECTION,PBS,-,-,- | S.N.A |
| ...3 | | AA61-00055C | BRACKET-CRT,WIRE;-PJT,SUS304 1/8H,-,-,- | S.N.A |
| △ | ..2 | AA26-30006F | TRANS-FLYBACK;-FWZ-50A001C,55,30KV | |
| ..2 | | AA63-00061B | SPACER-CAP;EPDM,-,BLK,-,PROJECTION,- | |
| ..2 | | AA63-00060C | SPACER-CRT,SILICON,-,GRAY,7,PROJECTION, | S.N.A |
| ..2 | | AA63-00091C | SPACER-CLENS,SILICON,-,GRAY,-,PROJECTION | S.N.A |
| ..2 | | AA64-00206B | CASE-COUPLER,R;-PROJECTION,-,ALDC8,-,BL | S.N.A |
| △ | ..2 | AA27-50005C | DEFLECTION-YOKE;-DPD-4392AL,43/PJTCRT, | |
| △ | ..2 | AA03-10026U | CRT-MONO;-P16LNM07RJA,-,7INCH,90deg,90 | |
| ..2 | | AA27-00003B | MAGNET-CONVERGENCE;-JH92LT-029,29.1MM | |
| ..2 | | AA63-60025A | SPACER-DY,NEOPRENE,-,BLK,VO,S4388,- | S.N.A |
| ..2 | | AA63-00099A | SPACER-FELT,PJT,-,BLK,-,30X30 | S.N.A |
| ..2 | | AA63-00076A | SPACER-LENS,FELT ,T1.0,BROWN,7CRT,PROJE | S.N.A |
| ..2 | | AA61-00056B | BRACKET-LENS;-PROJECTION,SECC,T1.6,-,- | S.N.A |
| ..2 | | AA60-10011A | SCREW-TAPTITE;HH,+PC,M4,L12,ZPC(BLK),SV | S.N.A |

ASSY-CABINET,MID

| | | | | |
|-----|--------|-------------|--|-------|
| 1 | * | AA91-00439C | ASSY-CABINET,MID;-WOOD,KBM21-58 NO-FERR | |
| ..2 | BF+CM | AA60-10051A | SCREW-WOOD;PH,+M4,L16,ZPC(BLK),SWRCH18A | S.N.A |
| ..2 | CABMID | AA63-00105A | SPACER-FELT;FELT,T2.0,BLK,32X87B,PCJ613R | S.N.A |
| ..2 | CABMID | AA61-00097A | HOLDER-WIRE;-,-,NYLON 6/6,-,NTR,- | S.N.A |
| ..2 | CABMID | AA60-10050X | SCREW-WOOD;FH,+M3.5,L32,ZPC(YEL),SWRCH1 | S.N.A |
| ..2 | CABMID | AA66-40010A | ROLLER-PAPER;PAPER,OD50,L80,T3,-,SPT-521 | S.N.A |
| ..2 | CABMID | AA63-00105B | SPACER-FELT;FELT,T2.0,BLK,32X1211,PCJ613 | S.N.A |
| ..2 | CABMID | 3001-000176 | SPEAKER;30W,8ohm,93dB,65Hz | |
| ..2 | CABMID | 3001-000153 | SPEAKER;20W,8ohm,93dB,1.3KHz | |
| ..2 | CAS+CM | AA60-10051A | SCREW-WOOD;PH,+M4,L16,ZPC(BLK),SWRCH18A | S.N.A |
| ..2 | SPK | AA39-00042C | LEAD CONNECTOR-ASSY;-,-,1.75uF,-,-,RE | |
| ..2 | SPK+CM | AA60-10051A | SCREW-WOOD;PH,+M4,L16,ZPC(BLK),SWRCH18A | S.N.A |
| ..2 | | AA63-00066C | SPACER-DUAL,LOCK:#250,-,-,11X20,-,- | S.N.A |
| ..2 | | AA63-00193B | COVER-AIRVENT;-533R,-,HIPS,VO,BLK,-,- | S.N.A |
| ..2 | | AA63-60126A | SPACER-FELT;FELT,T2,BLK,1160X15,PRJ43,5 | S.N.A |
| ..2 | | AA63-60126D | SPACER-FELT;FELT,T2,-,400X15,PRJ61,- | S.N.A |
| ..2 | | AA64-00740C | CABINET-LEG,FRONT;-61J5,SV-704P,HIPS,HB | |
| ..2 | | AA64-01272B | CABINET MIDDLE;61J5,KBM21-58 ,WOOD,-,- | |
| ..2 | | AA39-20505P | LEAD CONNECTOR-ASSY;-YSH025-04,REC,4P,1 | |
| ..2 | | AA61-00094B | HOLDER-RAIL;-PCJ533R,ABS,HB,BLK,240 | S.N.A |
| ..2 | | AA61-00094C | HOLDER-RAIL;-PCJ533R,ABS,HB,BLK,480 | S.N.A |
| ..2 | | AA61-00458B | CASTER;-,-,TP4020-05 PLY,OH56,-,-,SR4 | S.N.A |
| ..2 | | AA61-00464E | HOLDER-SCREEN,16T;61J5,ABS,BLK,HB,-,L117 | S.N.A |
| ..2 | | AA61-00464F | HOLDER-SCREEN,16T;61J5,ABS,BLK,HB,-,L865 | S.N.A |
| ..2 | | AA61-10247A | BRACKET-FOCUS;-S46DS,SECC,T1.0,-,-,- | S.N.A |
| ..2 | | AA61-10387A | BRACKET-GRILLE;-SVP-462J,SECC-1,TO.5,-, | S.N.A |
| ..2 | | AA61-20136A | HOLDER-MASK,PIN;-S4388,NYLON,-,BLK,#066 | S.N.A |

ASSY CABINET MASK

| | | | | |
|------|---|-------------|--|-------|
| 1 | * | AA91-00396F | ASSY CABINET MASK;-HB,BLK,S704+B702 TAN | |
| ..2 | | AA64-01165C | CABINET-MASK,SIDE;61J5,S704+B702,ABS,HB, | |
| ...3 | | AA64-01165A | CABINET-MASK,SIDE;61J5,L941 APCHUL,ABS,H | S.N.A |
| ..2 | | AA64-01162J | CABINET-MASK,TOP;61J5HF,S704+B702 TANTUS | S.N.A |
| ...3 | | AA64-01162A | CABINET-MASK;61J5,L1251 APCHUL,ABS,HB,BL | S.N.A |
| ..2 | | AA64-01162G | CABINET-MASK,BOT;61J5HF,S704+B702 DOLBY, | S.N.A |
| ...3 | | AA64-01162A | CABINET-MASK;61J5,L1251 APCHUL,ABS,HB,BL | S.N.A |
| ..2 | | AA63-00063A | SPACER-DUAL,LOCK:#400,-,-,19X19,SVP-614J | S.N.A |
| ..2 | | AA61-00441B | HOLDER-CORNER;E2 ALL,ABS,BLK,HB,-,S704+B | S.N.A |

| Level | Loc. No. | Code No. | Description ; Specification | Remark |
|------------------------|----------|-------------|--|--------|
| ASSY POWER CORD | | | | |
| 1 | * | AA96-20115F | ASSY POWER CORD;-AP2/YES,H/C50mm,KJP170 | |
| ..2 | | 3811-000401 | WIRE-PVC CU;BCWA,300V,ROLL,17/0.16mm,#22 | S.N.A |
| △ | ..2 | AA39-10005N | POWER-CORD;-KKP-560A,KLCE-2F,2.59,3PAU | S.N.A |
| ..2 | | AA61-20284A | HOLDER;-P-CORD,PPVO,BLK,KE-002 | S.N.A |

ASSY ACCESSORY

| | | | | |
|-----|---|-------------|--|-------|
| 1 | * | AA94-02563A | ASSY ACCESSORY;SP53J5HFX/RAD,J51A,NEWZEA | S.N.A |
| ..2 | | AA69-30009C | BAG-SHEET;LDPE,TO.08,W150,L120,-,-,- | S.N.A |
| ..2 | | AA68-00856A | MANUAL USERS;J51A,W/P100(G),44PB5,1,ENG | S.N.A |
| ..2 | | AA68-00711A | CARD WARRANTY;ALL,W/P100G,-,-,-,-,- | S.N.A |
| ..2 | | AA61-20126A | HOLDER-LEG;-,-,ABS,HB,BLK,- | S.N.A |
| ..2 | | AA39-40001B | CABLE-RCA;-RCA,1500mm,0.12/10,RED/WHIT/Y | |

REMOCON

| | | | | |
|---|---|-------------|---------------------------------------|--|
| 1 | * | AA59-00100A | REMOCON;-TM57,KS88P0416S,53,L/GRAY,S/ | |
|---|---|-------------|---------------------------------------|--|

MEMO



ELECTRONICS