



Internal Use Only

website: <http://biz.LGservice.com>

# LCD TV

# SERVICE MANUAL

CHASSIS : LB81A

**MODEL : 42LG50FD    42LG50FD-AD**

## CAUTION

BEFORE SERVICING THE CHASSIS,  
READ THE SAFETY PRECAUTIONS IN THIS MANUAL.



# CONTENTS

|                                     |           |
|-------------------------------------|-----------|
| <b>CONTENTS .....</b>               | <b>2</b>  |
| <b>PRODUCT SAFETY .....</b>         | <b>3</b>  |
| <b>SPECIFICATION .....</b>          | <b>6</b>  |
| <b>ADJUSTMENT INSTRUCTION .....</b> | <b>9</b>  |
| <b>TROUBLE SHOOTING .....</b>       | <b>15</b> |
| <b>BLOCK DIAGRAM.....</b>           | <b>19</b> |
| <b>EXPLODED VIEW .....</b>          | <b>21</b> |
| <b>SVC. SHEET .....</b>             |           |

# SAFETY PRECAUTIONS

## IMPORTANT SAFETY NOTICE

Many electrical and mechanical parts in this chassis have special safety-related characteristics. These parts are identified by  $\triangle$  in the Schematic Diagram and Replacement Parts List.

It is essential that these special safety parts should be replaced with the same components as recommended in this manual to prevent Shock, Fire, or other Hazards.

Do not modify the original design without permission of manufacturer.

### General Guidance

An **isolation Transformer should always be used** during the servicing of a receiver whose chassis is not isolated from the AC power line. Use a transformer of adequate power rating as this protects the technician from accidents resulting in personal injury from electrical shocks.

It will also protect the receiver and its components from being damaged by accidental shorts of the circuitry that may be inadvertently introduced during the service operation.

If any fuse (or Fusible Resistor) in this TV receiver is blown, replace it with the specified.

When replacing a high wattage resistor (Oxide Metal Film Resistor, over 1W), keep the resistor 10mm away from PCB.

Keep wires away from high voltage or high temperature parts.

### Before returning the receiver to the customer,

always perform an **AC leakage current check** on the exposed metallic parts of the cabinet, such as antennas, terminals, etc., to be sure the set is safe to operate without damage of electrical shock.

### Leakage Current Cold Check(Antenna Cold Check)

With the instrument AC plug removed from AC source, connect an electrical jumper across the two AC plug prongs. Place the AC switch in the on position, connect one lead of ohm-meter to the AC plug prongs tied together and touch other ohm-meter lead in turn to each exposed metallic parts such as antenna terminals, phone jacks, etc.

If the exposed metallic part has a return path to the chassis, the measured resistance should be between  $1M\Omega$  and  $5.2M\Omega$ .

When the exposed metal has no return path to the chassis the reading must be infinite.

An other abnormality exists that must be corrected before the receiver is returned to the customer.

### Leakage Current Hot Check (See below Figure)

Plug the AC cord directly into the AC outlet.

### Do not use a line Isolation Transformer during this check.


Connect 1.5K/10watt resistor in parallel with a 0.15uF capacitor between a known good earth ground (Water Pipe, Conduit, etc.) and the exposed metallic parts.

Measure the AC voltage across the resistor using AC voltmeter with 1000 ohms/volt or more sensitivity.

Reverse plug the AC cord into the AC outlet and repeat AC voltage measurements for each exposed metallic part. Any voltage measured must not exceed 0.75 volt RMS which corresponds to 0.5mA.

In case any measurement is out of the limits specified, there is possibility of shock hazard and the set must be checked and repaired before it is returned to the customer.

### Leakage Current Hot Check circuit

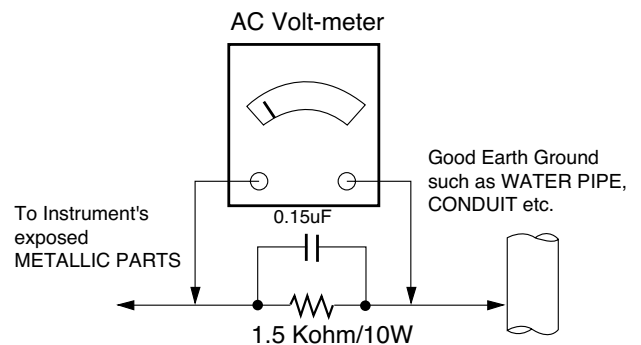

# SERVICING PRECAUTIONS

**CAUTION:** Before servicing receivers covered by this service manual and its supplements and addenda, read and follow the SAFETY PRECAUTIONS on page 3 of this publication.

**NOTE:** If unforeseen circumstances create conflict between the following servicing precautions and any of the safety precautions on page 3 of this publication, always follow the safety precautions. Remember: Safety First.

## General Servicing Precautions

1. Always unplug the receiver AC power cord from the AC power source before;
  - a. Removing or reinstalling any component, circuit board module or any other receiver assembly.
  - b. Disconnecting or reconnecting any receiver electrical plug or other electrical connection.
  - c. Connecting a test substitute in parallel with an electrolytic capacitor in the receiver.**CAUTION:** A wrong part substitution or incorrect polarity installation of electrolytic capacitors may result in an explosion hazard.

2. Test high voltage only by measuring it with an appropriate high voltage meter or other voltage measuring device (DVM, FETVOM, etc) equipped with a suitable high voltage probe. Do not test high voltage by "drawing an arc".
3. Do not spray chemicals on or near this receiver or any of its assemblies.
4. Unless specified otherwise in this service manual, clean electrical contacts only by applying the following mixture to the contacts with a pipe cleaner, cotton-tipped stick or comparable non-abrasive applicator; 10% (by volume) Acetone and 90% (by volume) isopropyl alcohol (90%-99% strength)  
**CAUTION:** This is a flammable mixture.  
Unless specified otherwise in this service manual, lubrication of contacts is not required.
5. Do not defeat any plug/socket B+ voltage interlocks with which receivers covered by this service manual might be equipped.
6. Do not apply AC power to this instrument and/or any of its electrical assemblies unless all solid-state device heat sinks are correctly installed.
7. Always connect the test receiver ground lead to the receiver chassis ground before connecting the test receiver positive lead.  
Always remove the test receiver ground lead last.
8. Use with this receiver only the test fixtures specified in this service manual.  
**CAUTION:** Do not connect the test fixture ground strap to any heat sink in this receiver.

## Electrostatically Sensitive (ES) Devices

Some semiconductor (solid-state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by static by static electricity.

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any electrostatic charge on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging wrist strap device, which should be removed to prevent potential shock reasons prior to applying power to the

unit under test.

2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static type solder removal device. Some solder removal devices not classified as "anti-static" can generate electrical charges sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.  
**CAUTION:** Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.
8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity sufficient to damage an ES device.)

## General Soldering Guidelines

1. Use a grounded-tip, low-wattage soldering iron and appropriate tip size and shape that will maintain tip temperature within the range or 500°F to 600°F.
2. Use an appropriate gauge of RMA resin-core solder composed of 60 parts tin/40 parts lead.
3. Keep the soldering iron tip clean and well tinned.
4. Thoroughly clean the surfaces to be soldered. Use a mall wire-bristle (0.5 inch, or 1.25cm) brush with a metal handle. Do not use freon-propelled spray-on cleaners.
5. Use the following unsoldering technique
  - a. Allow the soldering iron tip to reach normal temperature. (500°F to 600°F)
  - b. Heat the component lead until the solder melts.
  - c. Quickly draw the melted solder with an anti-static, suction-type solder removal device or with solder braid.  
**CAUTION:** Work quickly to avoid overheating the circuit board printed foil.
6. Use the following soldering technique.
  - a. Allow the soldering iron tip to reach a normal temperature (500°F to 600°F)
  - b. First, hold the soldering iron tip and solder the strand against the component lead until the solder melts.
  - c. Quickly move the soldering iron tip to the junction of the component lead and the printed circuit foil, and hold it there only until the solder flows onto and around both the component lead and the foil.  
**CAUTION:** Work quickly to avoid overheating the circuit board printed foil.
  - d. Closely inspect the solder area and remove any excess or splashed solder with a small wire-bristle brush.

## IC Remove/Replacement

Some chassis circuit boards have slotted holes (oblong) through which the IC leads are inserted and then bent flat against the circuit foil. When holes are the slotted type, the following technique should be used to remove and replace the IC. When working with boards using the familiar round hole, use the standard technique as outlined in paragraphs 5 and 6 above.

### Removal

1. Desolder and straighten each IC lead in one operation by gently prying up on the lead with the soldering iron tip as the solder melts.
2. Draw away the melted solder with an anti-static suction-type solder removal device (or with solder braid) before removing the IC.

### Replacement

1. Carefully insert the replacement IC in the circuit board.
2. Carefully bend each IC lead against the circuit foil pad and solder it.
3. Clean the soldered areas with a small wire-bristle brush.  
(It is not necessary to reapply acrylic coating to the areas).

## "Small-Signal" Discrete Transistor

### Removal/Replacement

1. Remove the defective transistor by clipping its leads as close as possible to the component body.
2. Bend into a "U" shape the end of each of three leads remaining on the circuit board.
3. Bend into a "U" shape the replacement transistor leads.
4. Connect the replacement transistor leads to the corresponding leads extending from the circuit board and crimp the "U" with long nose pliers to insure metal to metal contact then solder each connection.

## Power Output, Transistor Device

### Removal/Replacement

1. Heat and remove all solder from around the transistor leads.
2. Remove the heat sink mounting screw (if so equipped).
3. Carefully remove the transistor from the heat sink of the circuit board.
4. Insert new transistor in the circuit board.
5. Solder each transistor lead, and clip off excess lead.
6. Replace heat sink.

## Diode Removal/Replacement

1. Remove defective diode by clipping its leads as close as possible to diode body.
2. Bend the two remaining leads perpendicular y to the circuit board.
3. Observing diode polarity, wrap each lead of the new diode around the corresponding lead on the circuit board.
4. Securely crimp each connection and solder it.
5. Inspect (on the circuit board copper side) the solder joints of the two "original" leads. If they are not shiny, reheat them and if necessary, apply additional solder.

## Fuse and Conventional Resistor

### Removal/Replacement

1. Clip each fuse or resistor lead at top of the circuit board hollow stake.
2. Securely crimp the leads of replacement component around notch at stake top.
3. Solder the connections.

**CAUTION:** Maintain original spacing between the replaced component and adjacent components and the circuit board to prevent excessive component temperatures.

## Circuit Board Foil Repair

Excessive heat applied to the copper foil of any printed circuit board will weaken the adhesive that bonds the foil to the circuit board causing the foil to separate from or "lift-off" the board. The following guidelines and procedures should be followed whenever this condition is encountered.

### At IC Connections

To repair a defective copper pattern at IC connections use the following procedure to install a jumper wire on the copper pattern side of the circuit board. (Use this technique only on IC connections).

1. Carefully remove the damaged copper pattern with a sharp knife. (Remove only as much copper as absolutely necessary).
2. Carefully scratch away the solder resist and acrylic coating (if used) from the end of the remaining copper pattern.
3. Bend a small "U" in one end of a small gauge jumper wire and carefully crimp it around the IC pin. Solder the IC connection.
4. Route the jumper wire along the path of the out-away copper pattern and let it overlap the previously scraped end of the good copper pattern. Solder the overlapped area and clip off any excess jumper wire.

### At Other Connections

Use the following technique to repair the defective copper pattern at connections other than IC Pins. This technique involves the installation of a jumper wire on the component side of the circuit board.

1. Remove the defective copper pattern with a sharp knife.  
Remove at least 1/4 inch of copper, to ensure that a hazardous condition will not exist if the jumper wire opens.
2. Trace along the copper pattern from both sides of the pattern break and locate the nearest component that is directly connected to the affected copper pattern.
3. Connect insulated 20-gauge jumper wire from the lead of the nearest component on one side of the pattern break to the lead of the nearest component on the other side.  
Carefully crimp and solder the connections.

**CAUTION:** Be sure the insulated jumper wire is dressed so the it does not touch components or sharp edges.

# SPECIFICATION

NOTE : Specifications and others are subject to change without notice for improvement.

## 1. Application range

This specification is applied to the LCD TV used LB81A chassis.

## 2. Requirement for Test

Each part is tested as below without special appointment.

- 1) Temperature :  $25\pm5^{\circ}\text{C}$  ( $77\pm9^{\circ}\text{F}$ ), CST :  $40\pm5^{\circ}\text{C}$
- 2) Relative Humidity :  $65\pm10\%$
- 3) Power Voltage : Standard input voltage(100-240V~, 50/60Hz)  
\* Standard Voltage of each products is marked by models.
- 4) Specification and performance of each parts are followed each drawing and specification by part number in accordance with BOM.
- 5) The receiver must be operated for about 5 minutes prior to the adjustment.

## 3. Test method

- 1) Performance: LGE TV test method followed
- 2) Demanded other specification
  - Safety: CE, IEC specification
  - EMC: CE, IEC

| Model       | Market    | Appliance                                              |
|-------------|-----------|--------------------------------------------------------|
| 42LG50FD-AD | Australia | Safety : IEC60065<br>EN60065<br>EMC : CISPR 13 Class B |

## 4. General specification

| Item                  | Specification                                                                          | Remark            |
|-----------------------|----------------------------------------------------------------------------------------|-------------------|
| Broadcasting system   | PAL-BG, DTV : DVB-T                                                                    |                   |
| Available Channel     | 1) VHF : 00 ~ 12<br>2) UHF : 20 ~ 75<br>3) CATV : 02 ~ 44<br>4) DTV : 06 ~ 12, 27 ~ 69 |                   |
| Tuner IF              | 1) PAL : 38.90MHz(Picture),<br>34.40MHz(Sound)<br>2) DVB-T : 36.125MHz                 |                   |
| Input Voltage         | 100 - 240V~, 50/60Hz                                                                   | Mark : 240V, 50Hz |
| Screen Size           | 42 inch Wide (1366 x 768)                                                              |                   |
| Aspect Ratio          | 16:9                                                                                   |                   |
| Module                | LC420WUN-SAB1                                                                          |                   |
| Operating Environment | 1) Temp : 0 ~ 40 deg<br>2) Humidity : ~ 80 %                                           | LGE Spec          |
| Storage Environment   | 1) Temp : -20 ~ 60 deg<br>2) Humidity : ~ 85 %                                         |                   |

## 5. Component Video Input (Y, Pb, Pr)

| No | Specification |             |            | Remark         |
|----|---------------|-------------|------------|----------------|
|    | Resolution    | H-freq(kHz) | V-freq(Hz) |                |
| 1  | 720x480       | 15.73       | 59.94      | SDTV, DVD 480i |
| 2  | 720x480       | 15.75       | 60         | SDTV, DVD 480i |
| 3  | 720x480       | 31.47       | 59.94      | SDTV 480p      |
| 4  | 720X480       | 31.5        | 60         | SDTV 480p      |
| 5  | 720x576       | 15.625      | 50         | SDTV, DVD 576i |
| 6  | 720x576       | 31.25       | 50         | SDTV 576p      |
| 7  | 1280x720      | 44.96       | 59.94      | HDTV 720p      |
| 8  | 1280x720      | 45          | 60.36      | HDTV 720p      |
| 9  | 1280x720      | 37.5        | 50         | HDTV 720p      |
| 10 | 1920x1080     | 28.125      | 50         | HDTV 1080i     |
| 11 | 1920x1080     | 33.75       | 60         | HDTV 1080i     |
| 12 | 1920x1080     | 33.72       | 59.94      | HDTV 1080i     |
| 13 | 1920x1080     | 56.25       | 50         | HDTV 1080p     |
| 14 | 1920x1080     | 67.433      | 59.94      | HDTV 1080p     |
| 15 | 1920x1080     | 67.5        | 60         | HDTV 1080p     |

## 6. RGB PC INPUT Mode

| No | Resolution | H-freq(kHz) | V-freq.(Hz) | Pixel clock(MHz) | Proposed  | Remark                                                       |
|----|------------|-------------|-------------|------------------|-----------|--------------------------------------------------------------|
| 1  | 720*400    | 31.468      | 70.08       | 28.321           |           |                                                              |
| 2  | 640*480    | 31.469      | 59.94       | 25.17            | VESA      | Input 848*480 60Hz, 852*480 60Hz<br>--> 640*480 60Hz Display |
|    |            | 37.684      | 75.00       | 31.50            |           |                                                              |
| 3  | 800*600    | 37.879      | 60.31       | 40.00            | VESA      |                                                              |
|    |            | 46.875      | 75.00       | 49.50            |           |                                                              |
| 4  | 1024*768   | 48.363      | 60.00       | 65.00            | VESA(XGA) |                                                              |
|    |            | 56.470      | 70.00       | 75.00            |           |                                                              |
| 5  | 1280*768   | 47.78       | 59.87       | 79.5             | WXGA      |                                                              |
| 6  | 1360*768   | 47.72       | 59.8        | 84.75            | WXGA      |                                                              |
| 7  | 1366*768   | 47.56       | 59.6        | 84.75            | WXGA      |                                                              |
| 8  | 1280*1024  | 63.595      | 60.0        | 108.875          | SXGA      | FHD Model only                                               |
| 9  | 1920*1080  | 66.647      | 59.988      | 138.625          | WUXGA     | FHD Model only                                               |

## 7. HDMI Input (PC/DTV)

| No         | Resolution | H-freq(kHz)      | V-freq.(Hz)    | Pixel clock(MHz) | Proposed        | Remark               |
|------------|------------|------------------|----------------|------------------|-----------------|----------------------|
| <b>PC</b>  |            |                  |                |                  |                 |                      |
| 1          | 720*400    | 31.468           | 70.08          | 28.321           |                 | HDCP                 |
| 2          | 640*480    | 31.469<br>37.684 | 59.94<br>75.00 | 25.17<br>31.50   | VESA            | HDCP                 |
| 3          | 800*600    | 37.879<br>46.875 | 60.31<br>75.00 | 40.00<br>49.50   | VESA            | HDCP                 |
| 4          | 1024*768   | 48.363<br>56.470 | 60.00<br>70.00 | 65.00<br>75.00   | VESA(XGA)       | HDCP                 |
| 5          | 1280*768   | 47.78            | 59.87          | 79.5             | WXGA            | HDCP                 |
| 6          | 1360*768   | 47.72            | 59.8           | 84.75            | WXGA            | HDCP                 |
| 7          | 1366*768   | 47.56            | 59.6           | 84.75            | WXGA            | HDCP                 |
| 8          | 1280*1024  | 63.595           | 60.0           | 108.875          | SXGA            | FHD Model only, HDCP |
| 9          | 1920*1080  | 66.647           | 59.988         | 138.625          | WUXGA           | FHD Model only, HDCP |
| <b>DTV</b> |            |                  |                |                  |                 |                      |
| 1          | 720*480    | 31.47            | 59.94          | 27.00            | SDTV 480P(4:3)  |                      |
| 2          | 720*480    | 31.50            | 60             | 27.027           | SDTV 480P(4:3)  |                      |
| 3          | 640*480    | 31.469           | 59.94          | 25.175           | SDTV 480P(4:3)  |                      |
| 4          | 640*480    | 31.469           | 60.00          | 25.20            | SDTV 480P(4:3)  |                      |
| 5          | 720*480    | 31.47            | 59.94          | 27.000           | SDTV 480P(16:9) |                      |
| 6          | 720*480    | 31.50            | 60.00          | 27.027           | SDTV 480P(16:9) |                      |
| 7          | 720*576    | 31.25            | 50.00          | 27.000           | SDTV 576P       |                      |
| 8          | 1280*720   | 37.50            | 50.00          | 74.176           | HDTV 720P       | HDCP                 |
| 9          | 1280*720   | 44.96            | 59.94          | 74.176           | HDTV 720P       | HDCP                 |
| 10         | 1280*720   | 45.00            | 60.00          | 74.250           | HDTV 720P       |                      |
| 11         | 1920*1080  | 33.72            | 59.94          | 74.176           | HDTV 1080I      | HDCP                 |
| 12         | 1920*1080  | 33.75            | 60.00          | 74.250           | HDTV 1080I      | HDCP                 |
| 13         | 1920*1080  | 28.125           | 50.00          | 74.250           | HDTV 1080I 50Hz | HDCP                 |
| 14         | 1920*1080  | 27.000           | 24.00          | 74.250           | HDTV 1080P 24Hz | HDCP                 |
| 15         | 1920*1080  | 56.250           | 50             | 148.500          | HDTV 1080P 50Hz | HDCP                 |
| 16         | 1920*1080  | 67.433           | 59.94          | 148.352          | HDTV 1080P      | HDCP                 |
| 17         | 1920*1080  | 67.500           | 60             | 148.500          | HDTV 1080P      | HDCP                 |



# ADJUSTMENT INSTRUCTION

## 1. Application Range

This specification sheet is applied to all of the LCD TV with LB81A chassis.

## 2. Designation


- 1) The adjustment is according to the order which is designated and which must be followed, according to the plan which can be changed only on agreeing.
- 2) Power Adjustment: Free Voltage
- 3) Magnetic Field Condition: Nil.
- 4) Input signal Unit: Product Specification Standard
- 5) Reserve after operation: Above 5 Minutes (Heat Run)  
Temperature : at 25±5°C  
Relative humidity : 65±10%  
Input voltage : 220V, 60Hz
- 6) Adjustment equipments: Color Analyzer (CA-210 or CA-110), Pattern Generator (MSPG-925L or Equivalent), DDC Adjustment Jig equipment, SVC remote controller
- 7) Don't push The "IN STOP KEY" after completing the function inspection.

## 3. Main PCB check process


\* APC - After Manual-Insult, executing APC

### \* Download


- 1) Execute ISP program "Mstar ISP Utility" and then click "Config" tab.
- 2) Set as below, and then click "Auto Detect" and check "OK" message. If display "Error", Check connect computer, jig, and set.
- 3) Click "Connect" tab.  
If display "Can't", Check connect computer, jig, and set.

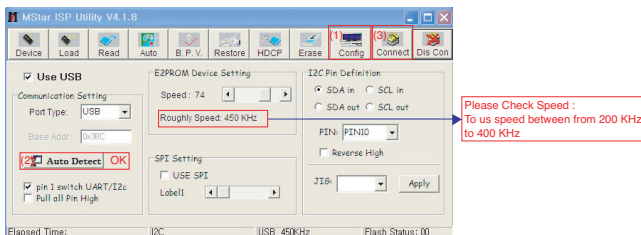

- 4) Click "Read" tab, and then load download file(XXXX.bin) by clicking "Read".

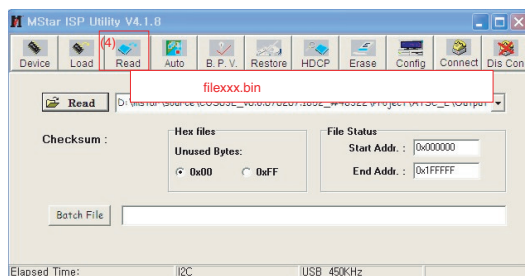


5. Click "Auto" tab and set as below
6. Click "Run".
7. After downloading, check "OK" message.

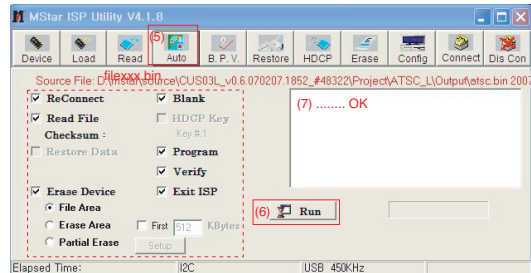


### \* USB DOWNLOAD


- 1) Put the USB Stick to the USB socket




- 2) Automatically detecting update file in USB Stick  
- If your downloaded program version in USB Stick is Low, it didn't work. But your downloaded version is High, USB data is automatically detecting
- 3) Show the message "Copying files from memory"



- 4) Updating is starting.



- 5) Fishing the version uploading, you have to put USB stick and "AC Power" off.



- 6) After putting "AC Power" on and check updated version on your TV.

**\* After downloading, have to adjust Tool Option again.**


- 1) Push "IN-START" key in service remote controller
- 2) Select "MODEL SELECT" and Push "OK" button.
- 3) Go To "INCH" and choice proper inch.
- 4) TV power turn off and on.
- 5) Completed selecting Tool option

### 3.1. ADC Process

#### (1) PC input ADC

- 1) Auto RGB Gain/Offset Adjustment
  - Convert to PC in Input-source
  - Signal equipment displays

Output Voltage : 700 mVp-p  
 Impress Resolution XGA (1024 x 768 @ 60Hz)  
 Model : 60 in Pattern Generator  
 Pattern : 65 in Pattern Generator (MSPG-925 Series, MSPG-1025D) - 7 color bar.  
 [gray pattern that left & right is black and center is white signal(Refer below picture)]




<Fig. 1> Adjustment pattern(PC)

- Adjust by commanding AUTO\_COLOR\_ADJUST.

- 2) Confirmation

- We confirm whether "0xAA (RGB)" address of EEPROM "0xA2" is "0xAA" or not.
- If "0xAA (RGB)" address of EEPROM "0xA2" isn't "0xAA", we adjust once more
- We can confirm the ADC values from "0xA4~0XA9 (RGB)" addresses in a page "0xA2"

\* Manual ADC process using Service Remocon. After enter Service Mode by pushing "ADJ" key, execute "ADC Adjust" by pushing "▶" key at "ADC CALIBRATION: RGB-PC".

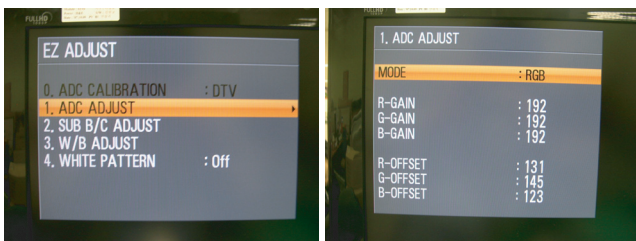

#### (2) COMPONENT input ADC

- 1) Component Gain/Offset Adjustment
  - Convert to Component in Input-source
  - Signal equipment displays

Impress Resolution 480i  
 MODEL : 209 in Pattern Generator(480i Mode)  
 Pattern : 65 in Pattern Generator (MSPG-925 Series, MSPG-1025D) - 7 color bar.

Impress Resolution 1080i

Model : 223 in Pattern Generator(1080i Mode)  
 Pattern: 65 in Pattern Generator (MSPG-925 Series, MSPG-1025D) - 7 color bar.


- Adjust by commanding AUTO\_COLOR\_ADJUST.

- 2) Confirmation


- We confirm whether "0xB3 (480i)/0xBC (1080i)" address of EEPROM "0xA2" is "0xAA" or not.
- If "0xB3 (480i)/0xBC(1080i)" address of EEPROM "0xA2" isn't "0xAA", we adjust once more.
- We can confirm the ADC values from "0xAD~0XB2 (480i)/0XB6~BB (1080i)" addresses in a page "0xA2".

\* Manual ADC process using Service Remocon. After enter Service Mode by pushing "ADJ" key, execute "ADC Adjust" by pushing "▶" key at "ADC CALIBRATION : COMPONENT".

Impress Resolution 480i

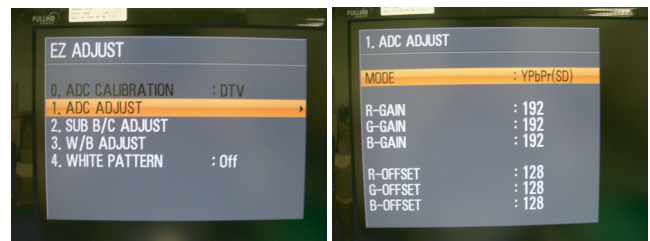

Impress Resolution 1080i

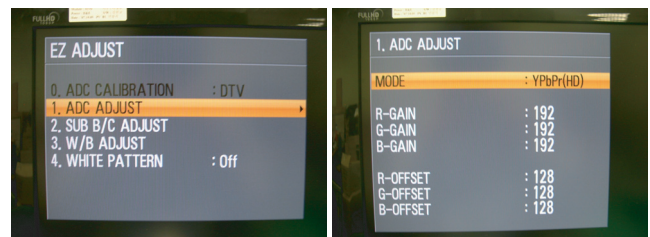

### 3.2. Function Check

#### (1) Check display and sound

- Check Input and Signal items. (cf. work instructions)

- 1) TV
- 2) AV (SCART1/SCART2/S-VHS/CVBS)
- 3) COMPONENT (480i)
- 4) RGB (PC : 1024 x 768 @ 60hz)
- 5) HDMI
- 6) PC Audio In

\* Display and Sound check is executed by Remote controller.

## 4. Total Assembly line process

### 4.1. Adjustment Preparation

- (1) W/B Equipment condition  
CA210: CH 9, Test signal: Inner pattern (85IRE)
- (2) Above 5 minutes H/run in the inner pattern. ("power on" key of adjust remote control)
- (3) 15 Pin D-Sub Jack is connected to the AUTO W/B EQUIPMENT.
- (4) Adjust Process will start by execute I2C Command (Inner pattern (0xF3, 0xFF).

|                   |        |        |    |                                    |                                                   |
|-------------------|--------|--------|----|------------------------------------|---------------------------------------------------|
| Color Temperature | Cool   | 11,000 | °K | X=0.276(±0.002)<br>Y=0.283(±0.002) | <Test Signal><br>Inner pattern<br>(216gray,85IRE) |
|                   | Medium | 9,300  | °K | X=0.285(±0.002)<br>Y=0.293(±0.002) |                                                   |
|                   | Warm   | 6,500  | °K | X=0.313(±0.002)<br>Y=0.329(±0.002) |                                                   |

- (5) Adjust Process will finish by execute I2C Command (Inner pattern (Inner pattern (0xF3,0x00)).

#### \*\* Caution \*\*

Color Temperature: COOL, Medium, Warm

One of R Gain/G Gain/ B Gain should be kept on 0xC0, and adjust other two lower than C0.  
(when R/G/B Gain are all C0, it is the FULL Dynamic Range of Module)

#### \* Manual W/B process using adjusts Remote control.

- After enter Service Mode by pushing "ADJ" key,
- Enter White Pattern off of service mode, and change off --> on.
- Enter "W/B ADJUST" by pushing "▶" key at "3.W/B ADJUST".
- The default value of RGB GAIN is 192 at Cool, Medium, Warm. (There is a difference between picture image and set)



- \* After done all adjustments, Press "In-start" button and compare Tool option and Area option value with its BOM, if it is correctly same then unplug the AC cable.  
If it is not same, then correct it same with BOM and unplug AC cable.  
For correct it to the model's module from factory JIG model.
- \* Don't push The "IN STOP KEY" after completing the function inspection.

### 4.2. DPM operation confirmation

(Only Apply for MNT Model)

Check if Power LED Color and Power Consumption operate as standard.

- Set Input to RGB and connect D-sub cable to set
- Measurement Condition: (100-240V@ 50/60Hz)
- Confirm DPM operation at the state of screen without Signal

### 4.3. DDC EDID Write (RGB 128Byte )

- Connect D-sub Signal Cable to D-Sub Jack.
- Write EDID DATA to EEPROM (24C02) by using DDC2B protocol.
- Check whether written EDID data is correct or not.

### 4.4. DDC EDID Write (HDMI 256Byte)

In case of 2008 year new model for Australia which is developed with Mstar scaler, Manufacture have no use for download of EDID for HDMI1/2/3/4 and RGB because EDID data is in the Application Program.

### 4.5 EDID DATA

No USE the EDID data of Digital data (HDMI 1,2,3,4) and Analog EDID data (RGB) As EDID data is recorded in the Mstar (Main IC) Except for RGB EDID data.

#### (1) ANALOG DATA 128Byte (2Bi) - Not USE

EDID block 0, Bytes 0-127[00H-7FH]

Block Type : EDID 1.3

|    | 0  | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | A  | B  | C  | D  | E  | F  |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0  | 00 | FF | FF | FF | FF | FF | FF | 00 | 1E | 6D | FB | 9C | 01 | 01 | 01 | 01 |
| 10 | 0A | 12 | 01 | 03 | 01 | 46 | 27 | 78 | EA | D9 | B0 | A3 | 57 | 49 | 9C | 25 |
| 20 | 11 | 49 | 4B | A5 | 4E | 00 | 31 | 40 | 45 | 40 | 61 | 40 | 81 | 80 | 01 | 01 |
| 30 | 01 | 01 | D1 | C0 | 01 | 01 | 1A | 36 | 80 | A0 | 70 | 38 | 1F | 40 | 30 | 20 |
| 40 | 35 | 00 | E8 | 26 | 32 | 00 | 00 | 1A | 1B | 21 | 50 | A0 | 51 | 00 | 1E | 30 |
| 50 | 48 | 88 | 35 | 00 | BC | 86 | 21 | 00 | 00 | 1C | 00 | 00 | 00 | FD | 00 | 39 |
| 60 | 4B | 1F | 54 | 12 | 00 | 0A | 20 | 20 | 20 | 20 | 20 | 20 | 00 | 00 | 00 | FC |
| 70 | 00 | 4C | 47 | 20 | 54 | 56 | 0A | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 00 | E4 |

#### (2) DIGITAL DATA(HDMI-1) 256Byte - Not USE

EDID block 0, Bytes 0-127[00H-7FH]

Block Type : EDID 1.3

|    | 0  | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | A  | B  | C  | D  | E  | F  |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0  | 00 | FF | FF | FF | FF | FF | FF | 00 | 1E | 6D | FC | 9C | 01 | 01 | 01 | 01 |
| 10 | 0A | 12 | 01 | 03 | 80 | 73 | 41 | 96 | 0A | CF | 74 | A3 | 57 | 4C | B0 | 23 |
| 20 | 09 | 48 | 4C | A1 | 0C | 00 | 31 | 40 | 45 | 40 | 61 | 40 | 81 | 80 | D1 | C0 |
| 30 | 01 | 01 | 01 | 01 | 01 | 01 | 02 | 3A | 80 | 18 | 71 | 38 | 2D | 40 | 58 | 2C |
| 40 | 45 | 00 | C4 | 8E | 21 | 00 | 00 | 1E | 01 | 1D | 00 | BC | 52 | D0 | 1E | 20 |
| 50 | B8 | 28 | 55 | 40 | C4 | 8E | 21 | 00 | 00 | 1E | 00 | 00 | 00 | FD | 00 | 30 |
| 60 | 58 | 1F | 64 | 11 | 00 | 0A | 20 | 20 | 20 | 20 | 20 | 20 | 00 | 00 | 00 | FC |
| 70 | 00 | 4C | 47 | 20 | 54 | 56 | 0A | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 01 | 6B |

EDID block 1, Bytes 128-255[80H- FFH]

Block Type : CEA EDID Timing Extension Version 3.

|    | 0  | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | A  | B  | C  | D  | E  | F  |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0  | 02 | 03 | 23 | F1 | 4E | 93 | 14 | 12 | 04 | 05 | 03 | 02 | 20 | 1F | 21 | 22 |
| 10 | 10 | 07 | 16 | 23 | 15 | 07 | 50 | 83 | 01 | 00 | 00 | 67 | 03 | 0C | 00 | 10 |
| 20 | 00 | B8 | 2D | 01 | 1D | 80 | D0 | 72 | 1C | 16 | 20 | 10 | 2C | 25 | 80 | C4 |
| 30 | 8E | 21 | 00 | 00 | 9E | 8C | 0A | D0 | 90 | 20 | 40 | 31 | 20 | 0C | 40 | 55 |
| 40 | 00 | C4 | 8E | 21 | 00 | 00 | 18 | 01 | 1D | 00 | 72 | 51 | D0 | 1E | 20 | 6E |
| 50 | 28 | 55 | 00 | C4 | 8E | 21 | 00 | 00 | 1E | 01 | 1D | 80 | 18 | 71 | 1C | 16 |
| 60 | 20 | 58 | 2C | 25 | 00 | C4 | 8E | 21 | 00 | 00 | 9E | 00 | 00 | 00 | 00 | 00 |
| 70 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 10 |

(3) DIGITAL DATA(HDMI-2) 256Byte - Not use  
EDID Block 0, Byte 0-127[00H-7FH]  
Block Type : EDID 1.3

|    | 0  | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | A  | B  | C  | D  | E  | F  |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0  | 00 | FF | FF | FF | FF | FF | FF | 00 | 1E | 6D | FC | 9C | 01 | 01 | 01 | 01 |
| 10 | 0A | 12 | 01 | 03 | 80 | 73 | 41 | 96 | 0A | CF | 74 | A3 | 57 | 4C | B0 | 23 |
| 20 | 09 | 48 | 4C | A1 | 0C | 00 | 31 | 40 | 45 | 40 | 61 | 40 | 81 | 80 | D1 | C0 |
| 30 | 01 | 01 | 01 | 01 | 01 | 01 | 02 | 3A | 80 | 18 | 71 | 38 | 2D | 40 | 58 | 2C |
| 40 | 45 | 00 | C4 | 8E | 21 | 00 | 00 | 1E | 01 | 1D | 00 | BC | 52 | D0 | 1E | 20 |
| 50 | B8 | 28 | 55 | 40 | C4 | 8E | 21 | 00 | 00 | 1E | 00 | 00 | 00 | FD | 00 | 30 |
| 60 | 58 | 1F | 64 | 11 | 00 | 0A | 20 | 20 | 20 | 20 | 20 | 20 | 00 | 00 | 00 | FC |
| 70 | 00 | 4C | 47 | 20 | 54 | 56 | 0A | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 01 | 6B |

EDID block 1, Bytes 128-255[80H- FFH]  
Block Type : CEA EDID Timing Extension Version 3.

|    | 0  | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | A  | B  | C  | D  | E  | F  |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0  | 02 | 03 | 23 | F1 | 4E | 93 | 14 | 12 | 04 | 05 | 03 | 02 | 20 | 1F | 21 | 22 |
| 10 | 10 | 07 | 16 | 23 | 15 | 07 | 50 | 83 | 01 | 00 | 00 | 67 | 03 | 0C | 00 | 20 |
| 20 | 00 | B8 | 2D | 01 | 1D | 80 | D0 | 72 | 1C | 16 | 20 | 10 | 2C | 25 | 80 | C4 |
| 30 | 8E | 21 | 00 | 00 | 9E | 8C | 0A | D0 | 90 | 20 | 40 | 31 | 20 | 0C | 40 | 55 |
| 40 | 00 | C4 | 8E | 21 | 00 | 00 | 18 | 01 | 1D | 00 | 72 | 51 | D0 | 1E | 20 | 6E |
| 50 | 28 | 55 | 00 | C4 | 8E | 21 | 00 | 00 | 1E | 01 | 1D | 80 | 18 | 71 | 1C | 16 |
| 60 | 20 | 58 | 2C | 25 | 00 | C4 | 8E | 21 | 00 | 00 | 9E | 00 | 00 | 00 | 00 | 00 |
| 70 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 |

(4) DIGITAL DATA(HDMI-3) 256Byte - Not USE  
EDID Block 0, Byte 0-127[00H-7FH]  
Block Type : EDID 1.3

|    | 0  | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | A  | B  | C  | D  | E  | F  |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0  | 00 | FF | FF | FF | FF | FF | FF | 00 | 1E | 6D | FC | 9C | 01 | 01 | 01 | 01 |
| 10 | 0A | 12 | 01 | 03 | 80 | 73 | 41 | 96 | 0A | CF | 74 | A3 | 57 | 4C | B0 | 23 |
| 20 | 09 | 48 | 4C | A1 | 0C | 00 | 31 | 40 | 45 | 40 | 61 | 40 | 81 | 80 | D1 | C0 |
| 30 | 01 | 01 | 01 | 01 | 01 | 01 | 02 | 3A | 80 | 18 | 71 | 38 | 2D | 40 | 58 | 2C |
| 40 | 45 | 00 | C4 | 8E | 21 | 00 | 00 | 1E | 01 | 1D | 00 | BC | 52 | D0 | 1E | 20 |
| 50 | B8 | 28 | 55 | 40 | C4 | 8E | 21 | 00 | 00 | 1E | 00 | 00 | 00 | FD | 00 | 30 |
| 60 | 58 | 1F | 64 | 11 | 00 | 0A | 20 | 20 | 20 | 20 | 20 | 20 | 00 | 00 | 00 | FC |
| 70 | 00 | 4C | 47 | 20 | 54 | 56 | 0A | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 01 | 6B |

EDID block 1, Bytes 128-255[80H- FFH]  
Block Type : CEA EDID Timing Extension Version 3.

|    | 0  | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | A  | B  | C  | D  | E  | F  |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0  | 02 | 03 | 23 | F1 | 4E | 93 | 14 | 12 | 04 | 05 | 03 | 02 | 20 | 1F | 21 | 22 |
| 10 | 10 | 07 | 16 | 23 | 15 | 07 | 50 | 83 | 01 | 00 | 00 | 67 | 03 | 0C | 00 | 30 |
| 20 | 00 | B8 | 2D | 01 | 1D | 80 | D0 | 72 | 1C | 16 | 20 | 10 | 2C | 25 | 80 | C4 |
| 30 | 8E | 21 | 00 | 00 | 9E | 8C | 0A | D0 | 90 | 20 | 40 | 31 | 20 | 0C | 40 | 55 |
| 40 | 00 | C4 | 8E | 21 | 00 | 00 | 18 | 01 | 1D | 00 | 72 | 51 | D0 | 1E | 20 | 6E |
| 50 | 28 | 55 | 00 | C4 | 8E | 21 | 00 | 00 | 1E | 01 | 1D | 80 | 18 | 71 | 1C | 16 |
| 60 | 20 | 58 | 2C | 25 | 00 | C4 | 8E | 21 | 00 | 00 | 9E | 00 | 00 | 00 | 00 | 00 |
| 70 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | F0 |

(4) DIGITAL DATA(HDMI-4) 256Byte - Not USE  
EDID Block 0, Byte 0-127[00H-7FH]  
Block Type : EDID 1.3

|    | 0  | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | A  | B  | C  | D  | E  | F  |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0  | 00 | FF | FF | FF | FF | FF | FF | 00 | 1E | 6D | FC | 9C | 01 | 01 | 01 | 01 |
| 10 | 0A | 12 | 01 | 03 | 80 | 73 | 41 | 96 | 0A | CF | 74 | A3 | 57 | 4C | B0 | 23 |
| 20 | 09 | 48 | 4C | A1 | 0C | 00 | 31 | 40 | 45 | 40 | 61 | 40 | 81 | 80 | D1 | C0 |
| 30 | 01 | 01 | 01 | 01 | 01 | 01 | 02 | 3A | 80 | 18 | 71 | 38 | 2D | 40 | 58 | 2C |
| 40 | 45 | 00 | C4 | 8E | 21 | 00 | 00 | 1E | 01 | 1D | 00 | BC | 52 | D0 | 1E | 20 |
| 50 | B8 | 28 | 55 | 40 | C4 | 8E | 21 | 00 | 00 | 1E | 00 | 00 | 00 | FD | 00 | 30 |
| 60 | 58 | 1F | 64 | 11 | 00 | 0A | 20 | 20 | 20 | 20 | 20 | 20 | 00 | 00 | 00 | FC |
| 70 | 00 | 4C | 47 | 20 | 54 | 56 | 0A | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 01 | 6B |

EDID block 1, Bytes 128-255[80H- FFH]  
Block Type : CEA EDID Timing Extension Version 3.

|    | 0  | 1  | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | A  | B  | C  | D  | E  | F  |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0  | 02 | 03 | 23 | F1 | 4E | 93 | 14 | 12 | 04 | 05 | 03 | 02 | 20 | 1F | 21 | 22 |
| 10 | 10 | 07 | 16 | 23 | 15 | 07 | 50 | 83 | 01 | 00 | 00 | 67 | 03 | 0C | 00 | 40 |
| 20 | 00 | B8 | 2D | 01 | 1D | 80 | D0 | 72 | 1C | 16 | 20 | 10 | 2C | 25 | 80 | C4 |
| 30 | 8E | 21 | 00 | 00 | 9E | 8C | 0A | D0 | 90 | 20 | 40 | 31 | 20 | 0C | 40 | 55 |
| 40 | 00 | C4 | 8E | 21 | 00 | 00 | 18 | 01 | 1D | 00 | 72 | 51 | D0 | 1E | 20 | 6E |
| 50 | 28 | 55 | 00 | C4 | 8E | 21 | 00 | 00 | 1E | 01 | 1D | 80 | 18 | 71 | 1C | 16 |
| 60 | 20 | 58 | 2C | 25 | 00 | C4 | 8E | 21 | 00 | 00 | 9E | 00 | 00 | 00 | 00 | 00 |
| 70 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | 00 | E0 |

- 1) All Data : HEXA Value
- 2) Changeable Data :
  - \*: Serial No : Controlled / Data:01
  - \*\* : Month : Controlled / Data:00
  - \*\*\*:Year : Controlled
  - \*\*\*\*:Check sum

## 4.7. HDCP (High-Bandwidth Digital Contents Protection)

### SETTING (Scaler : Mstar)

- Connect D-sub Signal Cable to D-Sub Jack
- Input HDCP key with HDCP-key- in-program
- HDCP Key value is stored on EEPROM (AT24C512) which is 0x80 addresses of 0xA0 page
- AC off/ on and on HDCP button of MSPG925 and confirm whether picture is displayed or not of using MSPG925
- HDCP Key value is different among the sets.

### HDCP-KEY

0:0x80

89 38 AE 0D ED 40 E6 BB FA 4E DE 51 FB 8E D9 AA  
34 A8 C4 EA D8 6C DC 5C 91 5C B1 A6 13 2B 8B 8B  
F7 46 CC 1C 88 20 A3 27 0E E1 28 84 89 39 A3 E2  
36 86 CE 67 EB A0 F2 35 6B 86 F5 21 71 95 8A 77  
A1 28 77 97 D3 7B EF 5C 15 48 AA 9E 97 39 CD 98  
40 5E 68 56 66 EF C1 3C E1 8F 2A 82 DE 8F 52 CC  
A8 1F 37 D9 D4 C6 24 16 7E 42 FF 57 CD 6B E0 86  
00 1A F1 19 5A AF 37 97 86 BA 83 29 FE 41 A8 D5

A1:0x00

F4 73 43 03 23 22 C5 28 96 9E 35 0D 67 A8 8B DD  
7A 89 38 E0 94 F0 FF F5 8F F3 4E 5C 82 09 F3 97  
EB 01 52 EC D8 98 5C 4F 43 2E E7 9F F5 85 6D 15  
B1 83 20 F8 5E D0 33 4F F0 C1 8F 65 77 3D 31 B2  
FB A1 6E CA A6 D3 A2 35 1D 16 41 C3 89 86 98 78  
8E 3E C1 64 01 79 05 21 47 AF 6A 6F 5B E1 4D 2B  
2F CC 18 8E 42 DC 9A F8 3C D0 D0 57 04 FB 14 42  
8C 54 9D A9 06 EB E7 48 E2 29 EF 7E FD F6 45 12  
AC E4 BC 45 67 A3 9B 65 A1 0E ED 1A 84 AD 49 87  
A2 77 3F 11 A7 1B D1 7F 25 36 6C 6F D3 DF 25 D0  
FB

## 4.8. Outgoing condition Configuration

- ffff and make ship condition
- When pressing IN-STOP key by Service remote control, Red LED are blinked alternatively. And then Automatically turn off. (Must not AC power OFF during blinking)




## 4.9. Internal pressure

Confirm whether is normal or not when between power board's ac block and GND is impacted on 1.5kV(dc) or 2.2kV(dc) for one second

## 5. Adjustment Command

### 5.1. I2C(100K BPS)


### 5.2. COMMUNICATION START



# Until ACK BIT goes LOW, Repeat it.

### 5.3. Command form


Command form use DDC2AB standard communication protocol.



- a. LEN : DATA BYTE number to send
- b. CMD : Command language theat monitor executes.
- c. VAL : FOS DATA
- d. CS : Dada's CHECKSUM that transmit
- e. DELAY : 50Ms
- f. A : Acknowledge

### 5.5. EEPROM DATA READ

#### (1) Signal TABLE



#### (2) Command Set

\* Purpose : To read(84h) the appointment Address of EEPROM by 128(80h)-byte

| Adjustment item | CMD(hex) | ADH(hex) | ADL(hex) | Details           |
|-----------------|----------|----------|----------|-------------------|
| EEPROM READ     | E7       | A0       | 0        | 0-Page 0~7F Read  |
|                 |          |          | 80       | 0-Page 80~FF Read |
|                 |          | A2       | 0        | 1-Page 0~7F Read  |
|                 |          |          | 80       | 1-Page 80~FF Read |
|                 |          | A4       | 0        | 2-Page 0~7F Read  |
|                 |          |          | 80       | 2-Page 80~FF Read |
|                 |          | A6       | 0        | 3-Page 0~7F Read  |
|                 |          |          | 80       | 3-Page 80~FF Read |

### 5.4. Adjustment Commands(LENGTH=84)

| Adjustment Contents                                   | CMD(hex) | ADR                              | VAL[HEX]            | Description                                                                                 |
|-------------------------------------------------------|----------|----------------------------------|---------------------|---------------------------------------------------------------------------------------------|
| FACTORY ON                                            | E0       | 00                               | 00                  | Factory mode on                                                                             |
| FACTORY OFF                                           | E2       | 00                               | 00                  | Factory mode off                                                                            |
| EEPROM ALL INIT.                                      | E4       | 00                               | 00                  | EEPROM All clear                                                                            |
| EEPROM Read                                           | E7       | 00                               | 00                  | EEPROM Read                                                                                 |
| EEPROM Write                                          | E8       | 00                               | data                | EEPROM Write by some values                                                                 |
| COLOR SAVE<br>(R/G/B cutoff, Drive, Contrast, Bright) | EB       | 00                               | 00                  | Color Save                                                                                  |
| H POSITION                                            | 20       | 00                               | 00 – 64             | They have different range each mode, FOS Adjustment                                         |
| V POSITION                                            | 30       | 00                               | 00 – 64             |                                                                                             |
| CLOCK                                                 | 90       | 00                               | 00 – 64             |                                                                                             |
| PHASE                                                 | 92       | 00                               | 00 – 64             |                                                                                             |
| R DRIVE                                               | 16       | 00:cool<br>01:medium<br>02:warm  | 00 – 80             | Drive adjustment                                                                            |
| G DRIVE                                               | 18       | 00 :cool<br>01:medium<br>02:warm | 00 – 80             |                                                                                             |
| B DRIVE                                               | 1A       | 00:cool<br>01:medium<br>02:warm  | 00 – 80             |                                                                                             |
| R CUTOFF                                              | 80       | 00                               | 00 – 7F             | Offset adjustment                                                                           |
| G CUTOFF                                              | 82       | 00                               | 00 – 7F             |                                                                                             |
| B CUTOFF                                              | 84       | 00                               | 00 – 7F             |                                                                                             |
| BRIGHT                                                | 10       | 00                               | 00 – 3F             | Bright adjustment                                                                           |
| CONTRAST                                              | 12       | 00                               | 00 - 64             | Luminance adjustment                                                                        |
| AUTO_COLOR_ADJUST                                     | F1       | 00                               | 02                  | Auto COLOR Adjustment                                                                       |
| CHANGE_COLOR_TEMP                                     | F2       | 00                               | 0,1,2,3             | 0: Cool<br>1: Medium<br>2: Warm<br>3: User                                                  |
| White Pattern                                         | F3       | 00                               | 00,FF               | 00: White pattern off<br>FF: White pattern on                                               |
| AUTO_INPUTCHANGE                                      | F4       | 00                               | 0,10,20,30,40,60,90 | 0 : TV<br>10 : DTV<br>20 : SCART1<br>30 : SCART2<br>40 : Component<br>60 : RGB<br>90 : HDMI |

## 5.6. E<sup>2</sup>PROM Data Write

### (1) Signal TABLE

|       |        |   |     |   |        |   |    |   |      |   |           |   |     |   |
|-------|--------|---|-----|---|--------|---|----|---|------|---|-----------|---|-----|---|
| START | 6E     | A | 50  | A | 84+n   | A | 03 | A | CMD  | A | ADH       | A | ADL | A |
|       | Data_1 | A | ... |   | Data_n | A | CS | A | STOP |   | Delay 20m |   |     |   |

LEN : 84h+Bytes

CMD : 8Eh

ADH : E<sup>2</sup>PROM Slave Address(A0,A2,A4,A6,A8), Not 00h  
(Reserved by Buffer To EEPROM)

ADL : E<sup>2</sup>PROM Sub Address(00~FF)

Data : Write data

### (2) Command Set

| Adjustment item | CMD(hex) | LEN  | Remark        |
|-----------------|----------|------|---------------|
| EEPROM WRITE    | E8       | 94   | 16-Byte Write |
|                 |          | 84+n | n-byte Write  |

#### \* Purpose

- 1) EDID write : 16-byte by 16-byte, 8 order (128-byte) write(TO "00 – 7F" of "EEPROM Page A4").
- 2) FOS Default write : 16-mode data (HFh, HFI, VF, STD, HP, VP, Clk, ClkPh, PhFine) write
- 3) Random Data write : write the appointment Address of E<sup>2</sup>PROM.

## 5.7. VRAM Read

- Send CMD(70h) to read Video RAM value from MICOM And save its value to 128-Bytes Buffer(Common Buffer for the use of EDID)


|       |    |   |    |   |    |   |    |   |    |   |    |   |    |   |    |   |      |
|-------|----|---|----|---|----|---|----|---|----|---|----|---|----|---|----|---|------|
| START | 6E | A | 50 | A | 84 | A | 03 | A | 70 | A | 00 | A | 00 | A | CS | A | STOP |
|-------|----|---|----|---|----|---|----|---|----|---|----|---|----|---|----|---|------|

- Delay 500ms (Time to Wait and Read Video RAM from MICOM)
- Be transmitted the contents of MICOM's 128-bytes Buffer to PC. (128th Data is the CheckSum of 127-bytes data : That's OK if the value of adding 128-bytes Data is Zero)


|       |    |   |        |     |          |   |    |    |      |
|-------|----|---|--------|-----|----------|---|----|----|------|
| START | 6F | A | Data 1 | ... | Data 128 | A | CS | NA | STOP |
|-------|----|---|--------|-----|----------|---|----|----|------|

# TROUBLESHOOTING


## 1. TV/CATV doesn't display

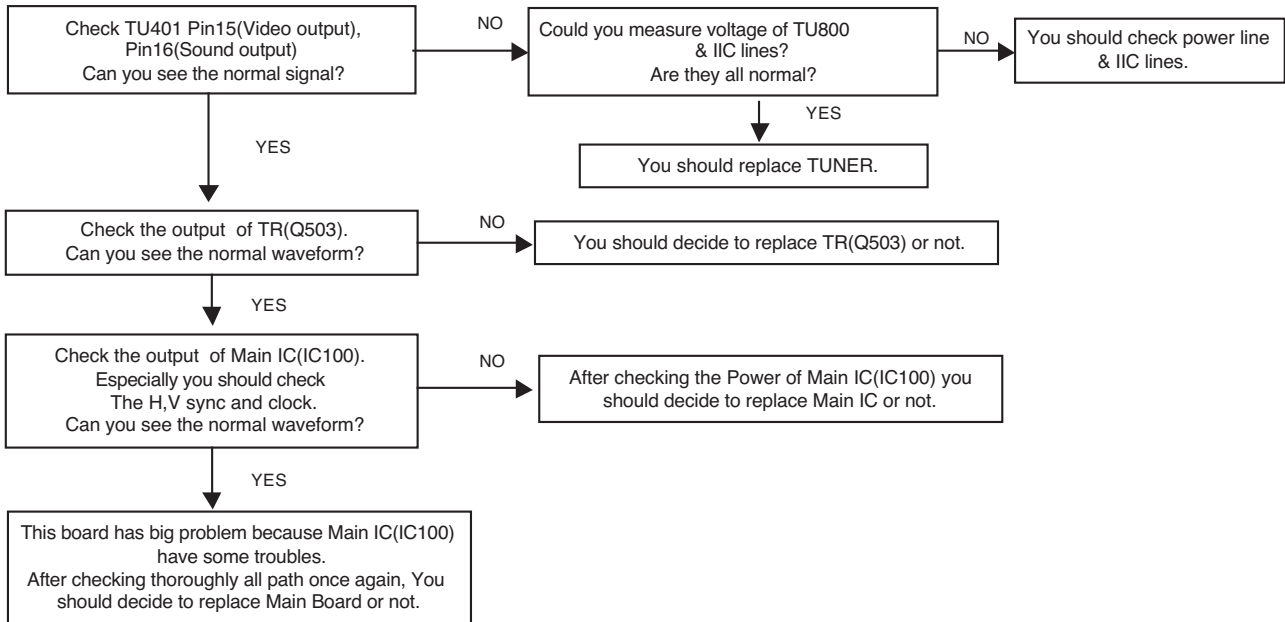


## 2. DTV doesn't display

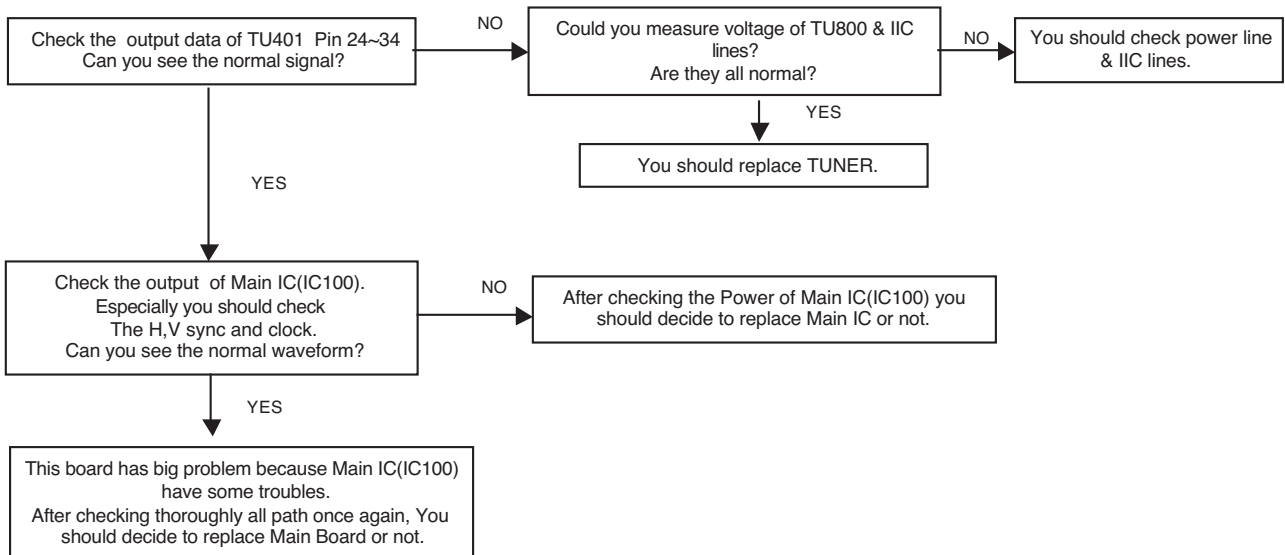

### 3. AV 1/2/3 doesn't display

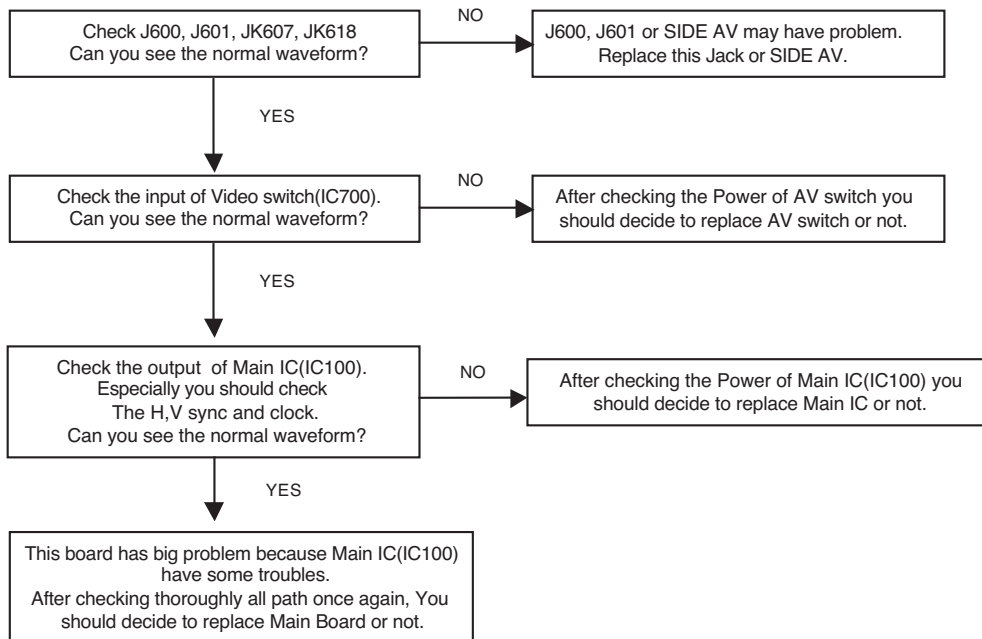


### 4. Component doesn't display

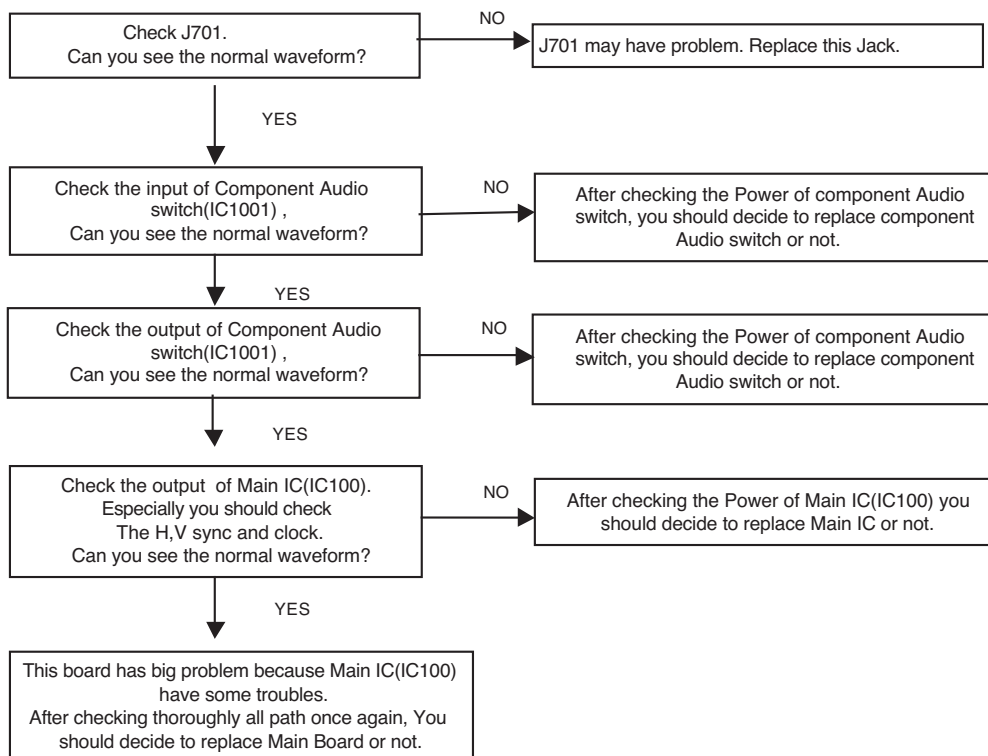





## 5. RGB PC doesn't display

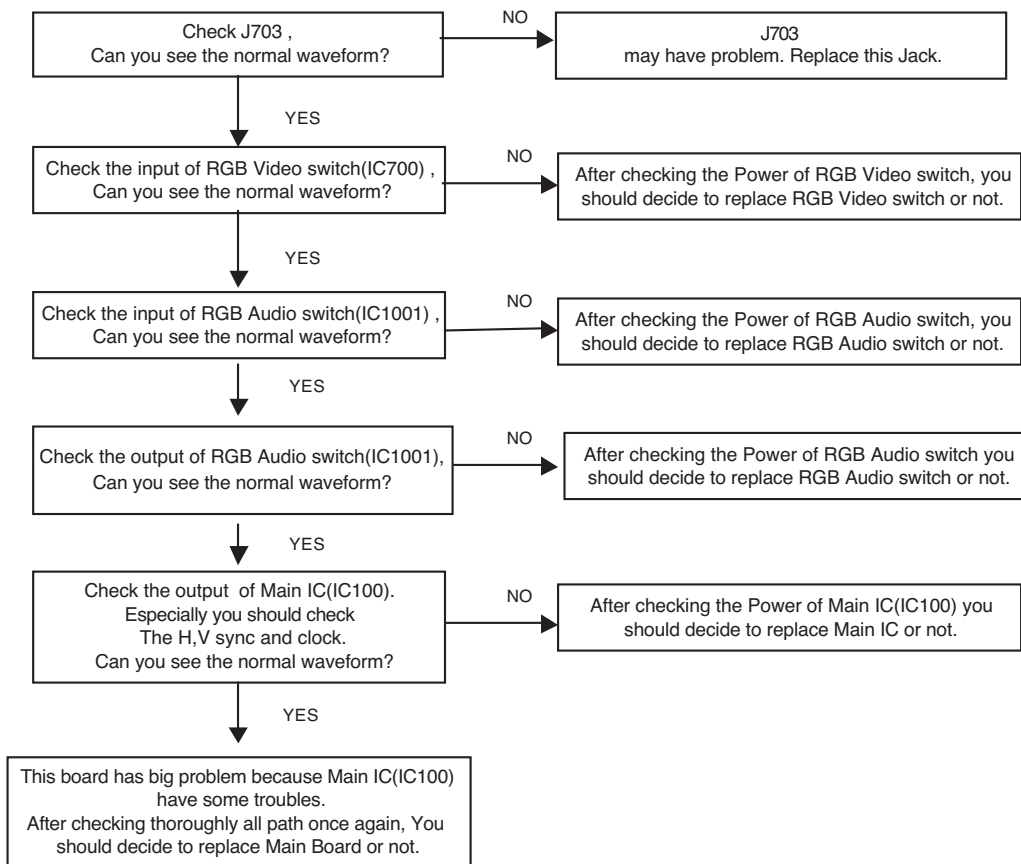

## 6. HDMI doesn't display

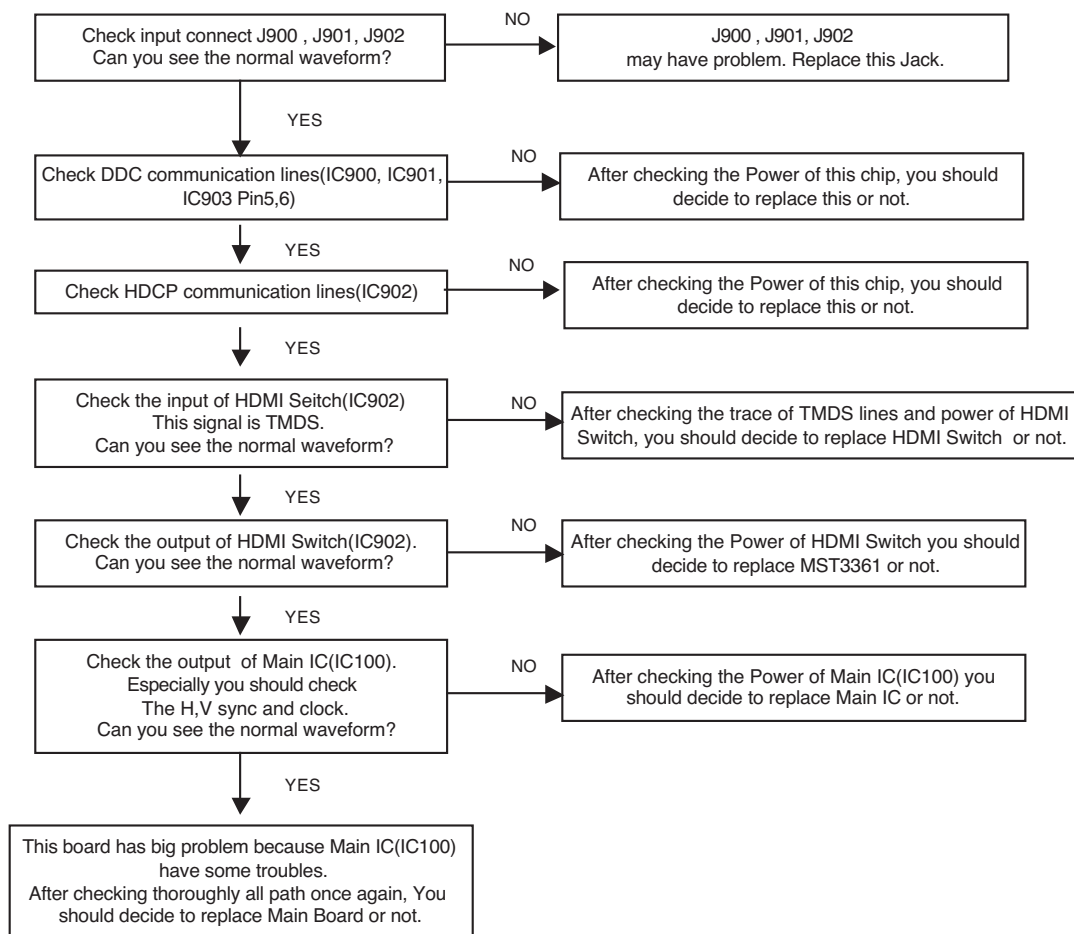

# BLOCK DIAGRAM

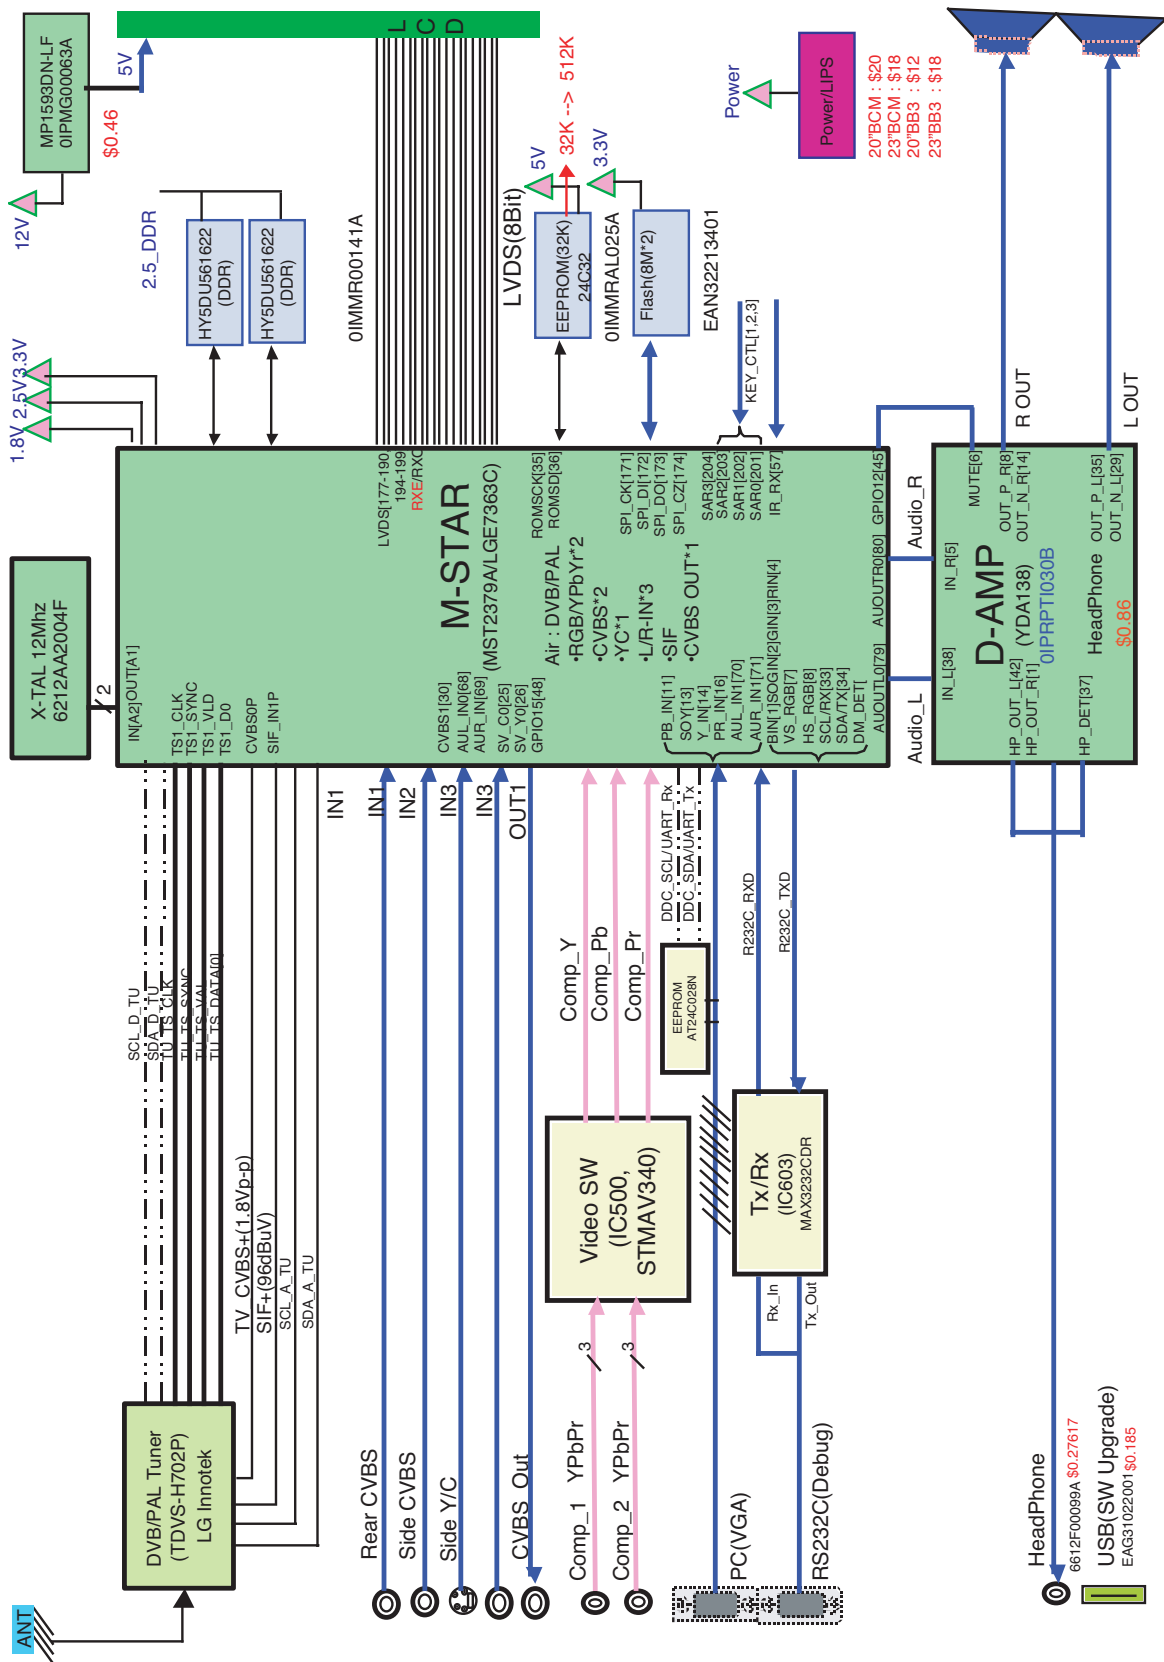





# EXPLODED VIEW

## IMPORTANT SAFETY NOTICE

Many electrical and mechanical parts in this chassis have special safety-related characteristics. These parts are identified by  $\Delta$  in the Schematic Diagram and EXPLODED VIEW. It is essential that these special safety parts should be replaced with the same components as recommended in this manual to prevent X-RADIATION, Shock, Fire, or other Hazards. Do not modify the original design without permission of manufacturer.

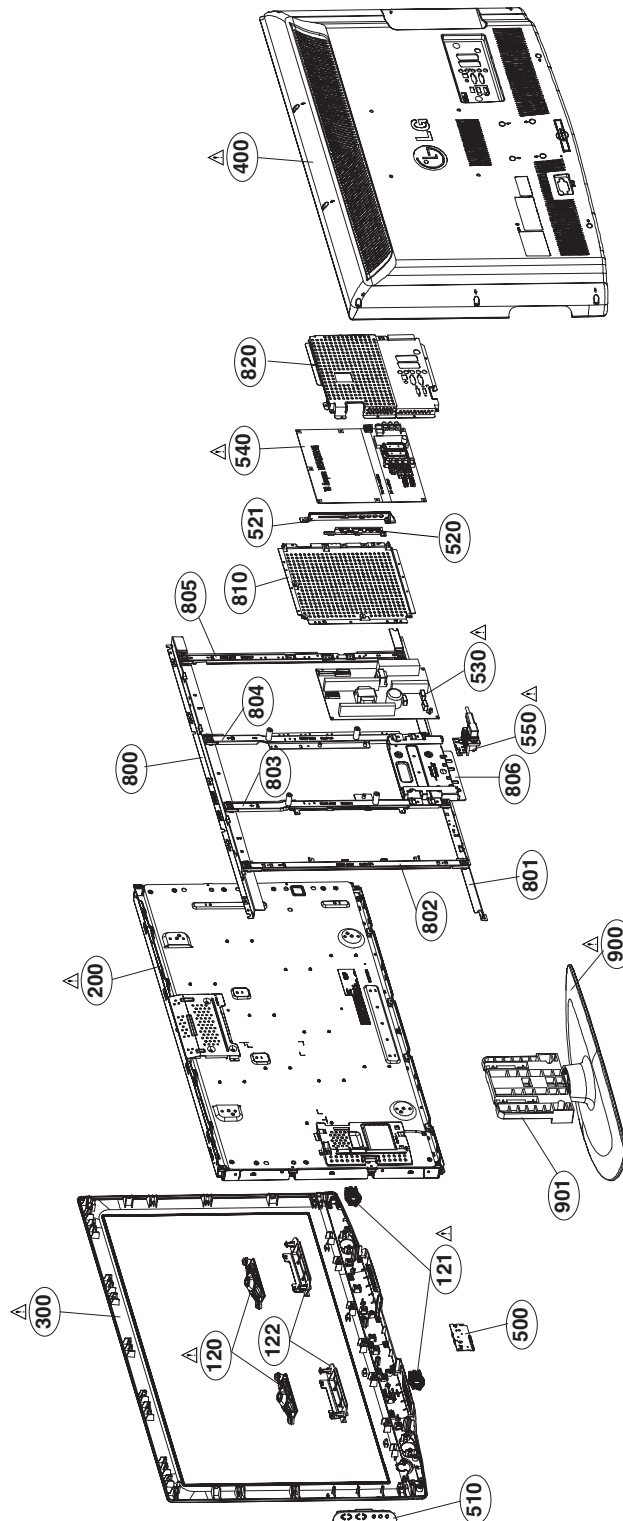

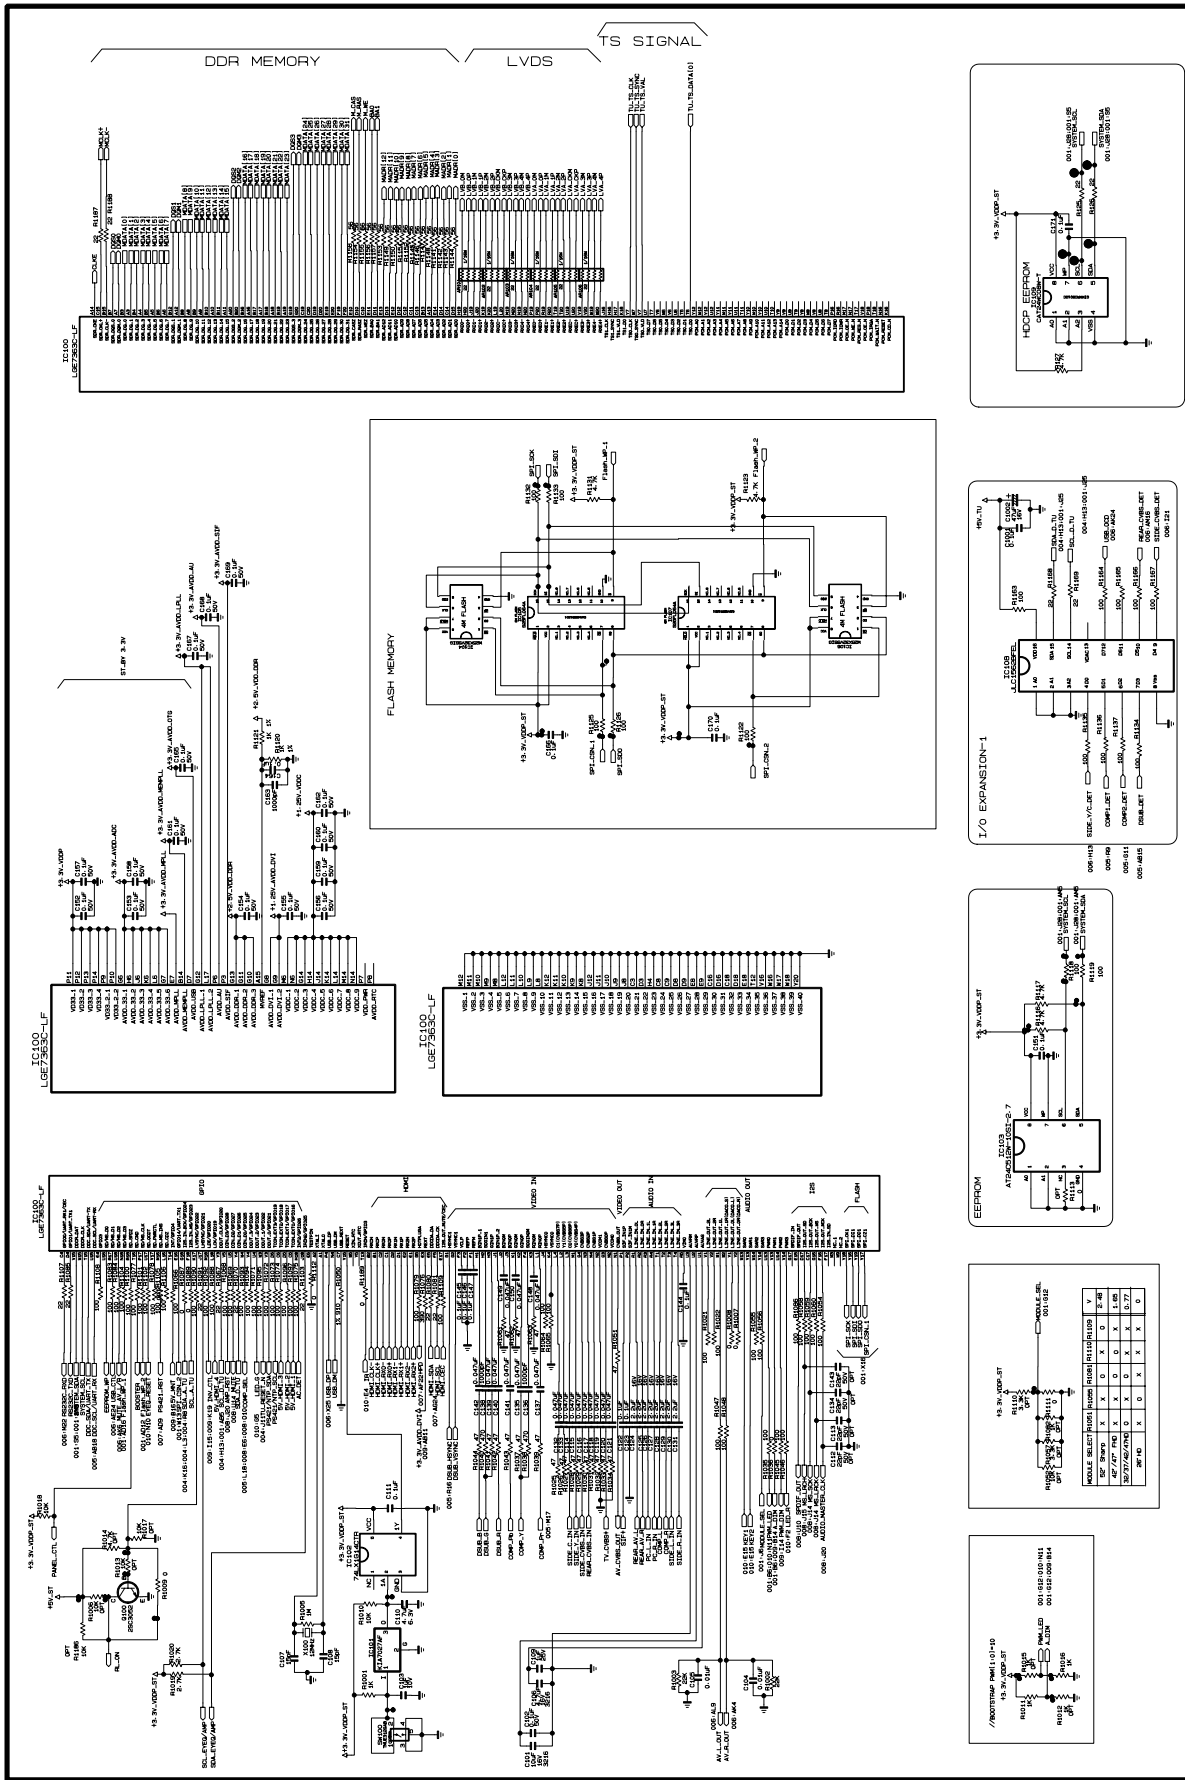


THE SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION AGAINST X-RADIATION. FILLS AND ELECTRICAL SHOCK HAZARDS. WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURER SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE SYMBOL MARK OF THE SCHEMATIC.

LG ELECTRONICS

|       |                       |       |            |
|-------|-----------------------|-------|------------|
| MODEL | AUS-30/EXA41845402(2) | DATE  | 2008.05.15 |
| BLOCK | INSTAL-LGE7363C       | SHEET | 1          |
|       |                       |       | 10         |



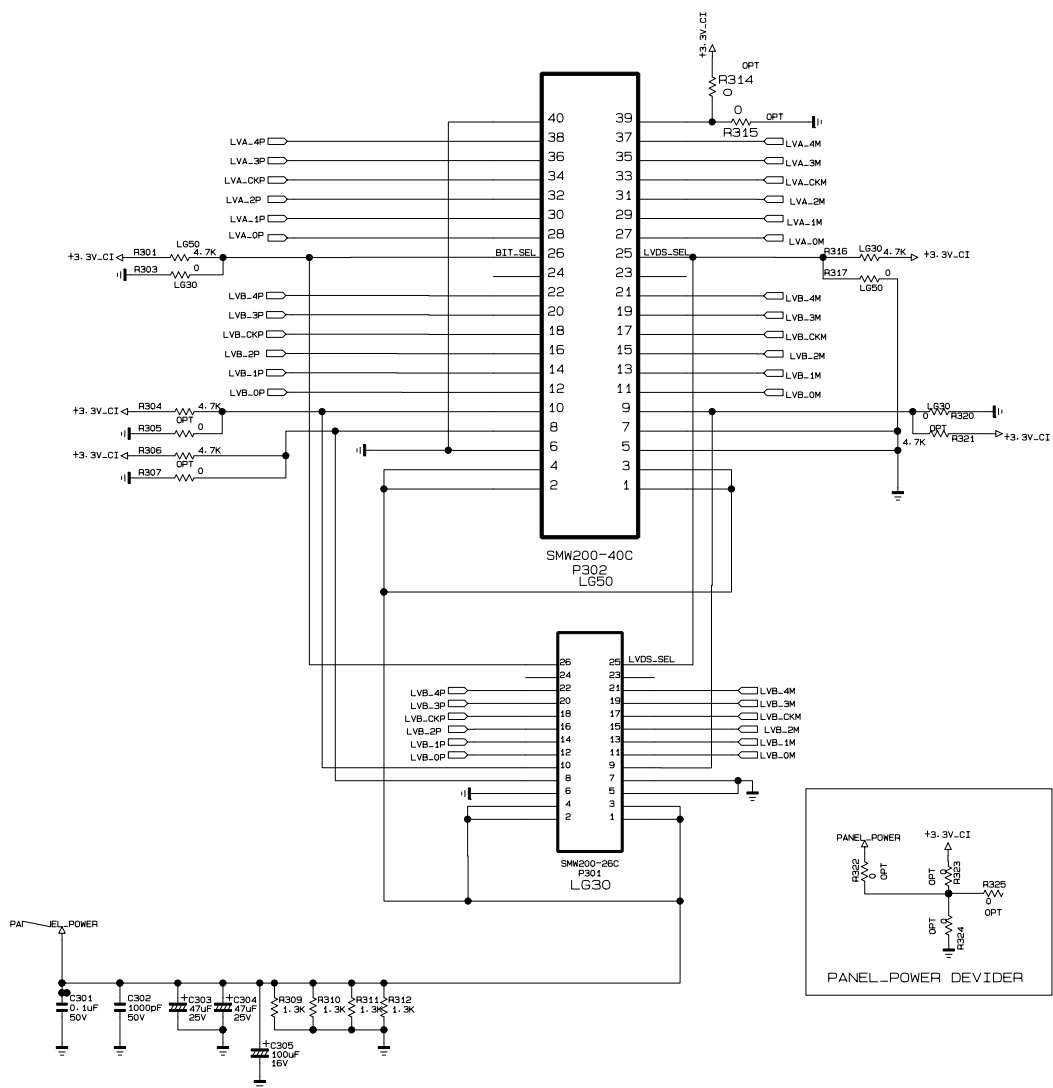


|       |                      |       |            |
|-------|----------------------|-------|------------|
| MODEL | AUS-3/EAX41845402(2) | DATE  | 2008.05.15 |
| BLOCK | Module & FRC CONTROL | SHEET | 3 / 10     |

THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILRE AND ELECTRICAL SHOCK HAZARDS. WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.







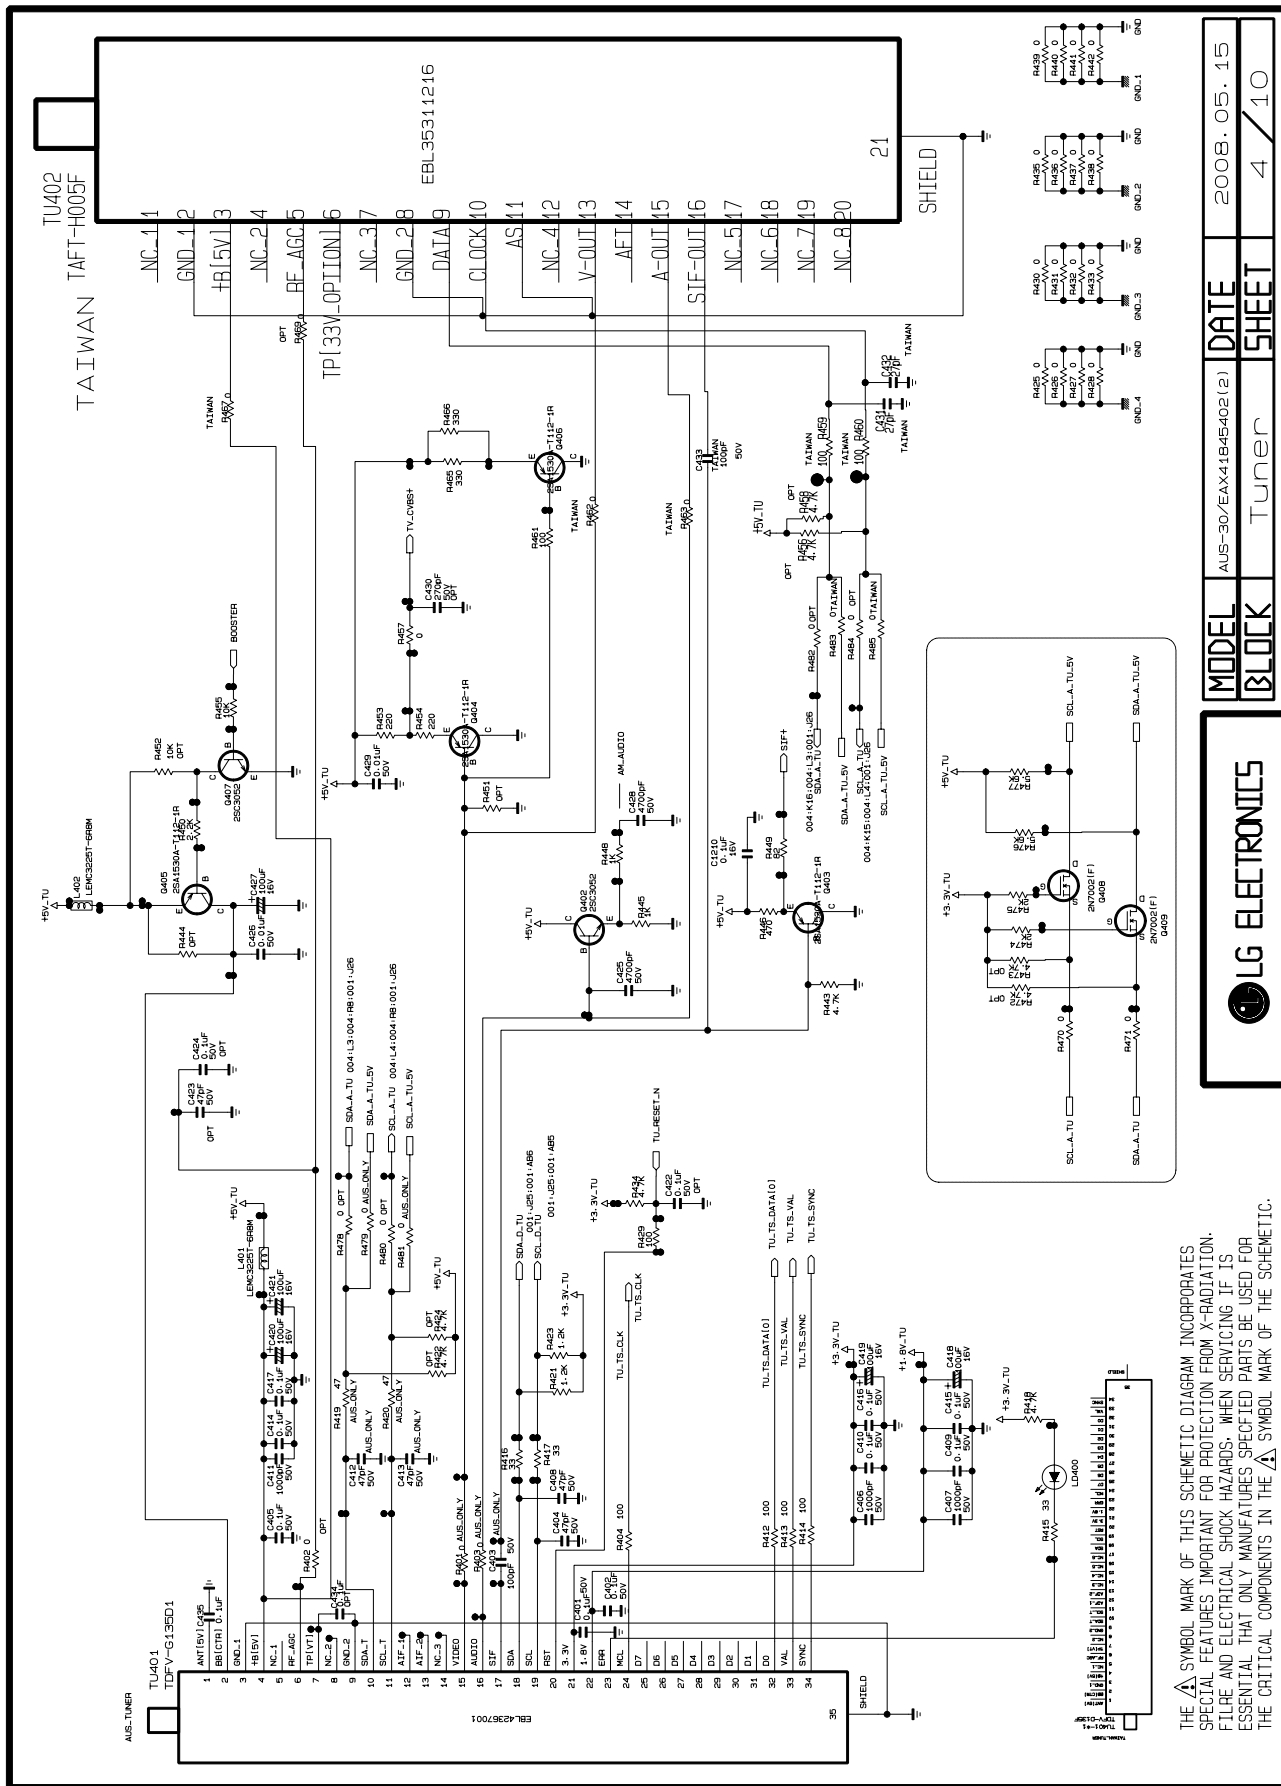

THE SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILTRATION OF ELECTRICAL SHOCK HAZARDS. WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURER SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE SYMBOL MARK OF THE SCHEMATIC.










|       |                      |       |            |
|-------|----------------------|-------|------------|
| MODEL | AUS-30/EA41B45402(2) | DATE  | 2008.05.15 |
| BLOCK | Tuner                | SHEET | 4 / 10     |



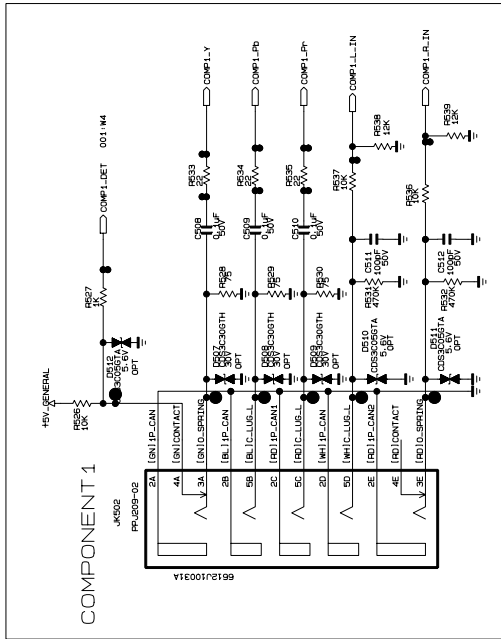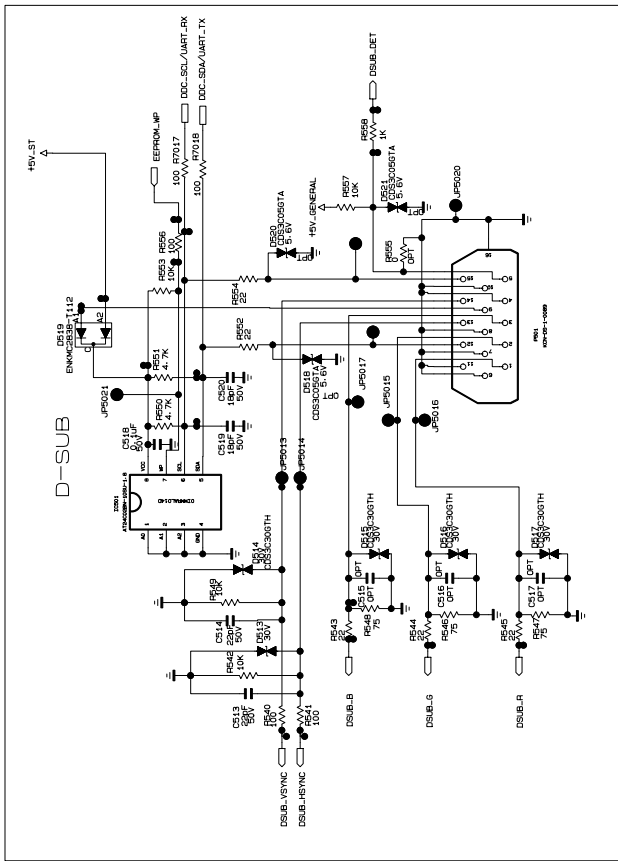

|              |                        |              |              |
|--------------|------------------------|--------------|--------------|
| <b>MODEL</b> | AUS-30/EAX41845402 (2) | <b>DATE</b>  | 2008. 05. 15 |
| <b>BLOCK</b> | COMP/DSUB              | <b>SHEET</b> | 5 / 10       |




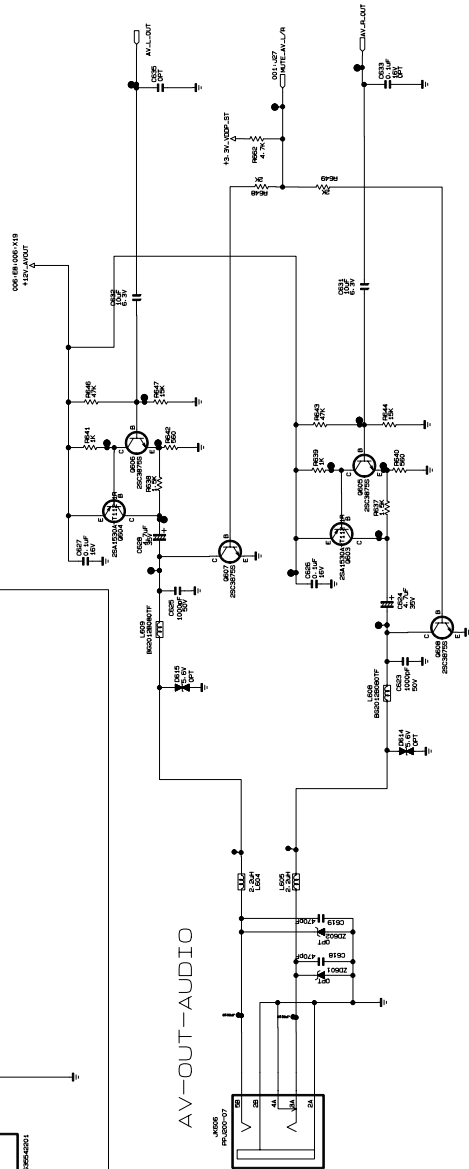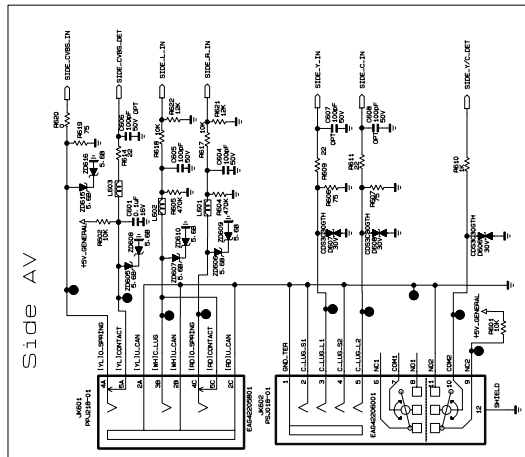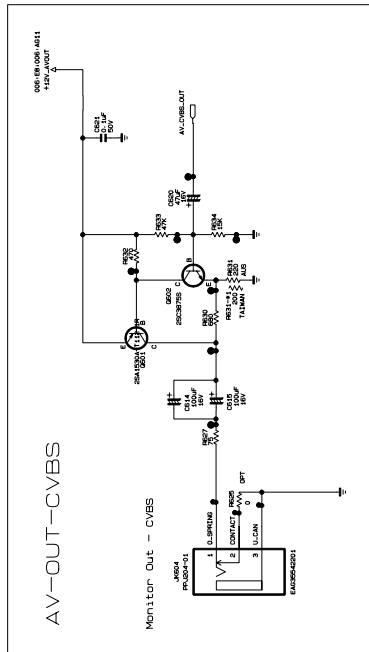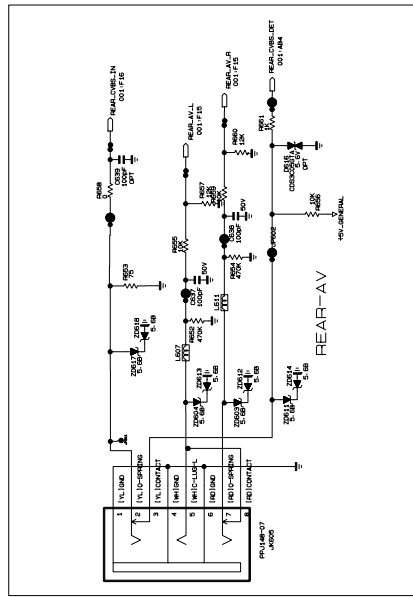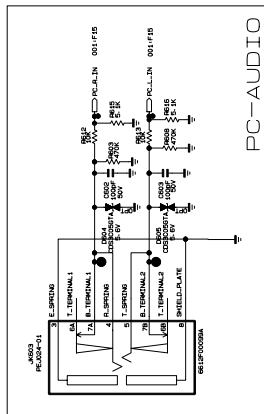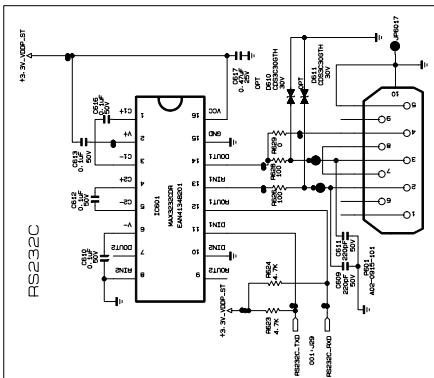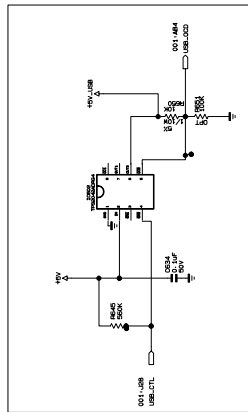

THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION, FILTRE AND ELECTRICAL SHOCK HAZARDS. WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURER SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

LG ELECTRONICS

|       |                        |       |            |
|-------|------------------------|-------|------------|
| MODEL | AUS-30/EAAX45B-4502(2) | DATE  | 2008.05.15 |
| BLOCK | AV/USB/RS232C          | SHEET | 6 / 10     |

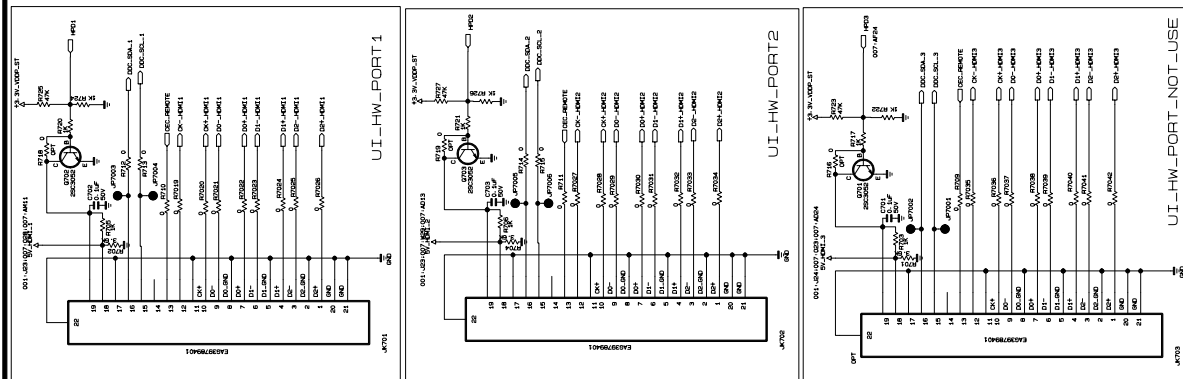



**PORT CONNECTION**

In case of 30/50 TOOL HDMI3


UI PORT 1 --- HW PORT JK701 --- SW PORT 4  
 UI PORT 2 --- HW PORT JK702 --- SW PORT 1  
 UI PORT 3 --- HW PORT JK703 --- SW PORT 3  
 UI PORT 4 --- HW PORT JK704 --- SW PORT 2

In case of 30/50/70 TOOL HDMI4

UI PORT 1 --- HW PORT JK701 --- SW PORT 4  
 UI PORT 2 --- HW PORT JK702 --- SW PORT 1  
 UI PORT 3 --- HW PORT JK703 --- SW PORT 2  
 UI PORT 4 --- HW PORT JK704 --- SW PORT 3

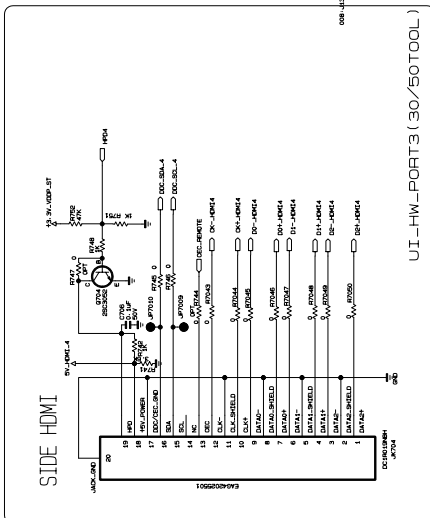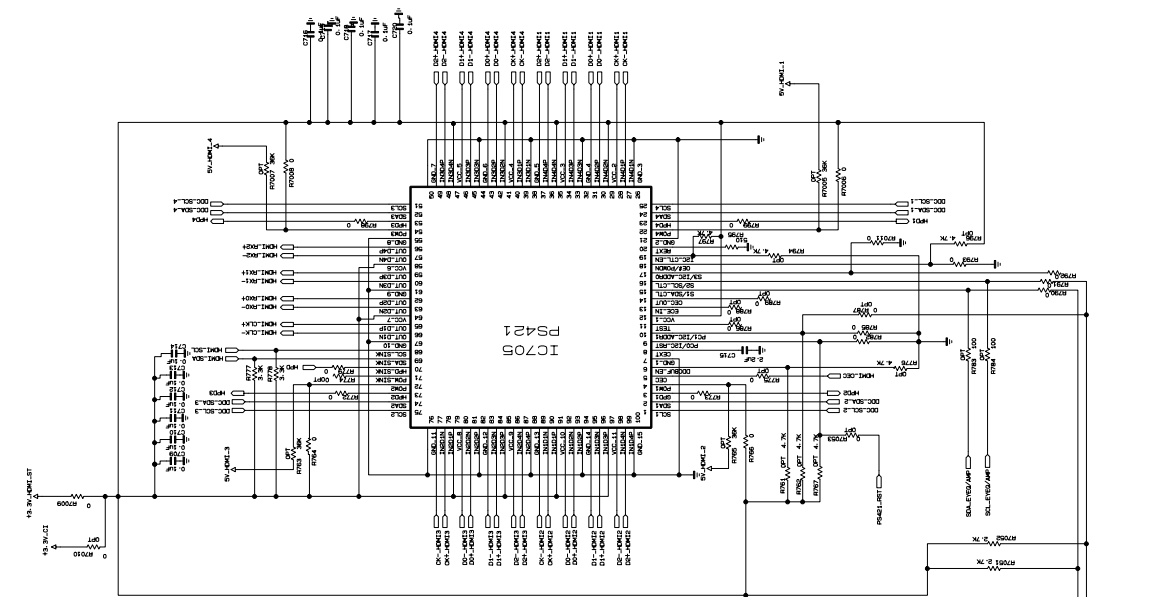

THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FILTRER AND ELECTRICAL SHOCK HAZARDS. WHEN SERVICING IT IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

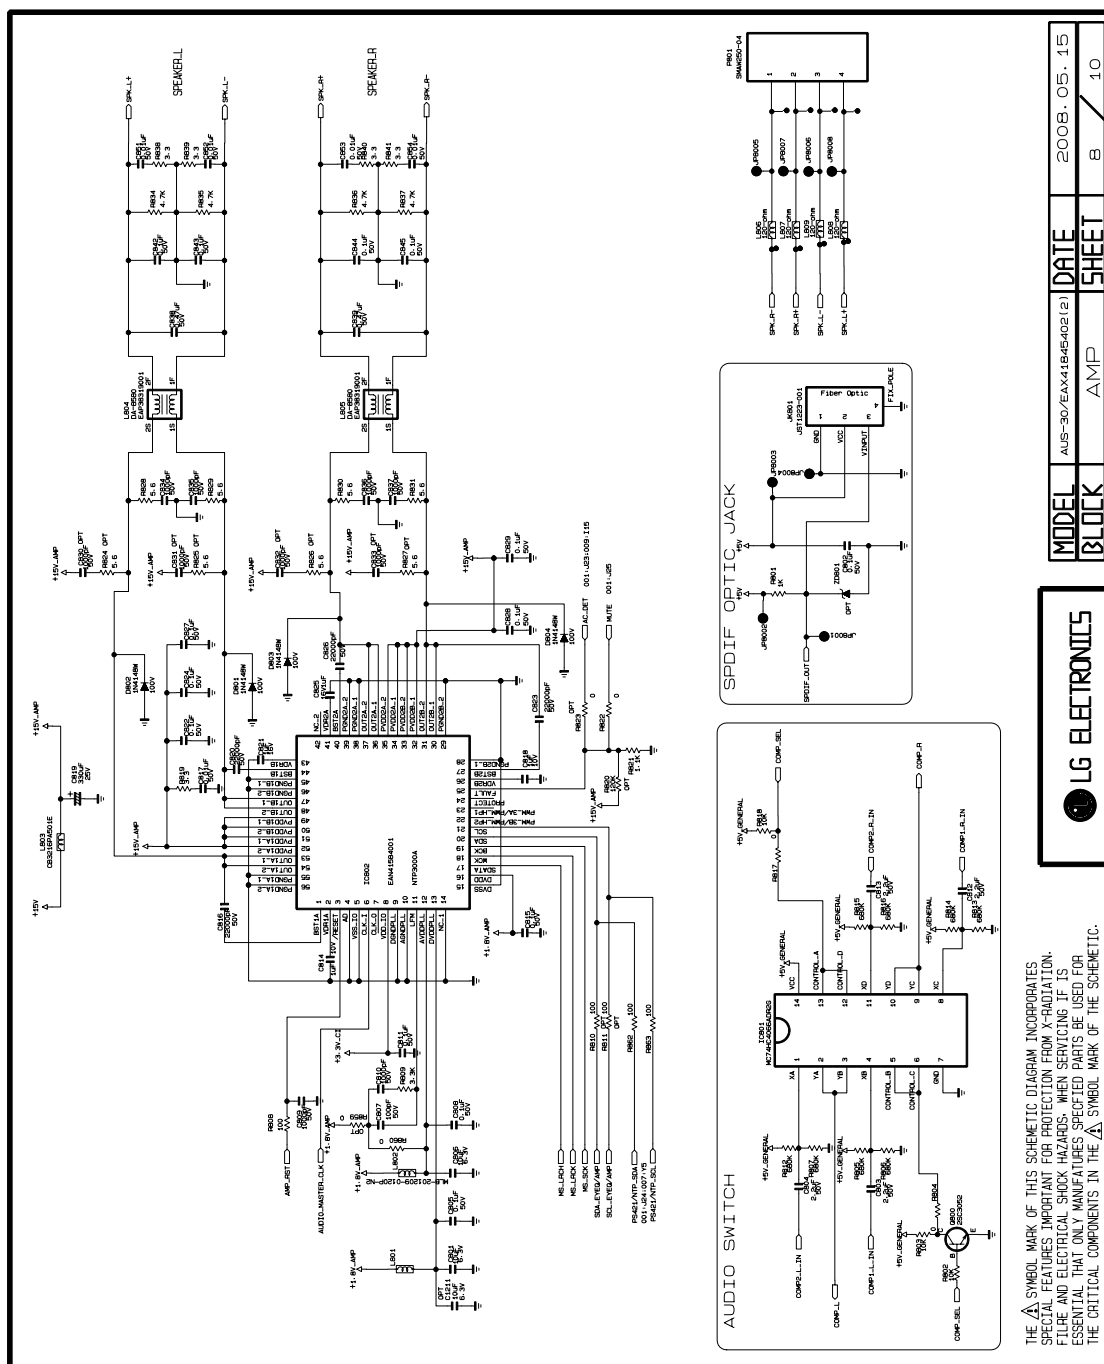



## +3.3V\_VDDP\_ST



|       |          |
|-------|----------|
| DATE  | 08.05.15 |
| SHEET | 10 / 10  |



P/NO : MFL47147101

May, 2008  
Printed in Korea

