

MOTOR STARTING CAPACITOR

ELECTRICAL APPARATUS USE METALIZED FILM WITH PRECISELY QUALITY CONTROL.












TS11

FEATURES

- High safety. High reliability.
- High I.R. (insulation resistance) small size.
- Low D.F. (dissipation factor), lower temperature rise.
- Durability and characteristics of frequency, etc.



SPECIFICATIONS	
OPERATING CONDITION	1) Range of temp: -25°C~+70°C or -40°C~+85°C 2) Max permissible over voltage: W.V X120% 3) Max permissible over current: rated current X130% 50/60, 1K, 10K, 100KHz
CAPACITANCE TOLERANCE	±5%, +10%~-5%, ±10%
RATED VOLTAGE	200~600VAC or 250~1500VDC
DISSIPATION FACTOR	Below 0.3% or 0.1%
INSULATION RESISTANCE	Above 2000MΩ
LIFE TEST	1) Max capacity VA: VA X135% 2) Continue life test: W.V.X120% 1000+-12hr. 3) On-off test: W.V.X 140% on 2sec. Test cycle 100,000+-1,000 times

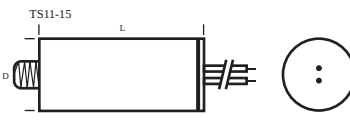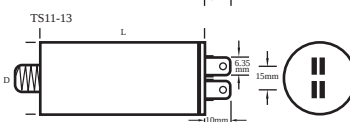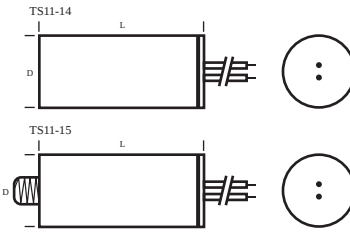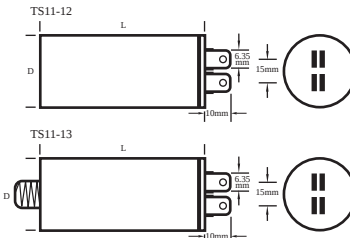

SQUARE TYPE

CAPACITANCE uF	250VAC			300VAC			350VAC			400VAC			450VAC		
	L	T	H	L	T	H	L	T	H	L	T	H	L	T	H
1	32	11	21	37	13.5	25	37	13.5	25	37	13.5	25	37	14.5	24
1.5	32	11	21	37	13.5	25	37	13.5	25	38	18	29	38	18	29
2	32	11	21	37	13.5	25	37	18	29	38	18	29	50	20	30
2.5	32	11	21	37	14.5	26	37	18	29	50	20	30	50	20	30
3	32	13	23.5	37	18	29	37	19	29	50	20	30	51	22	32
3.5	32	13	23.5	37	18	29	50	20	30	50	20	30	58	23	35
4	32	13.5	25	37	19	29	50	20	30	51	22	32	58	23	35
4.5	37	13.5	25	50	20	30	50	20	30	58	23	35	58	23	35
5	37	13.5	25	50	20	30	51	22	32	58	23	35			
5.5	37	13.5	25	50	20	30	51	22	32	58	23	35			
6	37	14.5	26	51	22	32	58	23	35	58	23	35			
6.5	38	18	29	51	22	32	58	23	35	58	23	35			
7	38	18	29	51	22	32	58	23	35						
8	38	18	29	58	23	35	58	23	35						
9	38	19	29	58	23	35									
10	50	20	30	58	23	35									
11	50	20	30	58	23	35									
12	50	20	30												
13	50	20	30												
14	50	20	30												
15	51	22	32												
16	51	22	32												

