

Technical Manual

JBL JRX118SP/230

SPECIFICATIONS



ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- Nominal Impedance: 4 ohm
- Amplifier Power: 300 Watts
- Frequency Range: 38Hz – 300 Hz (–10dB)
- Sensitivity: 96dB SPL (1 W at 1 M)
- Crossover Frequency: 300Hz

SYSTEM COMPONENTS:

- Cabinet: (Not For Sale)
- Grille: 352838-001
- Low Frequency Transducer: 460mm (18 in.) Cone Transducer (2043G)
- DC Resistance: 2.6 ohm

AURAL SWEEP TEST SPECIFICATIONS:

- A. System Aural Sweep Test: 0.5 Vrms for 300 W Output (Sub Level Control Fully Clock-Wise) Sweep 20 Hz to 150 Hz
- B. L.F. Aural Sweep Test: 10.0V Input, 20 Hz to 1.2 kHz

PHYSICAL SPECIFICATIONS:


- Enclosure Dimensions: 597mm x 516mm x 597mm D (23.5 x 20.3 x 23.5 in. D)
- Net Weight: 89 lbs. (40.4 kg.)

WARRANTY INFORMATION:

- Refer to Warranty Statement packed with each product.

PACKAGE

Warranty 59660
Specification Sheet
352941-001

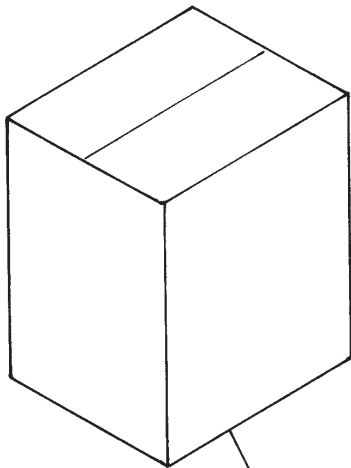


AC Cord
425-00000-00

Filler (2)
352986-001
Micro Foam (16)
49790P
Carton
352926-003

WIRING DIAGRAM

Driver, Low Freq
2043G
352938-001X
Cone Repl
C4R2043



RED


BLK

Amp, 120V
364250-001

Amp, 230V
364251-003


JBL JRX118SP/230

COMPONENT EXPLODED VIEW

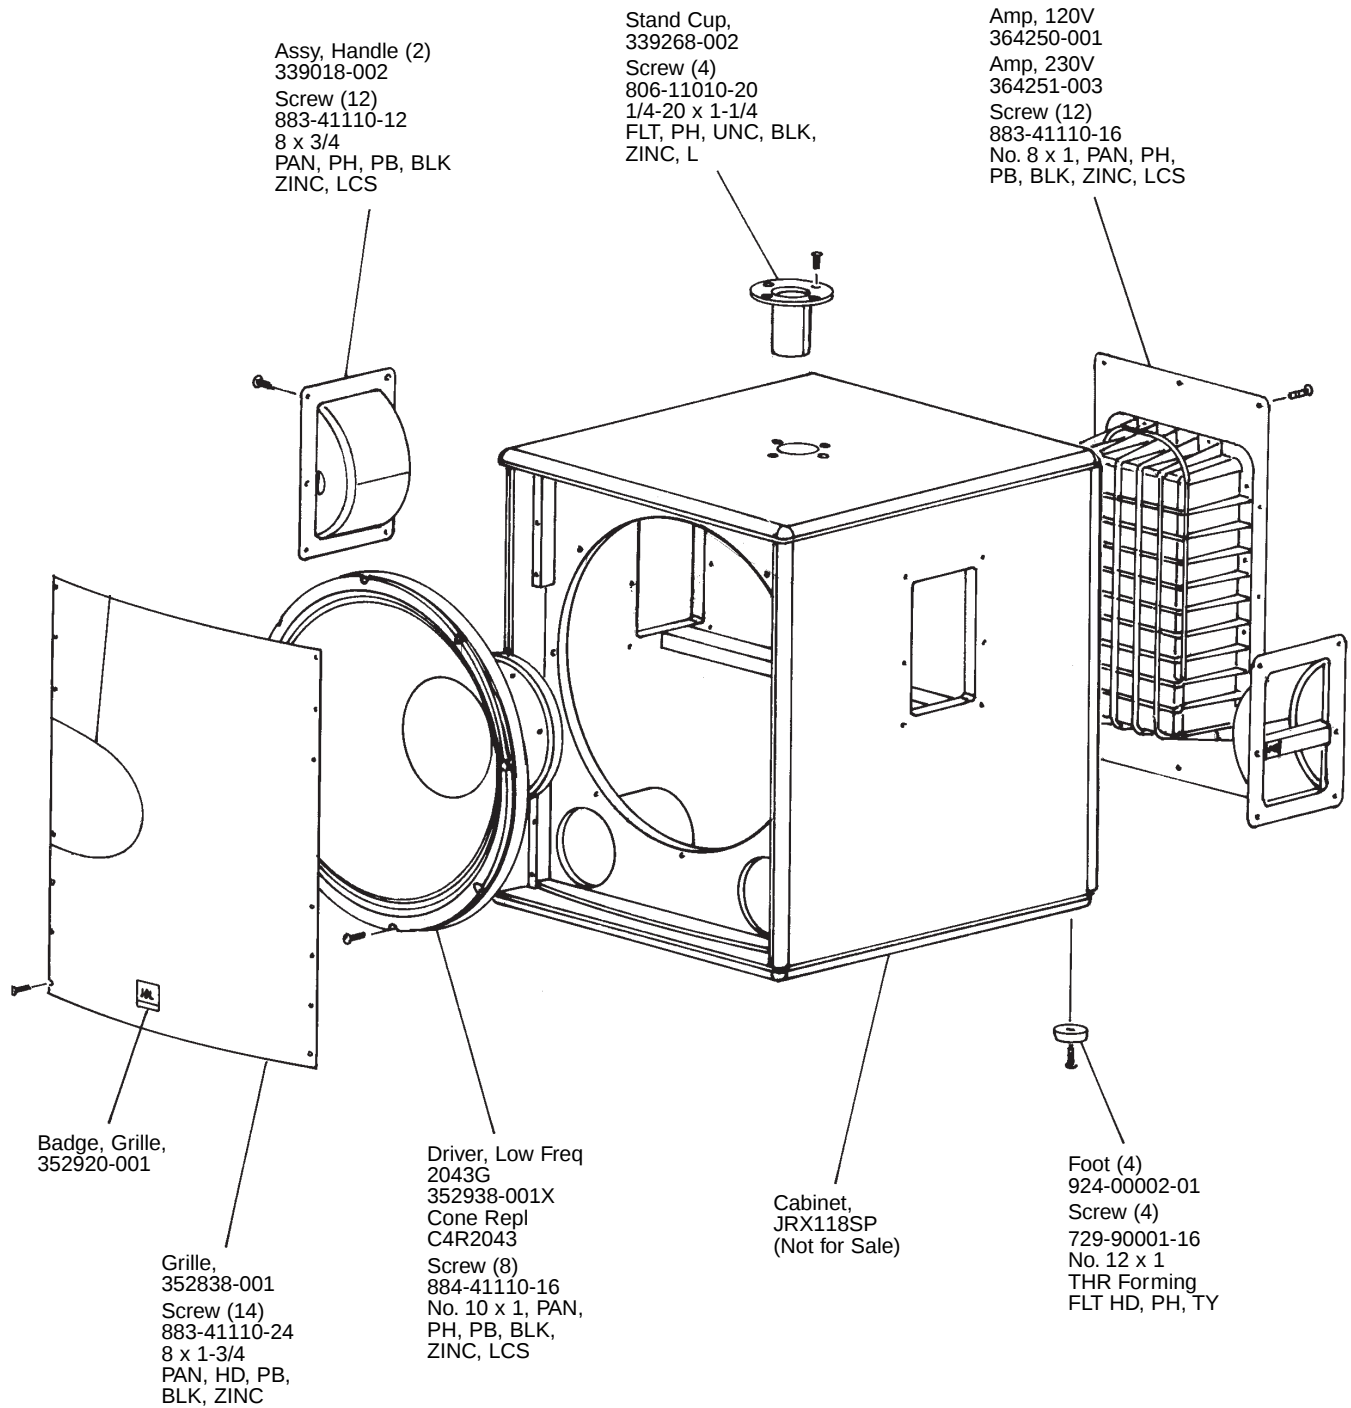

COMPONENTS

MAIN BOARD

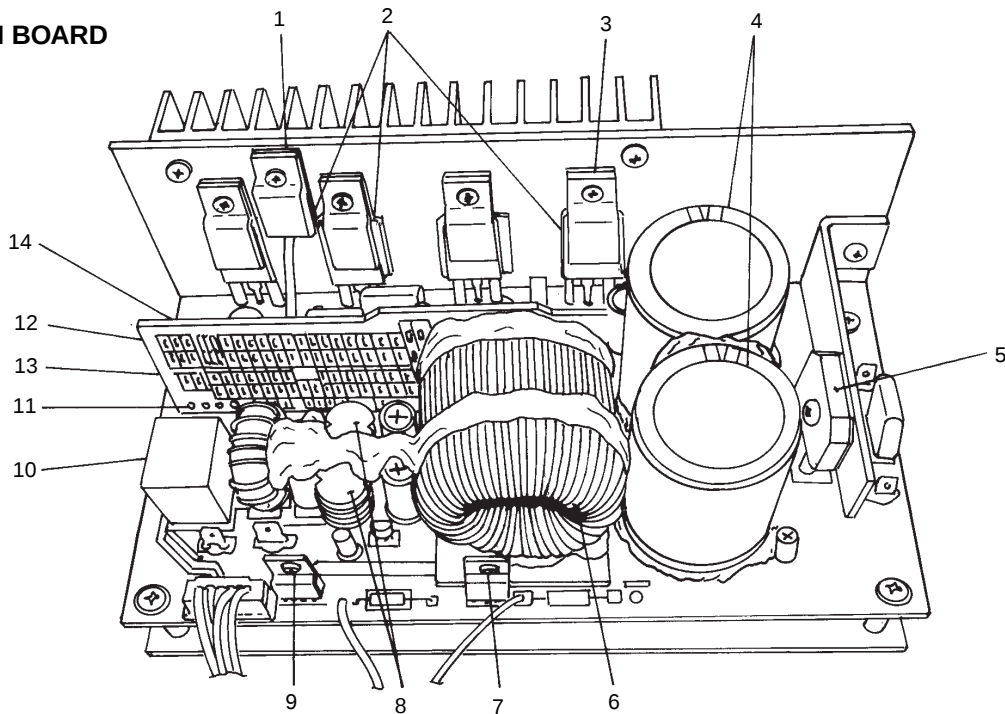


COMPONENT PARTS LIST: Main PCB 351044-001

Item	Part No.	Qty	Description	Ref. Des.
1	351047-001	1	TSE-103 K L:50MM	TH1
2	351056-001	4	IRFP250N	Q11,13,15,17
3	351036-001	5	Brkt Pwr Transistor	P. Transistors
4	351049-001	2	10000 UF63V	C1, C4
5	351059-001	1	400V, 8A	BR1
6	351053-001	1	70UH	L8
7	351060-001	1	LM317T	Q6

Item	Part No.	Qty	Description	Ref. Des.
8	351051-001	2	30MH	L9, L10
9	351061-001	2	LM337T	Q8
10	351070-001	1	48VDC RELAY	RLY1
11	351052-001	1	56 UH	L12
12	351072-001	1	JRX118SP DRIVE	PIN 1 A
13	351398-001	1	7 PIN CONN	
14	331399-001	1	11 PIN CONN	

INPUT BOARD

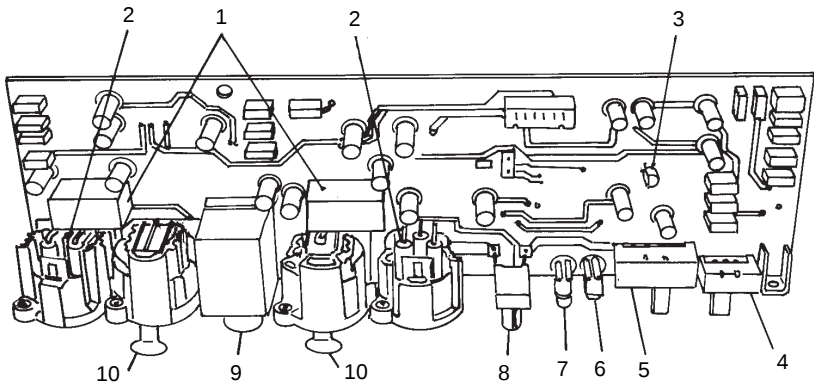


COMPONENT PARTS LIST: Input PCB 351086-001

Item	Part No.	Qty	Description	Ref. Des.
1	351104-001	2	TRS-5VDC	K1, K2
2	351098-001	2	PN: NC3MAH	JK201,JK204
3	351090-001	1	J113	Q206
4	351103-001	1	PO12BA-PA8 SW	S202
5	351102-001	1	P242BLB-PC10 SW	S201/SW201

Item	Part No.	Qty	Description	Ref. Des.
6	351089-001		PN: LT6431-81	D213
7	351088-001	1	PN: LT6421-81	D210
8	351087-001	1	PN: RD09L1120032-EJ	VR201
9	351100-001	1	PN: SCJ628R3 NAS1B00	JK1
10	351099-001	2	XLR (NEUTRIK)	JK202,JK204

COMPONENTS

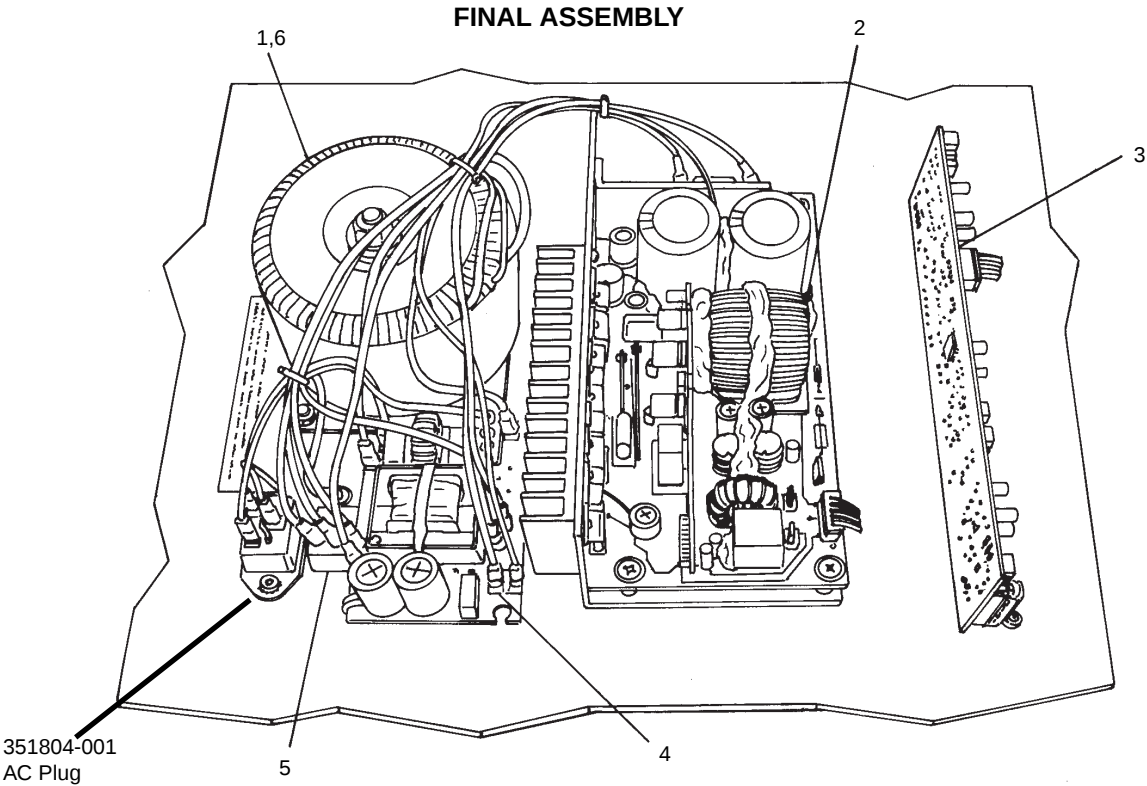

COMPONENT PARTS LIST: Final Assembly


Item	Part No.	Qty	Description
1	351032-001	1	PN:TTO-10654-01 Toroid Transformer 120V
2	351044-001	1	Main
3	351086-001	1	JRX118SP Pre PCB
4	351105-001	1	Fuse/PT2 BD
5	351255-001	1	Power Switch
6	352329-001	1	PN;TTO-10655-02 Toroid Transformer 220V


FUSE – PT2 BD

COMPONENT PARTS LIST: Fuse PT2 BD 351105-001

Item	Part No.	Qty	Description	Ref. Des.
1	351109-001	1	200V, 2A	BR2
2	351106-001	2	4700UF/25V 85C	C15, C16
3	351107-001	1	PN:XG275M224VHS2	CXAC18
4	351108-001	1	324UH	L13
5	351111-001	1	7A/250V 5X20MM	F1


Fuse Holder, 351110-001

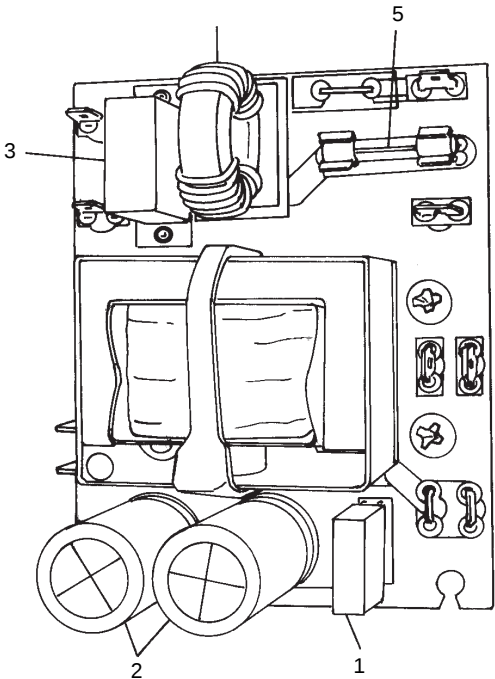

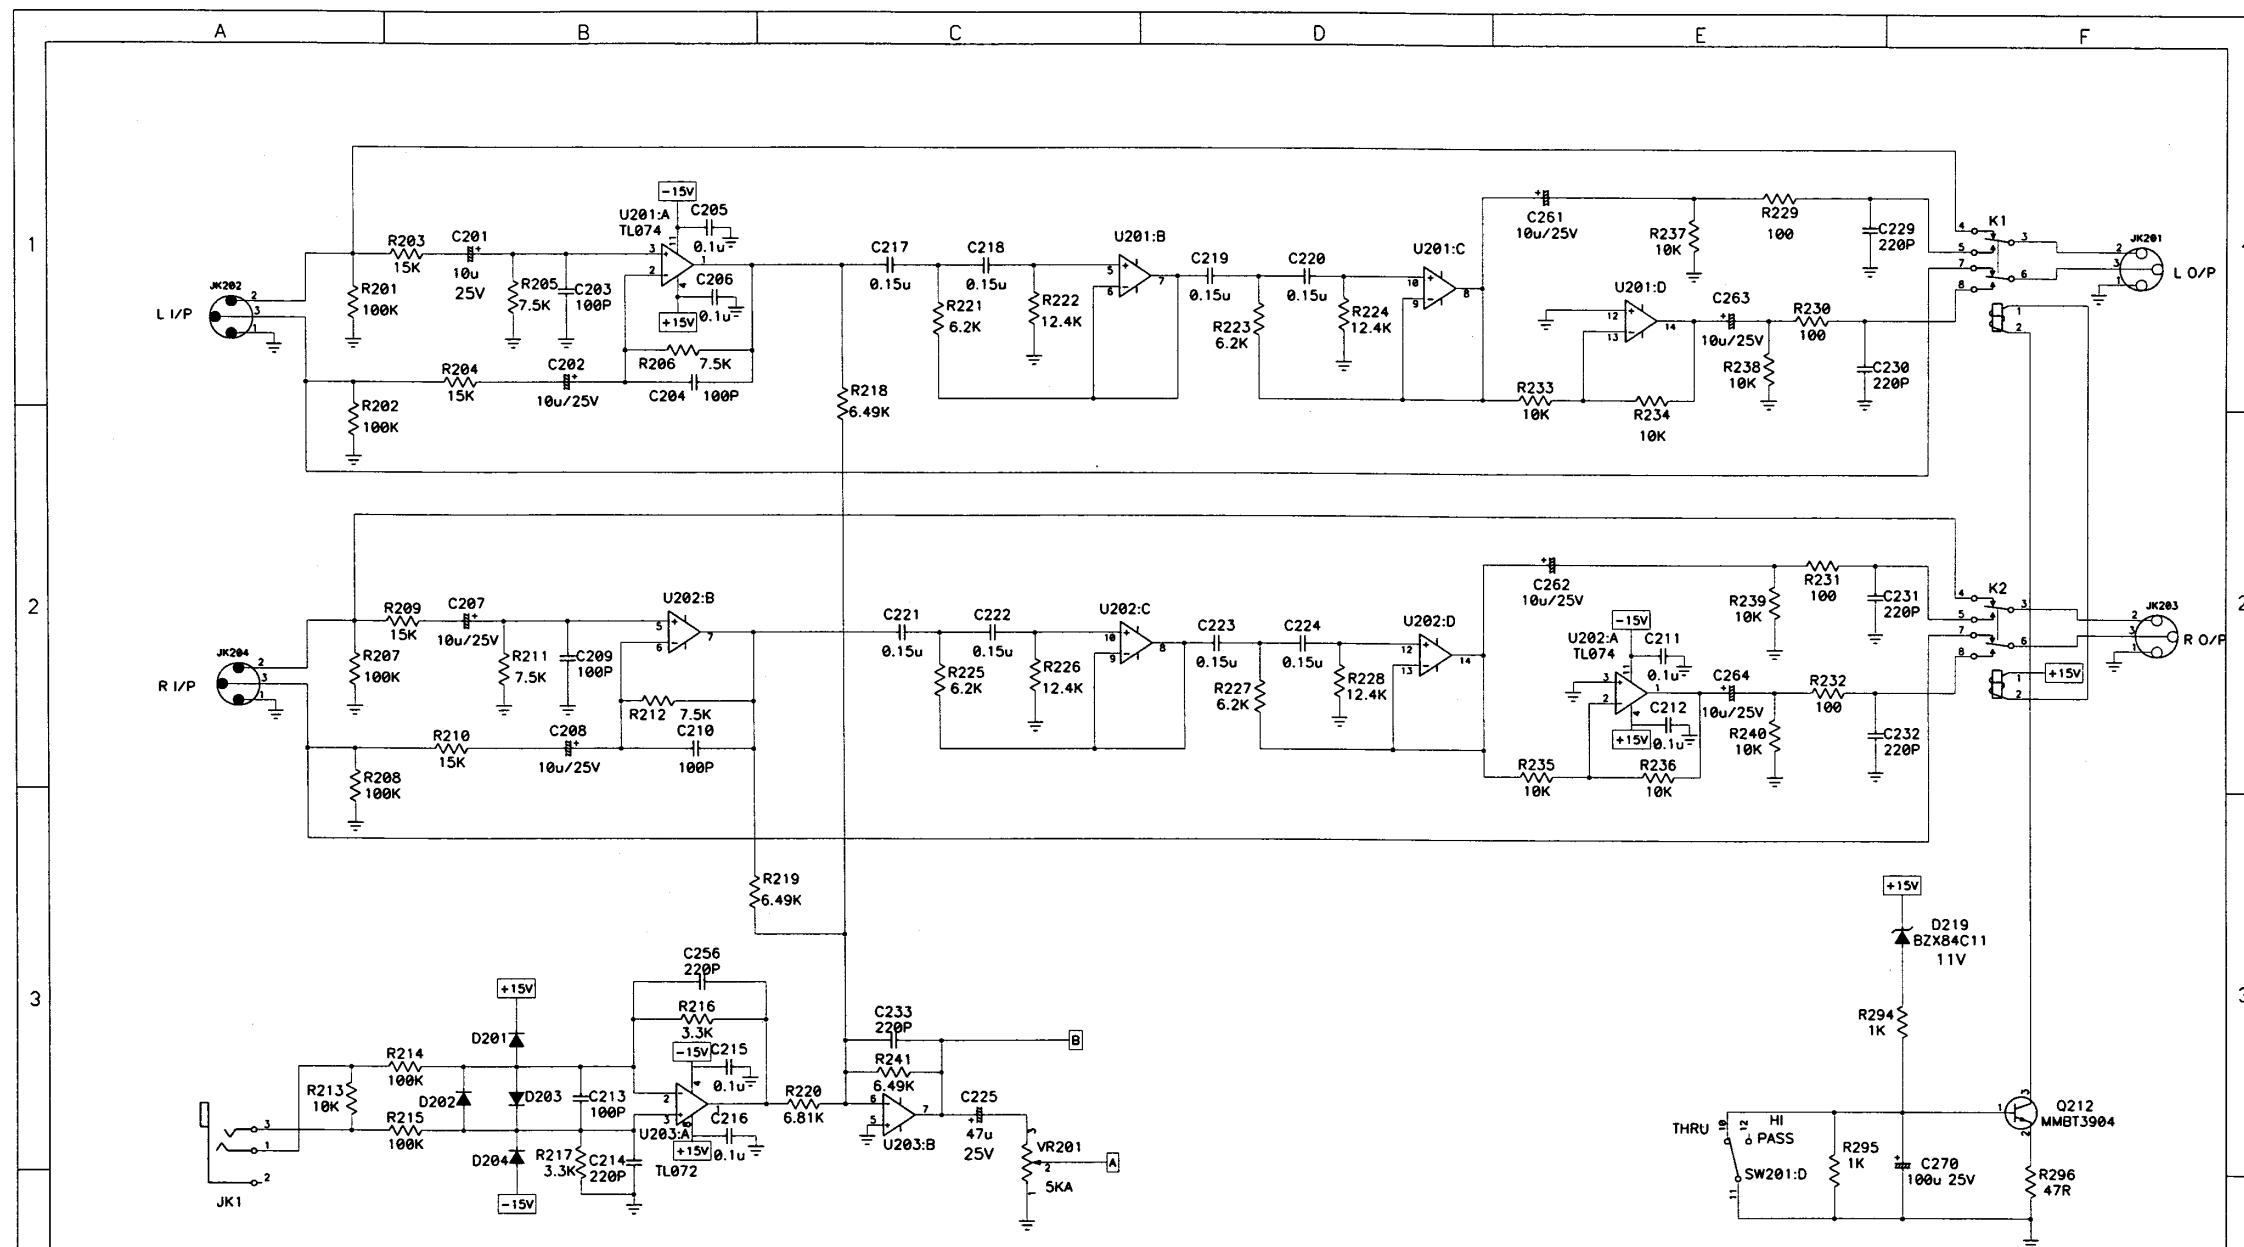

Rev:	Notes:	Date:	Rev:	Notes:	Date:	Draw by	Designed by	Checked by	Approved By	Customer:
01	Mass Production P1K = REV01	2002/04/12								JBL PRO
02										P/N: 1J03-1511-36
03										Model no: SF22SP AMP
04	ADD D207&R299	2002/05/13								Sch name: PRE AMP BOARD
										Issue no: 1J03-1511-31
										Date: 2002-04-19
										Sheet: Rev: 04
										Size: A2 Author: Vito

ELYTONE ELECTRONIC CO.,LTD.
TEL:+886-2-2671-2071
FAX:+886-2-2672-5943

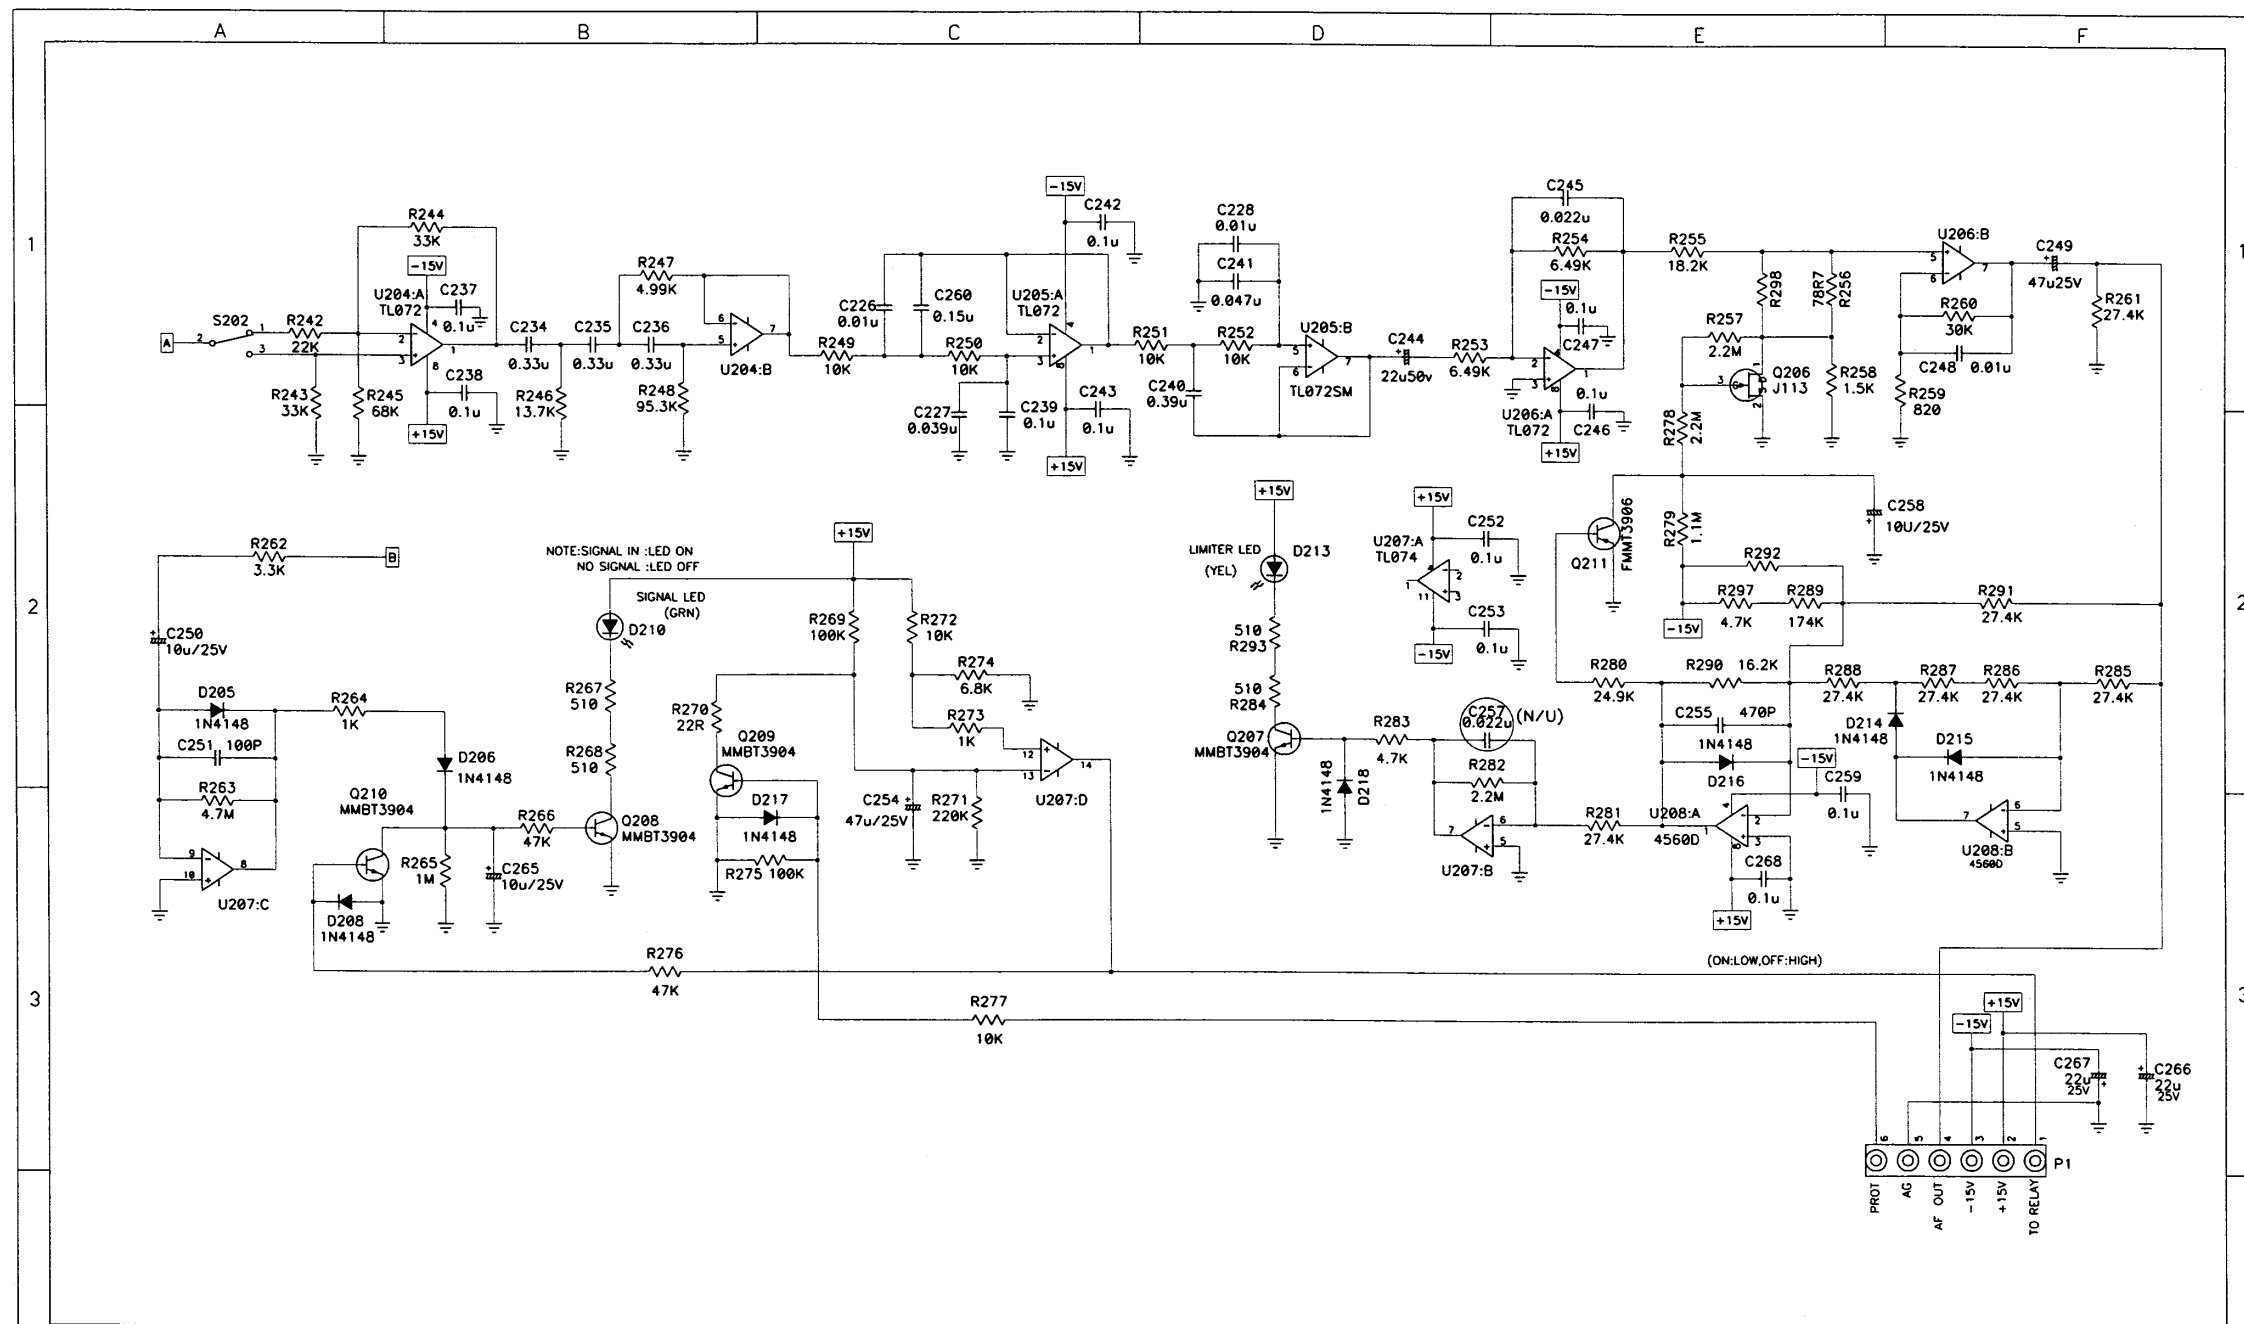

Rev:	Notes:	Date:	Rev:	Notes:	Date:	Draw by	Designed by	Checked by	Approved By	Customer:
01	Moss Production P1K = REV01	2002/04/12								JBL PRO
02	Modify C257 Was .022u Is .022u (N/U)	2002/04/19								P/N: 1J03-1511-36
										Model no: SF22SP AMP
										Sch name: PRE AMP BOARD
										Issue no: 1J03-1511-31
										Date: 2002-04-19
										Sheet: Rev: 04
										Size: A2 Author: Vito

ELYTONE ELECTRONIC CO.,LTD.
TEL:+886-2-2671-2071
FAX:+886-2-2672-5943

