

Philco

Vista Explodida



T
V

P
H
4
2

L
E
D

A


0800 415300

Suporte.tecnico@britania.com.br

VISTA EXPLODIDA

PRODUTO	CÓDIGO	PADRÃO N.º SÉRIE
TV PH42 LED A	099423000ATX	AA 000.000 TxxX

(X) - Último algarismo do código e N.º série significam a versão do aparelho

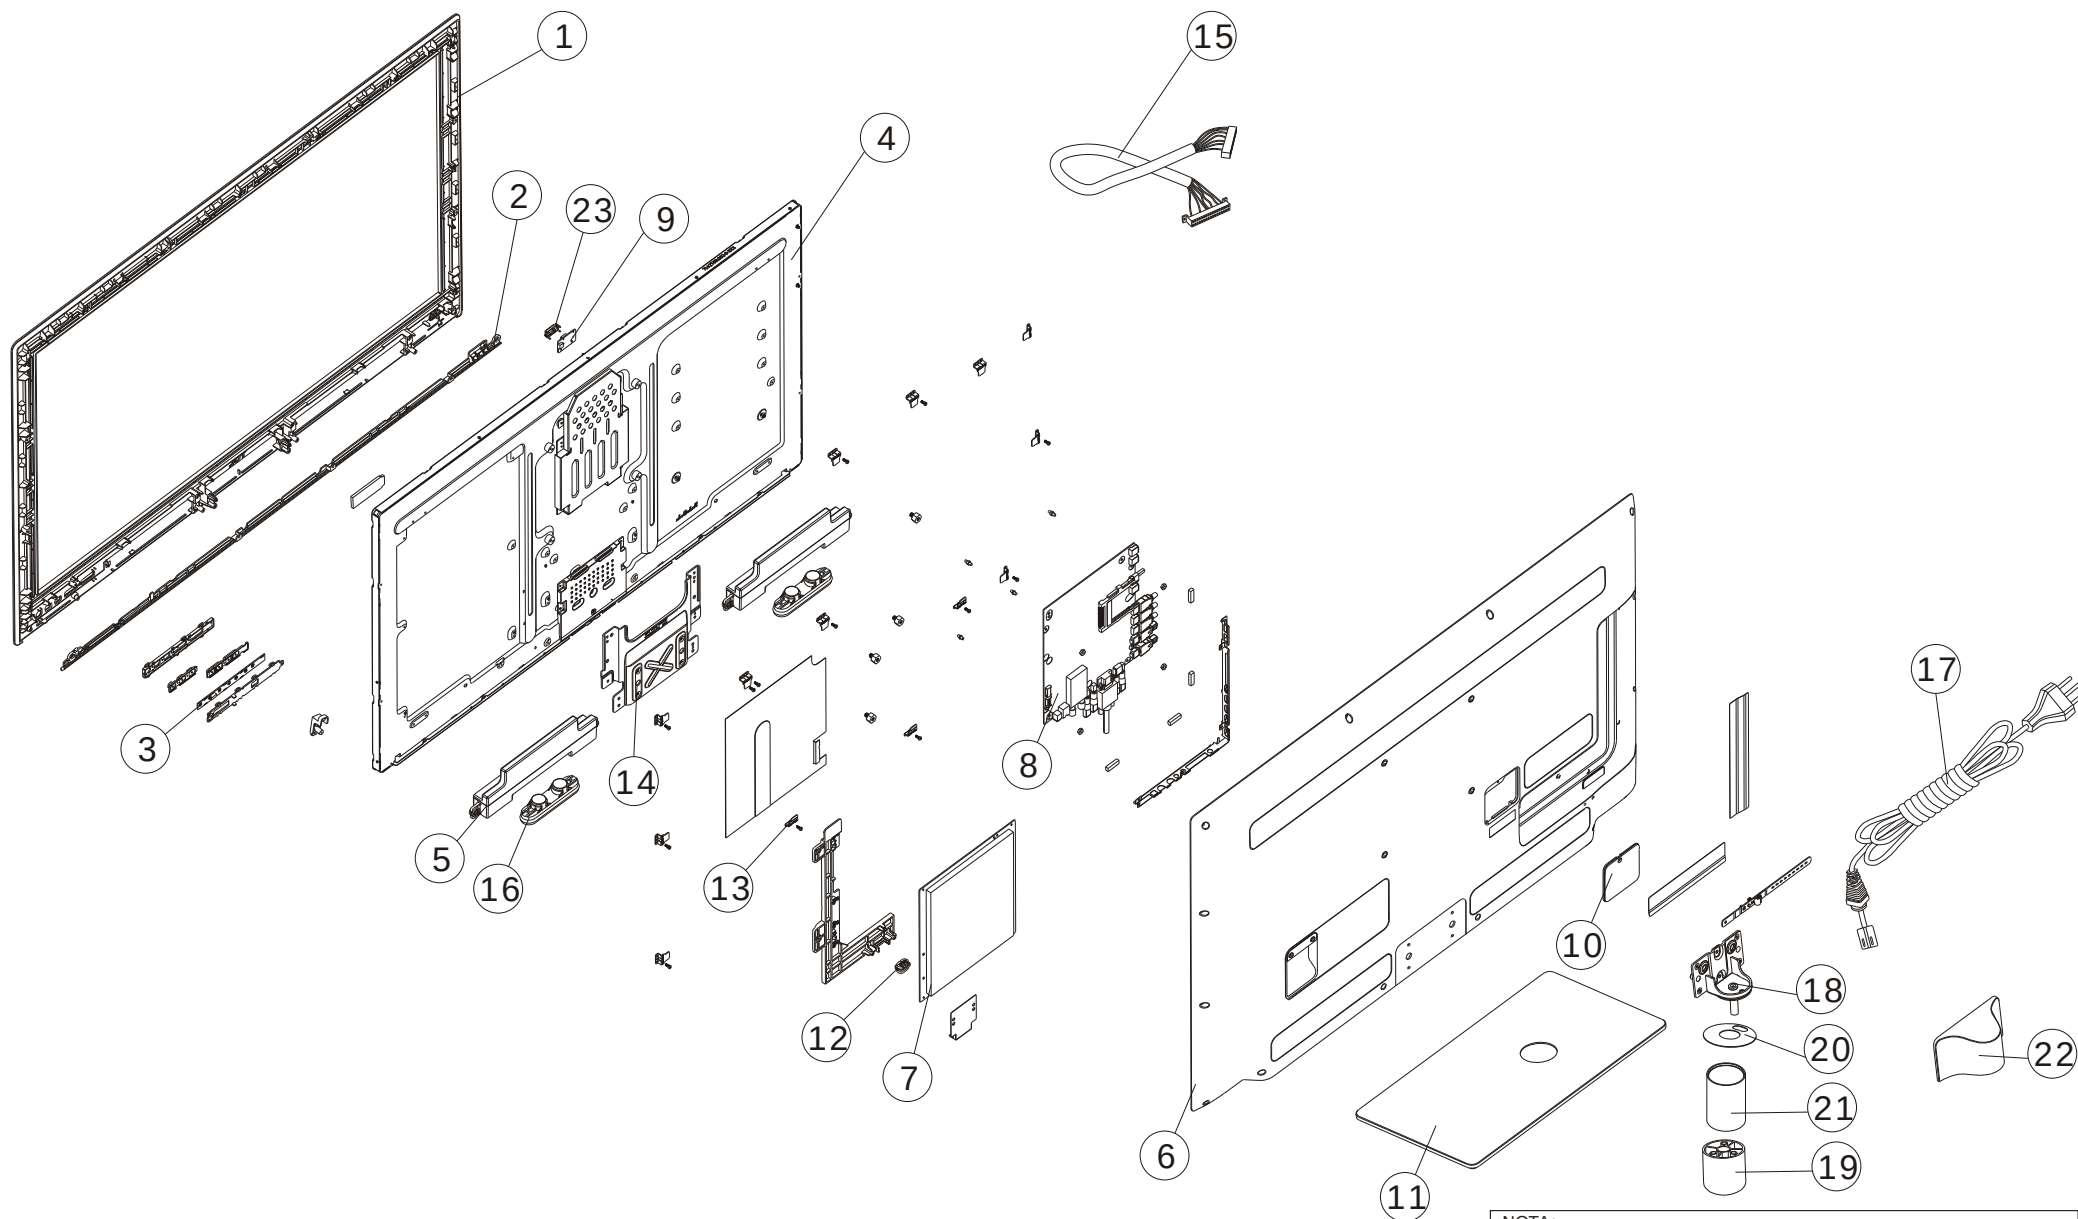

NOTA:


- Esta lista está sujeita a alterações sem aviso prévio, consultar o site www.telecontrol.com.br para informações atualizadas.
- Em caso de dúvidas, entrar em contato com o Suporte Técnico
- Somente os itens que possuem códigos serão fornecidos.



ITENS DA VISTA EXPLODIDA

Código	Descrição peça	Nº
710164	GAB FRONT TV PH42 LED A	1
710163	ACAB ACRILICO GAB FRONT PH42 LED A	2
710455	PCI TECLADO PH42 LED A	3
710387	DISPLAY AUO T420HW07 V.7 PH42 LED	4
710136	ALOJAMENTO ALTO-FAL PH42 LED A	5
710171	GAB TRAS TV PH42 LED A	6
710588	PCI FONTE PH42 LED A	7
710587	PCI PRINCIPAL PH42 LED A	8
710589	PCI IR PH42 LED A	9
710085	TAMPA CONEC ATUALIZACAO PH42 LED A	10
710138	BASE VIDRO PH42 LED A	11
710093	SOQUETE AC PH32 LED A	12
710161	SUP FIX PAINEL INF PH42 LED A	13
710162	SUPORTE FIX HASTE PH42 LED A	14
710175	CABO LVDS PAINEL 500mm PH42 LED A	15
710057	ALTO-FAL 16 ohm 10W YDP310-10T-A	16
710127	CORD 2x0,75mm 1,5M	17
710143	MESA HASTE PH42 LED A	18
710144	HASTE ALUMINIO PH42 LED	19
710145	ISOLADOR HASTE-MESA PH42 LED A	20
710146	LUVA MESA HASTE PH42 LED A	21
710148	COBERTURA HASTE PH42 LED A	22
710108	LENTE IR PH32/42 LED A	23



DEMAIS ITENS FORNECIDOS

Código	Descrição peça	Nº
PCI PRINCIPAL		
710366	CI MST6M20S (LQFP-216) (SMD)	UM21
710367	CI SIL9187 (QFN-71) (SMD)	U23
704478	CI 4558 (SOP-8) (SMD)	U25
707920	CI 74HC4052D (SO-16) (SMD)	U18
710368	CI STA335BW (PSSO-36) (SMD)	U700
708816	CI MP1482 (S08) (SMD)	U21,U20,UM20
705522	CI 1117-2.5 (SOT223) (SMD)	U6,U61
704492	CI 1117-3.3 (SOT223) (SMD)	U9,U62
706787	CI AMS1117 ADJ (SOT223)(SMD)	U7,U63
710369	CI AZ1084S 1.3V (TO252)(SMD)	U8
710370	CI D13N3LT (SO-8) (SMD)	Q6,Q38
707161	CI A04459 (SOIC-8) (SMD)	Q1
706624	CI AZ1084D 3.3V (TO252)(SMD)	U31
706491	CI LD1117S50TR (SMD)	U1
710371	TUNER VA1G5BF8012 45.75MHz SHARP	TU1
PCI FONTE		
710321	CI L6599DTR (SOC-16)	U401
701632	CI TL431.KA431 (TO-92)(PTH)	U202,U402,U404
707235	CI VIPER22A (DIP-8) (PTH)	U201
709217	CI LM393 (SOP-8) (SMD)	U403
708819	CI PS2561 OPTO (DIP-4) (PTH)	PC1,PC2,PC3
710372	CI NCP1607 (SO-8) (SMD)	U301
710359	TRANSISTOR TK12A50D (TO-220SIS)	QW1,QW2,QW3
711359	FUSIVEL RET 3.15A250V 5X20 PORCE	F1
ACESSÓRIOS		
710591	CONJ CALCO TV PH42 LED A	***
710153	EMBALAGEM PH42 LED A	***
710569	MINI FOLDER PHILCO	***
709126	CERTIF GARANTIA PHILCO MANAUS	***
710598	MANUAL USUARIO TV PH42 LED A	***
710599	GUIA RAPIDO TV PH42 LED A	***
710124	CABO ADAPT VIDEO COMPONENTE	***
710125	CABO ADAPT AUDIO	***
710126	CABO ADAPT VIDEO COMPOSTO	***
710373	KIT PARAFUSOS FIX BASE PH32 LED A	***
710150	PARAFUSO FIX BASE M6X20	***
711553	PARAFUSO GAB TRAS M6X8mm	***
710077	CHAVE ALLEN 4mm	***
710586	CONTROLE REM PH32/42/46/55 LED	***
710123	PILHA AAA 1,5V	***


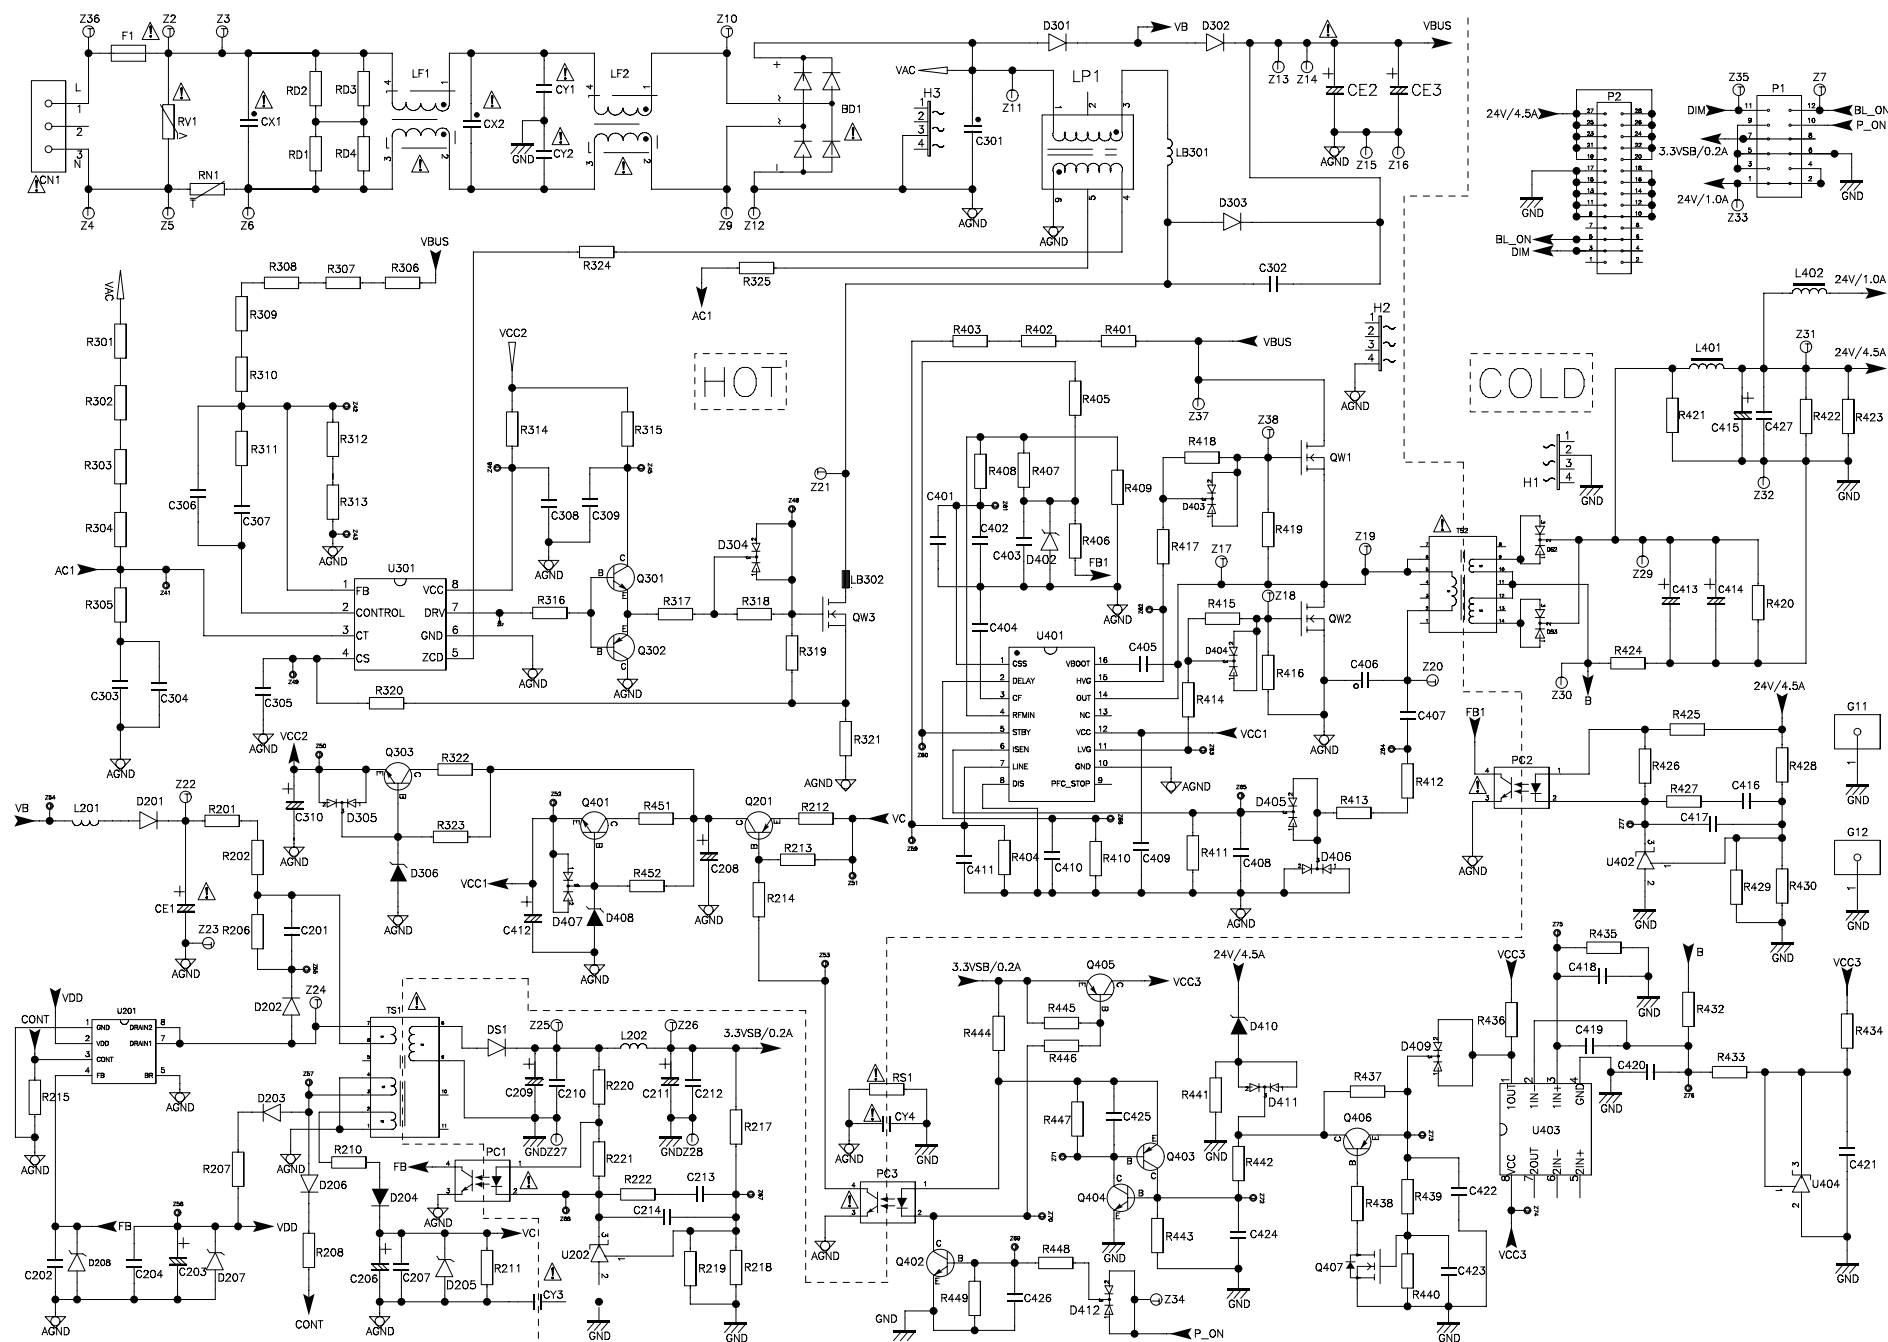




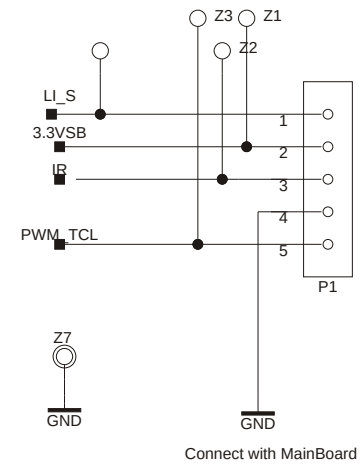
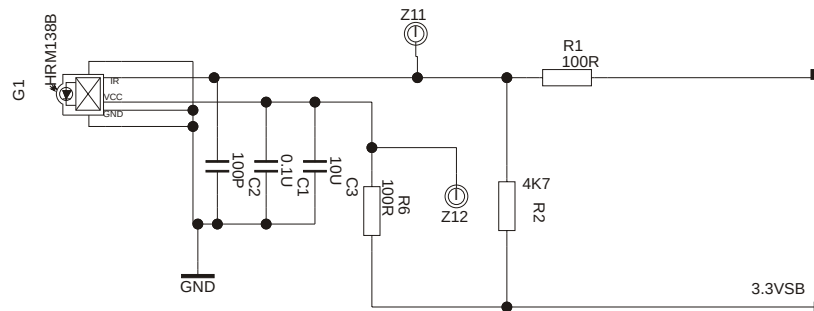



NC/LOGO

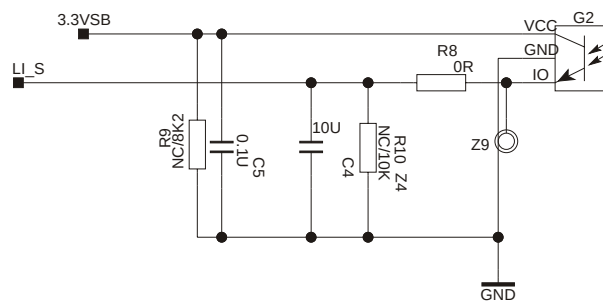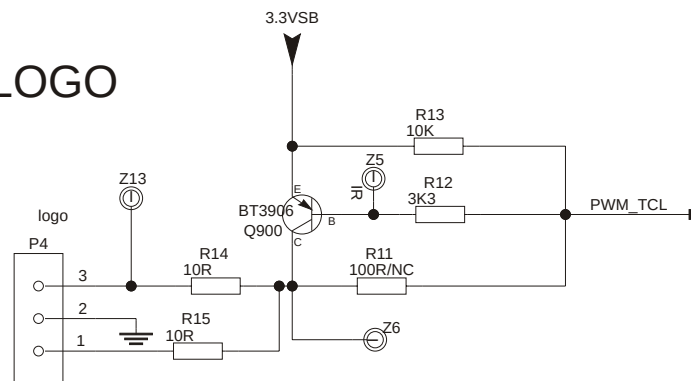


40-62FP11-IRA2XG

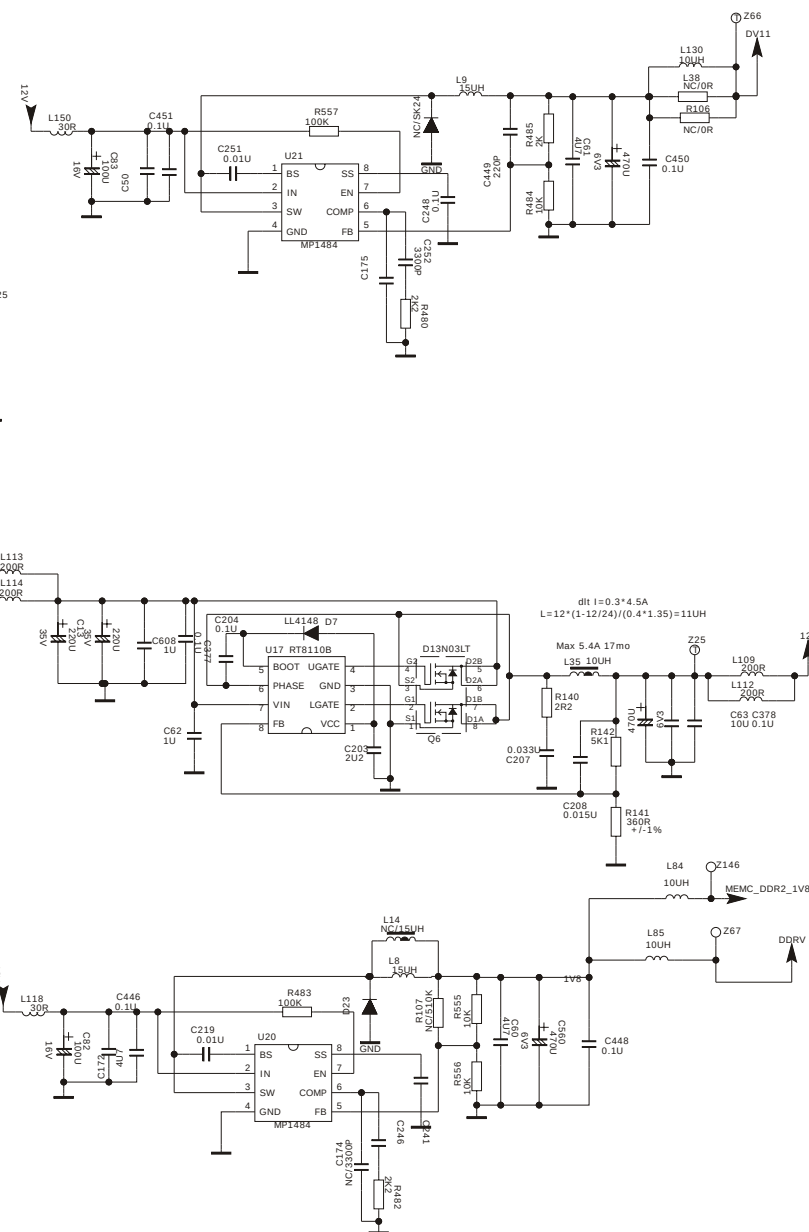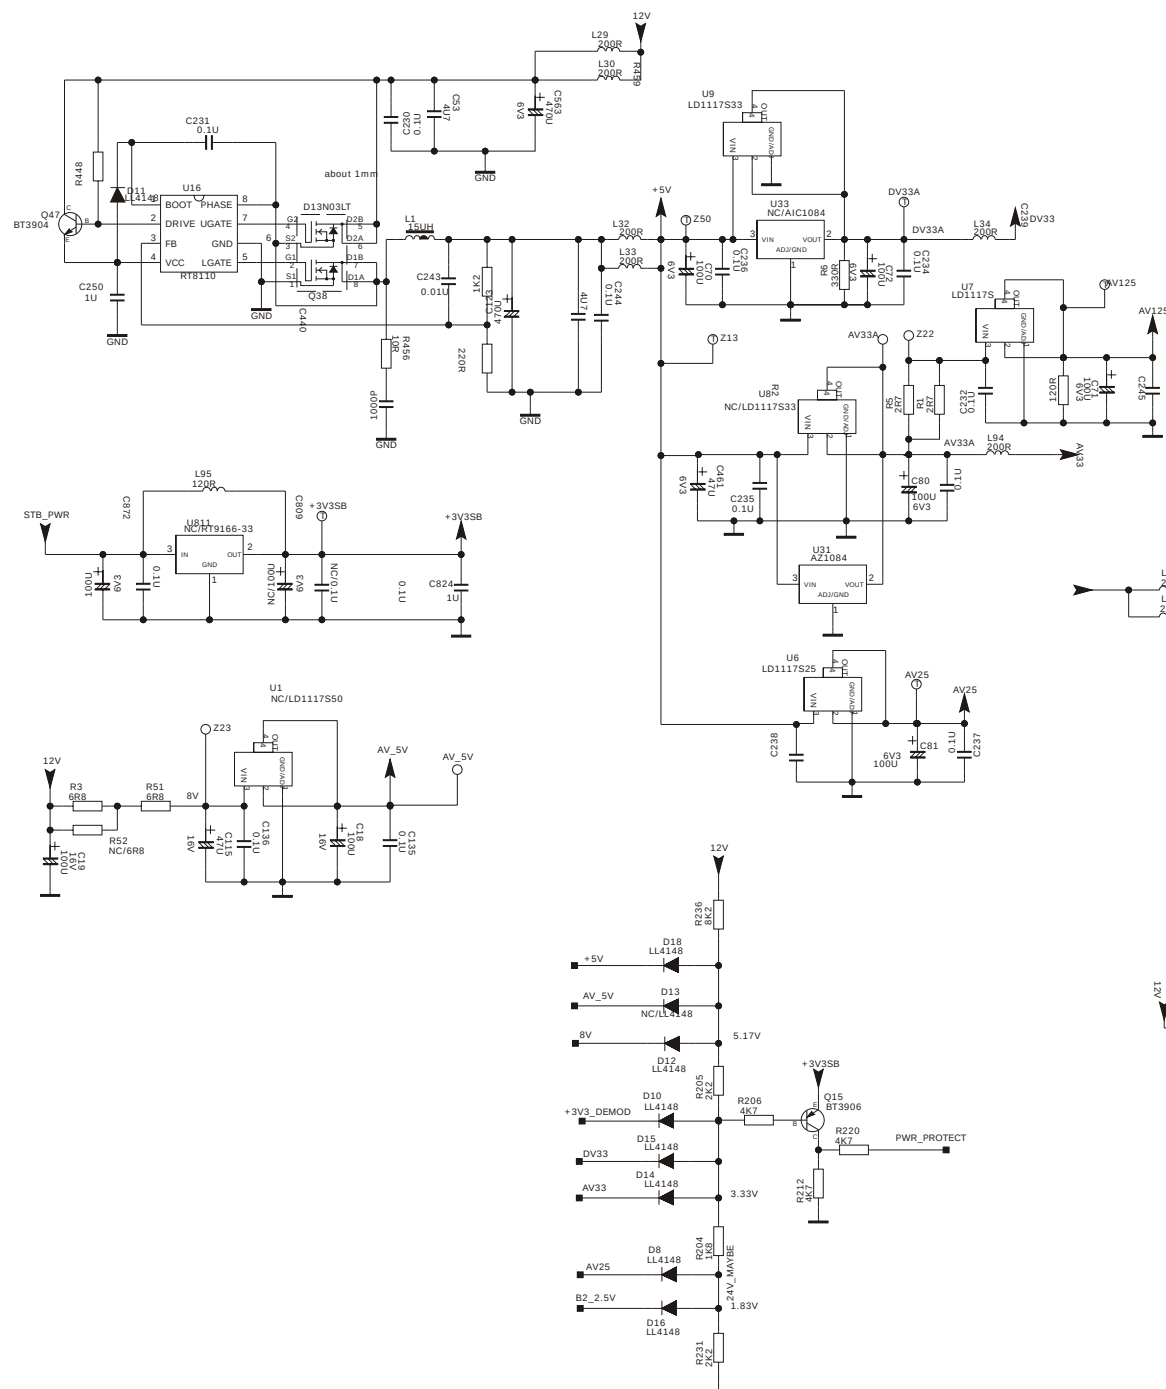

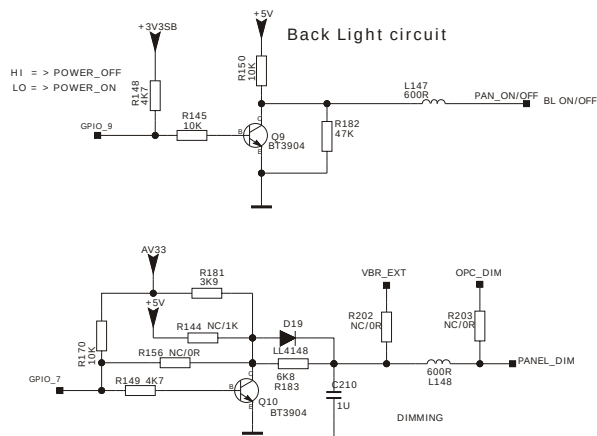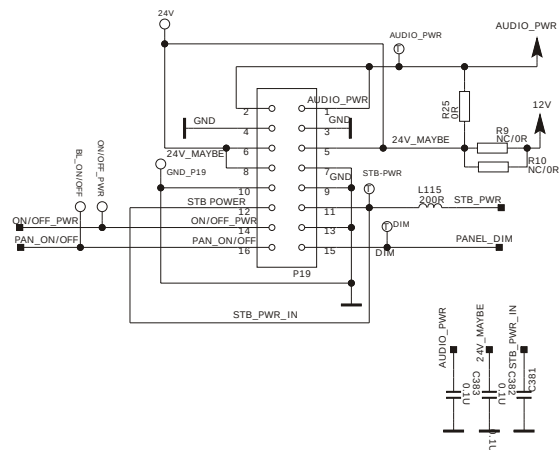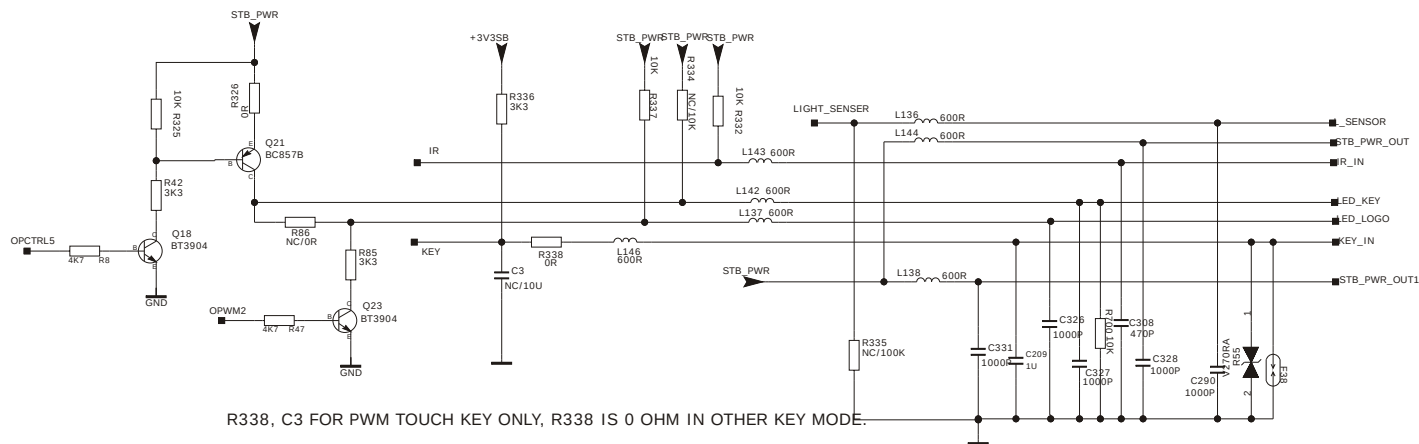

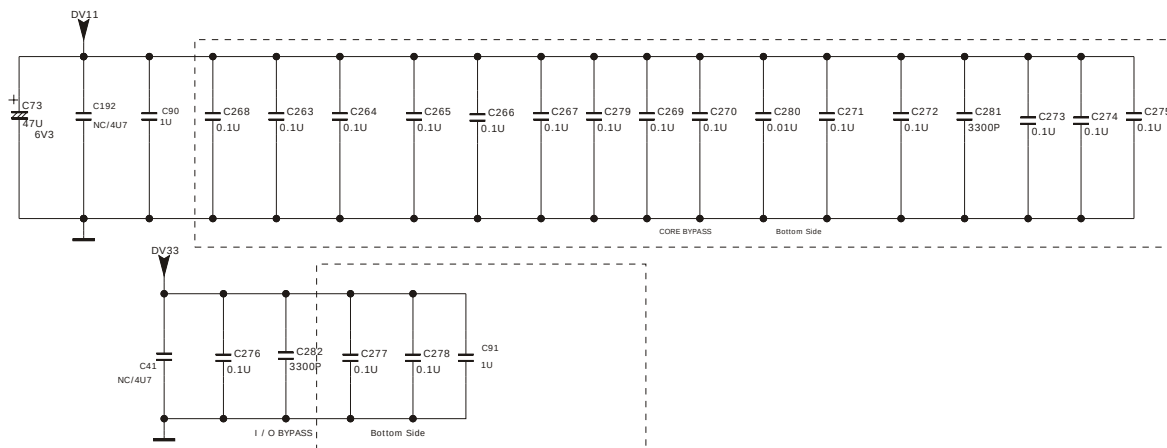

MT5362 STRAPPING MODE


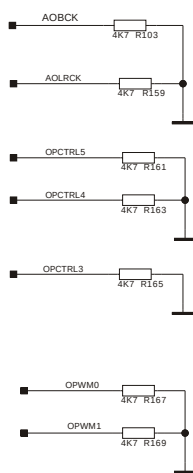





Strapping Mode	OPWM2	AOBCK	AOLRCK
Normal mode	0	0	0
ICE mode	0	0	1
CPU model mode	0	1	0


Trap Mode	OPCTRL5	OPCTRL4
Core Reset 1us	0	0
Core Reset 3.3V	0	1
SCAN mode	1	0
Core Reset 0.9V	1	1

Strapping Mode	OPCTRL3(0)	OPCTRL2(0)
XTAL 54MHz	0	0
XTAL 27MHz	1	0







Strapping Mode	OPWM0(0)	OPWM1(0)
Nor Boot	0	0
NAND Boot	0	1
large NAND Boot	1	0

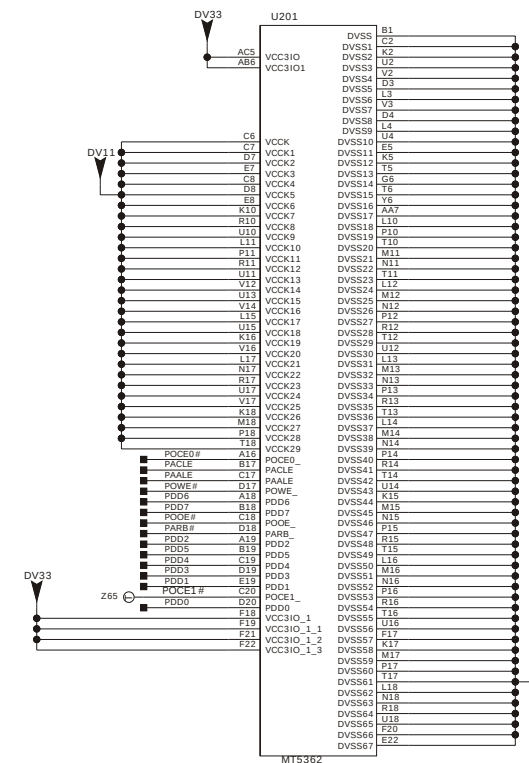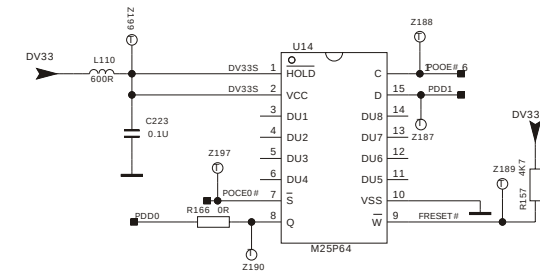

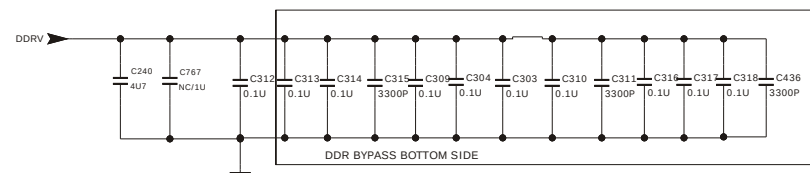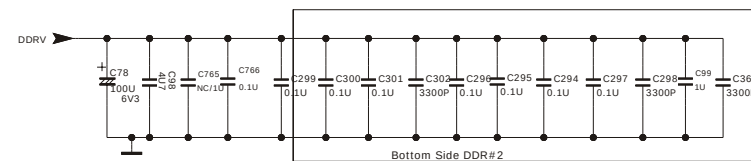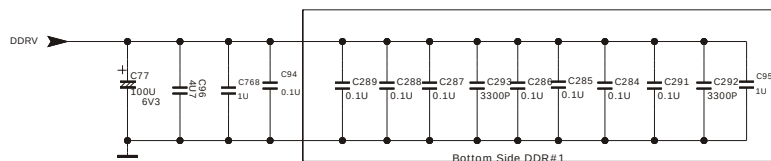



SYSTEM EEPROM

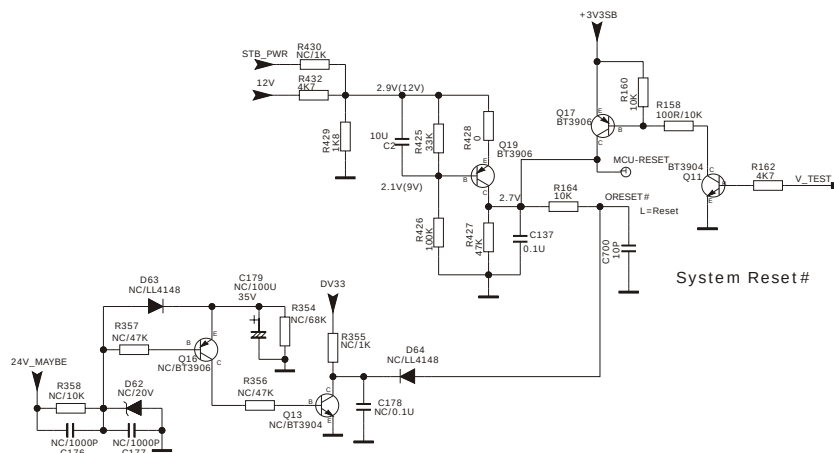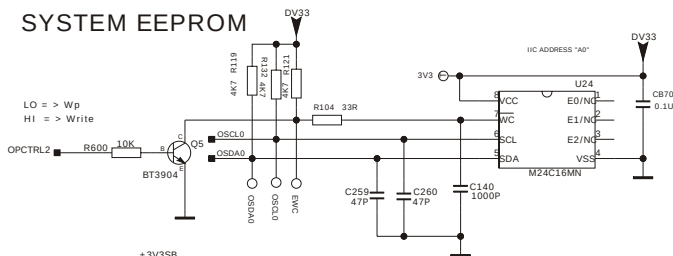

JTAG Port

