


MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



Low Impedance, Long Life
Series



LK → LZ
Long life




- Operating temperature range of -40 ~ +105°C
- Enabled high ripple current by a reduction of impedance at high frequency range
- High reliability withstanding 10000 hours load life at 105°C (6000 / 8000 hours for as specified below)
- Complied to the RoHS directive

Item	Characteristics									
Operating temperature range	-40 ~ +105°C									
Leakage current max.	$I = 0.01CV$ or $3\mu A$ whichever is greater (after 2 minutes) $I = 0.03CV$ or $4\mu A$ whichever is greater (after 1 minute)									
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C									
Dissipation factor max. (at 120Hz, 20°C)	Capacitance > $1000\mu F$: $\tan\delta$ increases by 0.02 for each $1000\mu F$ from below value.									
	Rated Voltage(V)	6.3	10	16	25	35				
	$\tan\delta$	0.22	0.19	0.16	0.14	0.12				
Low temperature characteristics (Impedance ratio at 120Hz)	Z-40°C / Z+20°C		Z-25°C / Z+20°C							
	3		2							
Load life	After an application of DC bias voltage plus the rated AC ripple current for 10000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.									
	Leakage current	Less than specified value								
	Capacitance change	Within $\pm 25\%$ of initial value								
	$\tan\delta$	Less than 200% of specified value								
	$\varnothing D$	$\varnothing D = 5, 6.3$		$\varnothing D = 8$	$\varnothing D \geq 10$					
	Life time	6000 hours		8000 hours	10000 hours					
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C 6035 clause 5.4.									

● DRAWING

Unit : mm

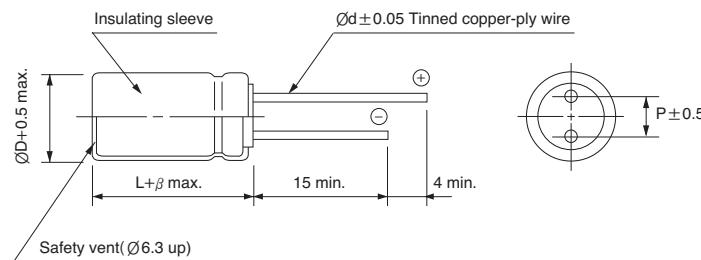

$\varnothing D$	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
$\varnothing d$	0.5	0.5	0.6	0.6	0.6	0.8	0.8
1.5						2.0	

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz
~ 33		0.32	0.60	0.80	0.90	1.00
39 ~ 270		0.40	0.63	0.82	0.91	1.00
330 ~ 680		0.45	0.67	0.84	0.92	1.00
820 ~ 1800		0.50	0.70	0.86	0.93	1.00
2200 ~		0.60	0.75	0.88	0.94	1.00

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



LZ series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	6.3			10			16		
	ØD × L (mm)	Impedance (Ω)max. 20 C 100kHz	Ripple current (mA rms) 105 C 100kHz	ØD × L (mm)	Impedance (Ω)max. 20 C 100kHz	Ripple current (mA rms) 105 C 100kHz	ØD × L (mm)	Impedance (Ω)max. 20 C 100kHz	Ripple current (mA rms) 105 C 100kHz
47	5 × 11	0.600	300	5 × 11	0.600	300	5 × 11	0.600	300
100	5 × 11	0.600	345	5 × 11	0.600	345	6.3 × 11	0.300	345
150	6.3 × 11	0.300	345	6.3 × 11	0.300	345	6.3 × 11	0.300	540
220	6.3 × 11	0.300	345	6.3 × 11	0.300	345	8 × 11.5	0.200	540
330	6.3 × 11	0.300	540	8 × 11.5	0.200	608	8 × 11.5	0.140	945
470	8 × 11.5	0.140	540	8 × 11.5	0.140	630	10 × 12.5	0.105	945
680	10 × 12.5	0.105	945	10 × 12.5	0.105	945	8 × 20	0.105	945
820	10 × 12.5	0.105	945	10 × 16	0.075	945	10 × 20	0.054	1760
				8 × 20	0.105	945	8 × 20	0.075	1250
1000	10 × 16	0.075	1250	10 × 12.5	0.105	945	10 × 20	0.054	1760
				10 × 16	0.075	1250			
				10 × 20	0.054	1650			
1200	10 × 16	0.075	1500	10 × 16	0.075	1760	10 × 20	0.054	1960
1500	10 × 20	0.054	1760	10 × 20	0.054	1760	12.5 × 20	0.050	1960
1800	10 × 20	0.054	1760	10 × 20	0.054	1760	12.5 × 20	0.050	2250
2200	12.5 × 20	0.050	1960	12.5 × 20	0.050	1960	12.5 × 25	0.040	2480
2700	12.5 × 20	0.050	2250	12.5 × 25	0.040	2250	12.5 × 25	0.040	2900
3300	12.5 × 20	0.050	2480	12.5 × 25	0.040	2480	16 × 25	0.030	3250
3900	12.5 × 25	0.040	2480	16 × 25	0.030	2480	16 × 25	0.030	3570
4700	16 × 25	0.030	3250	16 × 25	0.030	3250	16 × 31.5	0.027	3630
5600	16 × 25	0.030	3570	16 × 25	0.030	3570			
6800	16 × 25	0.030	3630	16 × 31.5	0.027	3630			
8200	16 × 31.5	0.027	3700	18 × 35.5	0.025	3700			

WV Item μF	25			35			50		
	ØD × L (mm)	Impedance (Ω)max. 20 C 100kHz	Ripple current (mA rms) 105 C 100kHz	ØD × L (mm)	Impedance (Ω)max. 20 C 100kHz	Ripple current (mA rms) 105 C 100kHz	ØD × L (mm)	Impedance (Ω)max. 20 C 100kHz	Ripple current (mA rms) 105 C 100kHz
10							5 × 11	3.000	160
22							5 × 11	1.800	240
33							5 × 11	1.800	292
47				6.3 × 11	0.300	345	6.3 × 11	1.000	450
56				6.3 × 11	0.300	345	6.3 × 11	0.700	450
68	6.3 × 11	0.300	345	6.3 × 11	0.300	345	8 × 11.5	0.500	490
100	6.3 × 11	0.300	345	6.3 × 11	0.300	500	8 × 11.5	0.300	724
120	6.3 × 11	0.300	345	8 × 11.5	0.200	540	8 × 11.5	0.200	950
150	8 × 11.5	0.250	345	8 × 11.5	0.160	945	10 × 12.5	0.120	979
180	8 × 11.5	0.200	345	8 × 11.5	0.140	945	8 × 20	0.120	1200
220	8 × 11.5	0.160	345	8 × 11.5	0.140	945	8 × 20	0.120	1370
				10 × 12.5	0.105	945	10 × 16	0.075	1370
270	10 × 12.5	0.105	945	8 × 15	0.120	945	10 × 20	0.064	1580
330	10 × 12.5	0.105	945	10 × 16	0.075	1250	10 × 20	0.064	1870
390	8 × 15	0.105	1250	10 × 20	0.054	1500	10 × 20	0.064	2050
	10 × 12.5	0.105	1250	8 × 20	0.085	1430			
470	10 × 16	0.075	1330	10 × 16	0.075	1600	12.5 × 20	0.050	2050
				10 × 20	0.054	1760			
560	8 × 20	0.054	1700	12.5 × 20	0.050	1960	12.5 × 25	0.040	2410
	10 × 20	0.054							
680	10 × 16	0.075		10 × 20	0.054	1850	12.5 × 25	0.040	2410
	10 × 20	0.054		12.5 × 20	0.050	2250			
820	10 × 20	0.054	2300	12.5 × 25	0.040	2350	16 × 20	0.040	2730
	12.5 × 20	0.050							
1000	12.5 × 20	0.050	2350	12.5 × 25	0.040	2480	16 × 25	0.036	3010
1200	12.5 × 20	0.050	2480	16 × 20	0.040	2900			
1500	16 × 20	0.040	2480	16 × 25	0.030	3250			
1800	16 × 20	0.040	2900	16 × 25	0.030	3570			
2200	12.5 × 30	0.040	2900	16 × 31.5	0.027	3630			
	16 × 25	0.030	3250						
2700	16 × 25	0.030	3570						
3300	16 × 31.5	0.027	3630						