



SAW Components

Data Sheet K 7254 M

Data Sheet

An abstract graphic featuring the word "EPCOS" in large, glowing, 3D letters. The letters are white with a blue glow and are positioned diagonally across the frame. In the background, there is a faint, stylized globe with circuitry patterns, suggesting a global network or technological theme. The overall color scheme is dark with blue and white highlights.



SAW Components

K 7254 M

IF Filter for Intercarrier / Multistandard Applications

38,00 MHz

Data Sheet

Standard

- B/G
- D/K
- M/N

Plastic package **SIP5K**


Features

- TV IF filter switchable from B/G, D/K mode to M/N mode
- M/N mode with Nyquist slope and sound shelf
- Customized group delay predistortion
- B/G, D/K mode with Nyquist slope and sound suppression
- Customized group delay predistortion

Terminals


- Tinned CuFe alloy

Dimensions in mm, approx. weight 1,0 g

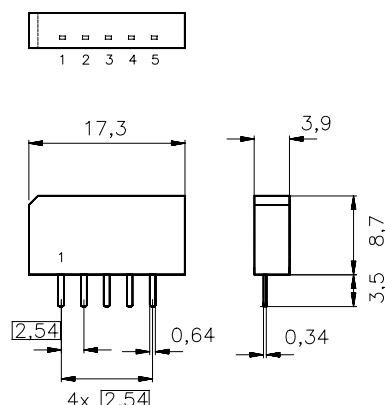

Pin configuration

- | | |
|-----|-----------------------|
| 1 | Input |
| 2 | Switching input |
| 3 | Chip carrier - ground |
| 4,5 | Output |

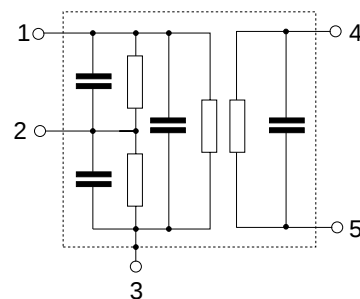

Type	Ordering code	Marking and package according to	Packing according to
K 7254 M	B39380-K7254-M100	C61157-A1-A15	F61074-V8067-Z000

Maximum ratings

Operable temperature range	T_A	-25/+65	°C	
Storage temperature range	T_{stg}	-40/+85	°C	
DC voltage	V_{DC}	5	V	between any terminals
AC voltage	V_{pp}	10	V	between any terminals



SAW Components	K 7254 M
IF Filter for Intercarrier / Multistandard Applications	38,00 MHz

Data Sheet

Characteristics in B/G, D/K mode (switching input pin 2 connected to ground)

Reference temperature:	$T_A = 25\text{ °C}$
Terminating source impedance:	$Z_S = 50\text{ }\Omega$
Terminating load impedance:	$Z_L = 2\text{ k}\Omega \parallel 3\text{ pF}$

		min.	typ.	max.	
Insertion attenuation	α				
Reference level for the following data	36,50 MHz	14,3	15,8	17,3	dB
Relative attenuation	α_{rel}				
Picture carrier	38,00 MHz	5,2	6,2	7,2	dB
Color carrier	33,57 MHz	0,2	1,2	2,2	dB
Sound carrier	31,50 MHz	46,0	63,0	—	dB
	32,50 MHz	36,0	48,0	—	dB
Adjacent picture carrier	30,00 MHz	44,0	55,0	—	dB
	31,00 MHz	42,0	55,0	—	dB
Adjacent sound carrier	39,50 MHz	40,0	51,0	—	dB
	40,50 MHz	40,0	53,0	—	dB
Lower sidelobe	25,00 29,20 MHz	42,0	51,0	—	dB
Upper sidelobe	39,50 45,00 MHz	34,0	39,0	—	dB
Reflected wave signal suppression					
1,3 μ s ... 6,0 μ s after main pulse (test pulse 250 ns, carrier frequency 36,50 MHz)		42,0	50,0	—	dB
Feedthrough signal suppression					
1,2 μ s ... 1,1 μ s before main pulse (test pulse 250 ns, carrier frequency 36,50 MHz)		50,0	56,0	—	dB
Group delay predistortion	$\Delta\tau$				
(reference frequency 38,00 MHz)					
	33,57 MHz	—	-60	—	ns
Impedance at 36,50 MHz					
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$		—	1,1 $\parallel$ 18,4	—	k Ω $\parallel$ pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		—	1,5 $\parallel$ 4,5	—	k Ω $\parallel$ pF
Temperature coefficient of frequency	TC_f	—	-72	—	ppm/K



SAW Components

K 7254 M

IF Filter for Intercarrier / Multistandard Applications

38,00 MHz

Data Sheet

Characteristics in M/N mode (switching input pin 2 connected to pin 1)

Reference temperature: $T_A = 25\text{ }^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\text{ }\Omega$
Terminating load impedance: $Z_L = 2\text{ k}\Omega \parallel 3\text{ pF}$

		min.	typ.	max.	
Insertion attenuation α					
Reference level for the following data	36,50 MHz	14,2	15,7	17,2	dB
Relative attenuation α_{rel}					
Picture carrier	38,00 MHz	5,3	6,3	7,3	dB
Color carrier	34,42 MHz	2,3	3,3	4,3	dB
Sound carrier	33,50 MHz	18,6	20,1	21,6	dB
Adjacent picture carrier	32,00 MHz	43,0	51,0	—	dB
Adjacent sound carrier	39,50 MHz	42,0	56,0	—	dB
Lower sidelobe	25,00 32,00 MHz	40,0	46,0	—	dB
Upper sidelobe	39,50 45,00 MHz	36,0	42,0	—	dB
Reflected wave signal suppression					
1,3 μs ... 6,0 μs after main pulse (test pulse 250 ns, carrier frequency 36,50 MHz)		42,0	50,0	—	dB
Feedthrough signal suppression					
1,2 μs ... 1,1 μs before main pulse (test pulse 250 ns, carrier frequency 36,50 MHz)		—	50,0	—	dB
Group delay predistortion $\Delta\tau$					
(reference frequency 38,00 MHz)	34,42 MHz	—	-60	—	ns
Impedance at 36,50 MHz					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	1,2 $\parallel$ 20,3	—	k Ω $\parallel$ pF
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	1,5 $\parallel$ 4,5	—	k Ω $\parallel$ pF
Temperature coefficient of frequency TC_f					
		—	-72	—	ppm/K



SAW Components



K 7254 M

IF Filter for Inter-carrier / Multistandard Applications

38,00 MHz

Data Sheet

Frequency response B/G, D/K mode

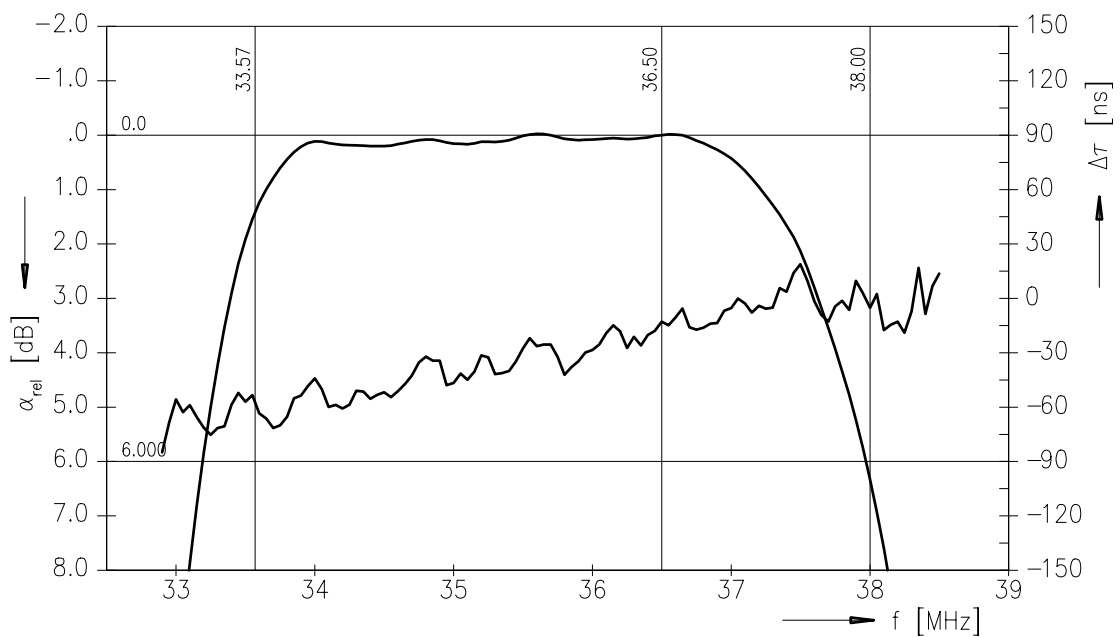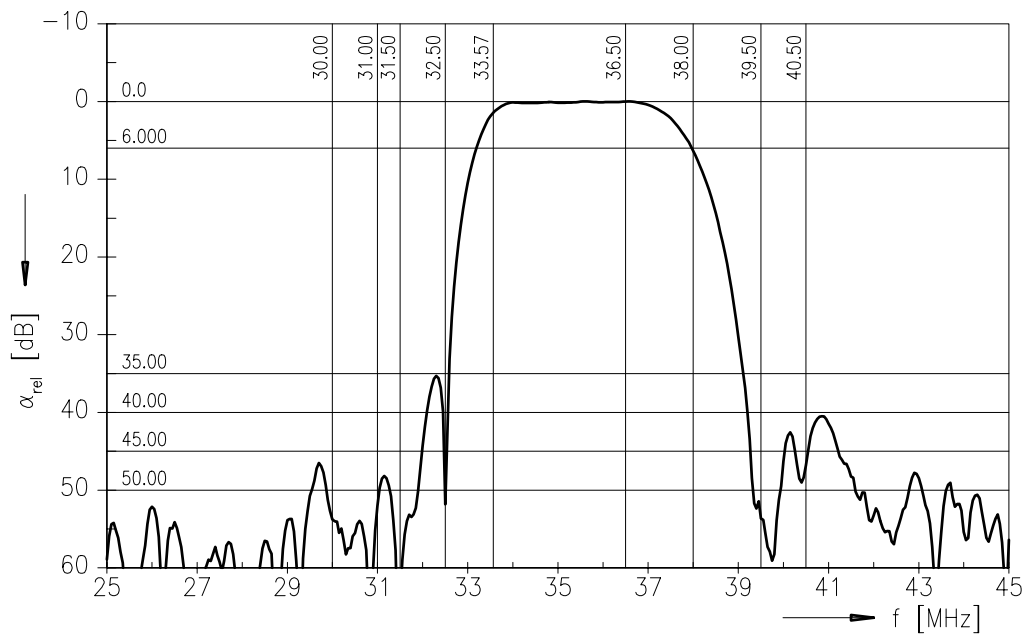



SAW Components


K 7254 M

IF Filter for Inter-carrier / Multistandard Applications


38,00 MHz

Data Sheet

Frequency response B/G, D/K mode

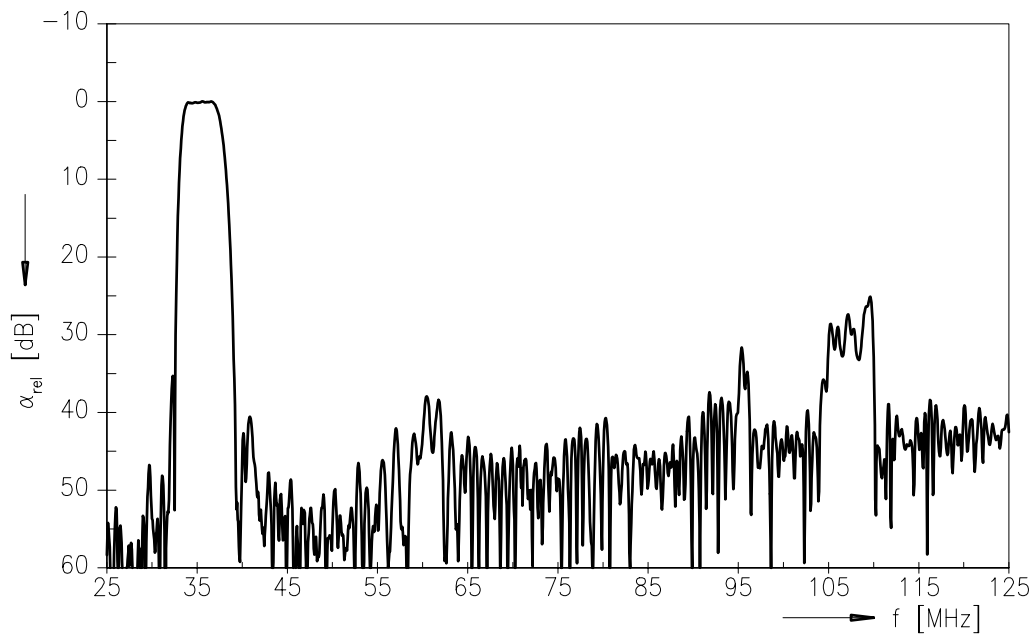

Time domain response B/G, D/K mode

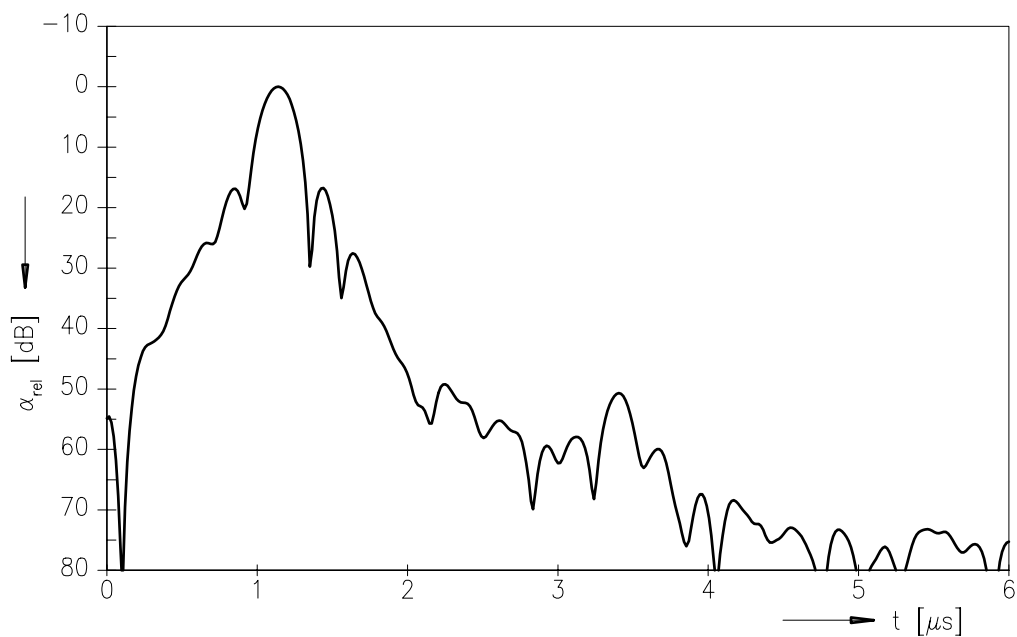



SAW Components



K 7254 M

IF Filter for Intercarrier / Multistandard Applications

38,00 MHz

Data Sheet

Frequency response M/N mode

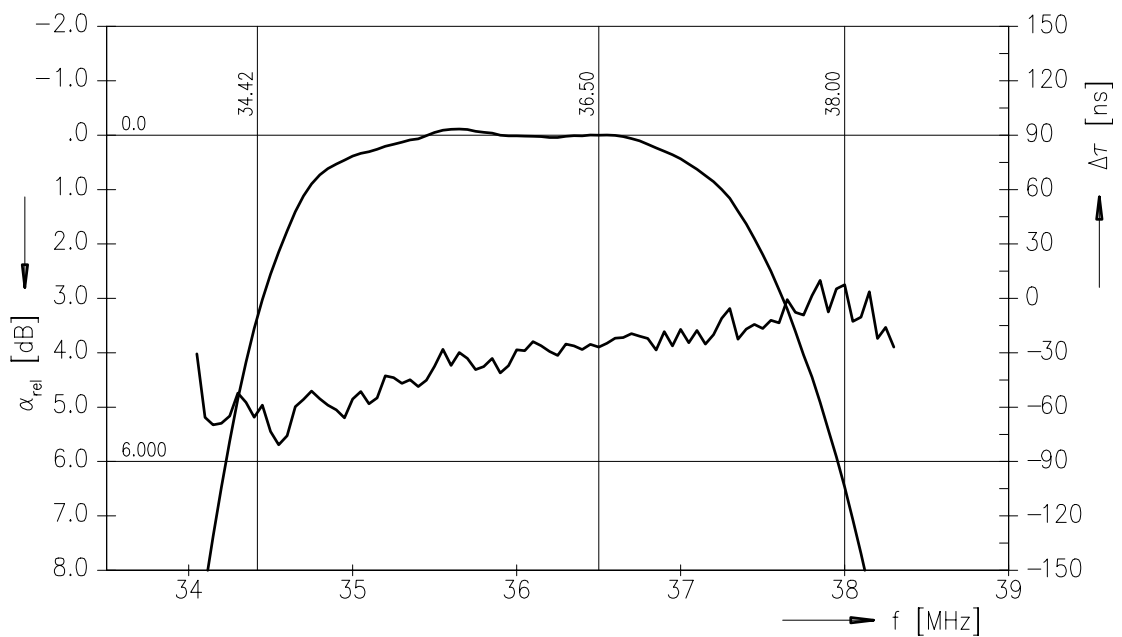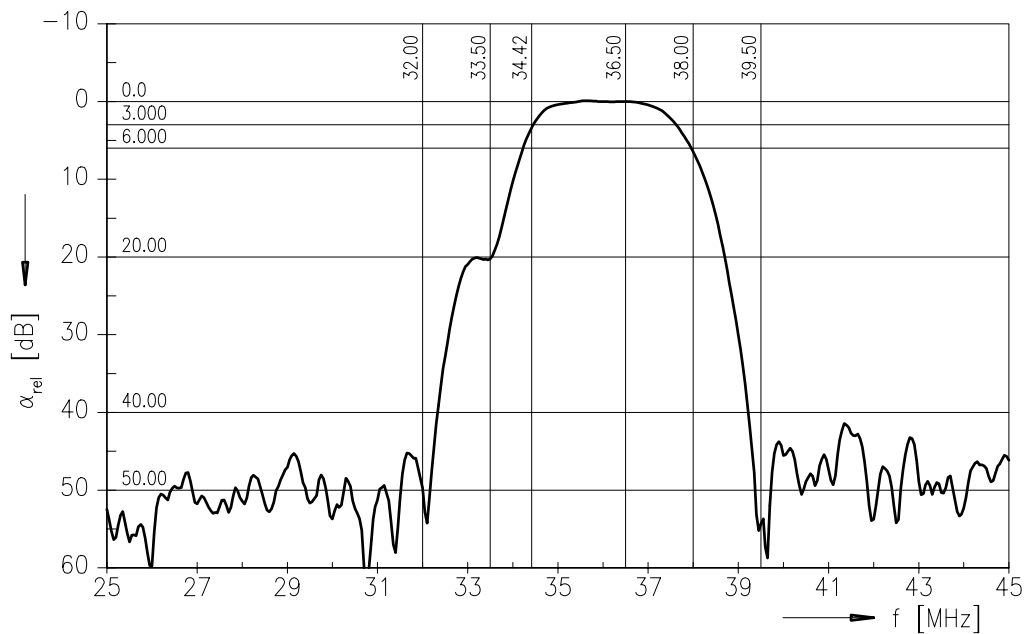



SAW Components


K 7254 M

IF Filter for Intercarrier / Multistandard Applications


38,00 MHz

Data Sheet

Frequency response M/N mode

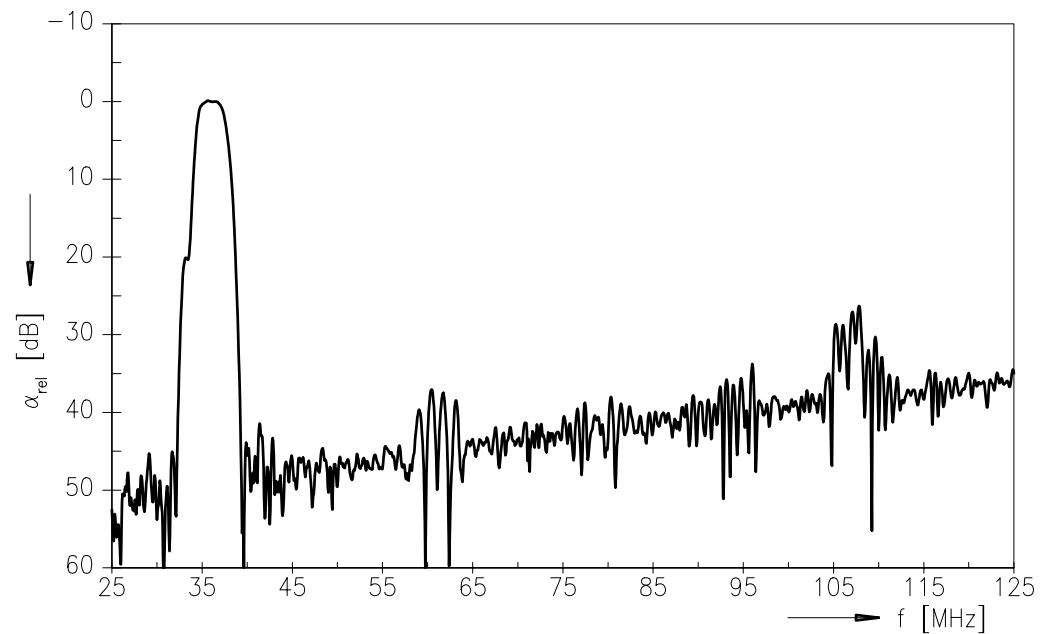

Time domain response M/N mode

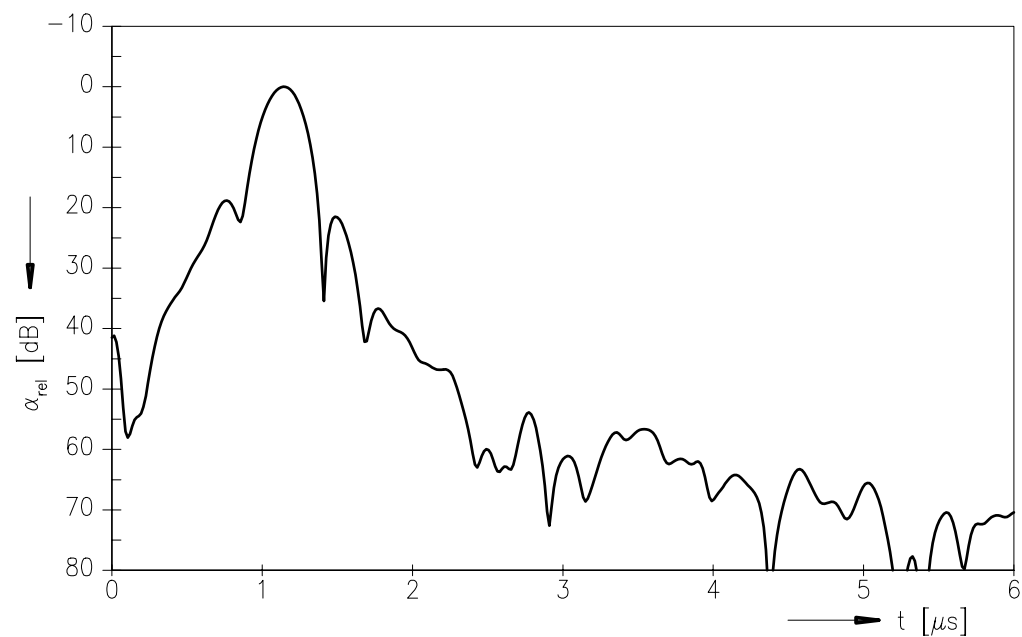



SAW Components	K 7254 M
IF Filter for Intercarrier / Multistandard Applications	38,00 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW CE MM PD

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2003. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.