



LG

Life's Good

Internal Use Only

LED TV


SERVICE MANUAL

CHASSIS : UA62M

MODEL : 65UH9500 65UH9500-UA

CAUTION

BEFORE SERVICING THE CHASSIS,
READ THE SAFETY PRECAUTIONS IN THIS MANUAL.

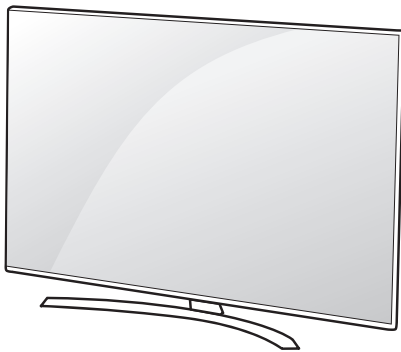

P/NO : MFL69460605 (1602-REV00)

Printed in Korea

CONTENTS

CONTENTS	2
SAFETY PRECAUTIONS	3
SERVICING PRECAUTIONS	4
SPECIFICATION	6
ADJUSTMENT INSTRUCTION	14
BLOCK DIAGRAM.....	25
EXPLODED VIEW	34
DISASSEMBLY	35
SCHEMATIC CIRCUIT DIAGRAM	APPENDIX
TROUBLE SHOOTING GUIDE	APPENDIX

SAFETY PRECAUTIONS

IMPORTANT SAFETY NOTICE

Many electrical and mechanical parts in this chassis have special safety-related characteristics. These parts are identified by $\triangle$ in the Schematic Diagram and Exploded View.

It is essential that these special safety parts should be replaced with the same components as recommended in this manual to prevent Shock, Fire, or other Hazards.

Do not modify the original design without permission of manufacturer.

General Guidance

An **isolation Transformer should always be used** during the servicing of a receiver whose chassis is not isolated from the AC power line. Use a transformer of adequate power rating as this protects the technician from accidents resulting in personal injury from electrical shocks.

It will also protect the receiver and its components from being damaged by accidental shorts of the circuitry that may be inadvertently introduced during the service operation.

If any fuse (or Fusible Resistor) in this TV receiver is blown, replace it with the specified.

When replacing a high wattage resistor (Oxide Metal Film Resistor, over 1 W), keep the resistor 10 mm away from PCB.

Keep wires away from high voltage or high temperature parts.

Before returning the receiver to the customer,

always perform an **AC leakage current check** on the exposed metallic parts of the cabinet, such as antennas, terminals, etc., to be sure the set is safe to operate without damage of electrical shock.

Leakage Current Cold Check(Antenna Cold Check)

With the instrument AC plug removed from AC source, connect an electrical jumper across the two AC plug prongs. Place the AC switch in the on position, connect one lead of ohm-meter to the AC plug prongs tied together and touch other ohm-meter lead in turn to each exposed metallic parts such as antenna terminals, phone jacks, etc.

If the exposed metallic part has a return path to the chassis, the measured resistance should be between 1 M Ω and 5.2 M Ω .

When the exposed metal has no return path to the chassis the reading must be infinite.

An other abnormality exists that must be corrected before the receiver is returned to the customer.

Leakage Current Hot Check (See below Figure)

Plug the AC cord directly into the AC outlet.

Do not use a line Isolation Transformer during this check.


Connect 1.5 K / 10 watt resistor in parallel with a 0.15 μ F capacitor between a known good earth ground (Water Pipe, Conduit, etc.) and the exposed metallic parts.

Measure the AC voltage across the resistor using AC voltmeter with 1000 ohms/volt or more sensitivity.

Reverse plug the AC cord into the AC outlet and repeat AC voltage measurements for each exposed metallic part. Any voltage measured must not exceed 0.75 volt RMS which corresponds to 0.5 mA.

In case any measurement is out of the limits specified, there is possibility of shock hazard and the set must be checked and repaired before it is returned to the customer.

Leakage Current Hot Check circuit

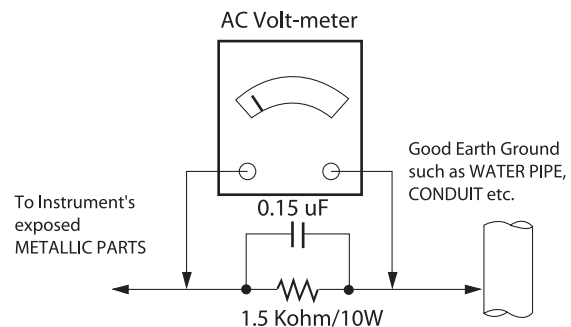

When 25A is impressed between Earth and 2nd Ground for 1 second, Resistance must be less than 0.1 Ω

*Base on Adjustment standard

SERVICING PRECAUTIONS

CAUTION: Before servicing receivers covered by this service manual and its supplements and addenda, read and follow the **SAFETY PRECAUTIONS** on page 3 of this publication.
NOTE: If unforeseen circumstances create conflict between the following servicing precautions and any of the safety precautions on page 3 of this publication, always follow the safety precautions. Remember: Safety First.

General Servicing Precautions

1. Always unplug the receiver AC power cord from the AC power source before;
 - a. Removing or reinstalling any component, circuit board module or any other receiver assembly.
 - b. Disconnecting or reconnecting any receiver electrical plug or other electrical connection.
 - c. Connecting a test substitute in parallel with an electrolytic capacitor in the receiver.**CAUTION:** A wrong part substitution or incorrect polarity installation of electrolytic capacitors may result in an explosion hazard.
2. Test high voltage only by measuring it with an appropriate high voltage meter or other voltage measuring device (DVM, FETVOM, etc) equipped with a suitable high voltage probe. Do not test high voltage by "drawing an arc".
3. Do not spray chemicals on or near this receiver or any of its assemblies.
4. Unless specified otherwise in this service manual, clean electrical contacts only by applying the following mixture to the contacts with a pipe cleaner, cotton-tipped stick or comparable non-abrasive applicator; 10 % (by volume) Acetone and 90 % (by volume) isopropyl alcohol (90 % - 99 % strength)
CAUTION: This is a flammable mixture.
Unless specified otherwise in this service manual, lubrication of contacts is not required.
5. Do not defeat any plug/socket B+ voltage interlocks with which receivers covered by this service manual might be equipped.
6. Do not apply AC power to this instrument and/or any of its electrical assemblies unless all solid-state device heat sinks are correctly installed.
7. Always connect the test receiver ground lead to the receiver chassis ground before connecting the test receiver positive lead.
Always remove the test receiver ground lead last.
8. Use with this receiver only the test fixtures specified in this service manual.
CAUTION: Do not connect the test fixture ground strap to any heat sink in this receiver.

Electrostatically Sensitive (ES) Devices

Some semiconductor (solid-state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by static by static electricity.

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any electrostatic charge on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging wrist strap device, which should be removed to prevent potential shock reasons prior to applying power to the unit under test.

2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static type solder removal device. Some solder removal devices not classified as "anti-static" can generate electrical charges sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.
CAUTION: Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.
8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity sufficient to damage an ES device.)

General Soldering Guidelines

1. Use a grounded-tip, low-wattage soldering iron and appropriate tip size and shape that will maintain tip temperature within the range of 500 °F to 600 °F.
2. Use an appropriate gauge of RMA resin-core solder composed of 60 parts tin/40 parts lead.
3. Keep the soldering iron tip clean and well tinned.
4. Thoroughly clean the surfaces to be soldered. Use a mall wire-bristle (0.5 inch, or 1.25 cm) brush with a metal handle. Do not use freon-propelled spray-on cleaners.
5. Use the following unsoldering technique
 - a. Allow the soldering iron tip to reach normal temperature. (500 °F to 600 °F)
 - b. Heat the component lead until the solder melts.
 - c. Quickly draw the melted solder with an anti-static, suction-type solder removal device or with solder braid.
CAUTION: Work quickly to avoid overheating the circuit board printed foil.
6. Use the following soldering technique.
 - a. Allow the soldering iron tip to reach a normal temperature (500 °F to 600 °F)
 - b. First, hold the soldering iron tip and solder the strand against the component lead until the solder melts.
 - c. Quickly move the soldering iron tip to the junction of the component lead and the printed circuit foil, and hold it there only until the solder flows onto and around both the component lead and the foil.
CAUTION: Work quickly to avoid overheating the circuit board printed foil.
 - d. Closely inspect the solder area and remove any excess or splashed solder with a small wire-bristle brush.

IC Remove/Replacement

Some chassis circuit boards have slotted holes (oblong) through which the IC leads are inserted and then bent flat against the circuit foil. When holes are the slotted type, the following technique should be used to remove and replace the IC. When working with boards using the familiar round hole, use the standard technique as outlined in paragraphs 5 and 6 above.

Removal

1. Desolder and straighten each IC lead in one operation by gently prying up on the lead with the soldering iron tip as the solder melts.
2. Draw away the melted solder with an anti-static suction-type solder removal device (or with solder braid) before removing the IC.

Replacement

1. Carefully insert the replacement IC in the circuit board.
2. Carefully bend each IC lead against the circuit foil pad and solder it.
3. Clean the soldered areas with a small wire-bristle brush. (It is not necessary to reapply acrylic coating to the areas).

"Small-Signal" Discrete Transistor

Removal/Replacement

1. Remove the defective transistor by clipping its leads as close as possible to the component body.
2. Bend into a "U" shape the end of each of three leads remaining on the circuit board.
3. Bend into a "U" shape the replacement transistor leads.
4. Connect the replacement transistor leads to the corresponding leads extending from the circuit board and crimp the "U" with long nose pliers to insure metal to metal contact then solder each connection.

Power Output, Transistor Device

Removal/Replacement

1. Heat and remove all solder from around the transistor leads.
2. Remove the heat sink mounting screw (if so equipped).
3. Carefully remove the transistor from the heat sink of the circuit board.
4. Insert new transistor in the circuit board.
5. Solder each transistor lead, and clip off excess lead.
6. Replace heat sink.

Diode Removal/Replacement

1. Remove defective diode by clipping its leads as close as possible to diode body.
2. Bend the two remaining leads perpendicular y to the circuit board.
3. Observing diode polarity, wrap each lead of the new diode around the corresponding lead on the circuit board.
4. Securely crimp each connection and solder it.
5. Inspect (on the circuit board copper side) the solder joints of the two "original" leads. If they are not shiny, reheat them and if necessary, apply additional solder.

Fuse and Conventional Resistor

Removal/Replacement

1. Clip each fuse or resistor lead at top of the circuit board hollow stake.
2. Securely crimp the leads of replacement component around notch at stake top.

3. Solder the connections.

CAUTION: Maintain original spacing between the replaced component and adjacent components and the circuit board to prevent excessive component temperatures.

Circuit Board Foil Repair

Excessive heat applied to the copper foil of any printed circuit board will weaken the adhesive that bonds the foil to the circuit board causing the foil to separate from or "lift-off" the board. The following guidelines and procedures should be followed whenever this condition is encountered.

At IC Connections

To repair a defective copper pattern at IC connections use the following procedure to install a jumper wire on the copper pattern side of the circuit board. (Use this technique only on IC connections).

1. Carefully remove the damaged copper pattern with a sharp knife. (Remove only as much copper as absolutely necessary).
2. Carefully scratch away the solder resist and acrylic coating (if used) from the end of the remaining copper pattern.
3. Bend a small "U" in one end of a small gauge jumper wire and carefully crimp it around the IC pin. Solder the IC connection.
4. Route the jumper wire along the path of the out-away copper pattern and let it overlap the previously scraped end of the good copper pattern. Solder the overlapped area and clip off any excess jumper wire.

At Other Connections

Use the following technique to repair the defective copper pattern at connections other than IC Pins. This technique involves the installation of a jumper wire on the component side of the circuit board.

1. Remove the defective copper pattern with a sharp knife. Remove at least 1/4 inch of copper, to ensure that a hazardous condition will not exist if the jumper wire opens.
2. Trace along the copper pattern from both sides of the pattern break and locate the nearest component that is directly connected to the affected copper pattern.
3. Connect insulated 20-gauge jumper wire from the lead of the nearest component on one side of the pattern break to the lead of the nearest component on the other side.

Carefully crimp and solder the connections.

CAUTION: Be sure the insulated jumper wire is dressed so the it does not touch components or sharp edges.

SPECIFICATION

NOTE : Specifications and others are subject to change without notice for improvement.

1. Application range

This spec sheet is applied to the LED TV used UA62M chassis

3. Test method

- (1) Performance: LGE TV test method followed
- (2) Demanded other specification
 - Safety : CE, IEC specification
 - EMC : CE, IEC

2. Test condition

Each part is tested as below without special notice.

- (1) Temperature : 25 °C ± 5 °C(77±9°F), CST : 40 °C±5 °C
- (2) Relative Humidity: 65 % ± 10 %
- (3) Power Voltage
 - Standard input voltage (100~240V@ 50/60Hz)
 - * Standard Voltage of each products is marked by models.
- (4) Specification and performance of each parts are followed each drawing and specification by part number in accordance with BOM.
- (5) The receiver must be operated for about 20 minutes prior to the adjustment.

4. General Specification

4.1. Model Specification

No	Item		Specification	Remark
1	Market		North America	
2	Broadcasting system		Digital : DVB-T2, ATSC /64 & 256 QAM, ATSC Analog : NTSC-M / NTSC-M	
3	Available Channel		VHF : 2~13	
			UHF : 14~69	
			DTV : 2-69	
			CATV : 1 ~ 135	
			CADTV : 1 ~ 135	
			DTV(UHD) : 2 ~ 69	
4	Receiving system		Digital : ATSC Analog : NTSC-M	
5	Video Input		NTSC-M	Rear gender(1EA)
6	Component Input		Y/Cb/Cr, Y/ Pb/Pr	Rear gender(1EA)
7	HDMI Input	HDMI 1	PC / DTV format	Support 6Gbps
		HDMI 2	PC / DTV format	Support 6Gbps, Support ARC
		HDMI 3	PC / DTV format	Support 6Gbps
8	Audio Input		Component / AV Audio / DVI Audio	L/R Input ; Rear(Gender) Component and av and DVI use same jack ; Rear (Gender)
9	SPDIF out(1EA)		Optical Audio out	Rear (1EA),
10	USB Input(3EA)		EMF, DivX HD, For SVC (download)	JPEG, MP3, DivX HD

4.2. Module Specification

No	Item	Specification		Remark
1	Display Screen Device	49" wide Color Display Module		Resolution: 3840*2160
		55" wide color display module		
		60" wide color display module		
		65" wide color display module		
		75" wide color display module		
		79" wide color display module		
		86" wide color display module		
2	Aspect Ratio	16:9		All
3	LCD Module	49" TFT QWUXGA LCD		LC490EQH-DJF1 [UH93/UH85]
		55" TFT QWUXGA LCD		LC550EQH-DJF1 [UH93/UH85]
				LC550EQF-YJF1 [UH96/UH95]
		60" TFT QWUXGA LCD		LC600EQF-DJF1 [UH93/UH85]
		65" TFT QWUXGA LCD		LC650EQF-DJF1 [UH93/UH85]
				LC650EQF-YJF1 [UH96/UH95]
		75" TFT QWUXGA LCD		LC750EQF-FJF1 [UH93/UH85]
				LC750EQF-FJM1 [UH68/UH65]
4	Operating Environment	TFT		LGE SPEC
		Temp. : 0 ~ 40 deg Humidity : 0 ~ 85%		
5	Storage Environment	TFT		
		Temp. : 0 ~ 50 deg Humidity : 20 ~ 90%		
6	Input Voltage	TFT		
		Temp. : -20 ~ 60 deg Humidity : 10 ~ 90%		
		ALEF		
		Temp. : -20 ~ 60 deg Humidity : 10 ~ 90%		
6	Input Voltage	AC100 ~ 240V, 50/60Hz		

5. External input format

5.1. 2D Mode

5.1.1. Component input(Y, PB, PR)

No	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock(MHz)	Proposed
1	720*480i	15.73	59.94	13.50	SDTV, DVD 480I(525I)
2	720*480i	15.75	60.00	13.51	SDTV, DVD 480I(525I)
3	720*576i	15.62	50.00	13.50	SDTV, DVD 576I(625I) 50Hz
4	720*480p	31.47	59.94	27.00	SDTV 480P
5	720*480p	31.50	60.00	27.02	SDTV 480P
6	720*576p	31.25	50.00	27.00	SDTV 576P 50Hz
7	1280*720	44.96	59.94	74.17	HDTV 720P
8	1280*720	45.00	60.00	74.25	HDTV 720P
9	1280*720	37.50	50.00	74.25	HDTV 720P 50Hz
10	1920*1080	28.12	50.00	74.25	HDTV 1080I 50Hz,
11	1920*1080	33.72	59.94	74.17	HDTV 1080I
12	1920*1080	33.75	60.00	74.25	HDTV 1080I
13	1920*1080	56.25	50	148.5	HDTV 1080P
14	1920*1080	67.43	59.94	148.5	HDTV 1080P
15	1920*1080	67.50	60.00	148.5	HDTV 1080P

5.1.2. HDMI Input (PC/DTV)

No.	Resolution	H-freq(kHz)	V-freq.(kHz)	Pixel clock(MHz)	Proposed	
	HDMI-PC					
1	640*350	31.46	70.09	25.17	EGA	
2	720*400	31.46	70.08	28.32	DOS	
3	640*480	31.46	59.94	25.17	VESA(VGA)	
4	800*600	37.87	60.31	40	VESA(SVGA)	
5	1024*768	48.36	60.00	65	VESA(XGA)	
6	1360*768	47.71	60.01	84.75	VESA(WXGA)	
7	1152*864	54.34	60.05	80	VESA	
8	1280*1024	63.98	60.02	109.00	SXGA	Support to HDMI-PC
9	1920*1080	67.5	60	158.40	WUXGA(Reduced Blanking)	
10	3840*2160	54	24.00	297.00	UDTV 2160P	
11	3840*2160	56.25	25.00	297.00	UDTV 2160P	
12	3840*2160	67.5	30.00	297.00	UDTV 2160P	
13	4096*2160	53.95	23.97	296.70	UDTV 2160P	
14	4096*2160	54	24	297	UDTV 2160P	

	HDMI-DTV					
No.	Resolution	H-freq(kHz)	V-freq.(kHz)	Pixel clock(MHz)	Proposed	Remarks
1	640*480	31.46	59.94	25.12	SDTV 480P	
2	640*480	31.5	60.00	25.12	SDTV 480P	
3	720*480	15.73	59.94	13.50	SDTV, DVD 480I(525I)	Spec. out but display
4	720*480	15.75	60.00	13.51	SDTV, DVD 480I(525I)	
5	720*576	15.62	50.00	13.50	SDTV, DVD 576I(625I) 50Hz	
6	720*480	31.47	59.94	27	SDTV 480P	
7	720*480	31.5	60.00	27.02	SDTV 480P	
8	720*576	31.25	50.00	27	SDTV 576P	
9	1280*720	44.96	59.94	74.17	HDTV 720P	
10	1280*720	45	60.00	74.25	HDTV 720P	
11	1280*720	37.5	50.00	74.25	HDTV 720P	
12	1920*1080	28.12	50.00	74.25	HDTV 1080I	
13	1920*1080	33.72	59.94	74.17	HDTV 1080I	
14	1920*1080	33.75	60.00	74.25	HDTV 1080I	
15	1920*1080	26.97	23.97	63.29	HDTV 1080P	
16	1920*1080	27.00	24.00	63.36	HDTV 1080P	
17	1920*1080	33.71	29.97	79.120	HDTV 1080P	
18	1920*1080	33.75	30.00	79.20	HDTV 1080P	
19	1920*1080	56.25	50.00	148.5	HDTV 1080P	
20	1920*1080	67.43	59.94	148.35	HDTV 1080P	
21	1920*1080	67.5	60.00	148.50	HDTV 1080P	
22	3840*2160	53.95	23.98	296.70	UDTV 2160P	
23	3840*2160	54	24.00	297.00	UDTV 2160P	
24	3840*2160	56.25	25.00	297.00	UDTV 2160P	
25	3840*2160	61.43	29.97	296.70	UDTV 2160P	
26	3840*2160	67.5	30.00	297.00	UDTV 2160P	
27	3840*2160	112.5	50.00	594	UDTV 2160P	When HDMI1,2,3 UHD DEEP COLOUR ON
28	3840*2160	134.86	59.94	593.40	UDTV 2160P	
29	3840*2160	135	60.00	594	UDTV 2160P	
30	4096*2160	53.95	23.98	296.70	UDTV 2160P	
31	4096*2160	54	24.00	297	UDTV 2160P	
32	4096*2160	56.25	25.00	297	UDTV 2160P	
33	4096*2160	61.43	29.97	296.70	UDTV 2160P	
34	4096*2160	67.5	30.00	297	UDTV 2160P	
35	4096*2160	112.5	50.00	594	UDTV 2160P	When HDMI1,2,3 UHD DEEP COLOUR ON
36	4096*2160	134.86	59.94	593.40	UDTV 2160P	
37	4096*2160	135	60.00	594	UDTV 2160P	

5.2. 3D Mode

5.2.1. HDMI Input 1.4b (3D supported mode automatically)

No	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock (MHz)	VIC	3D input proposed mode	Proposed
1	640*480	31.46 / 31.5	59.94/ 60	25.17/25.2	1	Top-and-Bottom Side-by-side(half)	Secondary(SDTV 480P) Secondary(SDTV 480P)
		62.93 / 63	59.94/ 60	50.35/50.4	1	Frame packing Line alternative	Secondary(SDTV 480P) (SDTV 480P)
		31.46 / 31.5	59.94/ 60	50.35/50.4	1	Side-by-side(Full)	(SDTV 480P)
2	720*480	31.46 / 31.5	59.94 / 60	27.00/27.03	2,3	Top-and-Bottom Side-by-side(half)	Secondary(SDTV 480P) Secondary(SDTV 480P)
		62.93 / 63	59.94 / 60	54/54.06	2,3	Frame packing Line alternative	Secondary(SDTV 480P) (SDTV 480P)
3	720*576	31.25	50	27	17,18	Top-and-Bottom Side-by-side(half)	Secondary(SDTV 576P) Secondary(SDTV 576P)
		62.5	50	54	17,18	Frame packing	Secondary(SDTV 576P)
4	720*576	15.62	50	27	21	Frame packing Top-and-Bottom Side-by-side(half)	Secondary(SDTV 576I) Secondary(SDTV 576I) Secondary(SDTV 576I)
5	1280*720	37.50	50	74.25	19	Top-and-Bottom Side-by-side(half)	Primary(HDTV 720P) Primary(HDTV 720P)
		44.96 / 45	59.94 / 60	74.17/74.25	4	Top-and-Bottom Side-by-side(half)	Primary(HDTV 720P) Primary(HDTV 720P)
		75	50	148.5	19	Frame packing	Primary(HDTV 720P)
		89.91/90	59.94 / 60	148.35/148.5	4	Frame packing	Primary(HDTV 720P)
6	1920*1080	28.12	50.00	74.25	20	Top-and-Bottom Side-by-side(half)	Secondary(HDTV 1080I) Primary(HDTV 1080I)
		33.72 / 33.75	59.94 / 60	74.17/74.25	5	Top-and-Bottom Side-by-side(half)	Secondary(HDTV 1080I) Primary(HDTV 1080I)
		56.25	50.00	148.5	20	Frame packing	Primary(HDTV 1080I)
		67.43/67.50	59.94 / 60	148.35/148.5	5	Frame packing	Primary(HDTV 1080I)
7	1920*1080	26.97 / 27	23.97 / 24	74.17/74.25	32	Top-and-Bottom Side-by-side(half)	Primary(HDTV 1080P) Primary(HDTV 1080P)
		28.12	25	74.25	33	Top-and-Bottom Side-by-side(half)	Secondary(HDTV 1080P) Secondary(HDTV 1080P)
		33.71 / 33.75	29.97 / 30.00	74.18/74.25	34	Top-and-Bottom Side-by-side(half)	Primary(HDTV 1080P) Secondary(HDTV 1080P)
		43.94/54	23.97 / 24	148.35/148.5	32	Frame packing	Primary(HDTV 1080P)
		56.25	25	148.5	33	Frame packing	Secondary(HDTV 1080P)
		67.43 / 67.5	29.97 / 30.00	148.35/148.5	34	Frame packing	Primary(HDTV 1080P)
		56.250	50	148.5	31	Top-and-Bottom Side-by-side(half)	Primary(HDTV 1080P) Secondary(HDTV 1080P)
		67.43 / 67.5	59.94 / 60	148.35/148.50	16	Top-and-Bottom Side-by-side(half)	Primary(HDTV 1080P) Secondary(HDTV 1080P)

5.2.2. HDMI 1.4/2.0(3D Supported mode manually)

No	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock (MHz)	Proposed	3D input proposed mode
1	720*480	31.5	60	27.03	SDTV 480P	2D to 3D, Side by Side(Half), Top & Bottom
2	720*576	31.25	50	27	HDTV 720P	
3	1280*720	45.00	60.00	74.25	HDTV 1080I	
		37.50	50	74.25	HDTV 1080P	
4	1920*1080	33.75	60.00	74.25	HDTV 1080P	
		28.125	50.00	74.25	HDTV 1080P	
5	1920*1080	27.00	24.00	74.25	HDTV 1080P	
		28.12	25	74.25	HDTV 2160P	
		33.75	30.00	74.25	HDTV 2160P	
		67.50	60.00	148.5	HDTV 2160P	
		56.250	50	148.5	HDTV 2160P	
6	3840*2160 4096*2160	53.95	23.97	296.70	HDTV 2160P	2D to 3D, Top & Bottom, Side by Side(half)
		54	24.00	297.00	HDTV 2160P	
		56.25	25.00	297.00	HDTV 2160P	
		61.43	29.97	296.70	HDTV 2160P	
		67.5	30.00	297.00	HDTV 2160P	
7	3840*2160	54	24.00	297.00	HDTV 2160P	2D to 3D, Top & Bottom(half), Side by Side(half), When HDMI1,2,3 UHD DEEP COLOUR ON
8	4096*2160	56.25	25.00	297.00	HDTV 2160P	

5.2.3. HDMI-PC Input (3D) (3D Supported Mode Manually)

No	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock (MHz)	Proposed	3D input proposed mode
1	1024*768	48.36	60	65	HDTV 768P	2D to 3D, Side by Side(half), Top & Bottom
2	1360*768	47.71	60	85.5	HDTV 768P	2D to 3D, Side by Side(half), Top & Bottom
3	1920*1080	67.50	60	148.50	HDTV 1080P	2D to 3D, Side by Side(half), Top & Bottom
4	3840*2160	54	24.00	297.00	HDTV 2160P	2D to 3D, Top & Bottom(half), Side by Side(half),
		56.25	25.00	297.00		
		67.5	30.00	297.00		
5	4096*2160	54	24	297.00	HDTV 2160P	2D to 3D, Top & Bottom(half), Side by Side(half),
6	Others	-	-	-	640*350 720*400 640*480 800*600 1152*864	2D to 3D, Side by Side(half), Top & Bottom

5.2.4. RF Input(3D supported mode manually)

No.	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock(MHz)	Proposed	3D input proposed mode
1	1280*720	37.50	50	74.25	HDTV 720P	2D to 3D, Side by Side, Top & Bottom
2	1920*1080	28.12	50	74.25	HDTV 1080I	2D to 3D, Side by Side, Top & Bottom

5.2.5. RF Input (3D supported mode automatically)

No.	Signal	3D input proposed mode
1	Frame Compatible	Side by Side(Half), Top & Bottom

5.2.6. USB – Movie (3D) (3D supported mode manually)

No.	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock(MHz)	3D input proposed mode
1	Under 704x480	-	-	-	2D to 3D
2	Over 704x480 Under 1080P interlaced	-	-	-	2D to 3D, Side by Side(Half), Top & Bottom
3	Over 704x480 Under 1080P progressive	-	50	-	2D to 3D, Side by Side(Half), Top & Bottom
		-	others	-	2D to 3D, Side by Side(Half), Top & Bottom
4	Over 2160P	-	24/25/30/60	-	2D to 3D, Side by Side(Half), Top & Bottom

5.2.7. USB -Photo (3D) (3D supported mode manually)

No	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock(MHz)	3D input proposed mode
1	Under 320x240	-	-	-	2D to 3D, Side by Side(Half), Top & Bottom
2	Over 320x240	-	-	-	2D to 3D, Side by Side(Half), Top & Bottom

5.2.8. USB(3D) (3D supported mode automatically)

No	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock(MHz)	3D input proposed mode
1	1080p	33.75	30	74.25	Side by Side(Half), Top & Bottom, Side by Side(Full), Frame Sequential, MPO(Photo), JPS(Photo)
2	2160p	67.5	30	297	



5.2.9. Component Input(3D supported mode manually)

No.	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock(MHz)	Proposed	3D input proposed mode
1	1280*720	37.5	50	74.25	HDTV 720P	2D to 3D, Side by Side(half), Top & Bottom
2	1280*720	45.00	60.00	74.25	HDTV 720P	
3	1280*720	44.96	59.94	74.17	HDTV 720P	
4	1920*1080	33.75	60.00	74.25	HDTV 1080I	
5	1920*1080	33.72	59.94	74.17	HDTV 1080I	
6	1920*1080	28.12	50	74.25	HDTV 1080I	
7	1920*1080	67.500	60	148.50	HDTV 1080P	
8	1920*1080	67.43	59.94	148.35	HDTV 1080P	
9	1920*1080	27.00	24.00	74.25	HDTV 1080P	
10	1920*1080	28.12	25	74.25	HDTV 1080P	
11	1920*1080	56.25	50	74.25	HDTV 1080P	
12	1920*1080	26.97	23.97	74.17	HDTV 1080P	
13	1920*1080	33.75	30.00	74.25	HDTV 1080P	
14	1920*1080	33.71	29.97	74.17	HDTV 1080P	

5.2.10. Miracast, Widi (3D supported mode manually)

No	Resolution	H-freq(kHz)	V-freq.(Hz)	Pixel clock(MHz)	3D input proposed mode
1	1024X768p	-	30 / 60	-	2D to 3D, Side by Side(Half), Top & Bottom
2	1280x720p	-	30 / 60	-	
3	1920X1080p		30 / 60		
4	Others		-		2D to 3D

**Remark: 3D Input mode

No.	Side by Side	Top & Bottom	Checker-board	Single Frame Sequential	Frame Pack-ing	Line Interleaving	Column Interleaving	2D to 3D
1								

ADJUSTMENT INSTRUCTION

1. Application Range

This spec. sheet applies to UA62M Chassis applied LED TV all models manufactured in TV factory

2. Specification.

- (1) Because this is not a hot chassis, it is not necessary to use an isolation transformer. However, the use of isolation transformer will help protect test instrument
- (2) Adjustment must be done in the correct order.
- (3) The adjustment must be performed in the circumstance of $25 \pm 5^\circ\text{C}$ of temperature and $65 \pm 10\%$ of relative humidity if there is no specific designation
- (4) The input voltage of the receiver must keep 100~240V, 50/60Hz
- (5) The receiver must be operated for about 5 minutes prior to the adjustment when module is in the circumstance of over 15°C

- In case of keeping module is in the circumstance of 0°C , it should be placed in the circumstance of above 15°C for 2 hours
- In case of keeping module is in the circumstance of below -20°C , it should be placed in the circumstance of above 15°C for 3 hours

* (Caution) When still image is displayed for a period of 20 minutes or longer (especially where W/B scale is strong. Digital pattern 13ch and/or Cross hatch pattern 09ch), there can some afterimage in the black level area.

3. PCB assembly adjustment method

3.1. MAC Address, ESN Key, Wide-vine Key, HDCP 2.2 Download

- D/L Program : keydownload.exe

3.1.1. Equipment & Condition


- (1) Play file: keydownload.exe
- (2) Key Write: Com 1,2,3,4 and 115200 (Baudrate)
- (3) Barcode: Com 1,2,3,4 and 9600 (Baudrate)



3.1.2. Download Process

(MAC + WIDEVINE + ESN+HDCP2.2)

- (1) Execute "keydownload.exe" on PC
- (2) Select the download items.
- (3) Mode check : Online only
- (4) Check the test process
 - DETECT -> MAC_WRITE -> ESN_WRITE (only Colombia/Panama) -> WIDEVINE_WRITE
- (5) Play: START
- (6) Check of result: Ready, Test, OK or NG

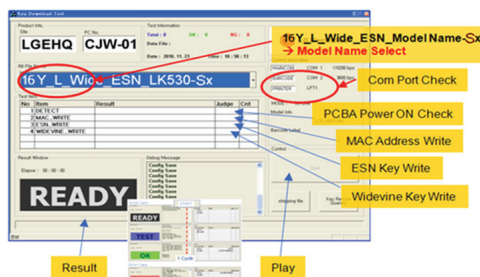

3.1.3. Inspection : InINSTANT menu, check these keys.

3.2. LAN Test(Ping-test)

3.2.1. PING Test(LAN Operating Test)

3.2.1.1. Check PCBA


- (1) Connect LAN to PCBA & Power On.(Default IP can be set to automatic setting. When power ON, IP can be Automatically be achieved from the router)
- (2) Push ADJ key on Adjust remote-controller.
- (3) Enter "13. ACAP PING TEST" & check Network.

3.2.1.2. Check Set(Manufacturer)

- (1) Connect TV-Set & PC with Cross LAN cable.(PC IP : 12.12.2.3)
- (2) Execute "PINT Test program", Check setting data of program. (TV-Set IP : 12.12.2.2)



- (3) Push Power Only key on Adjust remote-controlle.
- (4) Click "RUN", Check "OK" or "NG"

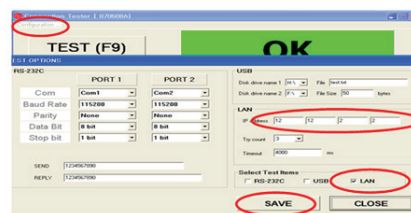


3.3. Main S/W program download


3.3.1. Using the Memory Stick

** USB DOWNLOAD : Service Mode

- (1) Insert the USB memory Stick to the USB port
- (2) Automatically detect the SW Version.
-> S/W download process is executed automatically.
- (3) Show the message "Copy the file from the Memory"

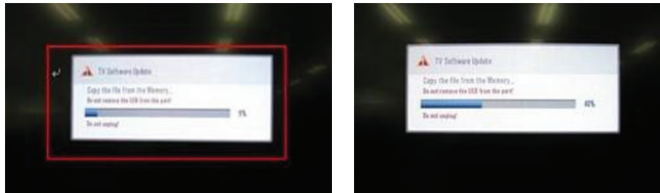

- (4) After Finished the Download, Automatically DC Off -> On



- (5) If the TV IS Turn On, Check the updated SW Version and Tool Option.

3.4. Input tool option

Adjust tool option refer to the BOM.

- Tool Option Input : PCBA Check Process
- Area Option Input : Set Assembly Process

After Input Tool Option and AC off

Before PCBA check, you have to change the Tool option and have to AC off/on (Plug out and in)

(If missing this process, set can operate abnormally)

3.4.1. Profile

Must be changed the option value because being different with some setting value depend on module maker, inch and market

3.4.2. Equipment

adjustment remote control.

3.4.3. Adjustment method

- The input methods are same as other chassis.(Use ADJ Key on the Adjust Remocon.)
(If not changed the option, the input menu can differ the model spec.)
Refer to Job Expression of each main chassis ass'y (EBTxxxxxxx) for Option value

(Caution)

Don't Press "IN-STOP" key after completing the function inspection.

3.5. EDID D/L method

Recommend that don't connect HDMI and RGB(D-SUB) cable when downloading the EDID.

If not possible, recommend that connect the MSPG equipment.

There are two methods of downloading the edid data

It is a VESA regulation. A PC or a MNT will display an optimal resolution through information

Sharing without any necessity of user input. It is a realization of "Plug and Play"

3.5.1. 1st Method

EDID data's are automatically downloaded when adjusting the Tool Options.

Automatically downloaded when pushing the enter key in the EDID D/L menu.

It takes about 2seconds.

3.5.2. 2nd Method

(Caution)

Must be checked that the tool option is right or not.

If tool option is wrong, HDMI edid data could not be downloaded well.

- (1) Press the ADJ key
- (2) Move to the 13. EDID D/L and Press the right direction key(▶)
- (3) Press the right direction key(▶) at Start.
- (4) After about a few seconds, appear "Waiting.." => "OK", then complete.

3.5.3. RS-232C command Method

- (1) Command : AE 00 10

(Caution)

Don't connect HDMI and RGB(D-SUB) cable when downloading the EDID.

If the cables are connected, Downloading of edid could be failed.

3.5.4. EDID data

3.5.4.1. DTS

Input	3D			
	6G		3G	
HDMI 1	9F	65	9F	8B
HDMI 2	9F	55	9F	7B
HDMI 3	9F	45	9F	6B

(1) 3D_6G

- HDMI1 6G_UHD Deep Color ON

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	00	FF	FF	FF	FF	FF	FF	00	1E	6D	01	00	01	01	01	01
10	01	1A	01	03	80	A0	5A	78	0A	EE	91	A3	54	4C	99	26
20	0F	50	54	A1	08	00	31	40	45	40	61	40	71	40	81	80
30	01	01	01	01	01	01	08	E8	00	30	F2	70	5A	80	B0	58
40	8A	00	40	84	63	00	00	1E	02	3A	80	18	71	38	2D	40
50	58	2C	45	00	40	84	63	00	00	1E	00	00	00	FD	00	3A
60	3E	1E	88	3C	00	0A	20	20	20	20	20	20	00	00	00	FC
70	00	4C	47	20	54	56	0A	20	20	20	20	20	20	20	01	9F
80	02	03	49	F1	50	61	10	04	05	03	02	20	22	01	5D	5E
90	5F	66	62	63	64	29	3D	06	C0	15	07	50	09	57	07	75
A0	03	0C	00	10	00	B8	3C	20	C0	87	01	02	03	04	01	40
B0	01	FC	18	10	16	67	D8	5D	C4	01	78	80	03	E3	05	C0
C0	00	E3	0F	01	10	E3	06	07	01	01	1D	80	18	71	1C	16
D0	20	58	2C	25	00	40	84	63	00	00	9E	66	21	50	B0	51
E0	00	1B	30	40	70	36	00	40	84	63	00	00	1E	00	00	00
F0	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	65

- HDMI2 6G_UHD Deep Color ON

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	00	FF	FF	FF	FF	FF	FF	00	1E	6D	01	00	01	01	01	01
10	01	1A	01	03	80	A0	5A	78	0A	EE	91	A3	54	4C	99	26
20	0F	50	54	A1	08	00	31	40	45	40	61	40	71	40	81	80
30	01	01	01	01	01	01	08	E8	00	30	F2	70	5A	80	B0	58
40	8A	00	40	84	63	00	00	1E	02	3A	80	18	71	38	2D	40
50	58	2C	45	00	40	84	63	00	00	1E	00	00	00	FD	00	3A
60	3E	1E	88	3C	00	0A	20	20	20	20	20	20	00	00	00	FC
70	00	4C	47	20	54	56	0A	20	20	20	20	20	20	20	01	9F
80	02	03	49	F1	50	61	10	04	05	03	02	20	22	01	5D	5E
90	5F	66	62	63	64	29	3D	06	C0	15	07	50	09	57	07	75
A0	03	0C	00	20	00	B8	3C	20	C0	87	01	02	03	04	01	40
B0	01	FC	18	10	16	67	D8	5D	C4	01	78	80	03	E3	05	C0
C0	00	E3	0F	01	10	E3	06	07	01	01	1D	80	18	71	1C	16
D0	20	58	2C	25	00	40	84	63	00	00	9E	66	21	50	B0	51
E0	00	1B	30	40	70	36	00	40	84	63	00	00	1E	00	00	00
F0	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	55

- HDMI3 6G_UHD Deep Color ON

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	00	FF	FF	FF	FF	FF	FF	00	1E	6D	01	00	01	01	01	01
10	01	1A	01	03	80	A0	5A	78	0A	EE	91	A3	54	4C	99	26
20	0F	50	54	A1	08	00	31	40	45	40	61	40	71	40	81	80
30	01	01	01	01	01	01	08	E8	00	30	F2	70	5A	80	B0	58
40	8A	00	40	84	63	00	00	1E	02	3A	80	18	71	38	2D	40
50	58	2C	45	00	40	84	63	00	00	1E	00	00	00	FD	00	3A
60	3E	1E	88	3C	00	0A	20	20	20	20	20	20	00	00	00	FC
70	00	4C	47	20	54	56	0A	20	20	20	20	20	20	20	01	9F
80	02	03	49	F1	50	61	10	04	05	03	02	20	22	01	5D	5E
90	5F	66	62	63	64	29	3D	06	C0	15	07	50	09	57	07	75
A0	03	0C	00	30	00	B8	3C	20	C0	87	01	02	03	04	01	40
B0	01	FC	18	10	16	67	D8	5D	C4	01	78	80	03	E3	05	C0
C0	00	E3	0F	01	10	E3	06	07	01	01	1D	80	18	71	1C	16
D0	20	58	2C	25	00	40	84	63	00	00	9E	66	21	50	B0	51
E0	00	1B	30	40	70	36	00	40	84	63	00	00	1E	00	00	00
F0	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	45

(2) 3D_3G

- HDMI1 3G_UHD Deep Color ON

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	00	FF	FF	FF	FF	FF	FF	00	1E	6D	01	00	01	01	01	01
10	01	1A	01	03	80	A0	5A	78	0A	EE	91	A3	54	4C	99	26
20	0F	50	54	A1	08	00	31	40	45	40	61	40	71	40	81	80
30	01	01	01	01	01	01	08	E8	00	30	F2	70	5A	80	B0	58
40	8A	00	40	84	63	00	00	1E	02	3A	80	18	71	38	2D	40
50	58	2C	45	00	40	84	63	00	00	1E	00	00	00	FD	00	3A
60	3E	1E	88	3C	00	0A	20	20	20	20	20	20	00	00	00	FC
70	00	4C	47	20	54	56	0A	20	20	20	20	20	20	20	01	9F
80	02	03	3B	F1	4E	5D	10	04	05	03	02	20	22	01	5E	5F
90	62	63	64	29	3D	06	C0	15	07	50	09	57	07	75	03	0C
A0	00	10	00	B8	3C	20	C0	87	01	02	03	04	01	40	01	FC
B0	18	10	16	E3	0E	61	66	E3	06	07	01	01	1D	80	18	71
C0	1C	16	20	58	2C	25	00	40	84	63	00	00	9E	66	21	50
D0	B0	51	00	1B	30	40	70	36	00	40	84	63	00	00	1E	00
E0	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
F0	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	8B

- HDMI2 3G_UHD Deep Color ON

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	00	FF	FF	FF	FF	FF	FF	00	1E	6D	01	00	01	01	01	01
10	01	1A	01	03	80	A0	5A	78	0A	EE	91	A3	54	4C	99	26
20	0F	50	54	A1	08	00	31	40	45	40	61	40	71	40	81	80
30	01	01	01	01	01	01	08	E8	00	30	F2	70	5A	80	B0	58
40	8A	00	40	84	63	00	00	1E	02	3A	80	18	71	38	2D	40
50	58	2C	45	00	40	84	63	00	00	1E	00	00	00	FD	00	3A
60	3E	1E	88	3C	00	0A	20	20	20	20	20	20	00	00	00	FC
70	00	4C	47	20	54	56	0A	20	20	20	20	20	20	20	01	9F
80	02	03	3B	F1	4E	5D	10	04	05	03	02	20	22	01	5E	5F
90	62	63	64	29	3D	06	C0	15	07	50	09	57	07	75	03	0C
A0	00	20	00	B8	3C	20	C0	87	01	02	03	04	01	40	01	FC
B0	18	10	16	E3	0E	61	66	E3	06	07	01	01	1D	80	18	71
C0	1C	16	20	58	2C	25	00	40	84	63	00	00	9E	66	21	50
D0	B0	51	00	1B	30	40	70	36	00	40	84	63	00	00	1E	00
E0	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
F0	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	7B

- HDMI3 3G_UHD Deep Color ON

	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	00	FF	FF	FF	FF	FF	FF	00	1E	6D	01	00	01	01	01	01
10	01	1A	01	03	80	A0	5A	78	0A	EE	91	A3	54	4C	99	26
20	0F	50	54	A1	08	00	31	40	45	40	61	40	71	40	81	80
30	01	01	01	01	01	01	08	E8	00	30	F2	70	5A	80	B0	58
40	8A	00	40	84	63	00	00	1E	02	3A	80	18	71	38	2D	40
50	58	2C	45	00	40	84	63	00	00	1E	00	00	00	FD	00	3A
60	3E	1E	88	3C	00	0A	20	20	20	20	20	20	00	00	00	FC
70	00	4C	47	20	54	56	0A	20	20	20	20	20	20	20	01	9F
80	02	03	3B	F1	4E	5D	10	04	05	03	02	20	22	01	5E	5F
90	62	63	64	29	3D	06	C0	15	07	50	09	57	07	75	03	0C
A0	00	30	00	B8	3C	20	C0	87	01	02	03	04	01	40	01	FC
B0	18	10	16	E3	0E	61	66	E3	06	07	01	01	1D	80	18	71
C0	1C	16	20	58	2C	25	00	40	84	63	00	00	9E	66	21	50
D0	B0	51	00	1B	30	40	70	36	00	40	84	63	00	00	1E	00
E0	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00
F0	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	6B

3.6. ADC Calibration

Comp 480i/Comp 1080p/RGB

3.6.1. ADC Calibration : Internal Auto ADC

ADC calibration is not necessary because MAIN SoC (LGExxxx) is already calibrated from IC Maker

3.6.2. Manual ADC Calibration

3.6.2.1. Equipment & Condition

- (1) Adjustment Remocon
- (2) 801GF (802B, 802F, 802R) or MSPG925FA Pattern Generator
 - Resolution : 480i Comp1 (MSPG-925FA: model-209, pattern-65)
 - Resolution : 1080p Comp1 (MSPG-925FA: model-225, pattern-65)
 - Resolution : 1080p RGB (MSPG-925FA: model-225, pattern-65)
 - Pattern : Horizontal 100% Color Bar Pattern
 - Pattern level: 0.7±0.1 Vp-p

3.6.2.2. Adjust method

3.6.2.2.1. ADC 480i/1080p Comp

- (1) Check connected condition of Comp cable to the equipment
- (2) Give a 480i Mode, Horizontal 100% Color Bar Pattern to Comp1. (MSPG-925FA -> Model: 209, Pattern: 65)
- (3) Change input mode as Component1 and picture mode as "Standard"
- (4) Press the In-start Key on the ADJ remote after at least 1 min of signal reception. Then, select
- (5) External ADC. And Press OK or Right Button for going to sub menu.
- (6) Press OK in Comp 480i menu
- (7) Give a 1080p Mode, Horizontal 100% Color Bar Pattern to Comp1. (MSPG-925FA -> Model: 225, Pattern: 65)
- (8) Press OK in Comp 1080p menu
- (9) If ADC Comp is successful, "ADC Component Success" is displayed.
- (10) If ADC calibration is failure, "ADC Component Fail" is displayed.
- (11) If ADC calibration is failure, after rechecking ADC pattern or condition, retry calibration
- (12) If ADC calibration is failure, after recheck ADC pattern or condition, retry calibration

3.7. Check SW Version


3.7.1. Method

- (1) Push In-star key on Adjust remote-controller.
- (2) SW Version check

IN START		Adjust Check	
Model Name :	49UH9300-NA	1.Adjust Check	
Serial Number :	012PTED6N500	2.ADC Data	Country Group
S/W Version :	3.02.06.01	3.Power Off Status	Country Group Code
MICOM Version :	3.05.3	4.System1	Country Group
BOOT Version :	1.02.22	5.System2	Country
UHD BE Version :	OK(40.00.1b.00)	6.System3	Area Option
Chip Type :	LG1312	7.Model Number D/L	Tool Option
Wi-Fi Channel :	1	8.Test Option	Tool Option1
Wi-Fi MAC :	E8:F2:E2:69:06:CA	9.Spread Spectrum	Tool Option2
Wi-Fi Speed :	USB 2.0	10.Stable Count	Tool Option3
MAC Address :	3C:CD:93:4F:CB:5D	11.SDP Server Selection	Tool Option4
IP Address :	0.0.0.0	12.RF Remocon Test	Tool Option5
SFU Key :	OK	13.Access Code	Tool Option6
Widevine :	LGTV10L000011618	14.Twin TV	Tool Option7
ESN Num. :	LGTV20162+21001000272		Tool Option9
HDCP1.4 :	OK		Tool CRC
HDCP2(Miracast/HDMI) :	OK/OK		Adjust White Balance :
DTCP :	OK		Adjust ADC(OTP) :
RF Receiver Version	1.3.4.18		Component
Wi-Fi/Magic Search :	OK/OK		EDID :
Camera Ver. :	NULL	HDMI1	OK(0x7F,0xCB)
Debug Status :	Release	HDMI2	OK(0x7F,0xBB)
SIGN Key :	DEVELKEY	HDMI3	OK(0x7F,0xAB)
Eye Check :	OK		
Control Key :	OK		
Access USB Status :	1/-/T/-/-(C)		
UTT : 40	75		
APP History Version	146(deathvalley)		
PQL DB :	LGD_EGDE_Si2178B_XXXX55		
Video :	NULL		

3.8. Camera Port Inspection

- (1) Objective : To check PCBA's CAMERA Port.
 - (2) How-it-works
 - 1) Connect the PCBA like below Picture.
 - 2) Send specific RS-232C Command for displaying Camera Preview.
- * CAMERA need to be status of Slide up

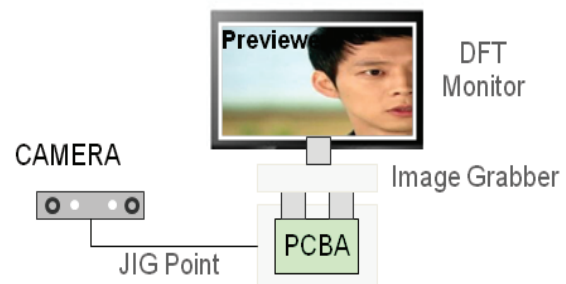

3) RS-232C Command

RS-232C COMMAND			Explanation
CMD	DATA	ID	
Ai	00	23	Camera Function Start.
Ai	00	24	Camera Function End.

4. SET assembly adjustment method

4.1. Input Area-Option

4.1.1. Profile

Must be changed the Area option value because being different of each Country's Language and signal Condition.

4.1.2. Equipment

adjustment remote control.

4.1.3. Adjustment method

- The input methods are same as other chassis.(Use IN-START Key on the Adjust Remocon.)
- Refer to Job Expression of each main chassis ass'y (EBTxxxxxxx) for Option value.

4.2. Adjustment of White Balance

* In case of keeping module is in the circumstance of 0°C, it should be placed in the circumstance of above 15°C for 2 hours

* In case of keeping module is in the circumstance of below -20°C, it should be placed in the circumstance of above 15°C for 3 hours.


- Purpose : Adjust the color temperature to reduce the deviation of the module color temperature.
- Principle : To adjust the white balance without the saturation, Fix the one of R/G/B gain to 192 (default data) and decrease the others.
- Adjustment mode : Three modes – Cool / Medium / Warm

* Required Equipment

- Remote controller for adjustment
- Color Analyzer : CA100+ or CA-210 or same product (should be used in the calibrated ch by CS-1000)
 - LCD TV : CH-9
 - PDP TV : CH-10
 - White LED TV : CH-14
 - ALEF : CH-18
 - RGB LED(MNT) : CH-16
 - Auto W/B adjustment instrument(only for Auto adjustment)

4.2.1. Adjustment of White Balance (For Automatic Adjustment)

Connecting diagram of equipment for measuring (For Automatic Adjustment)

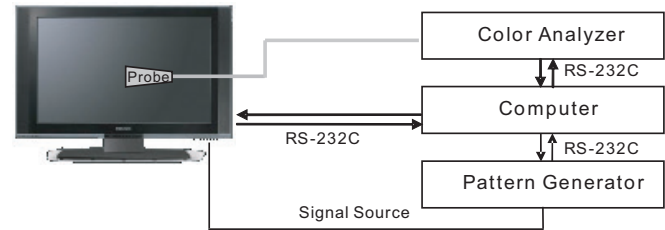

* If TV internal pattern is used, not needed

- (1) Set TV in ADJ mode using P-ONLY key (or POWER ON key)
- (2) Place optical probe on the center of the display
- (3) It need to check probe condition of zero calibration before adjustment.
- (4) Connect RS-232C Cable
- (5) Select mode in ADJ Program and begin a adjustment.
- (6) When WB adjustment is completed with OK message, check adjustment status of pre-set mode (Cool, Medium, Warm)
- (7) Remove probe and RS-232C cable.

- W/B Adj. must begin as start command "wb 00 00" , and finish as end command "wb 00 ff", and Adj. offset if need

4.2.2. Adjustment of White Balance (for Manual adjustment)

4.2.1.1. Adj. condition and cautionary items

- (1) Lighting condition in surrounding area surrounding lighting should be lower 10 lux. Try to isolate adj. area into dark surrounding.
- (2) Probe location: Color Analyzer (CA-210) probe should be within 10cm and perpendicular of the module surface (80°~100°)
- (3) Aging time
 - 1) After Aging Start, Keep the Power ON status during 5 Minutes.
 - 2) In case of LCD, Back-light on should be checked using no signal or Full-white pattern.

4.2.2.2. Equipment

- (1) Color Analyzer: CA-210 (NCG: CH 9 / WCG: CH12 / LED: CH14)
- (2) Adj. Computer (During auto adj., RS-232C protocol is needed)
- (3) Adjust Remocon
- (4) Video Signal Generator MSPG-925F 720p/216-Gray (Model: 217, Pattern: 78)

4.2.2.3. Adjustment

- (1) Set TV in Adj. mode using POWER ON
- (2) Zero Calibrate the probe of Color Analyzer, then place it on the center of LCD module within 10cm of the surface.
- (3) Press ADJ key -> EZ adjust using adj. R/C -> 6. White-Balance then press the cursor to the right (KEY▶). When KEY(▶) is pressed 216 Gray internal pattern will be displayed.
- (4) One of R Gain / G Gain / B Gain should be fixed at 192, and the rest will be lowered to meet the desired value.
- (5) Adj. is performed in COOL, MEDIUM, WARM 3 modes of color temperature.

- If internal pattern is not available, use RF input. In EZ Adj. menu 6.White Balance, you can select one of 2 Test-pattern: ON, OFF. Default is inner(ON). By selecting OFF, you can adjust using RF signal in 216 Gray pattern.

4.2.3. LED White balance table

4.2.3.1. Cool Mode

- (1) Purpose : Especially G-gain fix adjust leads to the luminance enhancement. Adjust the color temperature to reduce the deviation of the module color temperature.
- (2) Principle : To adjust the white balance without the saturation, Adjust the G gain more than 172 (If R gain or G gain is more than 255 , G gain can adjust less than 172) and change the others (R/B Gain).
- (3) Adjustment mode : mode – Cool

5.2.3.2. Medium / Warm Mode

- (1) Purpose : Adjust the color temperature to reduce the deviation of the module color temperature.
- (2) Principle : To adjust the white balance without the saturation,Fix the one of R/G/B gain to 192 (default data) and decrease the others.
- (3) Adjustment mode : Two modes – Medium / Warm

- Standard color coordinate and temperature when using the CA210 equipment(CH 14)

Mode	Coordinate		Temp	Δuv
	X	Y		
Cool	0.271±0.002	0.270±0.002	13000K	0.0000
Medium	0.286±0.002	0.289±0.002	9300K	0.0000
Warm	0.313±0.002	0.329±0.002	6500K	0.0000

- The Time Table of color coordinates by SET Aging Time

(1) Edge LED Models(UH8/UH9)_nomarl line

	Aging time (Min)	Cool		Medium		Warm	
		X	Y	X	Y	X	Y
		271	270	286	289	313	329
1	0-2	282	289	297	308	324	348
2	3-5	281	287	296	306	323	346
3	6-9	279	284	294	303	321	343
4	10-19	277	280	292	299	319	339
5	20-35	275	277	290	296	317	336
6	36-49	274	274	289	293	316	333
7	50-79	273	272	288	291	315	331
8	80-119	272	271	287	290	314	330
9	Over 120	271	270	286	289	313	329

- In the SET applied LED module (LM9600), cause of the physical characteristics of LED Module, sets are taken a 120 minutes by aging time to stabilize a color coordinates. So White Balance Control equipments have to get the SET Aging Time from the SET and then going to control the W/B by revise color coordinates at each time

- To check the Coordinates of White Balance, you have to measure at the below conditions.

Picture Mode : select Vivid and change

Dynamic Contrast : Off ,

Dynamic Colour : Off,


Clear White : Off

-> Picture Mode change : Vivid -> Vivid(User)

- (If you miss the upper condition, the coordinates of W/B can be lower than the spec.)


4.4. LAN Inspection

- (1) LAN Port connection with PCB
- (2) Network setting at MENU Mode of TV
- (3) Setting automatic IP
- (4) Setting state confirmation
- (5) If automatic setting is finished, you confirm IP and MAC Address

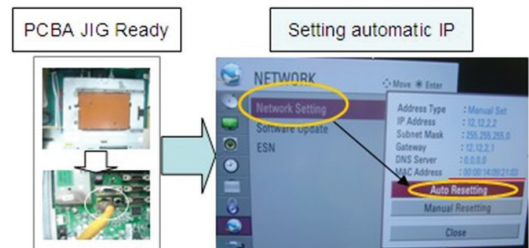

4.5. WIDEVINE Key Inspection

(1) Confirm Key input Data at the "IN START" MENU Mode

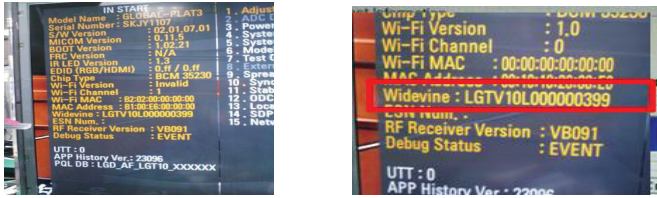

4.6. Model name & Serial number D/L

4.6.1. Notice

- (1) Serial number D/L is using of scan equipment.
- (2) Setting of scan equipment operated by Manufacturing Technology Group.
- (3) Serial number D/L must be conformed when it is produced in production line, because serial number D/L is mandatory by D-book 4.0
- (4) Check the model name In-start menu -> Factory name displayed
- (5) Check the Diagnostics (DTV country only) -> Buyer model displayed


4.6.2. Method : Auto

- (1) Press "Power on" key of service remocon. (Baud rate : 115200 bps)
- (2) Connect RS232 Signal Cable to RS-232 Jack
- (3) Write Serial number by use RS-232.
- (4) Must check the serial number at Instart menu.

4.6.3. Method : Manual

* If the TV set is downloaded By OTA or Service man, Sometimes model name or serial number is initialized.
(Not always) It is impossible to download by bar code scan, so It need Manual download.

- (1) Press the 'instart' key of ADJ remote controller.
- (2) Go to the menu '6. Model Number D/L' like below photo.
- (3) Input the Factory model name or Serial number like photo.

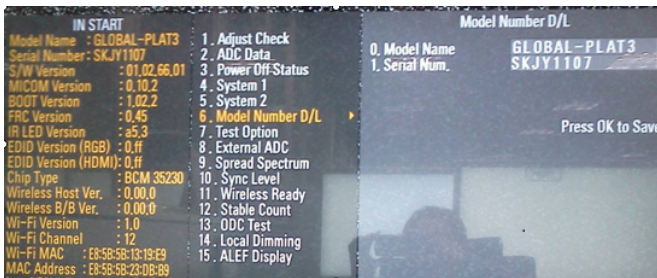

4.7. Wi-Fi MAC Address Check

4.7.1. Using RS232 Command

	Command	Set ACK
Transmission	[A][I][Set ID][20][Cr]	[O][K][x] or [N][G]



4.7.2. Check the menu on in-start



4.8. Local Dimming Inspection (Optional)

4.8.1. ALEF models with local dimming

- (1) Press 'TILT' key of the Adj. R/C and check moving patterns. The black bar patterns moves from top left to bottom right.
If local dimming function does not work, a whole screen shows full white.



4.9. GND and Hi-Pot test

4.9.1. GND & HI-POT auto-check preparation

- (1) Check the POWER CABLE and SIGNAL CABLE insertion condition

4.9.2. GND & HI-POT auto-check

- (1) Pallet moves in the station. (POWER CORD / AV CORD is tightly inserted)
- (2) Connect the AV JACK Tester.
- (3) Controller (GWS103-4) on.
- (4) GND Test (Auto)
 - If Test is failed, Buzzer operates.
 - If Test is passed, execute next process (Hi-pot test). (Remove A/V CORD from A/V JACK BOX)
- (5) HI-POT test (Auto)
 - If Test is failed, Buzzer operates.
 - If Test is passed, GOOD Lamp on and move to next process automatically.

4.9.3. Check point

- (1) Test voltage
 - 1) 3 Poles
 - GND: 1.5KVac/min at 100mA
 - SIGNAL: 3KVac/min at 100mA
- (2) TEST time: 1 second
- (3) TEST POINT
 - 1) 3 Poles
 - GND Test = POWER CORD GND and SIGNAL CABLE GND.
 - Hi-pot Test = POWER CORD GND and LIVE & NEUTRAL.
- (4) LEAKAGE CURRENT: At 0.5mA Arms

4.10. Motion Remote controller Inspection

- (1) Equipment : Motion remote controller for test, IR-KEY-CODE remote controller for test
 - 1) Check battery before test. (Recommend : Change battery for every Lot.)
- (2) Process
 - 1) If you select the 'start key(wheel)' on the controller, you can pairing with the TV SET.
 - 2) You can check the cursor on the TV Screen, when select the 'Wheel Key' on the controller
 - 3) You must remove the pairing with the TV Set by select 'Back + Home Key' on the controller

4.11. AUDIO output check

No	Item	Min	Typ	Max	Unit	Remark
1	Audio practical max Output, L/R (Distortion=10% max Output)	9.0 8.5	10.0 8.10	12.0 9.88	W Vrms	Measurement condition
2	Speaker (8Ω Impedance)		10.0	15.0	W	Measurement condition

*Measurement condition:

- (1) RF input: Mono, 1KHz sine wave signal, 100% Modulation
- (2) CVBS, Component: 1KHz sine wave signal (0.4Vrms)
- (3) RGB PC: 1KHz sine wave signal (0.7Vrms)


4.12. 3D Function test

4.12.1. Equipment


Pattern Generator MSPG-3233, HDMI mode 37, pattern No. 81

4.12.2. Process


- (1) Connect HDMI (HDMI mode 371, Pattern No. 81)



- (2) Insert 3D Mode, Select side by side mode.
- (3) Without 3D-glasses, Like below figure.



- (4) With 3D left-glass, Like below figure. (Center is RED)



- (5) With 3D right-glass, Like below figure. (Center is Blue)



4.13. HDMI ARC Function Inspection

4.13.1. Test equipment

- Optic Receiver Speaker
- MSHG-600 (SW: 1220 ↑)
- HDMI Cable (for 1.4 version)

4.13.2. Test method

- (1) Insert the HDMI Cable to the HDMI ARC port from the master equipment (HDMI1)
- (2) Check the sound from the TV Set



- (3) Check the Sound from the Speaker or using AV & Optic TEST program (It's connected to MSHG-600)

Flow Line



Cell Line




* Remark: Inspect in Power Only Mode and check SW version in a master equipment




4.14. Camera Port Inspection

- (1) Objective : To check how it connects between Camera and PCBA normally, and their Function
- (2) Test Method : This Inspection is available only Power-Only Status.
 - 1) Push Camera Up
 - 2) Camera's Preview picture appears on TV Set
- (3) Push Camera Down

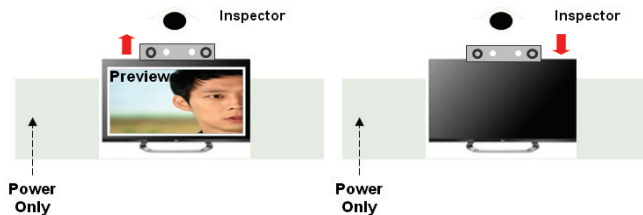

4.15. PIP/W&R Function Inspection



- (1) Objective : To check the connection between sub tuner and PCBA, and their Function
- (2) Test Method : This Inspection is available only Power-Only Status.
 - 1) Press exit key of the Adj. R/C and Press PIP key.
 - 2) Check that the SUB TUNER pop up window on the TV Set.
- (3) Check that the normal operation (picture, sound) of DTV on the TV Set.

** Appendix **

A. DDC Adjustment Command set

	Adjustment content	CMD (HEX)	ADR	VALUE	detail
1	Aging On/Off	F3	00	FF/00	FF : ON / 00 : OFF
2	Input select	F4	00		0x10 : TV 0x20 : AV1 0x21 : AV2 0x40 : Component1 0x41 : Component2 0x60 : RGB 0x90 : HDMI1 0x91 : HDMI2
3	R GAIN	16	00	00 - C0	Gain Value Adjustment CSM COOL
4	G GAIN	18		00 - C0	
5	B GAIN	1A		00 - C0	
6	R GAIN	16	01	00 - C0	Gain Value Adjustment CSM NORMAL
7	G GAIN	18		00 - C0	
8	B GAIN	1A		00 - C0	
9	R GAIN	16	02	00 - C0	Gain Value Adjustment CSM WARM
10	G GAIN	18		00 - C0	
11	B GAIN	1A		00 - C0	
12	CSM mode	F2	00	00	COOL
				01	NORMAL
				02	WARM
13	AUTO ADC	F1	00	0, 1, 2	0: Offset Value Adjustment 1: Gain Value Adjustment 2: Offset and Gain Value Adjustment
14	EEPROM Read	E7	00	00	EEPROM read
15	EEPROM Write	E8	00	data	EEPROM write

B. DDC command protocol

1. Signal TABLE

START 6E A 50 A 84 A 03 A CMD A ADR A VAL A CS A STOP

2. E²PROM Data Write

(1) Signal TABLE

START 6E A 50 A 84+n A 03 A CMD A ADH A ADL A
Data_1 A ... Data_n A CS A STOP Delay 20

LEN : 84h+Bytes

CMD : E8h

ADH : E2PROM Slave Address(A0,A2,A4,A6),
Not 00h(Reserved by BufferToEEPROM)

ADL : E2PROM Sub Address(00~FF)

Data : Write data

Delay : 20ms

(2) Command Set

	Adjustment content	CMD(hex)	LEN	Detail
1	EEPROM READ	E8h	94h	16-Byte Write
2			(84+n)h	n-byte Write

3. E²PROM Data Read

(1) Command Sequential TABLE

START 6E A 50 A 84 A 03 A CMD A ADH A ADL A CS A STOP

Delay 150ms

START 6F A D1 A 128 Bytes Dn A STOP

(2) COMMAND SET

No.	Adjustment content	CMD (hex)	ADH (hex)	ADL (hex)	Detail
1	EEPROM READ	E7	A0	0	0-Page 0~7F Read
2				80	0-Page 80~FF Read
3			A2	0	1-Page 0~7F Read
4				80	1-Page 80~FF Read
5			A4	0	2-Page 0~7F Read
6				80	2-Page 80~FF Read
7			A6	0	3-Page 0~7F Read
8				80	3-Page 80~FF Read

C. RS-232C Command Protocol

RS-232C COMMAND			Explanation
CMD	ID	DATA	
wb	00	00	White Balance Adjust Start.
wb	00	10	Gain Adjust Start (Internal white pattern)
wb	00	1f	Gain Adjust Stop.
wb	00	20	Offset Adjust Start. (Internal white pattern)
wb	00	2f	Offset Adjust Stop.
wb	00	ff	White Balance Adjust Stop (Internal pattern Exit)
xb	00		10 : Analog, 20 : Video 1, 21 : Video 2, 40 : Component 1, 41 : Component 2, 50 : RGB_DTV, 60 : RGB_PC 90 : HDMI 1, 91 : HDMI 2, 92 : HDMI
ad	00	10	ADC Start


D. Bluetooth S/W Upgrade by using USB drive Input

(1) Preparation Equipment

1) USB Memory Stick



2) New Bluetooth Software

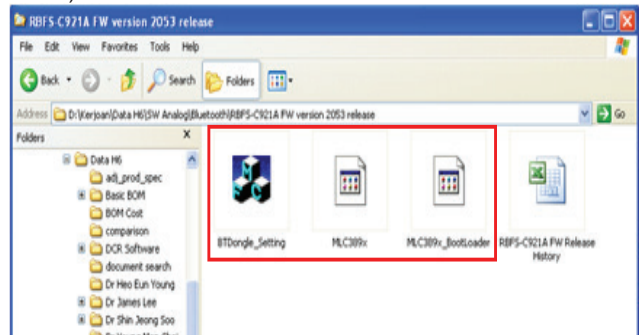

3) Copy New File


Copy Bluetooth software MCL389x.bin file to memory stick with out folder.

(Caution) Do not copy the file to the inside folder

3) Copy New File

Copy Bluetooth software MCL389x.bin file to memory stick with out folder.

(Caution) Do not copy the file to the inside folder

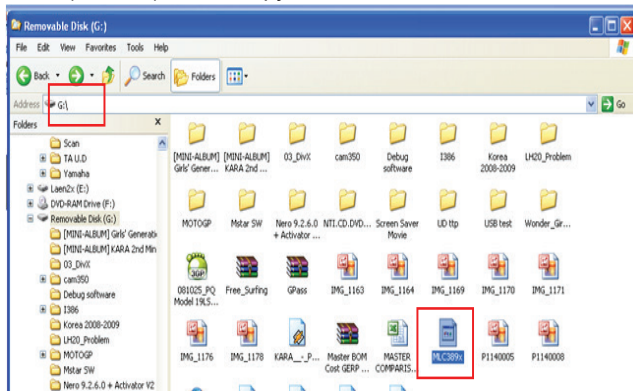

(2) Connection


- Plug-in USB Memory stick to the USB input of the set.

(3) USB input -> Automatically loading menu



* The OSD "USB Device loading" is appeared by automatically...


(4) Selecting Window for Bluetooth Software update

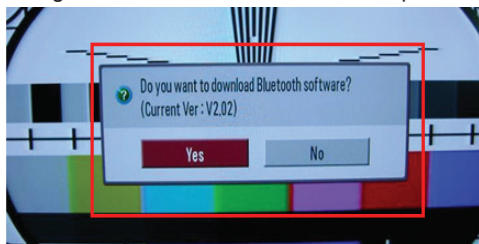

▪ The Pop-up window appears for selecting to update Bluetooth software and information about current Bluetooth software. (Ex : V2.02)


▪ Select "Yes"

(5) Bluetooth S/W Downloading Process

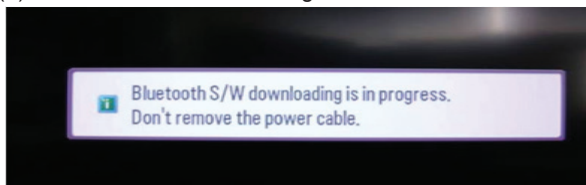

▪ Time Process Downloading new Bluetooth software about 10seconds
▪ Please Wait until finish and do not un-plug power cable

(6) OSD – Bluetooth software updated successfully

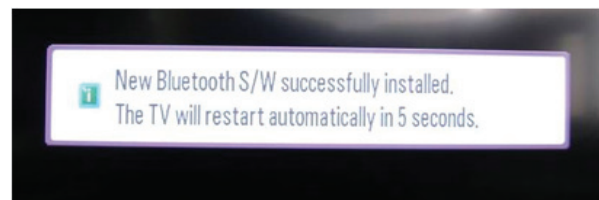

- OSD Information Bluetooth software update success
- LCDTV Set will restart by automatically...
- Time Process to restart about 5seconds


(7) Check S/W Version

- Push "IN-START" button on service remote Controller
- Check Information Bluetooth S/W version will appear on OSD Service Menu.


Example : Bluetooth SW version 2.05

Block Diagram


1. M16 + F16 Circuit Block Diagram

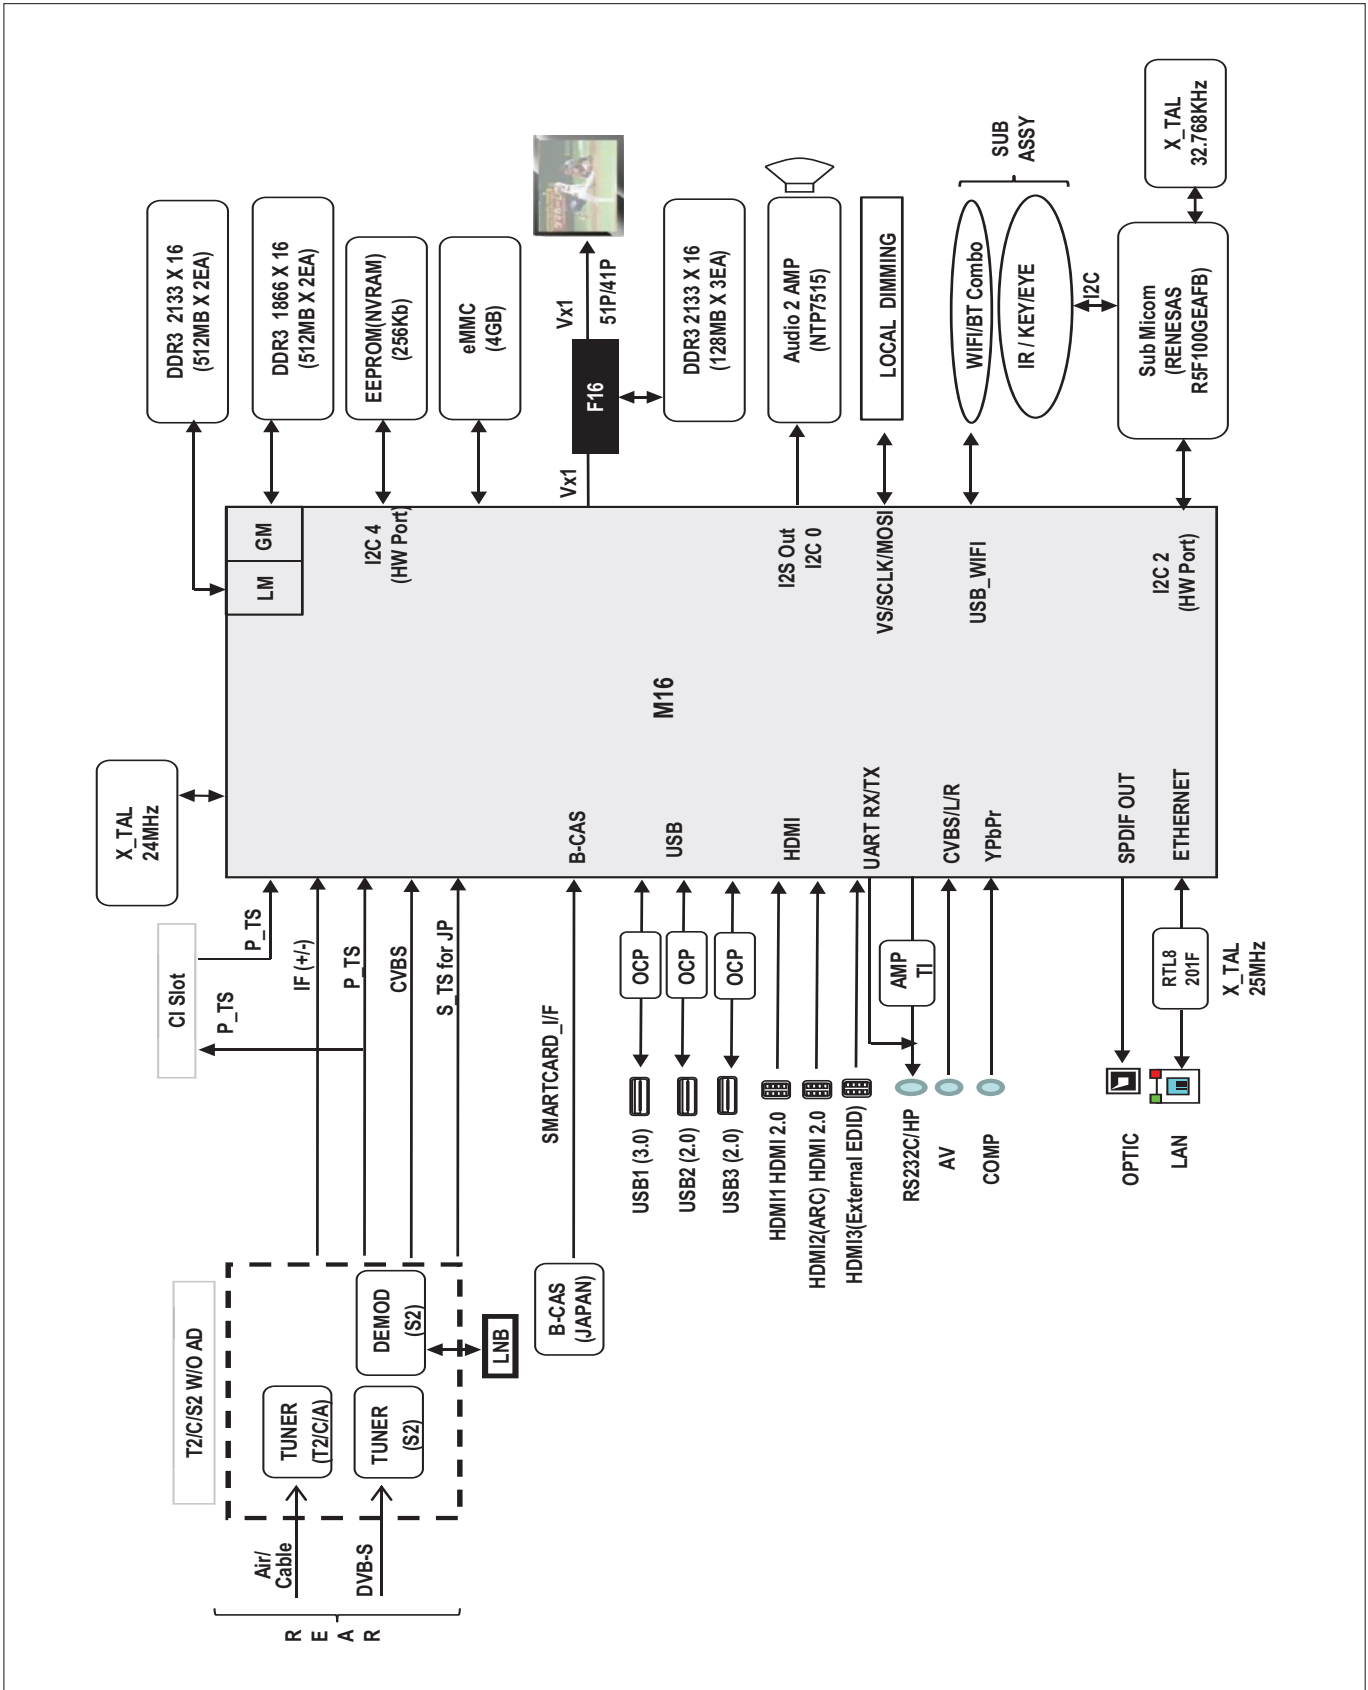


2. M16 + F16 I2C Block Diagram

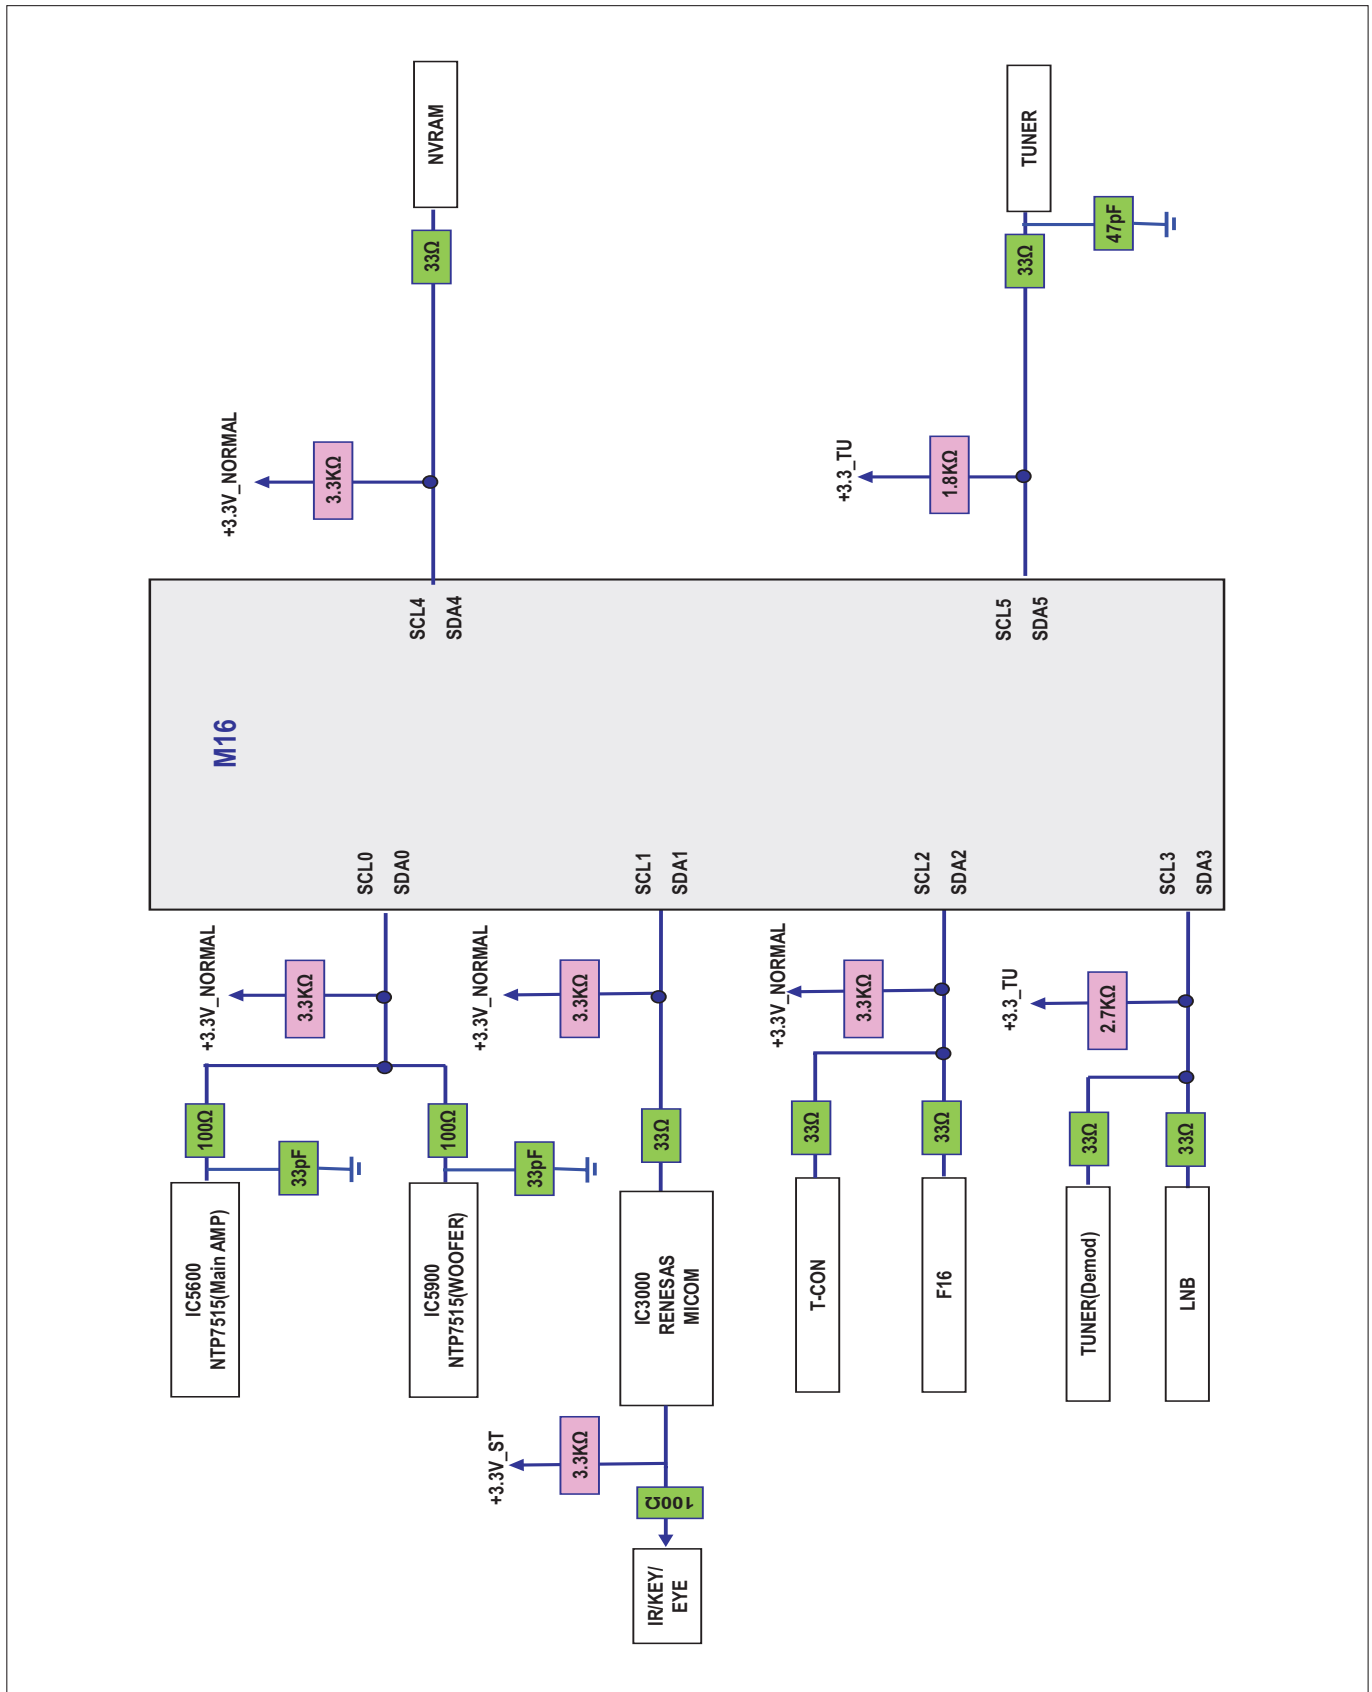


3. F16 Block Diagram

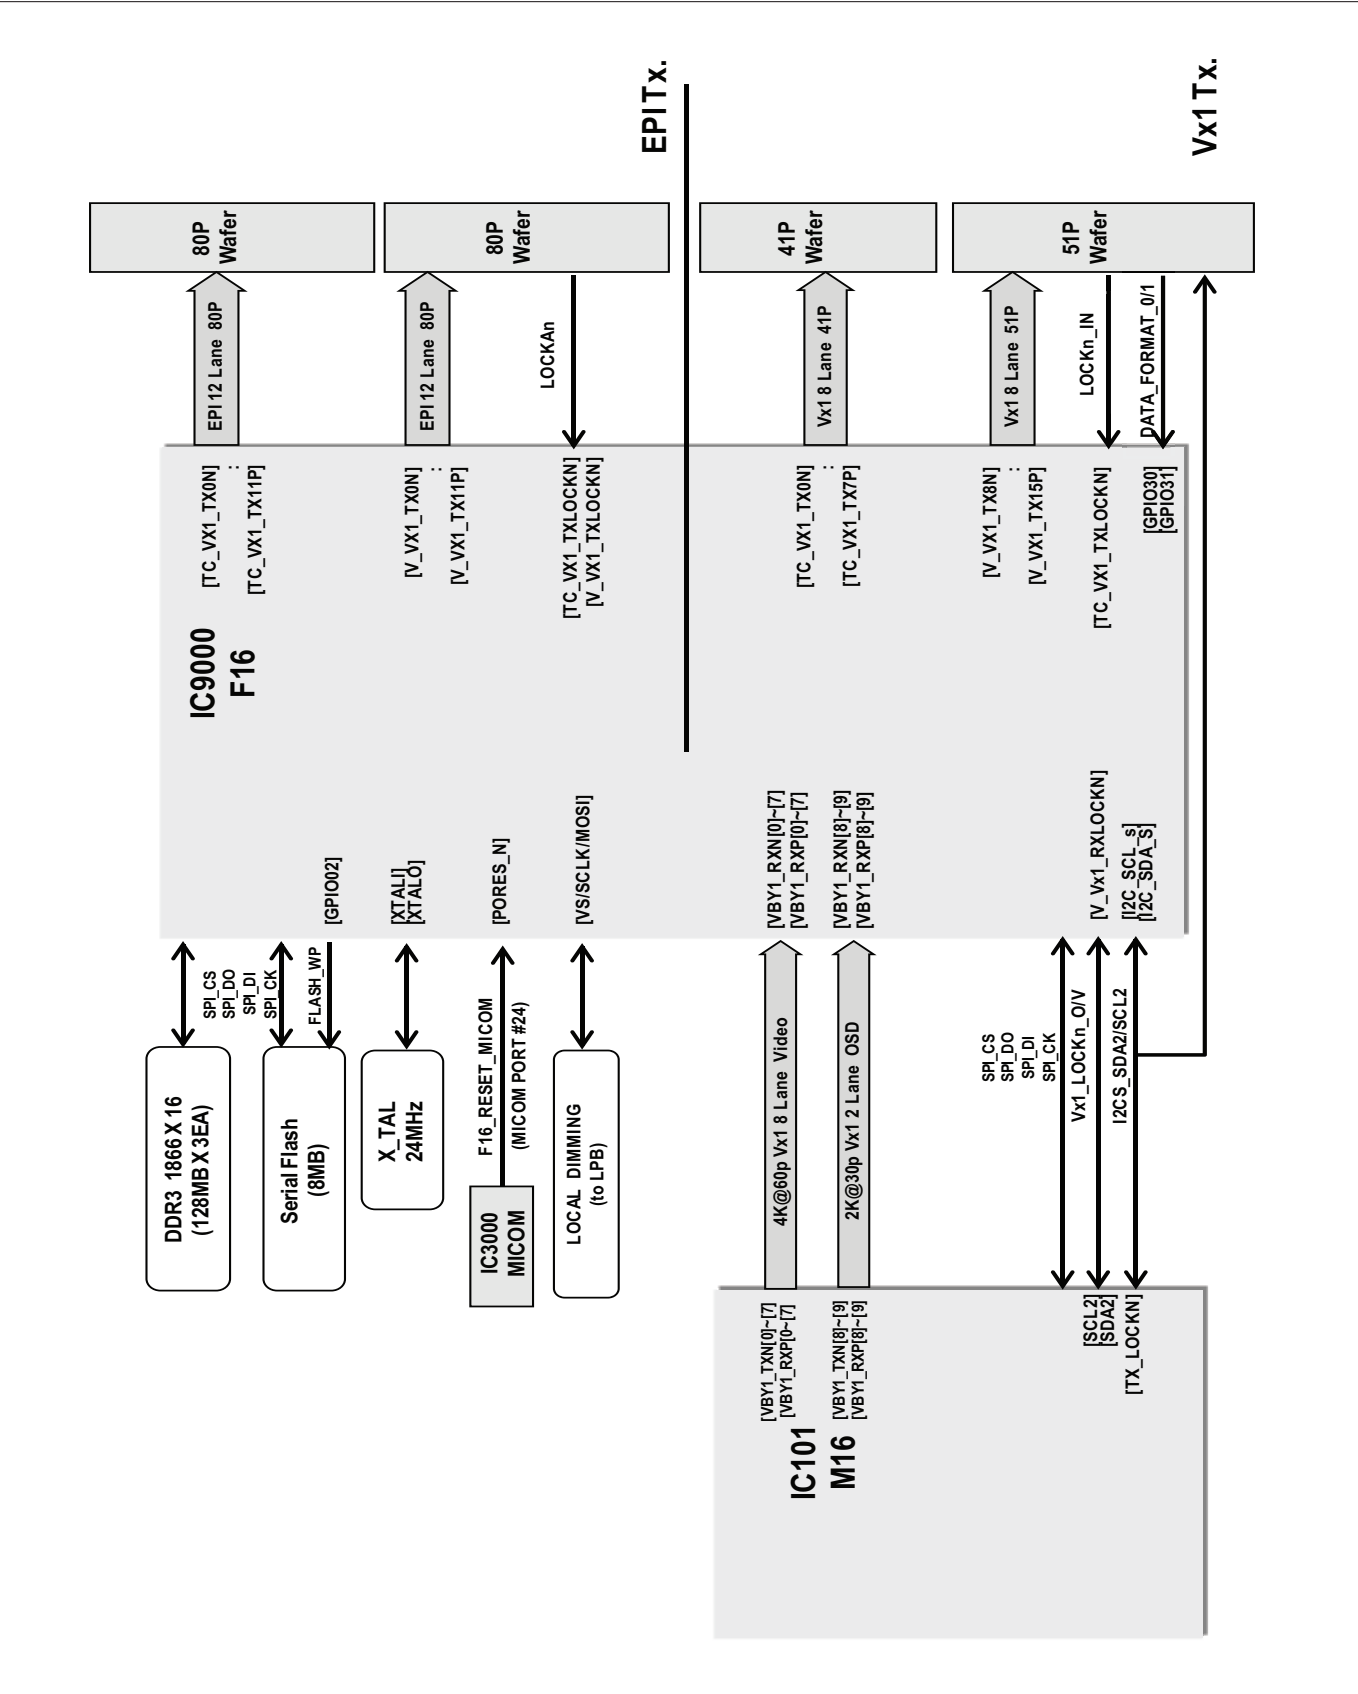


4. M16 Power Block

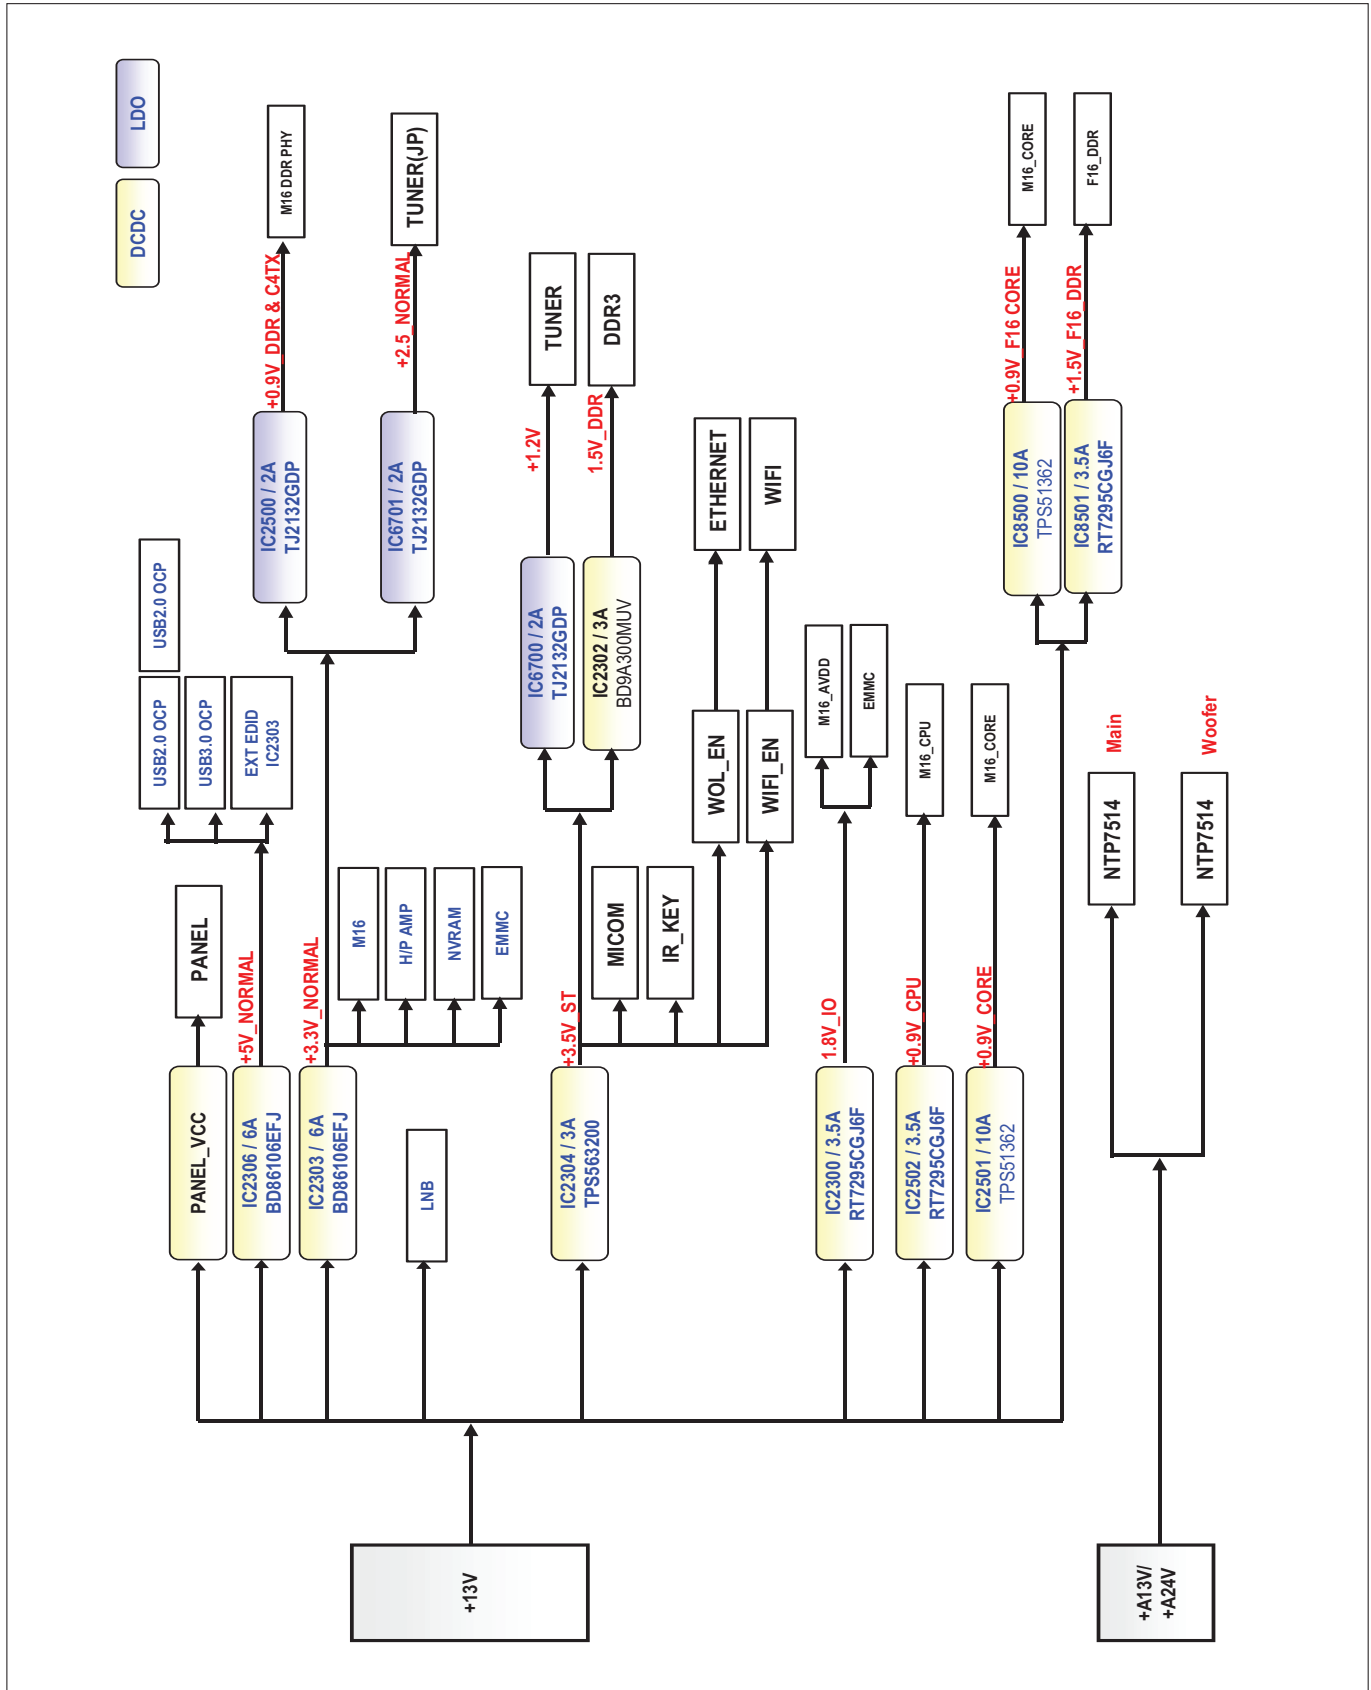


5. Tuner/CI Block Diagram

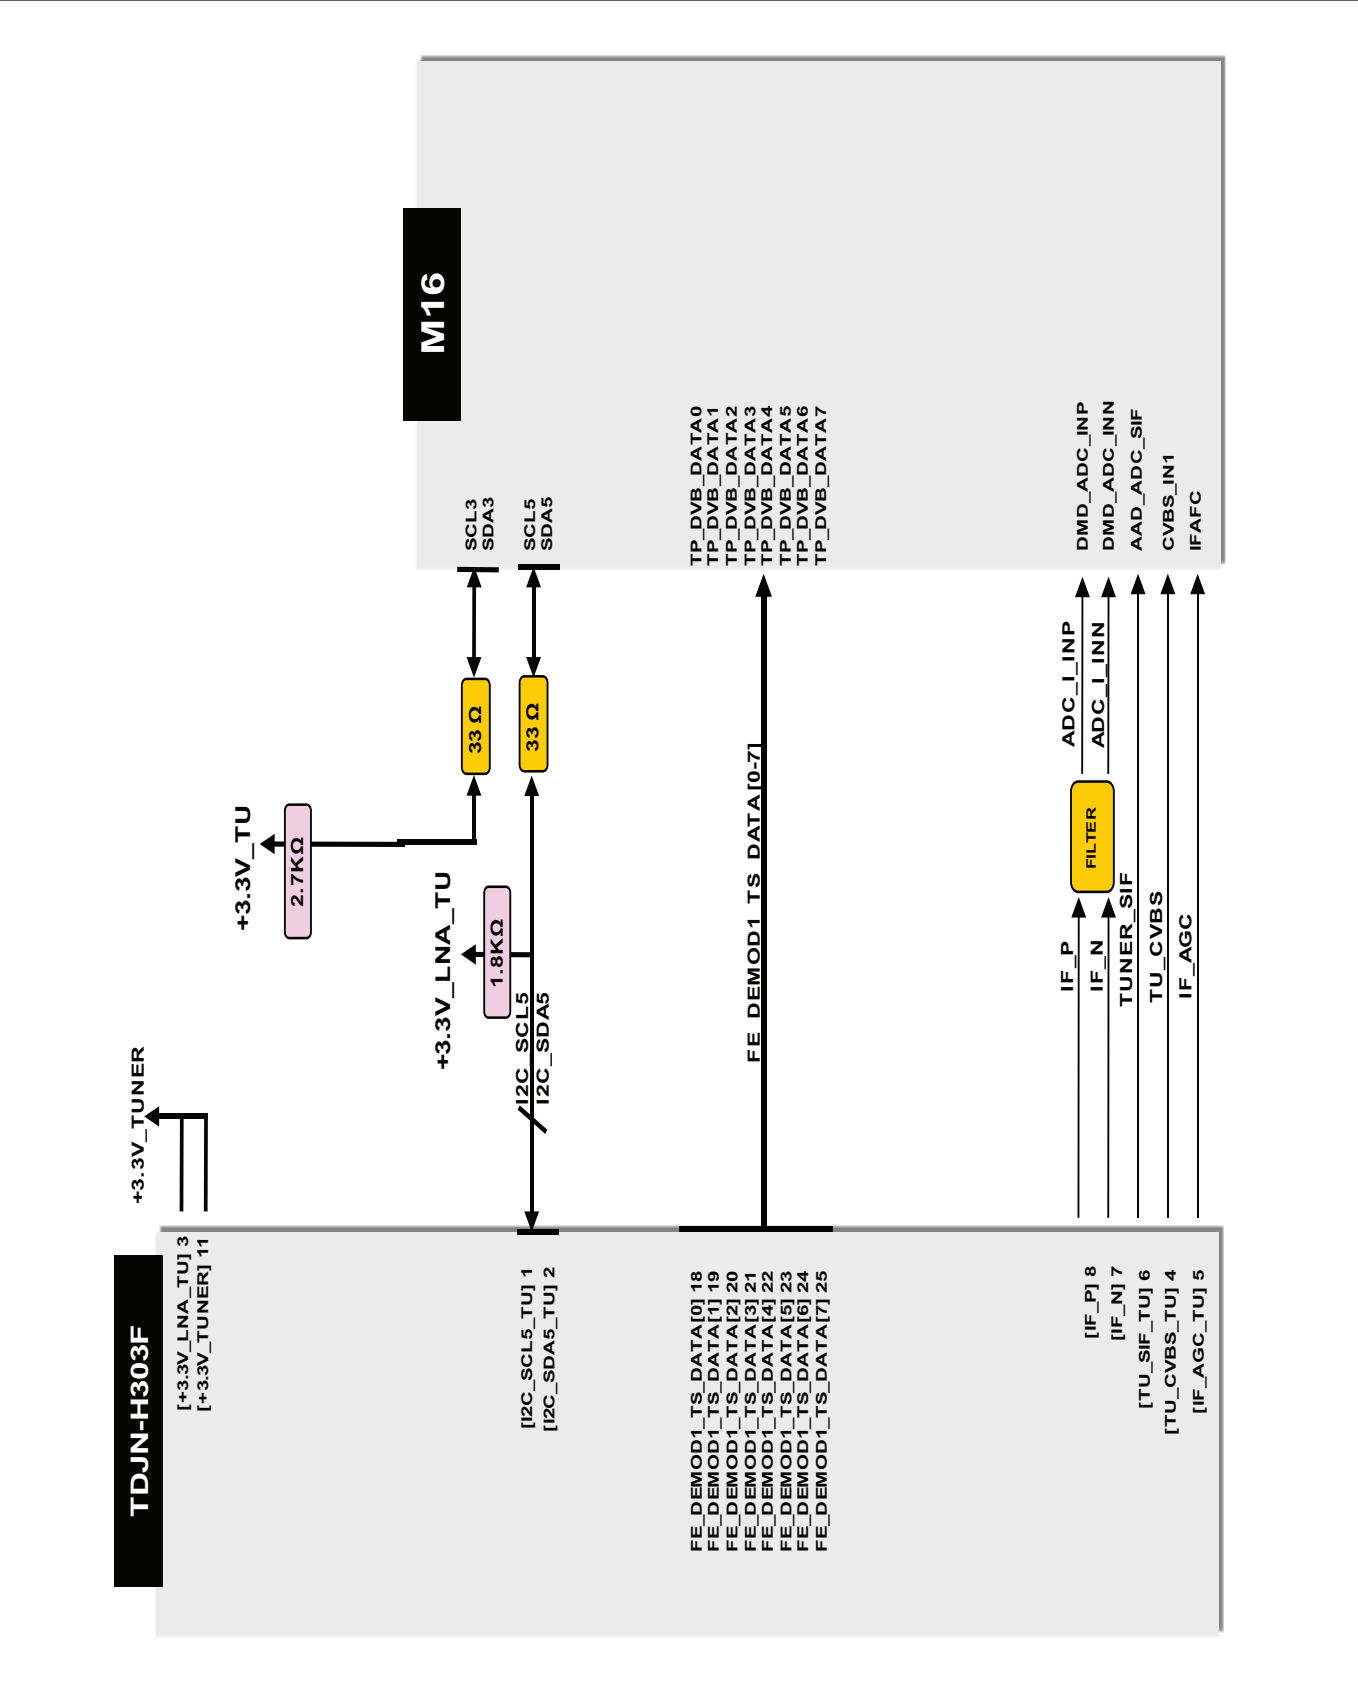


6. Video/Audio In Block Diagram

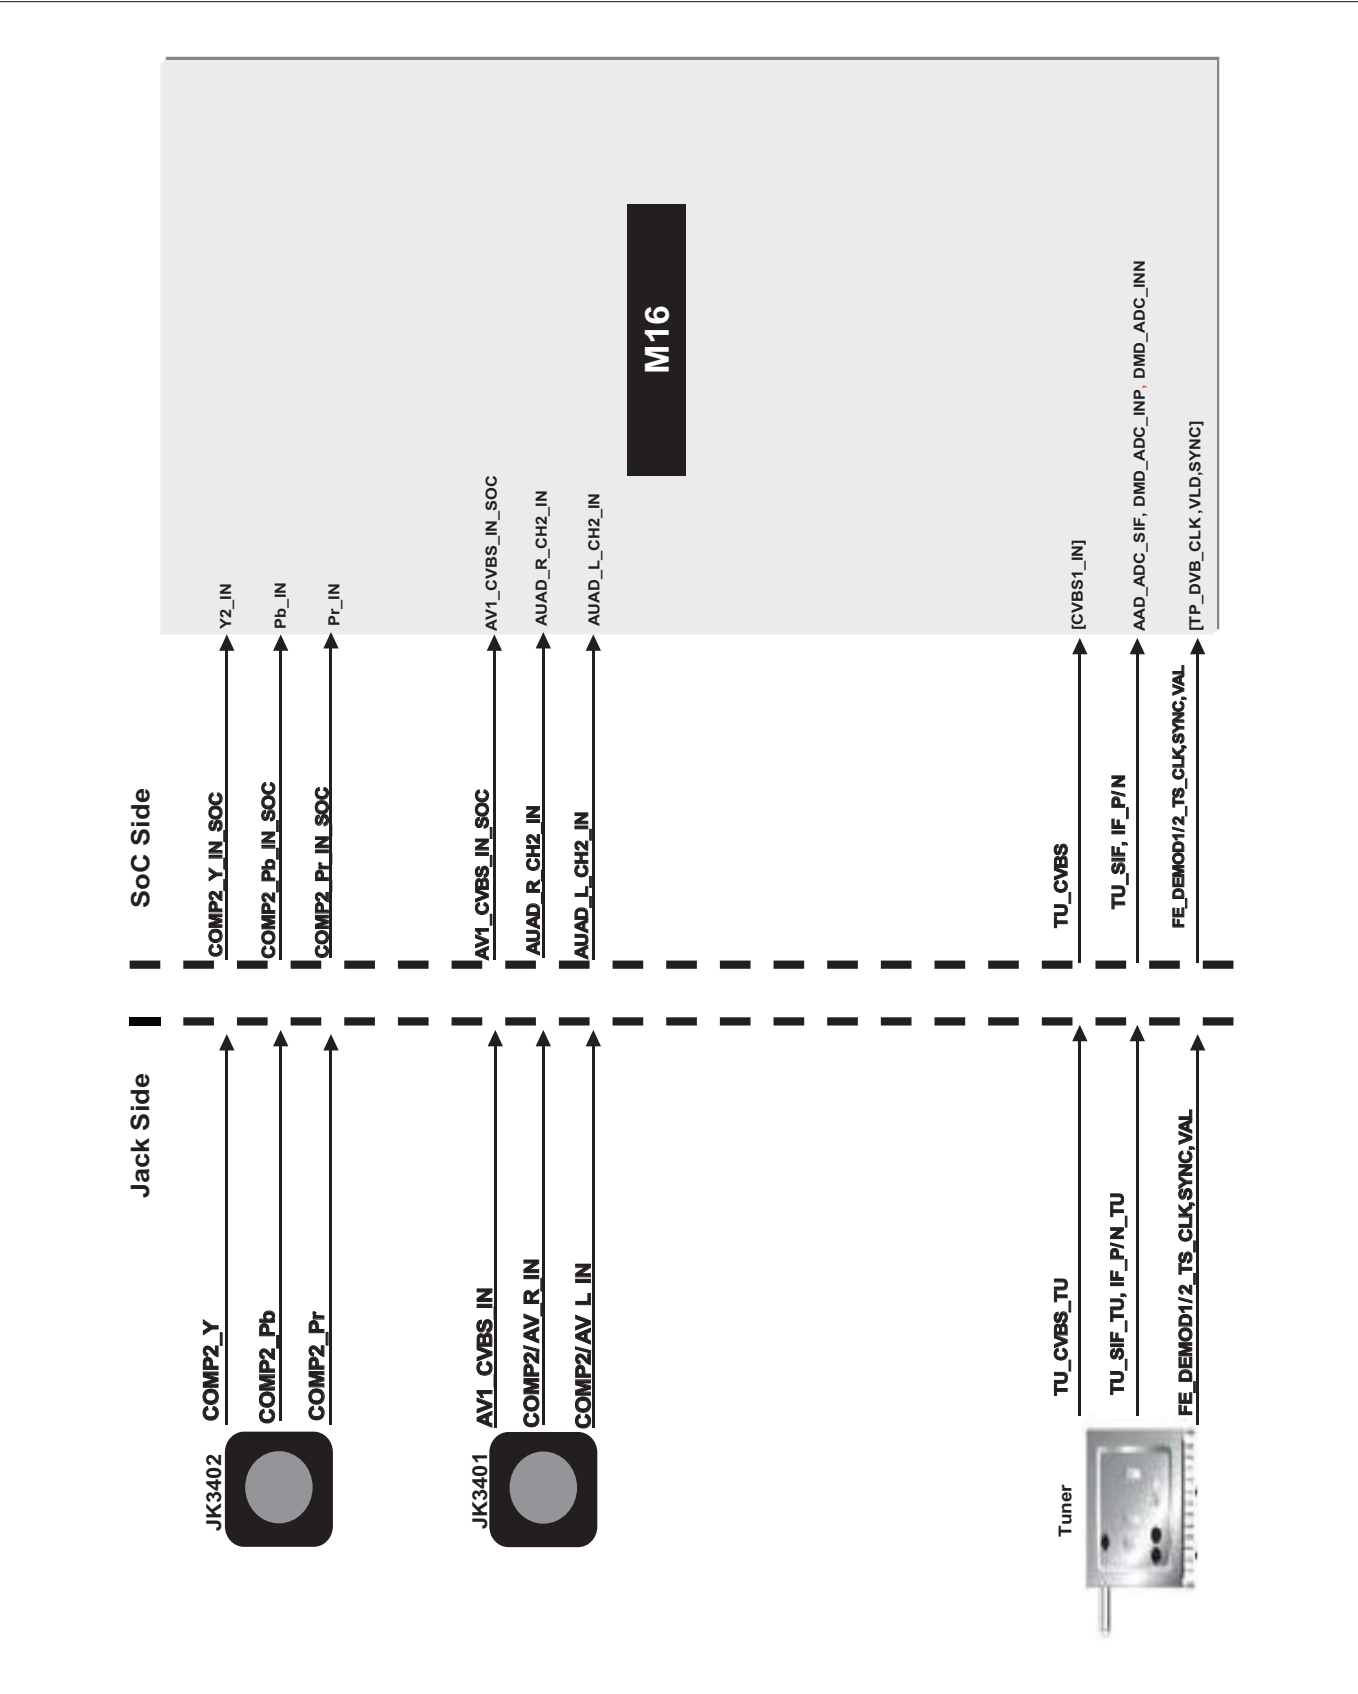


7. Audio Out Block Diagram

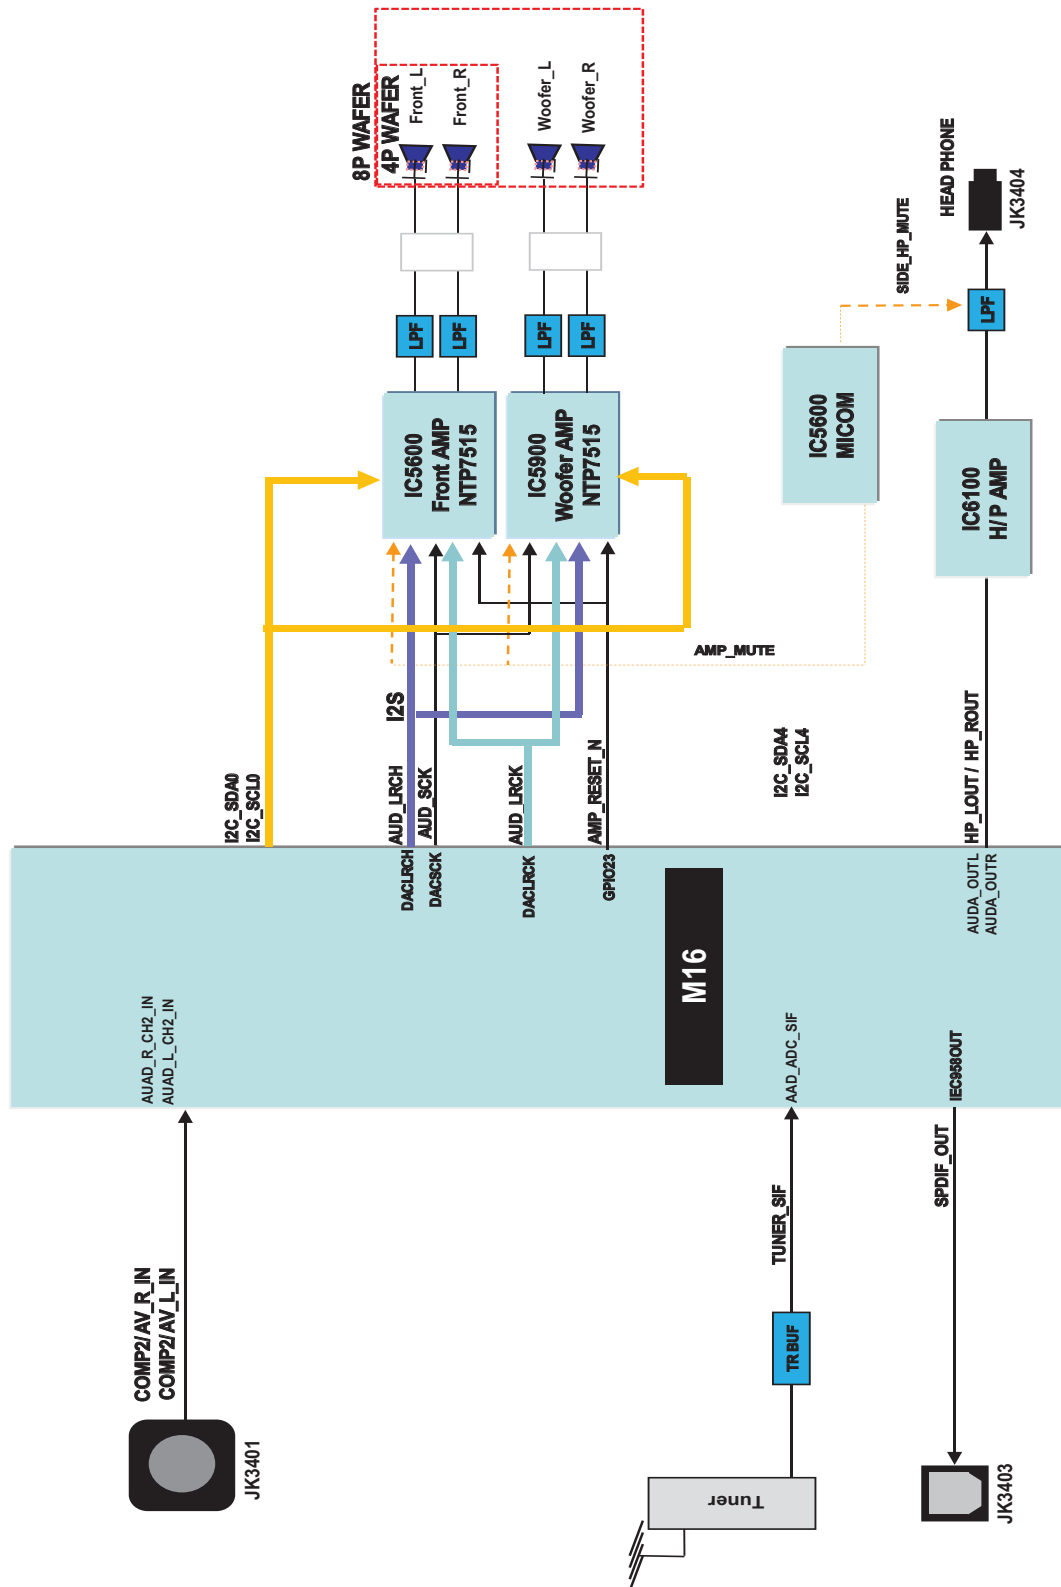

8. HDMI

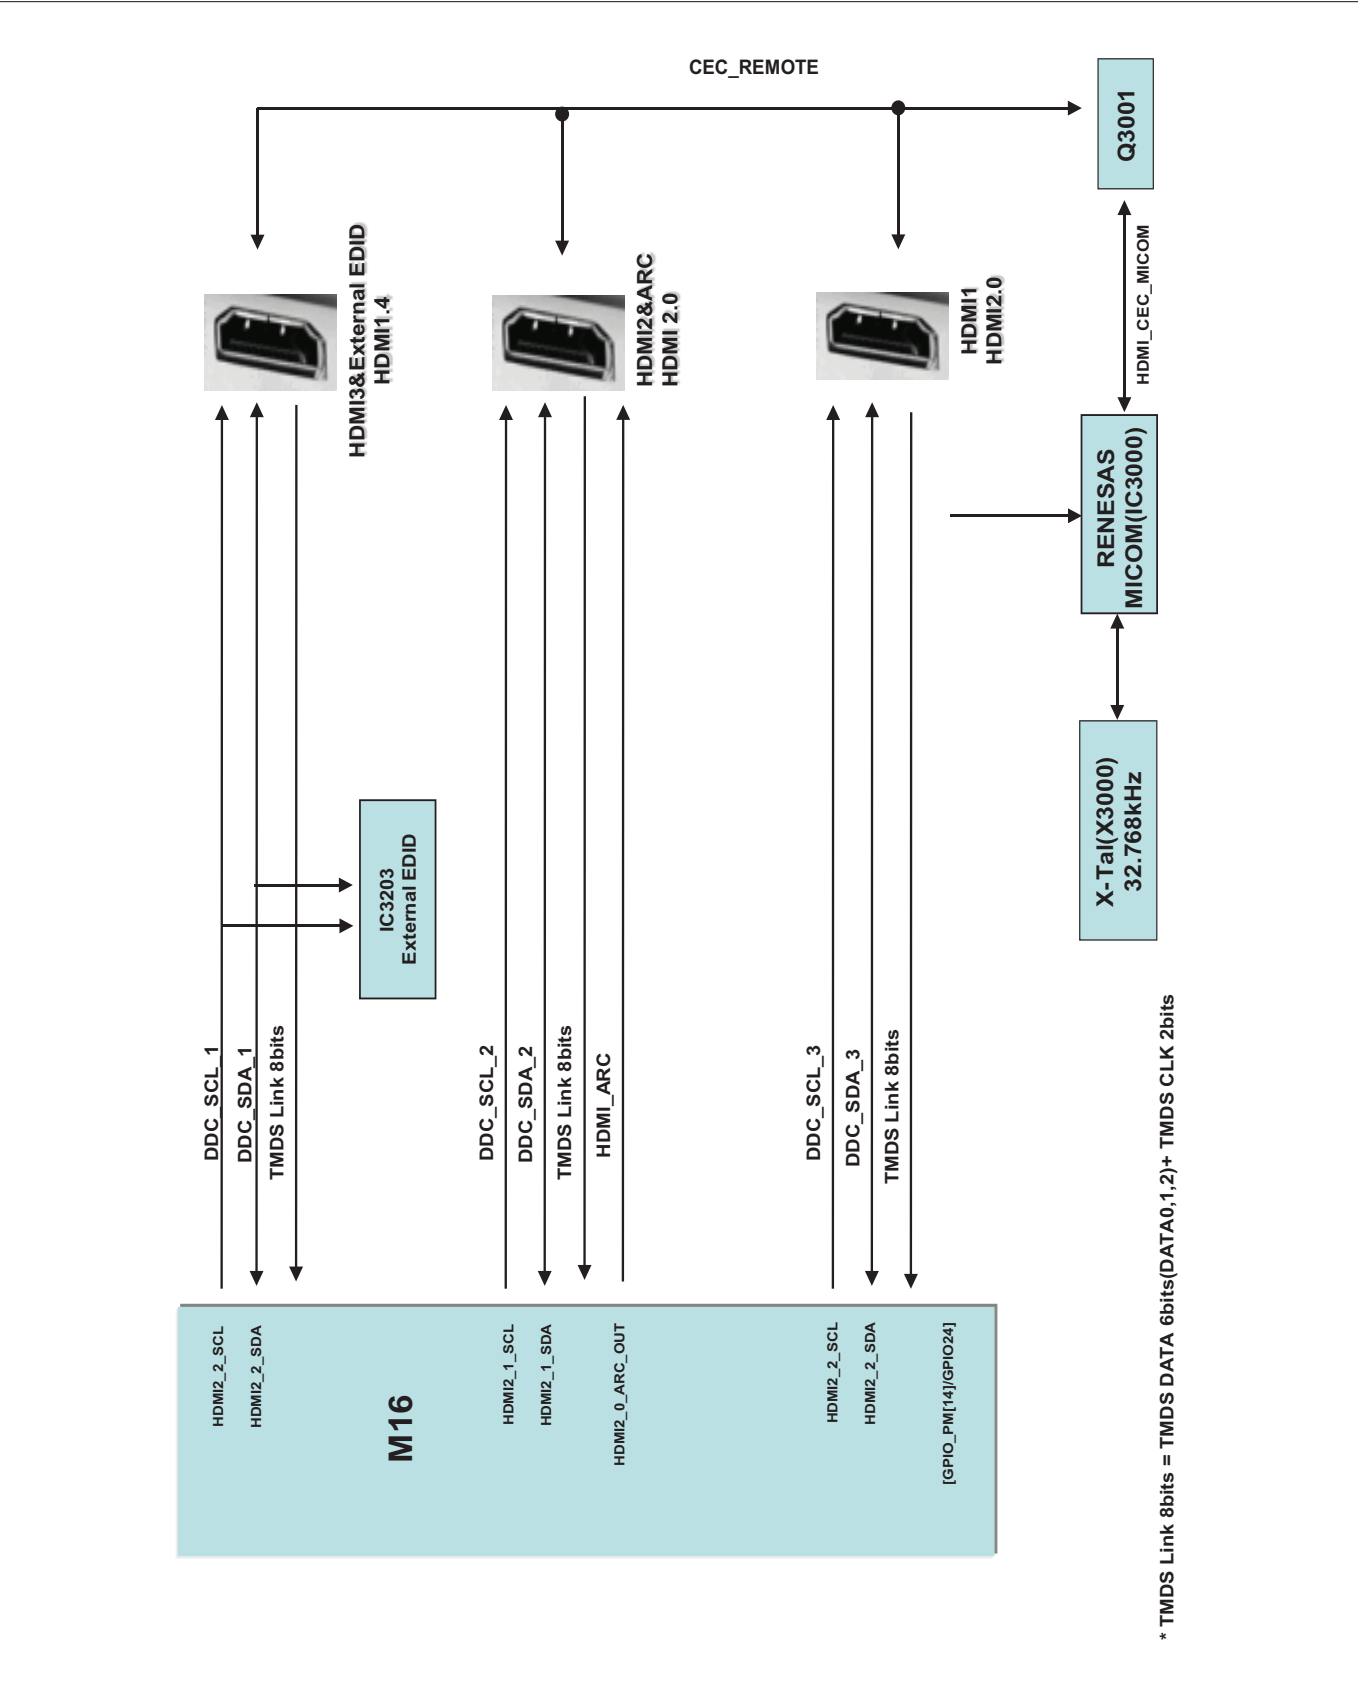


9. USB / WIFI / M-REMOTE / UART

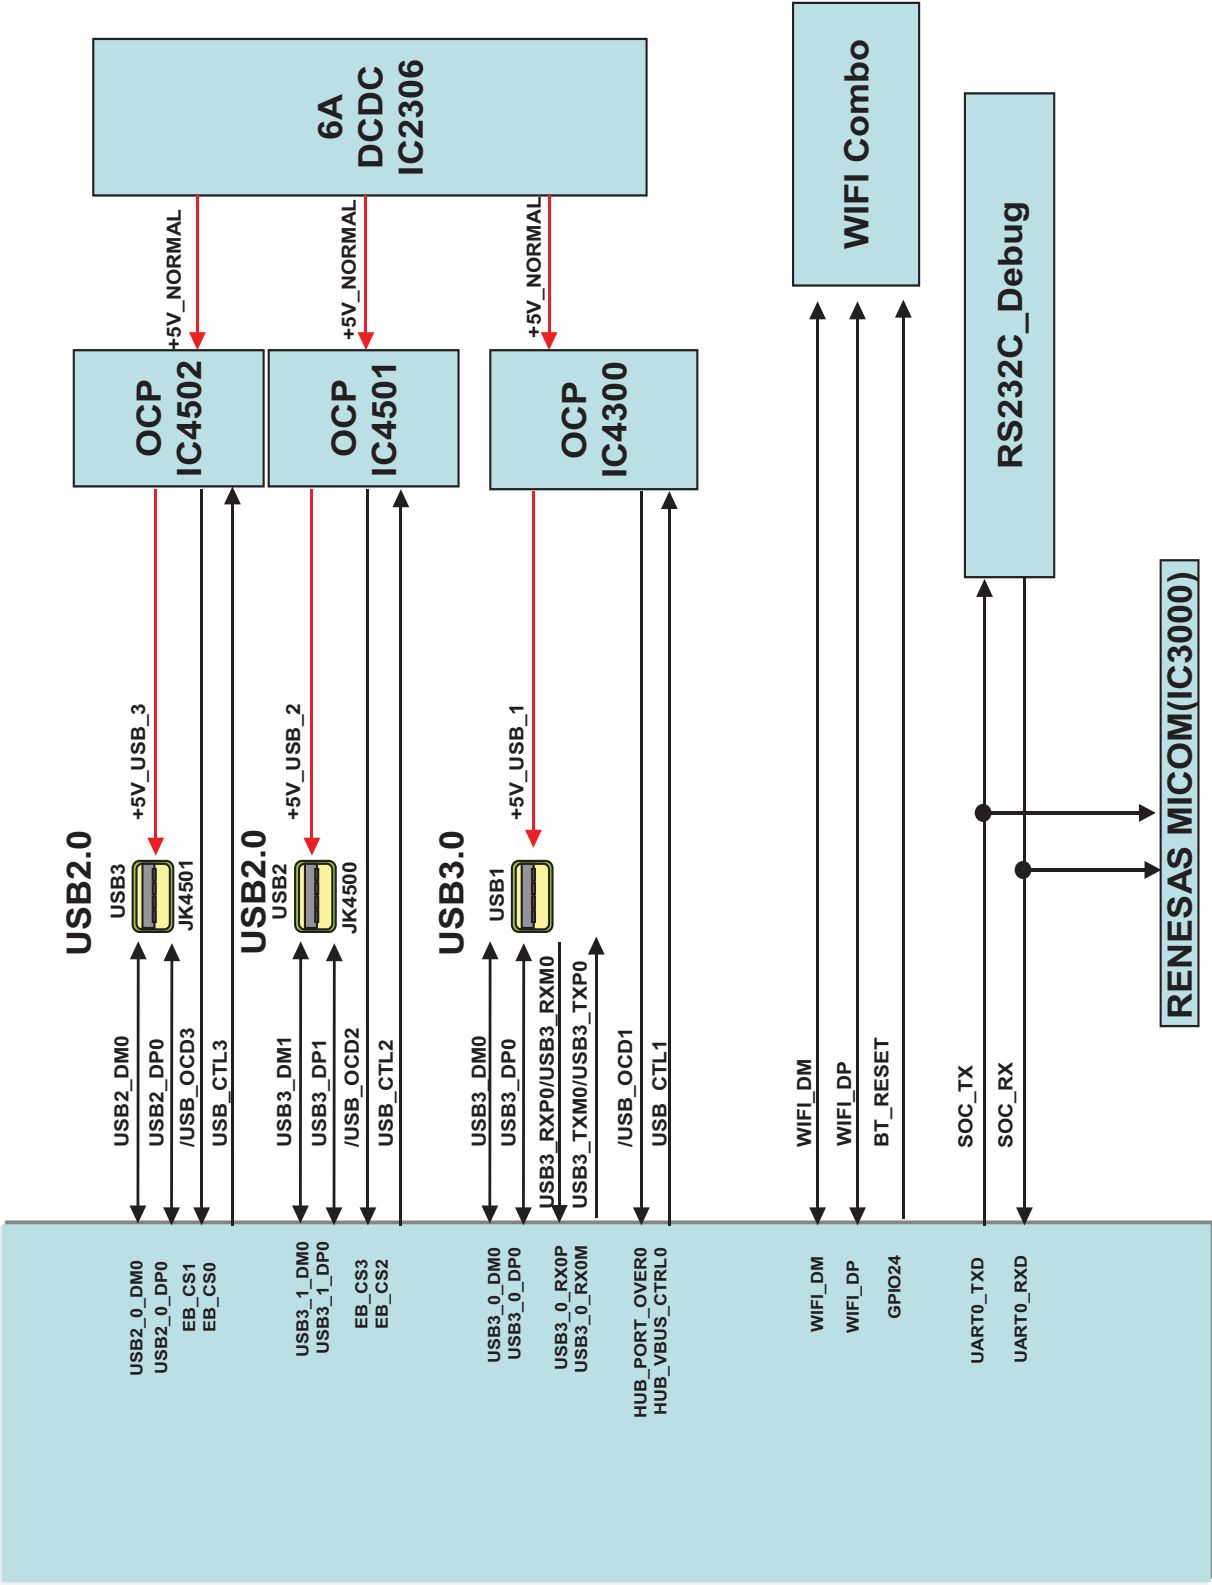

EXPLODED VIEW

IMPORTANT SAFETY NOTICE


Many electrical and mechanical parts in this chassis have special safety-related characteristics. These parts are identified by Δ in the Schematic Diagram and EXPLODED VIEW. It is essential that these special safety parts should be replaced with the same components as recommended in this manual to prevent Shock, Fire, or other Hazards. Do not modify the original design without permission of manufacturer.

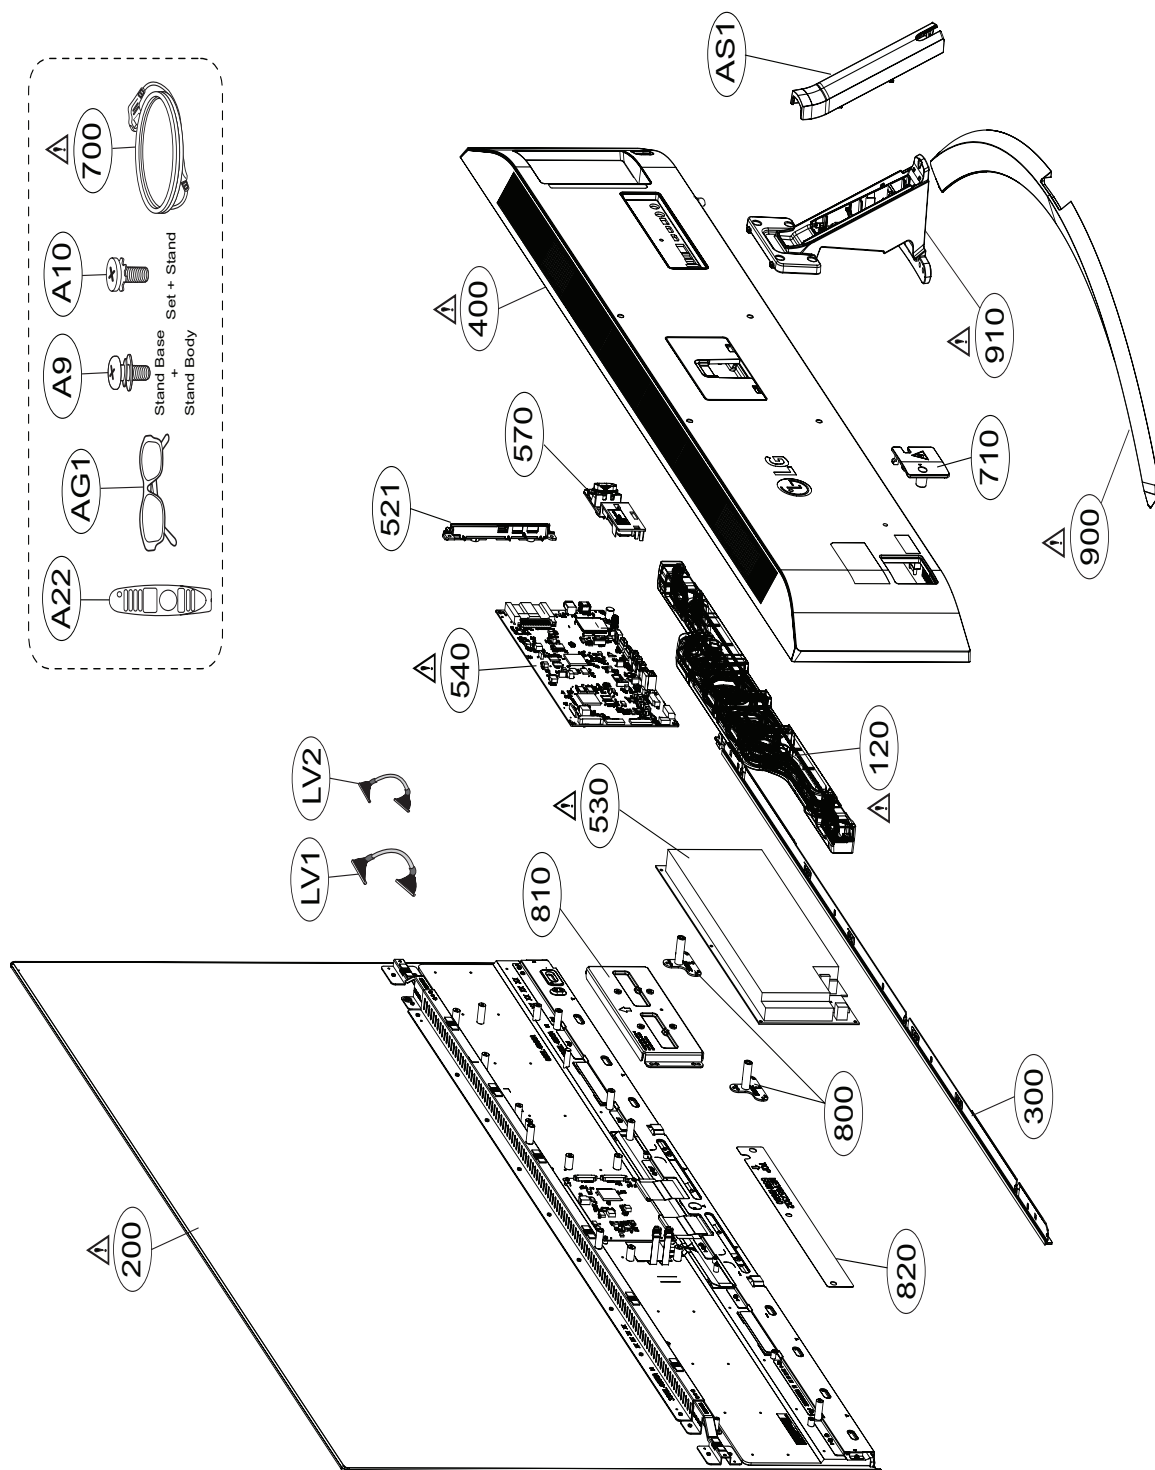

DISASSEMBLY

1. Disassemble Stand


(1) Push up Cable Cover and Pull the Cable Cover.

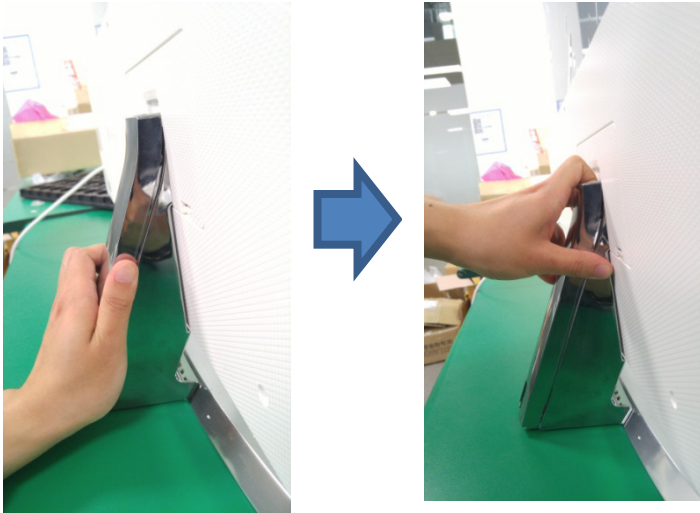


(2) Disassemble Stand Cover.



(3) Disassemble Screw (4EA).

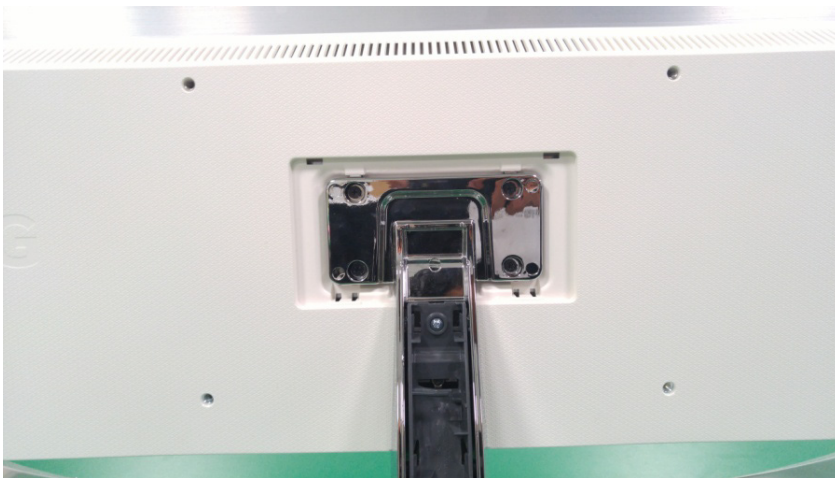

2. Disassemble B/C Screw

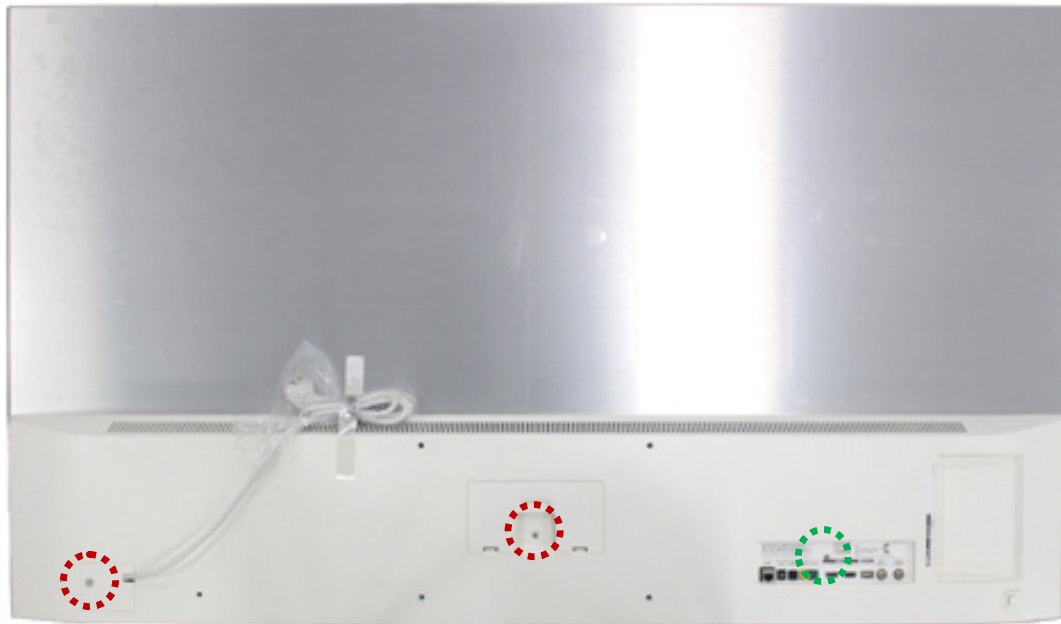

O : M3*5.5 (8EA)

O : M4*10 (1EA)

O : 4 ~ 7Kgf.cm

O : 5~ 7Kgf.cm

3. Disassemble Back Cover


(1) Pull the Power Cord Bracket Holding Power Cable.






(2) Pull the Back Cover upward with using snap.





(3) Change Position and Pull up Back Cover.

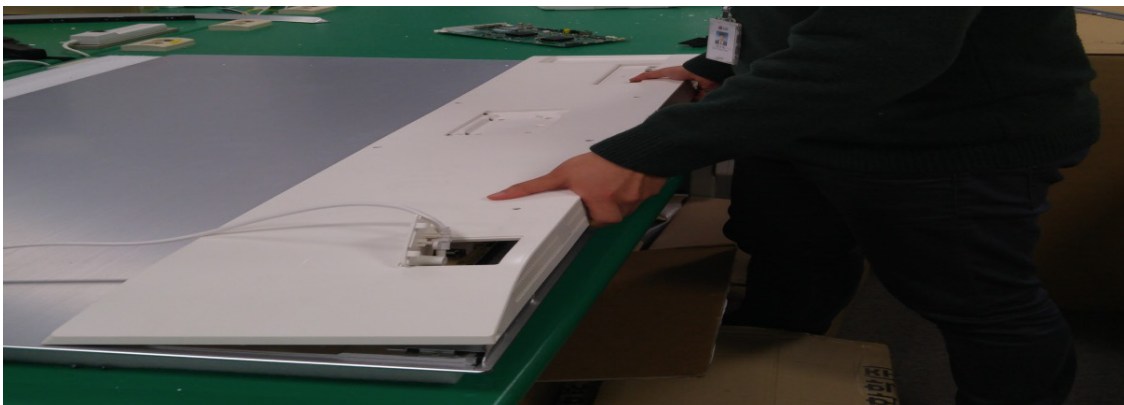

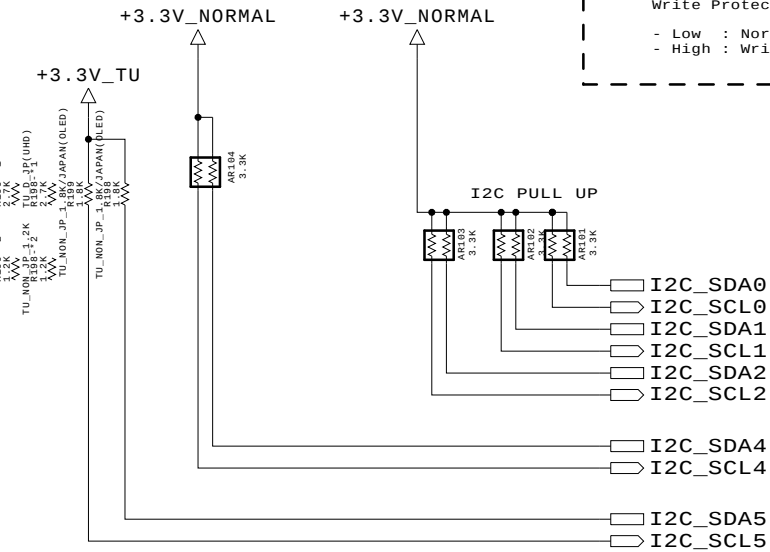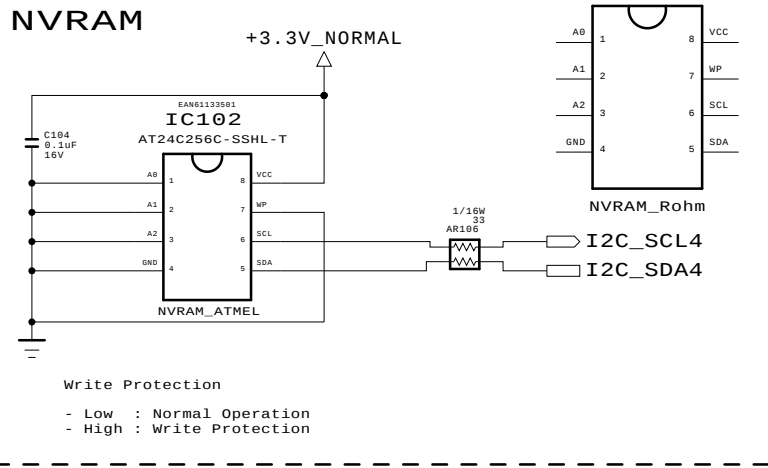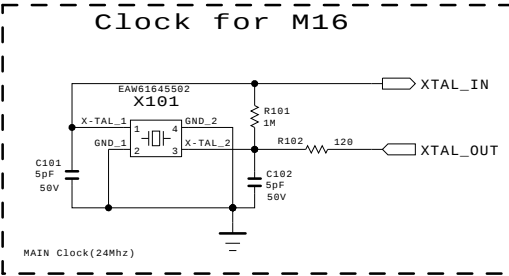

I2C

I2C-0 : AMP
I2C-1 : MICOM
I2C-2 : T-CON, L/DIMING
I2C-3 : S/Demod, T2/Demod, LNB
I2C-4 : NVRAM
I2C-5 : TUNER_MOPLL (T/C, ATV)

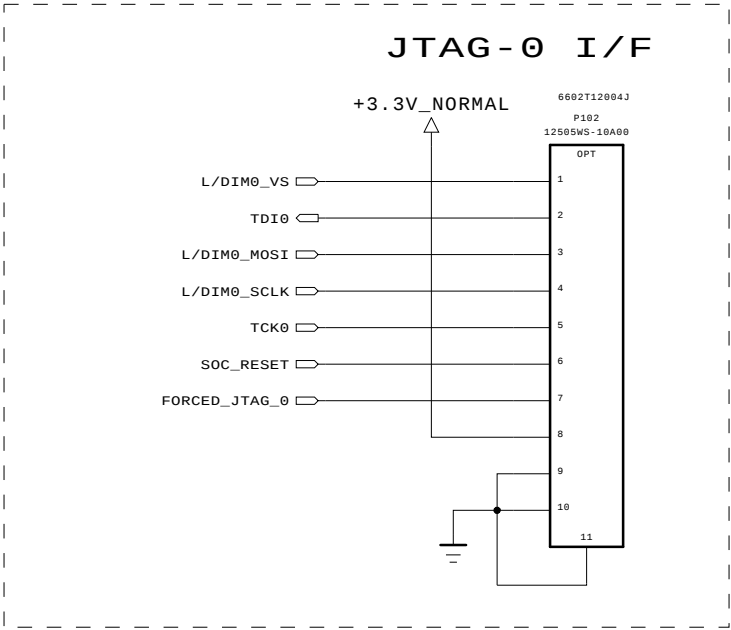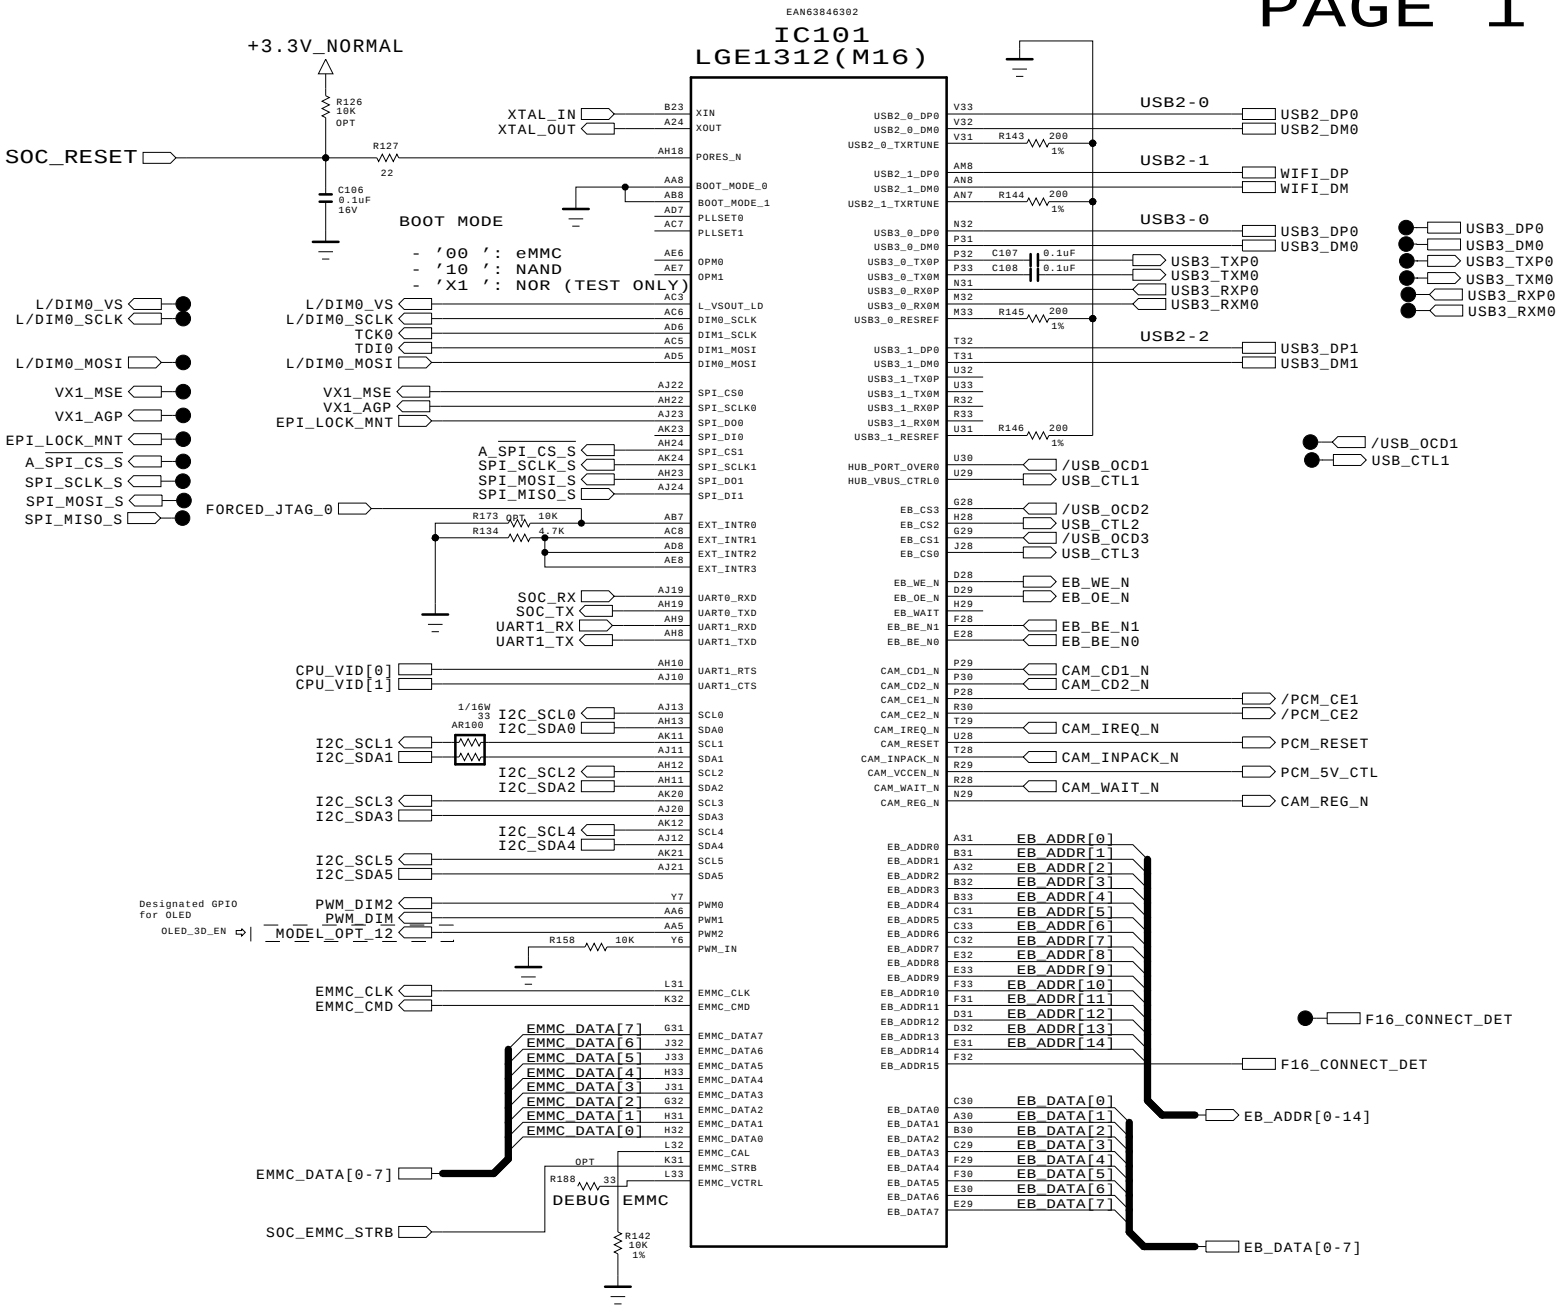


THE SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE SYMBOL MARK OF THE SCHEMATIC.




SECRET
LGElectronics




MODEL	M16	DATE	2015.12.22
BLOCK	M16 Symbol A	SHEET	1 / 99

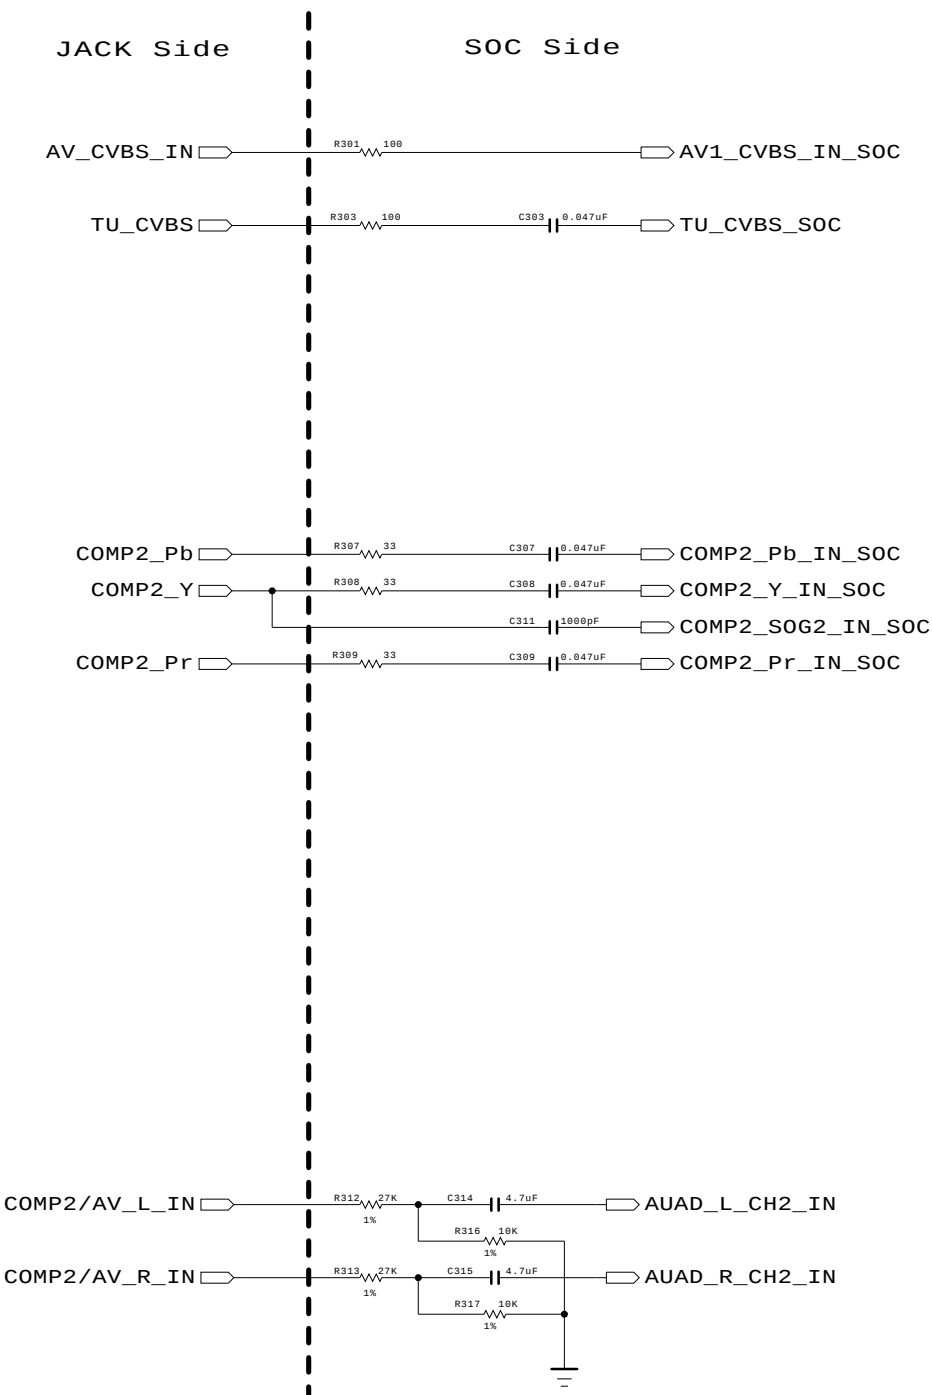


Placed as close as possible to IC101

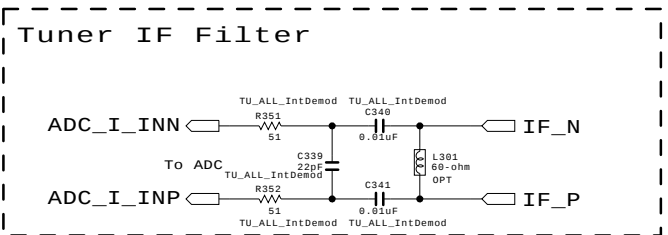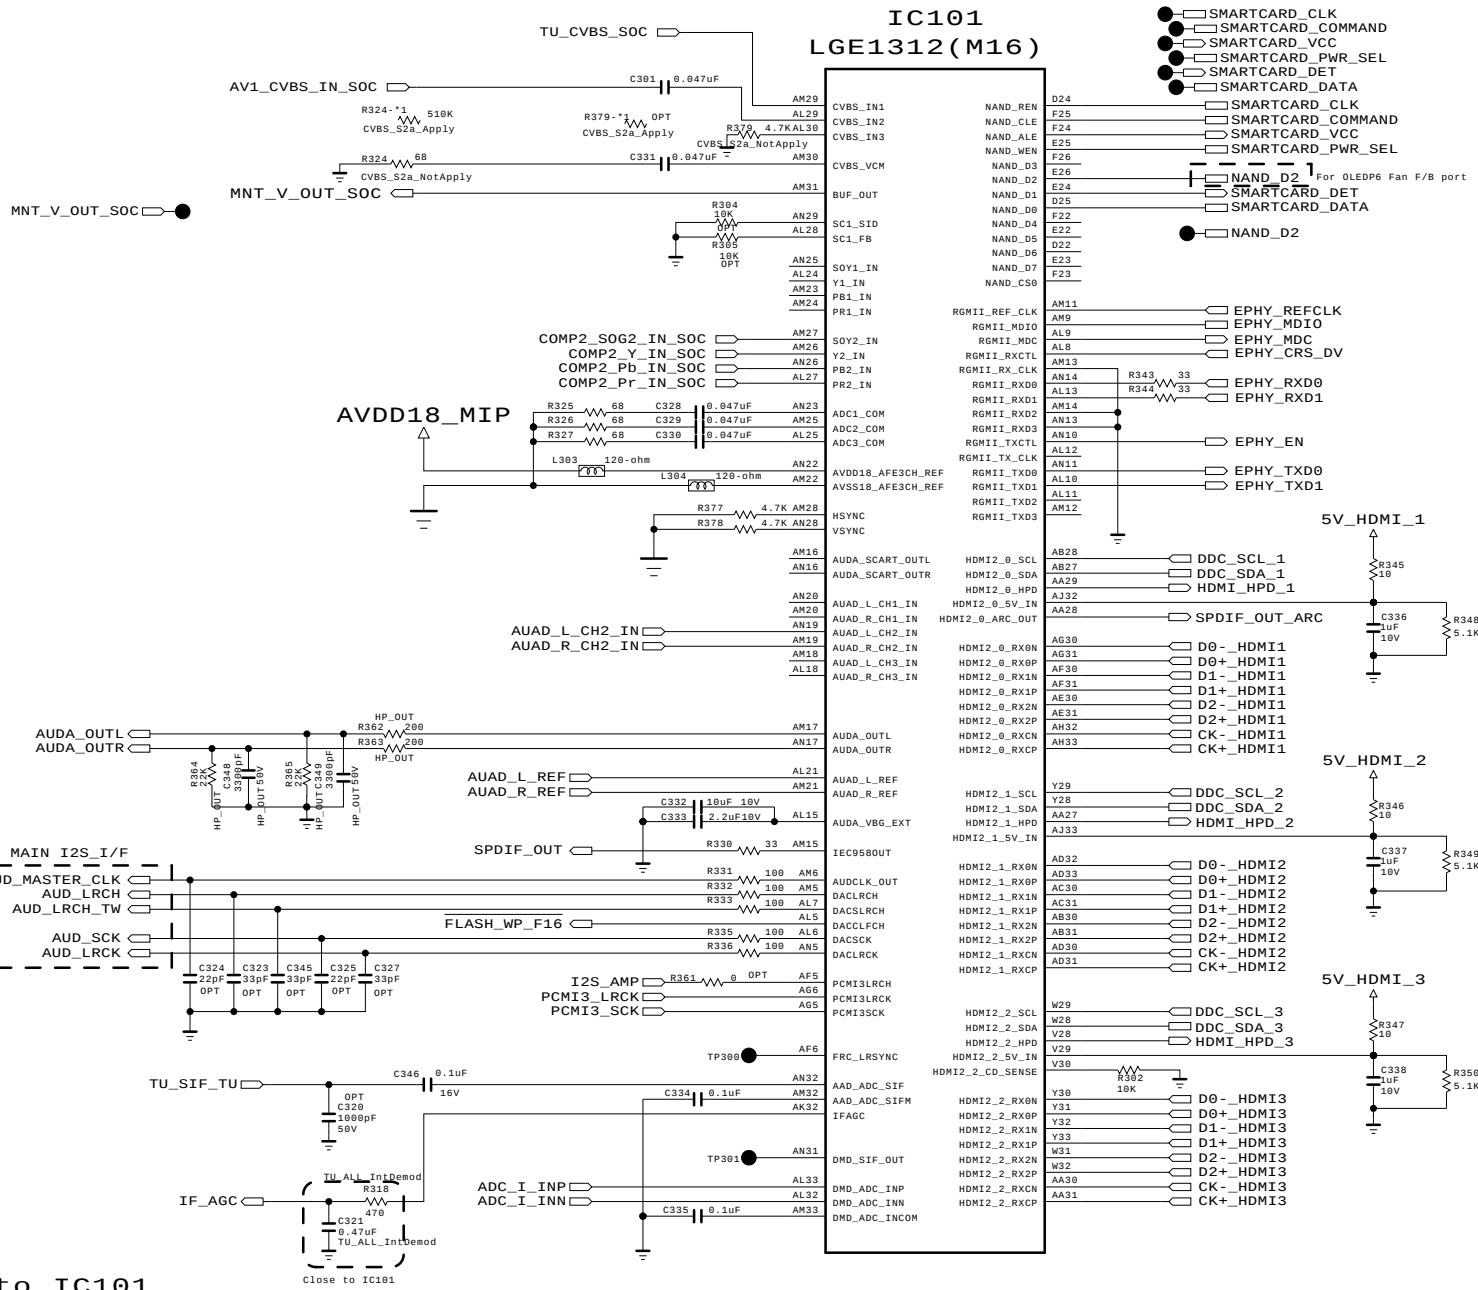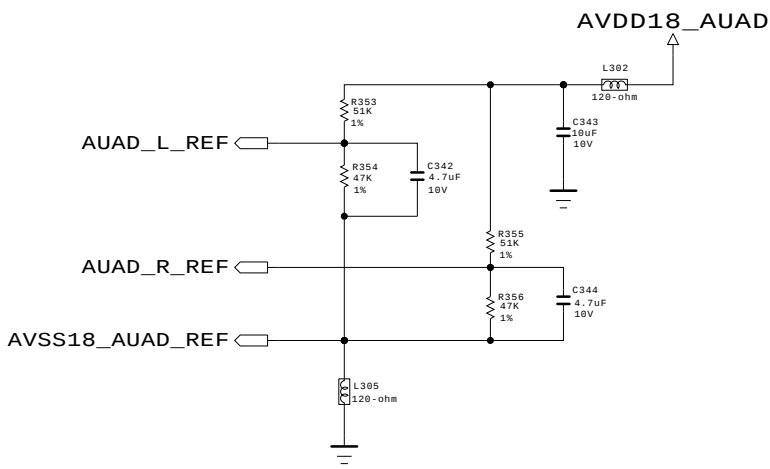

IC101
LGE1312(M16)

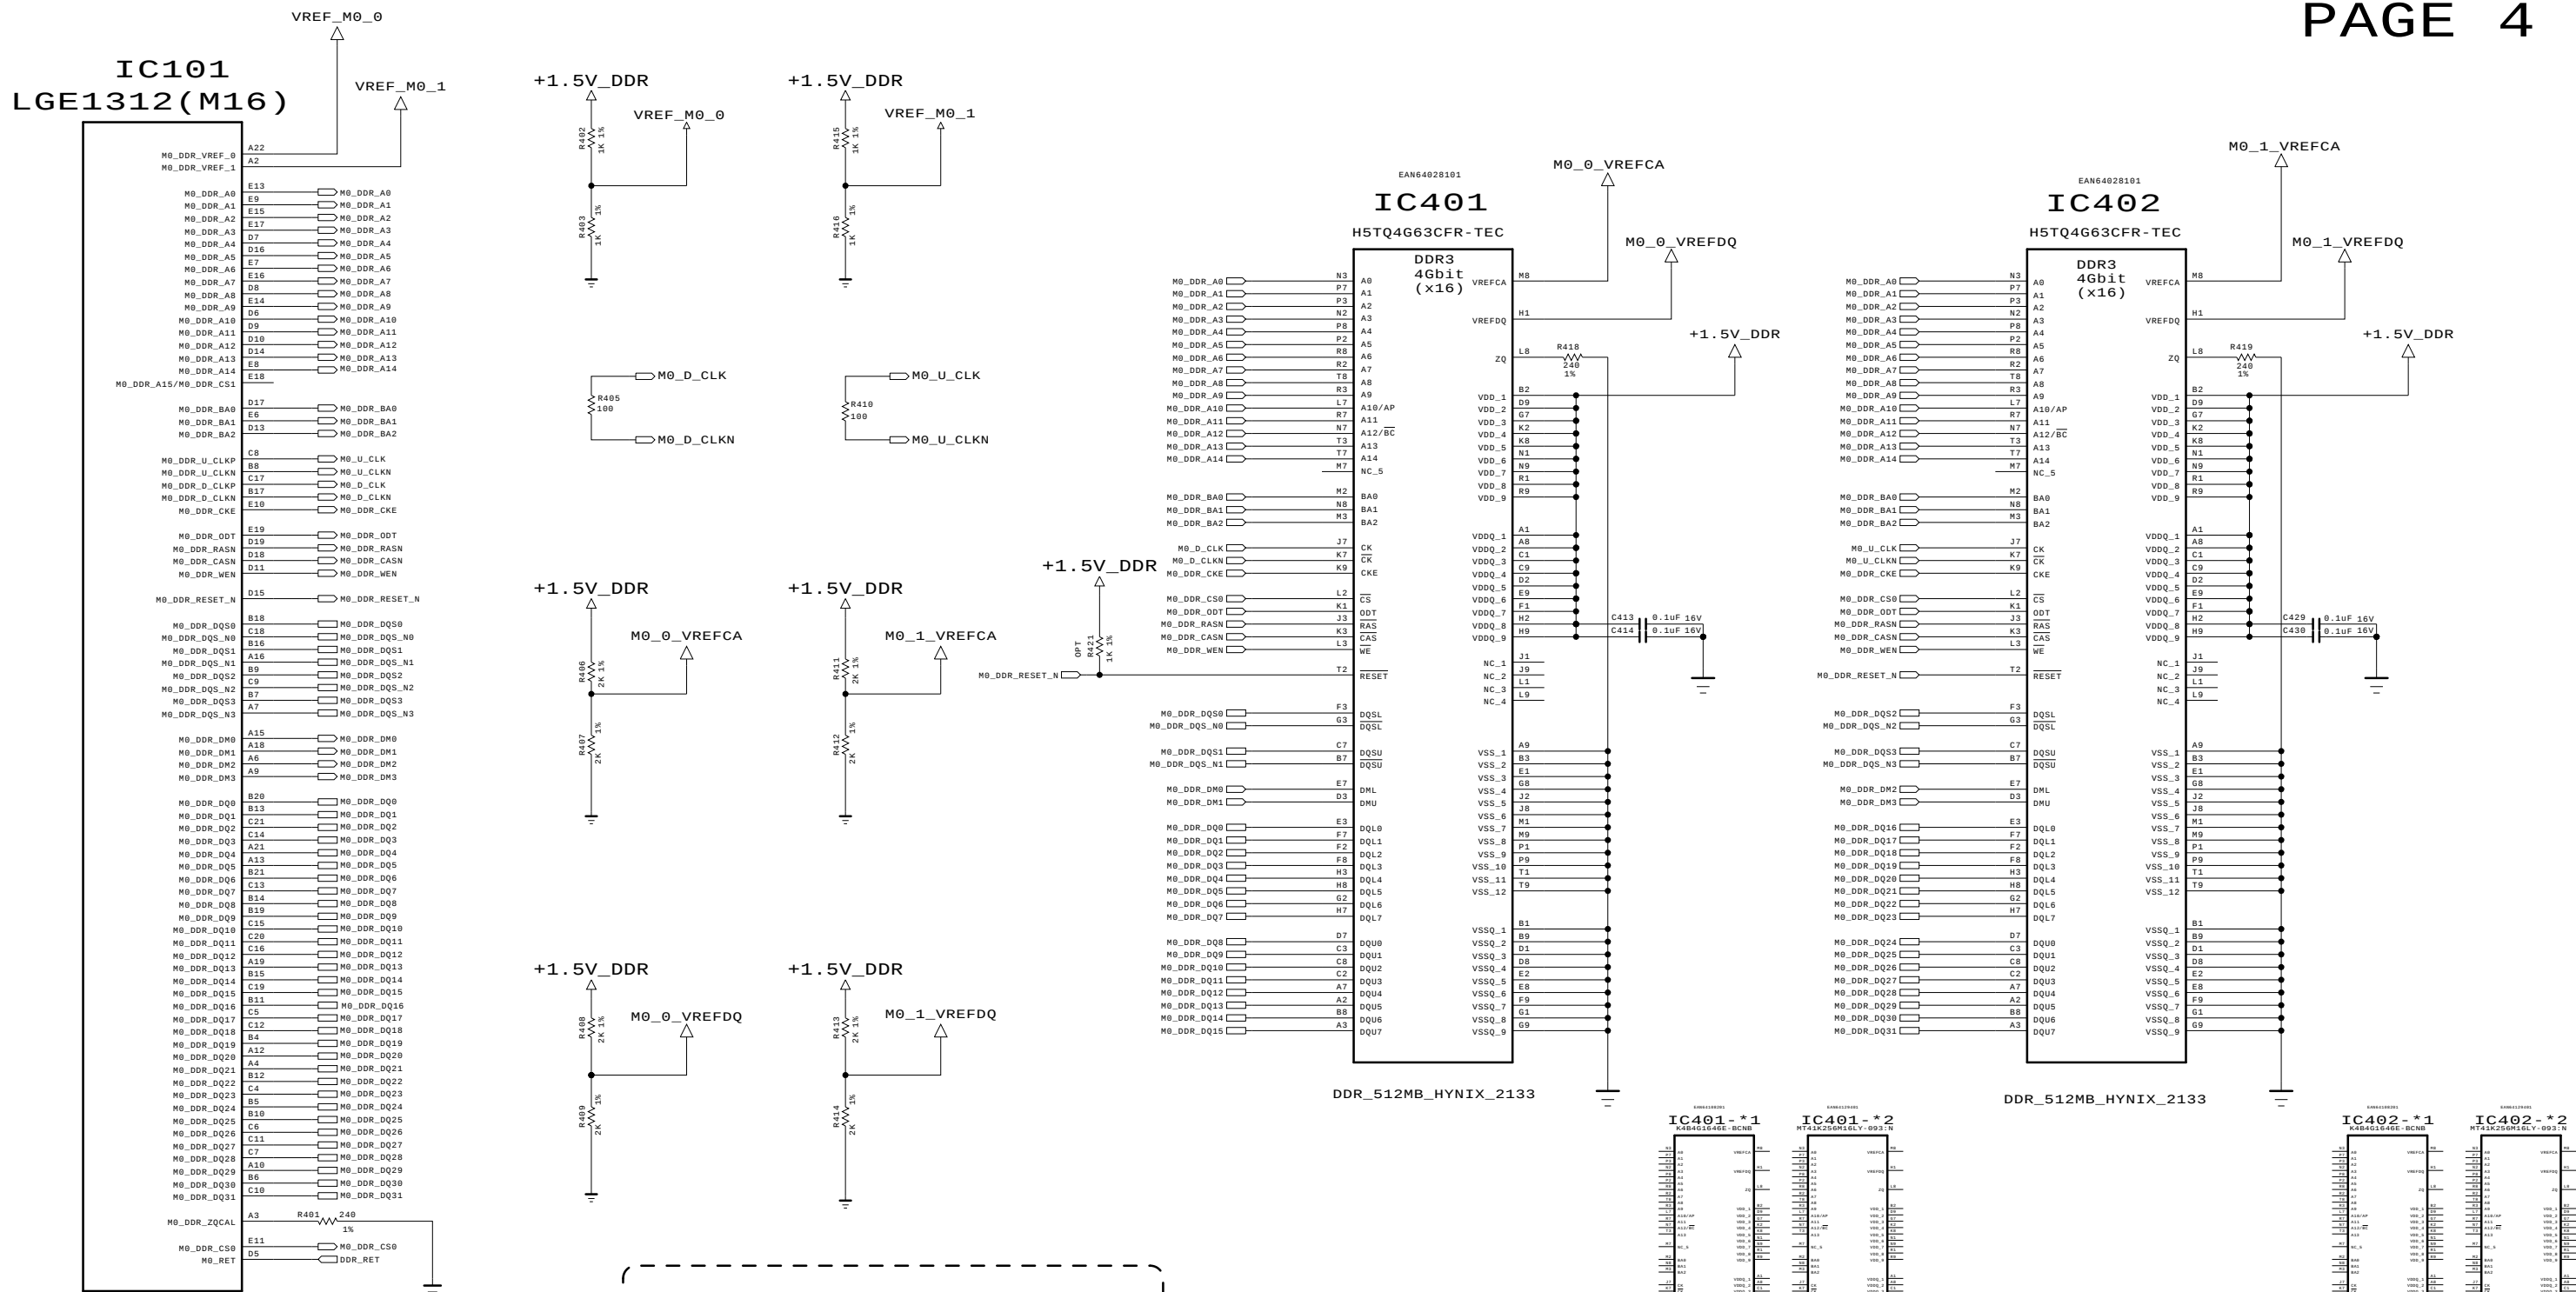

Add CS signal for 2T Mode &
RET signal for Instant On

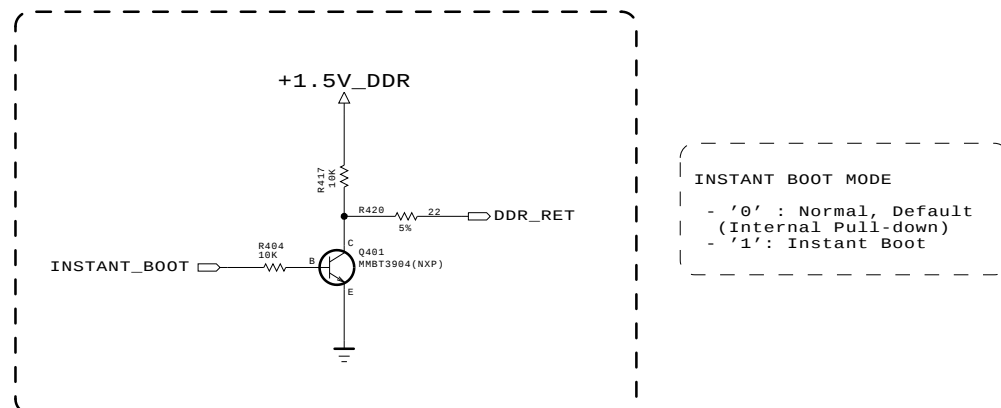

DDR_512MB_HYUNIX_2133


IC401- *1 IC40410-40-BCNE	IC401- *2 IC40410-40-BCNE	IC402- *1 IC40410-40-BCNE	IC402- *2 IC40410-40-BCNE
00	00	00	00
01	01	01	01
02	02	02	02
03	03	03	03
04	04	04	04
05	05	05	05
06	06	06	06
07	07	07	07
08	08	08	08
09	09	09	09
10	10	10	10
11	11	11	11
12	12	12	12
13	13	13	13
14	14	14	14
15	15	15	15
16	16	16	16
17	17	17	17
18	18	18	18
19	19	19	19
20	20	20	20
21	21	21	21
22	22	22	22
23	23	23	23
24	24	24	24
25	25	25	25
26	26	26	26
27	27	27	27
28	28	28	28
29	29	29	29
30	30	30	30
31	31	31	31
32	32	32	32
33	33	33	33
34	34	34	34
35	35	35	35
36	36	36	36
37	37	37	37
38	38	38	38
39	39	39	39
40	40	40	40
41	41	41	41
42	42	42	42
43	43	43	43
44	44	44	44
45	45	45	45
46	46	46	46
47	47	47	47
48	48	48	48
49	49	49	49
50	50	50	50
51	51	51	51
52	52	52	52
53	53	53	53
54	54	54	54
55	55	55	55
56	56	56	56
57	57	57	57
58	58	58	58
59	59	59	59
60	60	60	60
61	61	61	61
62	62	62	62
63	63	63	63
64	64	64	64
65	65	65	65
66	66	66	66
67	67	67	67
68	68	68	68
69	69	69	69
70	70	70	70
71	71	71	71
72	72	72	72
73	73	73	73
74	74	74	74
75	75	75	75
76	76	76	76
77	77	77	77
78	78	78	78
79	79	79	79
80	80	80	80
81	81	81	81
82	82	82	82
83	83	83	83
84	84	84	84
85	85	85	85
86	86	86	86
87	87	87	87
88	88	88	88
89	89	89	89
90	90	90	90
91	91	91	91
92	92	92	92
93	93	93	93
94	94	94	94
95	95	95	95
96	96	96	96
97	97	97	97
98	98	98	98
99	99	99	99
100	100	100	100
101	101	101	101
102	102	102	102
103	103	103	103
104	104	104	104
105	105	105	105
106	106	106	106
107	107	107	107
108	108	108	108
109	109	109	109
110	110	110	110
111	111	111	111
112	112	112	112
113	113	113	113
114	114	114	114
115	115	115	115
116	116	116	116
117	117	117	117
118	118	118	118
119	119	119	119
120	120	120	120
121	121	121	121
122	122	122	122
123	123	123	123
124	124	124	124
125	125	125	125
126	126	126	126
127	127	127	127
128	128	128	128
129	129	129	129
130	130	130	130
131	131	131	131
132	132	132	132
133	133	133	133
134	134	134	134
135	135	135	135
136	136	136	136
137	137	137	137
138	138	138	138
139	139	139	139
140	140	140	140
141	141	141	141
142	142	142	142
143	143	143	143
144	144	144	144
145	145	145	145
146	146	146	146
147	147	147	147
148	148	148	148
149	149	149	149
150	150	150	150
151	151	151	151
152	152	152	152
153	153	153	153
154	154	154	154
155	155	155	155
156	156	156	156
157	157	157	157
158	158	158	158
159	159	159	159
160	160	160	160
161	161	161	161
162	162	162	162
163	163	163	163
164	164	164	164
165	165	165	165
166	166	166	166
167	167	167	167
168	168	168	168
169	169	169	169
170	170	170	170
171	171	171	171
172	172	172	172
173	173	173	173
174	174	174	174
175	175	175	175
176	176	176	176
177	177	177	177
178	178	178	178
179	179	179	179
180	180	180	180
181	181	181	181
182	182	182	182
183	183	183	183
184	184	184	184
185	185	185	185
186	186	186	186
187	187	187	187
188	188	188	188
189	189	189	189
190	190	190	190
191	191	191	191
192	192	192	192
193	193	193	193
194	194	194	194
195	195	195	195
196	196	196	196
197	197	197	197
198	198	198	198
199	199	199	199
200	200	200	200
201	201	201	201
202	202	202	202
203	203	203	203
204	204	204	204
205	205	205	205
206	206	206	206
207	207	207	207
208	208	208	208
209	209	209	209
210	210	210	210
211	211	211	211
212	212	212	212
213	213	213	213
214	214	214	214
215	215	215	215
216	216	216	216
217	217	217	217
218	218	218	218
219	219	219	219
220	220	220	220
221	221	221	221
222	222	222	222
223	223	223	223
224	224	224	224
225	225	225	225
226	226	226	226
227	227	227	227
228	228	228	228
229	229	229	229
230	230	230	230
231	231	231	231
232	232	232	232
233	233	233	233
234	234	234	234
235	235	235	235
236	236	236	236
237	237	237	237
238	238	238	238
239	239	239	239
240	240	240	240
241	241	241	241
242	242	242	242
243	243	243	243
244	244	244	244
245	245	245	245
246	246	246	246
247	247	247	247
248	248	248	248
249	249	249	249
250	250	250	250
251	251	251	251
252	252	252	252
253	253	253	253
254	254	254	254
255	255	255	255
256	256	256	256
257	257	257	257
258	258	258	258
259	259	259	259
260	260	260	260
261	261	261	261
262	262	262	262
263	263	263	263
264	264	264	264
265	265	265	265
266	266	266	266
267	267	267	267
268	268	268	268
269	269	269	269
270	270	270	270
271	271	271	271
272	272	272	272
273	273	273	273
274	274	274	274
275	275	275	275
276	276	276	276
277	277	277	277
278	278	278	278
279	279	279	279
280	280	280	280
281	281	281	281
282	282	282	282
283	283	283	283
284	284	284	284
285	285	285	285
286	286	286	286
287	287	287	287
288	288	288	288
289	289	289	289
290	290	290	290
291	291	291	291
292	292	292	292
293	293	293	293
294	294	294	294
295	295	295	295
296	296	296	296
297	297	297	297
298	298	298	298
299	299	299	299
300	300	300	300
301	301	301	301
302	302	302	302
303	303	303	303
304	304	304	304
305	305	305	305
306	306	306	306
307	307	307	307
308	308	308	308
309	309	309	309
310	310	310	310
311	311	311	311
312	312	312	312
313	313	313	313
314	314	314	314
315	315	315	315
316	316	316	316
317	317	317	317
318	318	318	318
319	319	319	319
320	320	320	320
321	321	321	321
322	322	322	322
323	323	323	323
324	324	324	324
325	325	325	325
326	326	326	326
327	327	327	327
328	328	328	328
329	329	329	329
330	330	330	330
331	331	331	331
332	332	332	332
333	333	333	333
334	334	334	334
335	335	335	335
336	336	336	336
337	337	337	337
338	338	338	338
339	339	339	339
340	340	340	340
341	341	341	341
342	342	342	342
343	343	343	343
344	344	344	344
345	345	345	345
346	346	346	346
347	347	347	347
348	348	348	348
349	349	349	349
350			

THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
G Electronics



MODEL	M16	DATE	2015.02.09
BLOCK	M16 DDR3-M0	SHEET	4 / 26

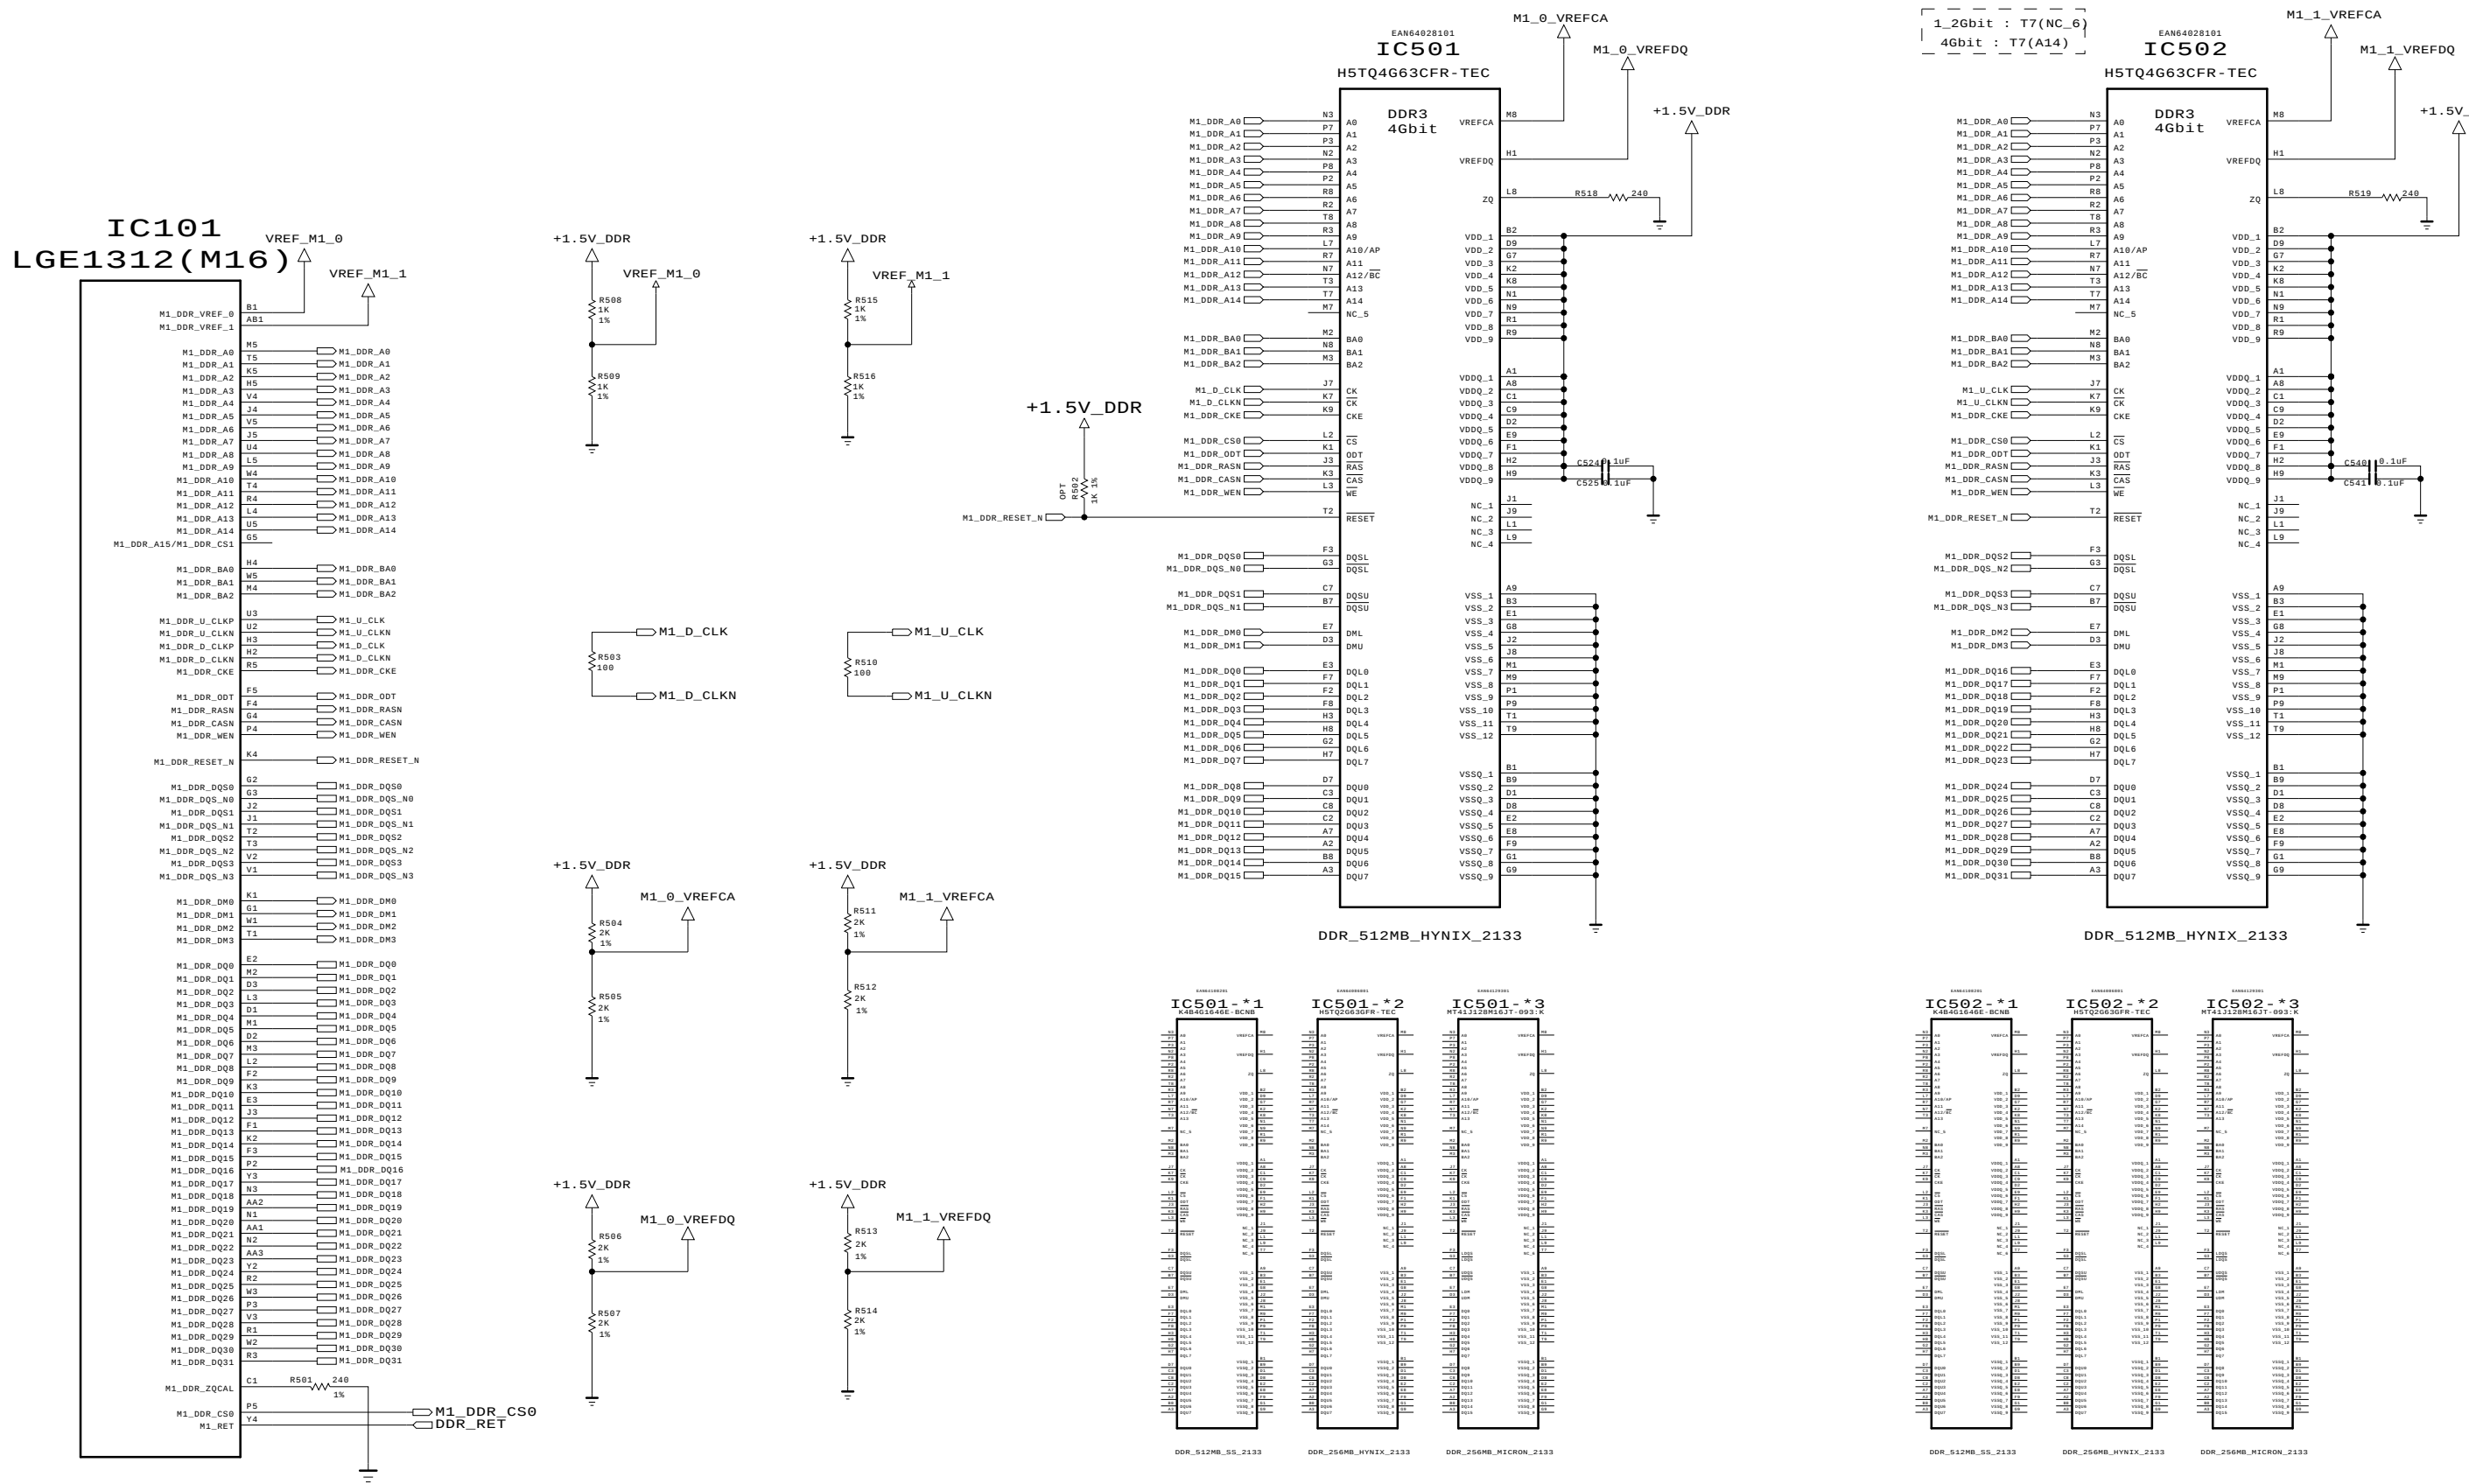


Add CS signal for 2T Mode &
RET signal for Instant On

THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
G Electronics



MODEL	M16	DATE	2016.02.09
BLOCK	M16 DDR3-M1	SHEET	5 / 26

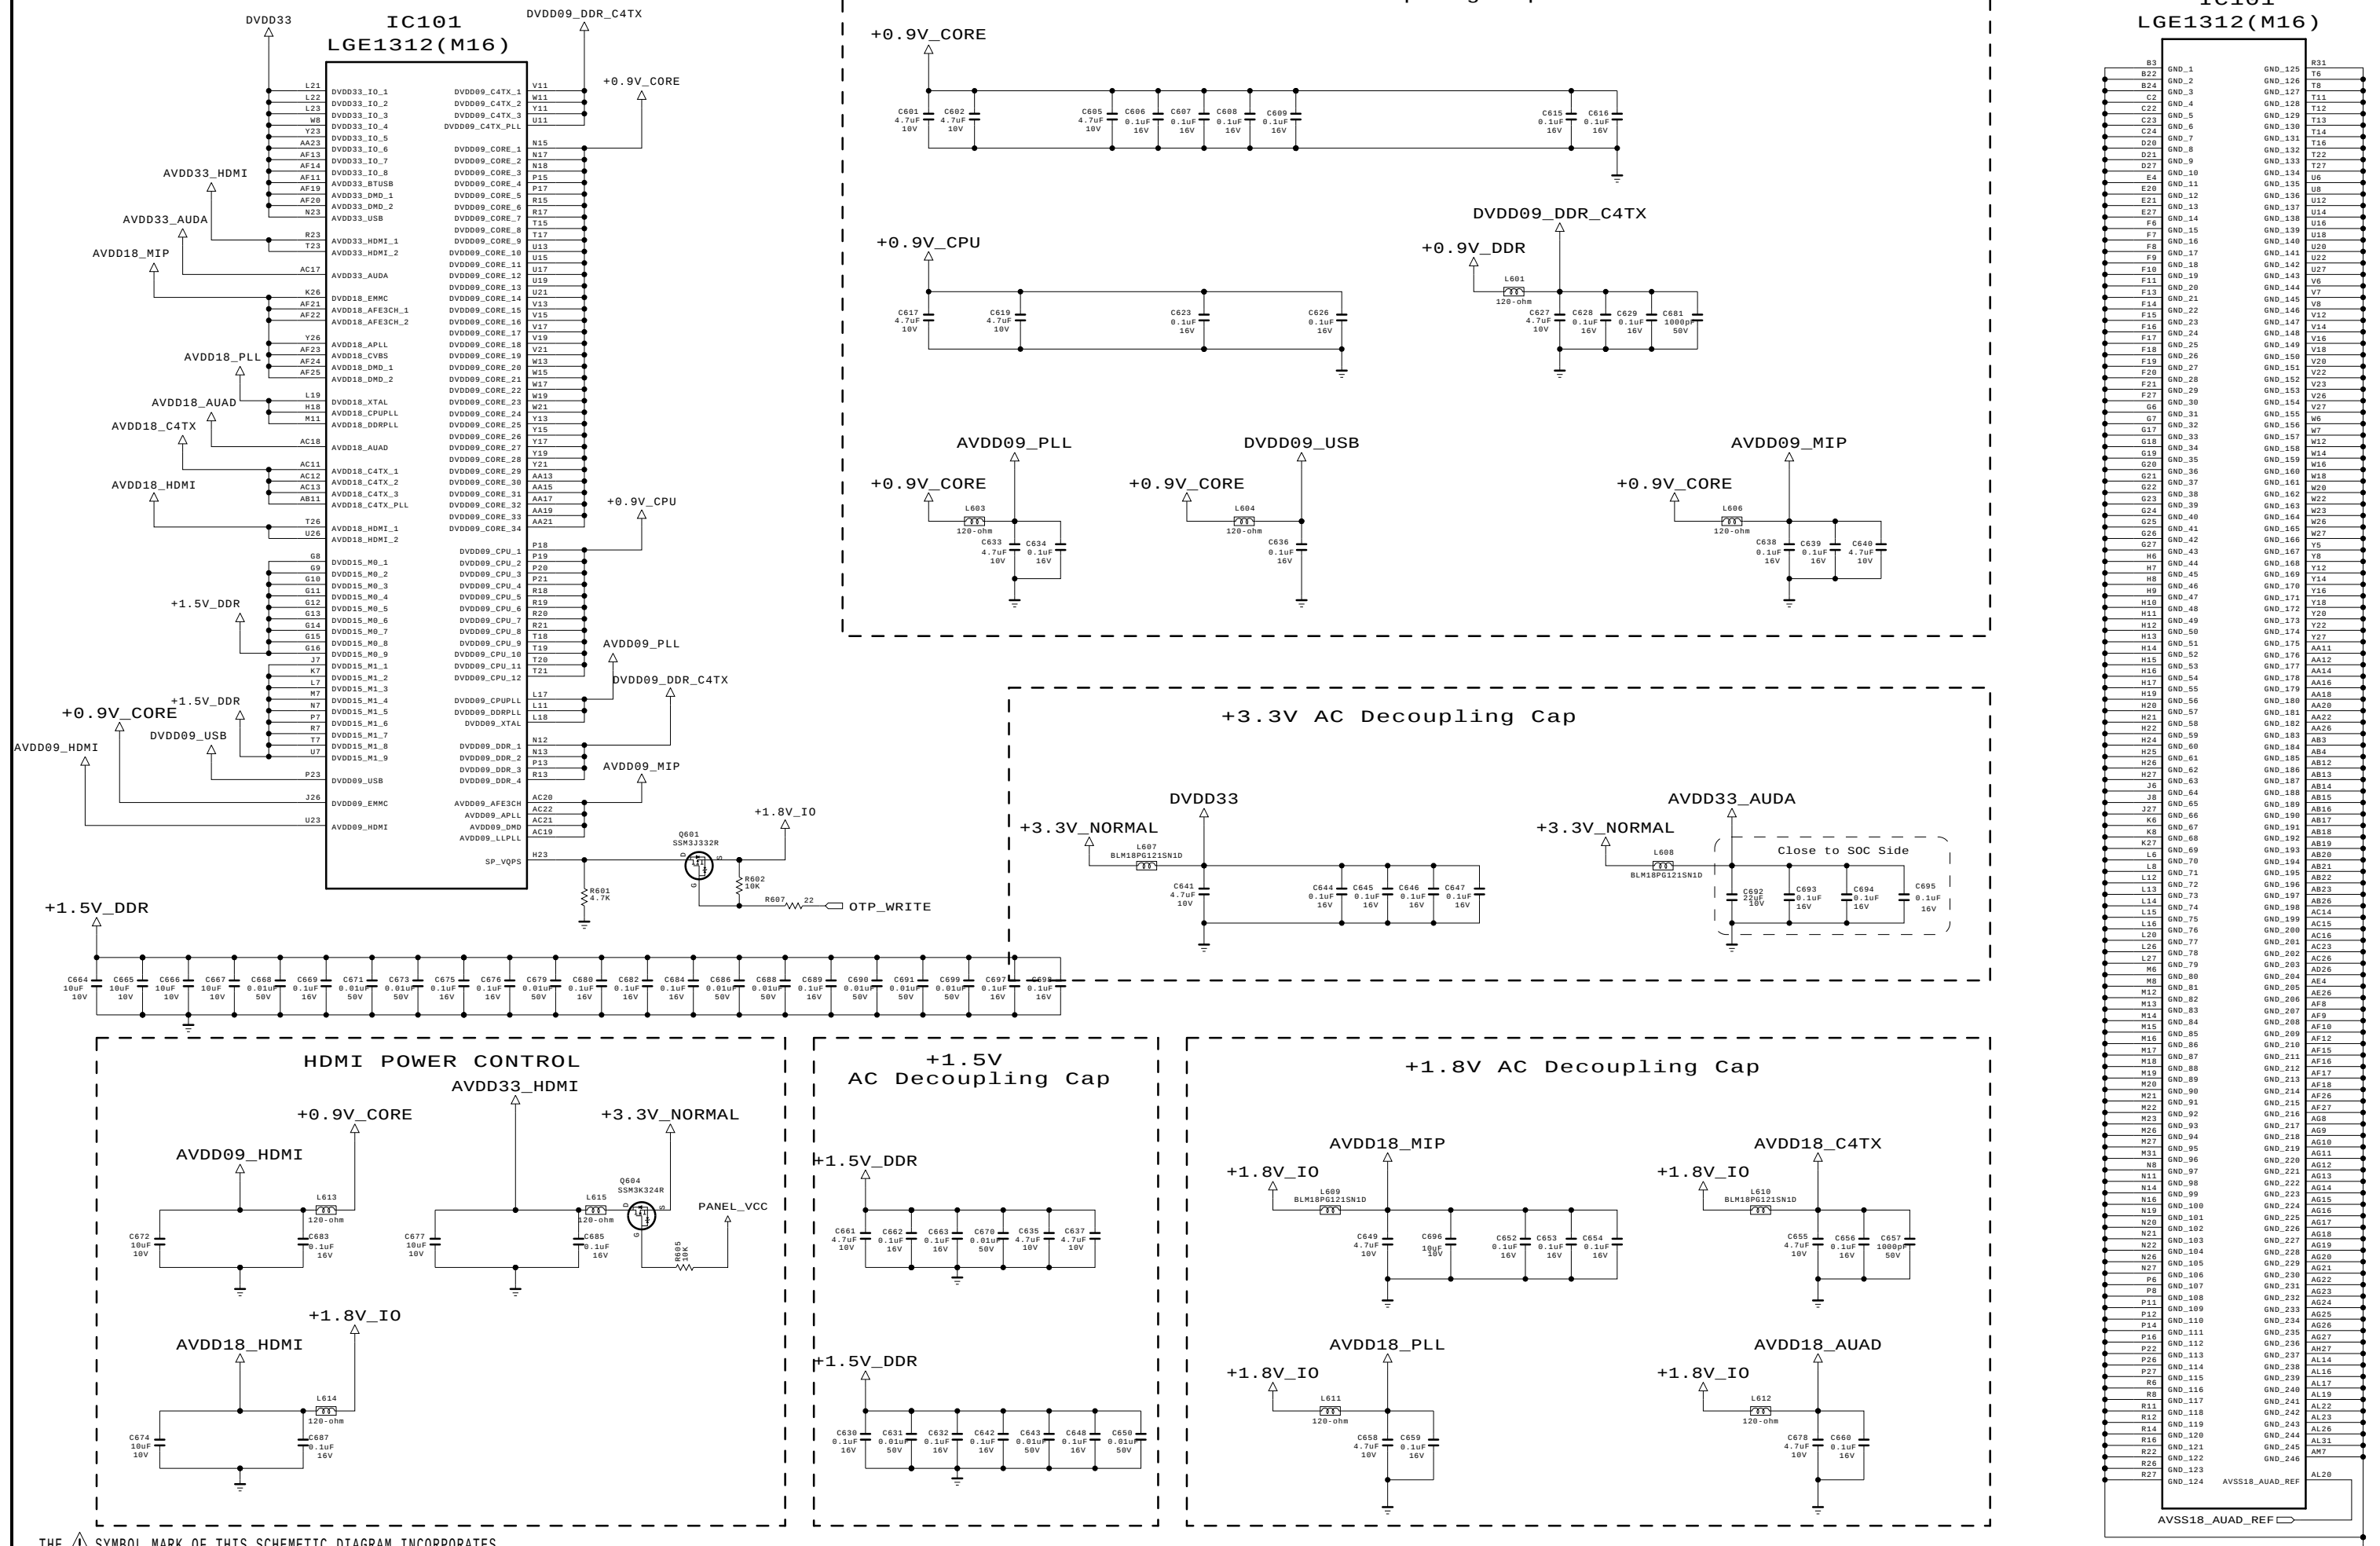




THE SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE SYMBOL MARK OF THE SCHEMATIC.

SECRET
LG Electronics



LG ELECTRONICS

MODEL	M16	DATE	2015.02.16
BLOCK	VCC & GND	SHEET	6 / 27

CI CAM

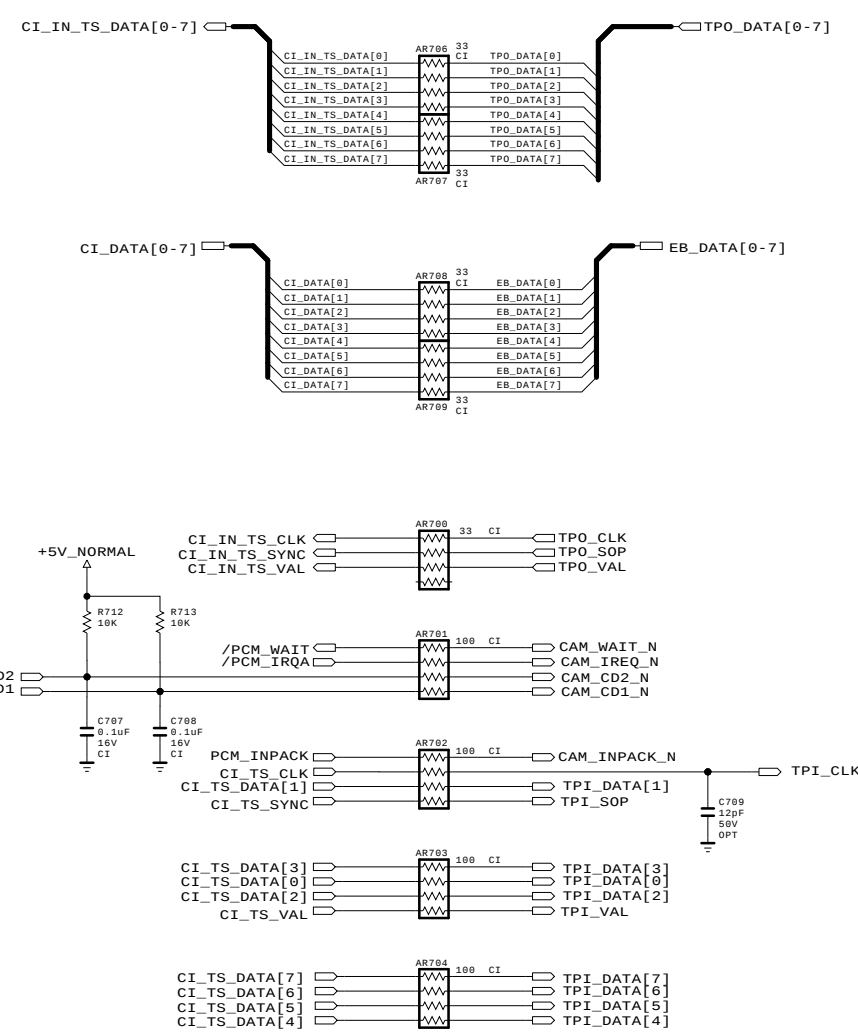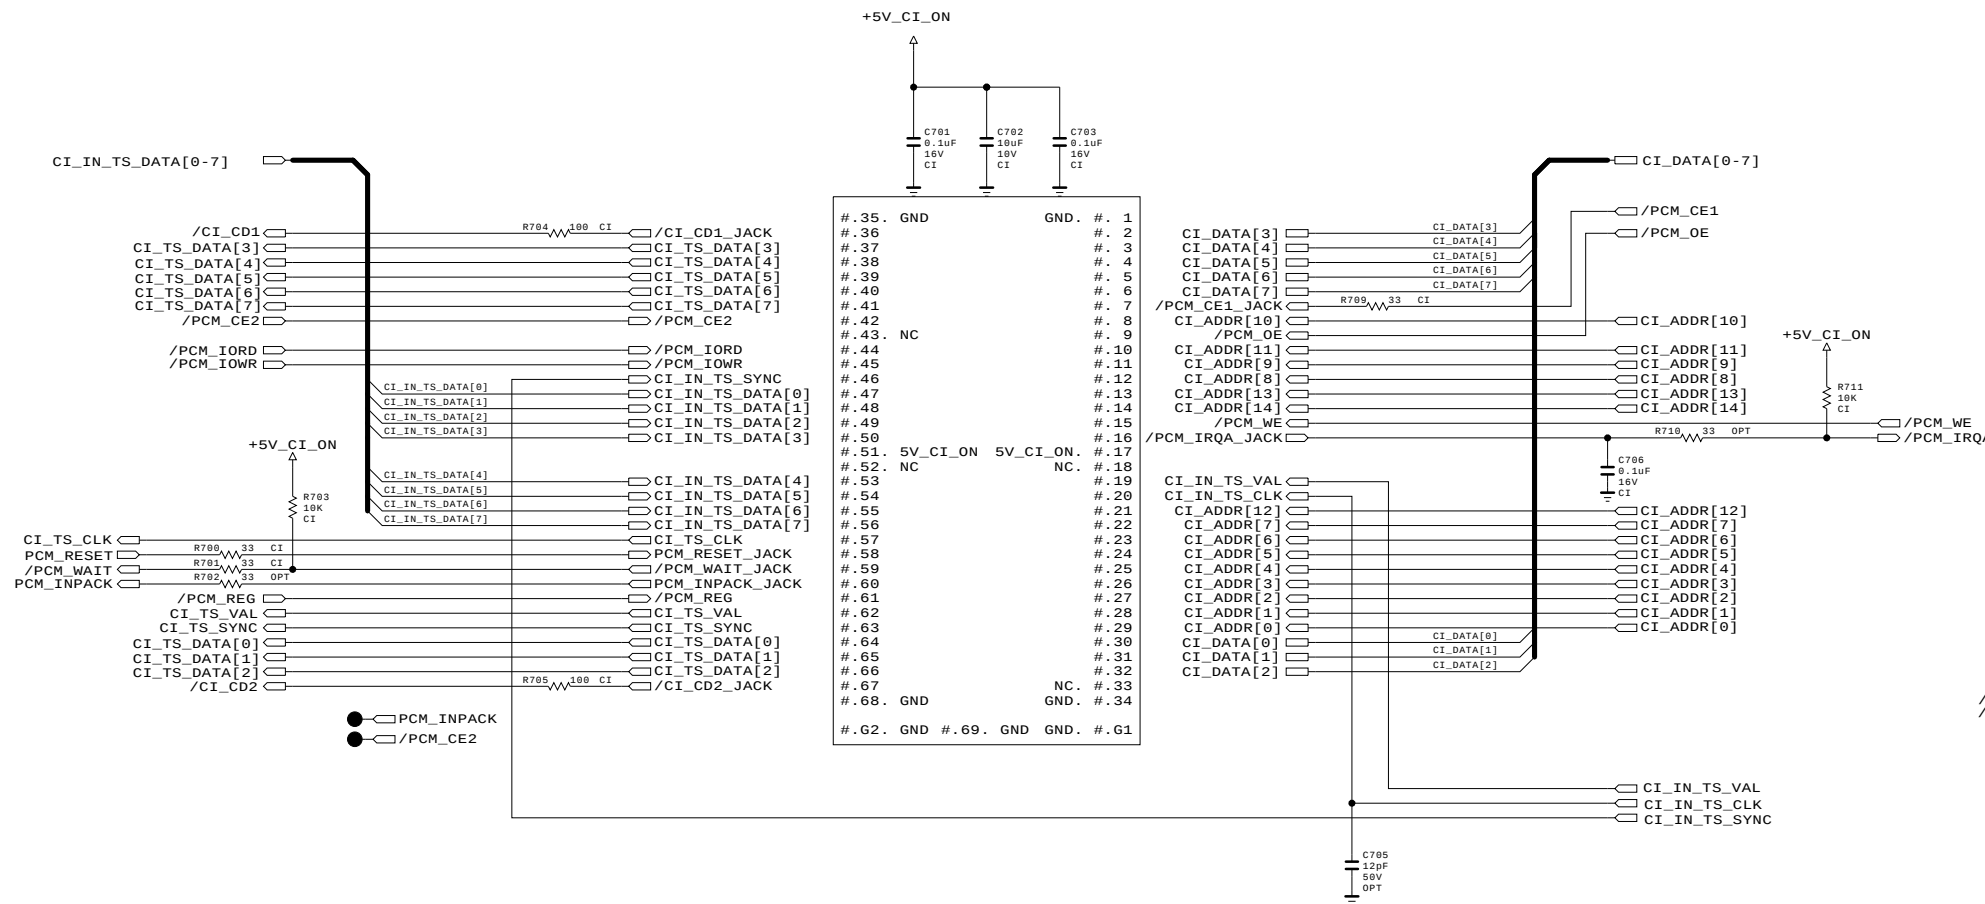

CI POWER ENABLE CONTROL

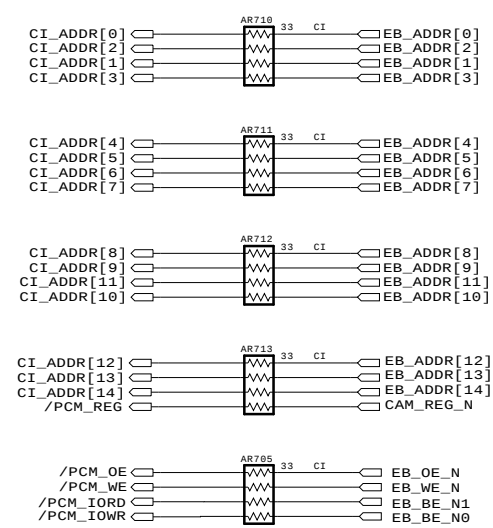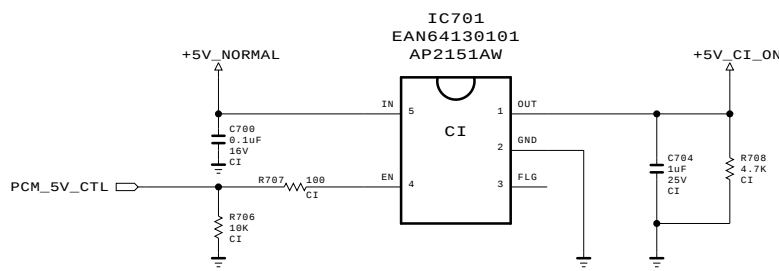

THE SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE SYMBOL MARK OF THE SCHEMATIC.


SECRET
LGElectronics



MODEL	M16	DATE	2015.02.09
BLOCK	CI for DVB	SHEET	7 / 26

CI CAM

```
CI Slot
LONG   : EAG63217207
SHORT  : EAG63217208
```

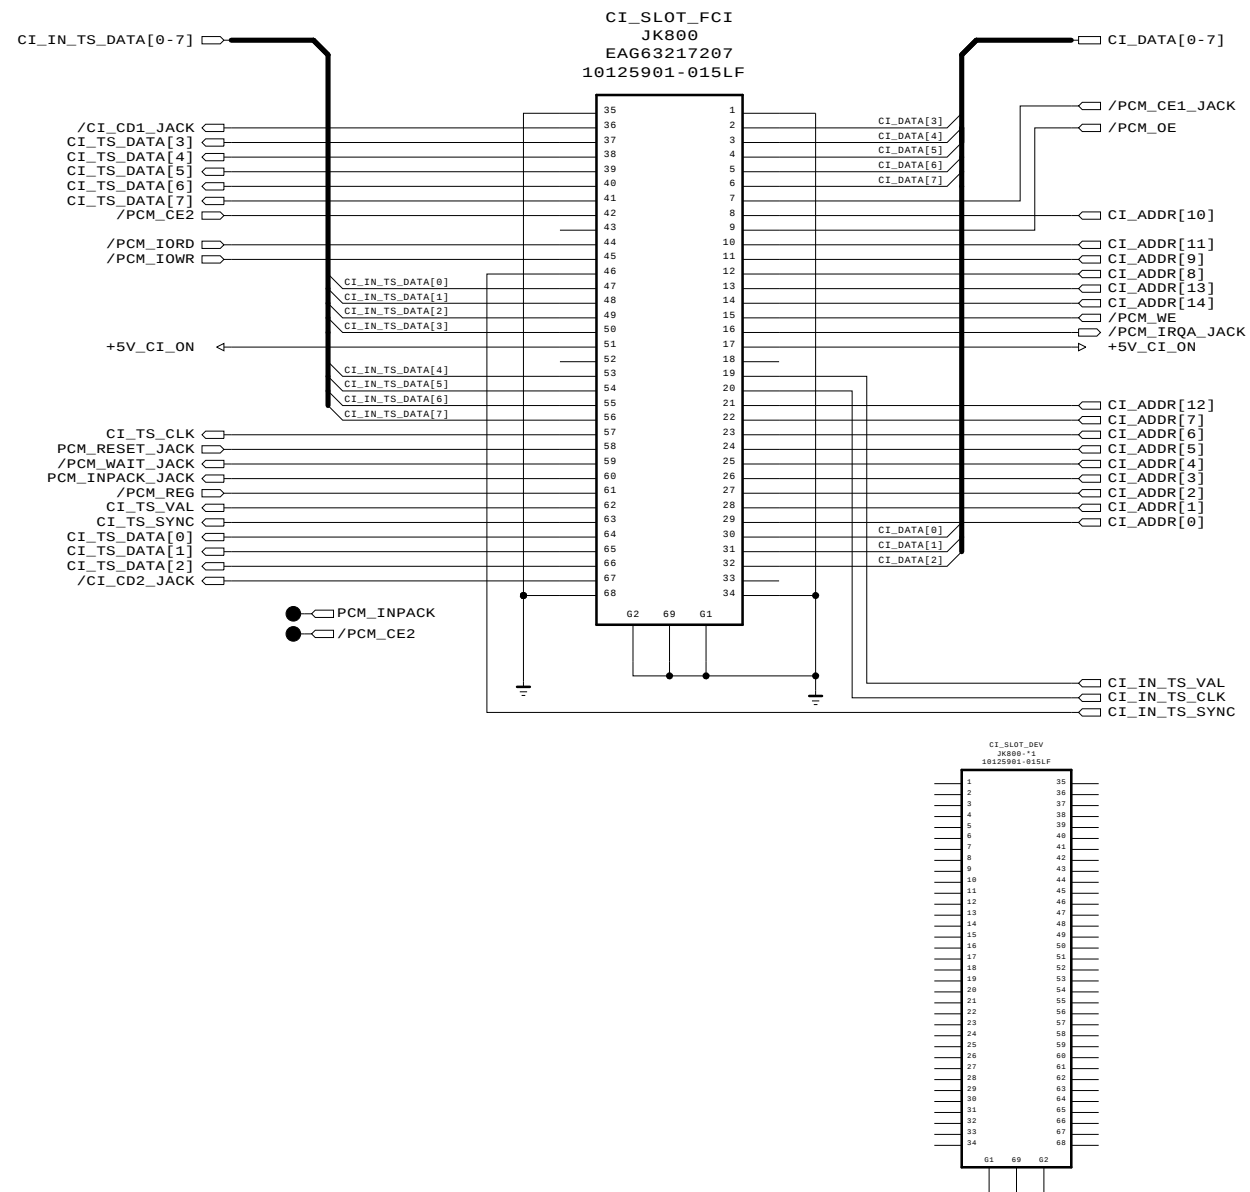


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
G Electronics




MODEL	M16	DATE	2015.02.09
BLOCK	CI for DVB	SHEET	7 / 26

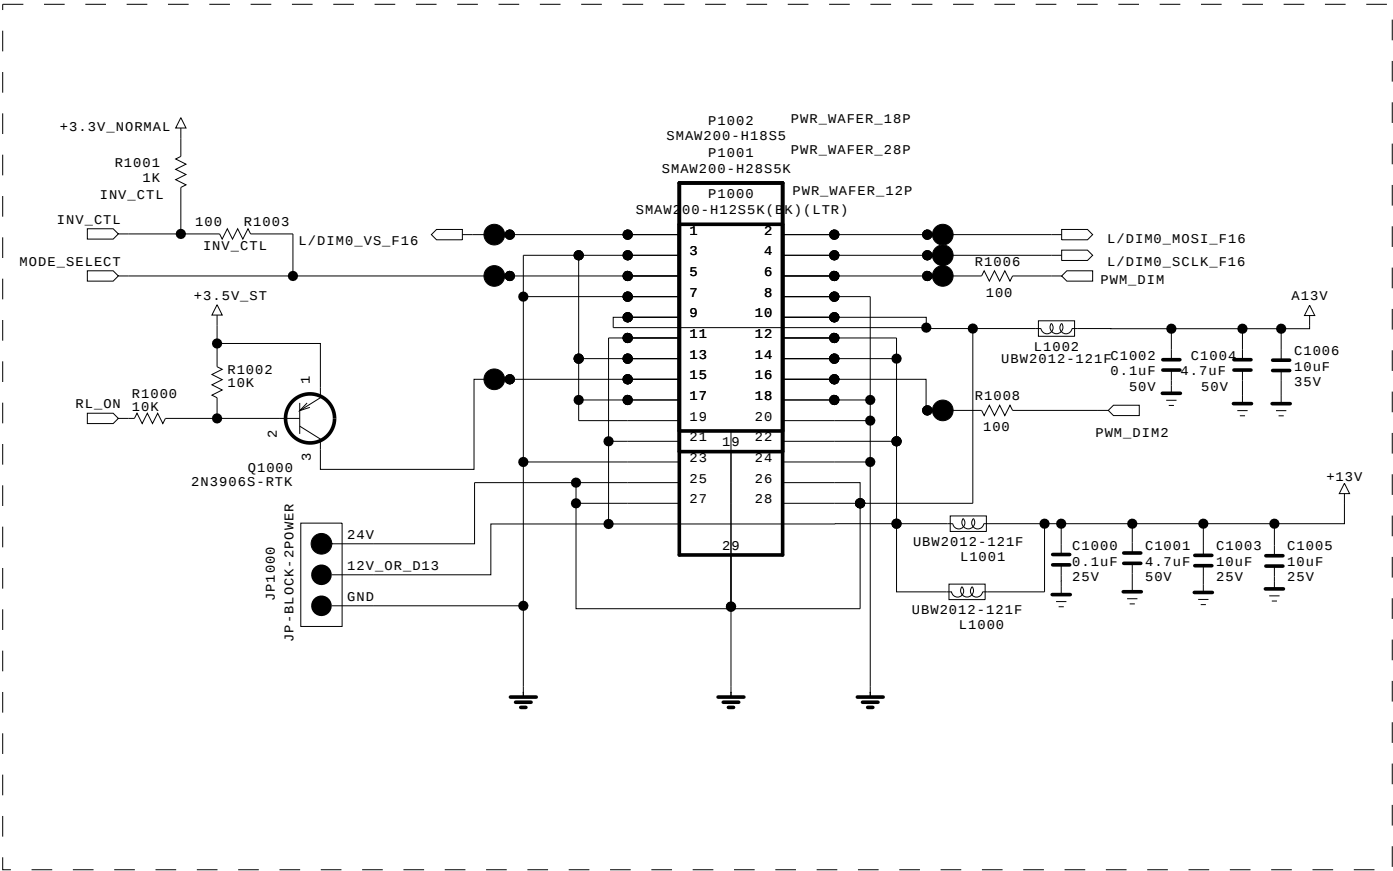

28pin power pin map
12/24V multi power + local dimming


Pin	Signal	Pin	Signal
1	VSYNC	2	SIN
3	GND	4	SCLK
5	DRVON	6	PDIM1
7	GND	8	GND
9	A13	10	A13
11	D13	12	D13
13	GND	14	D13
15	PWR-ON	16	PDIM2
17	GND	18	GND
19	GND	20	GND
21	D13	22	D13
23	GND	24	GND
25	A13	26	A13
27	A13	28	A13

A13 : 12V
D13 : 24V

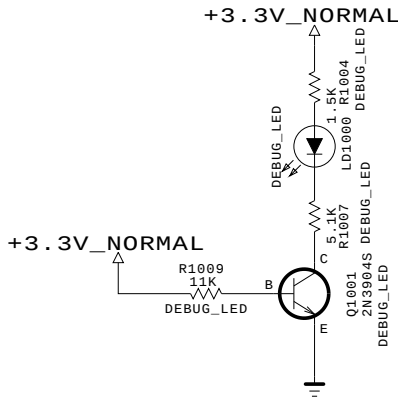


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics

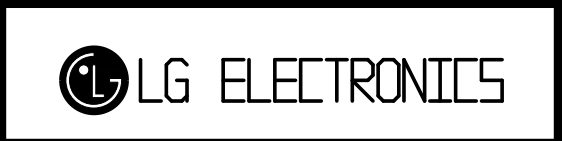


MODEL	Power Wafer (UH80)	DATE	15/06/13
BLOCK		SHEET	/

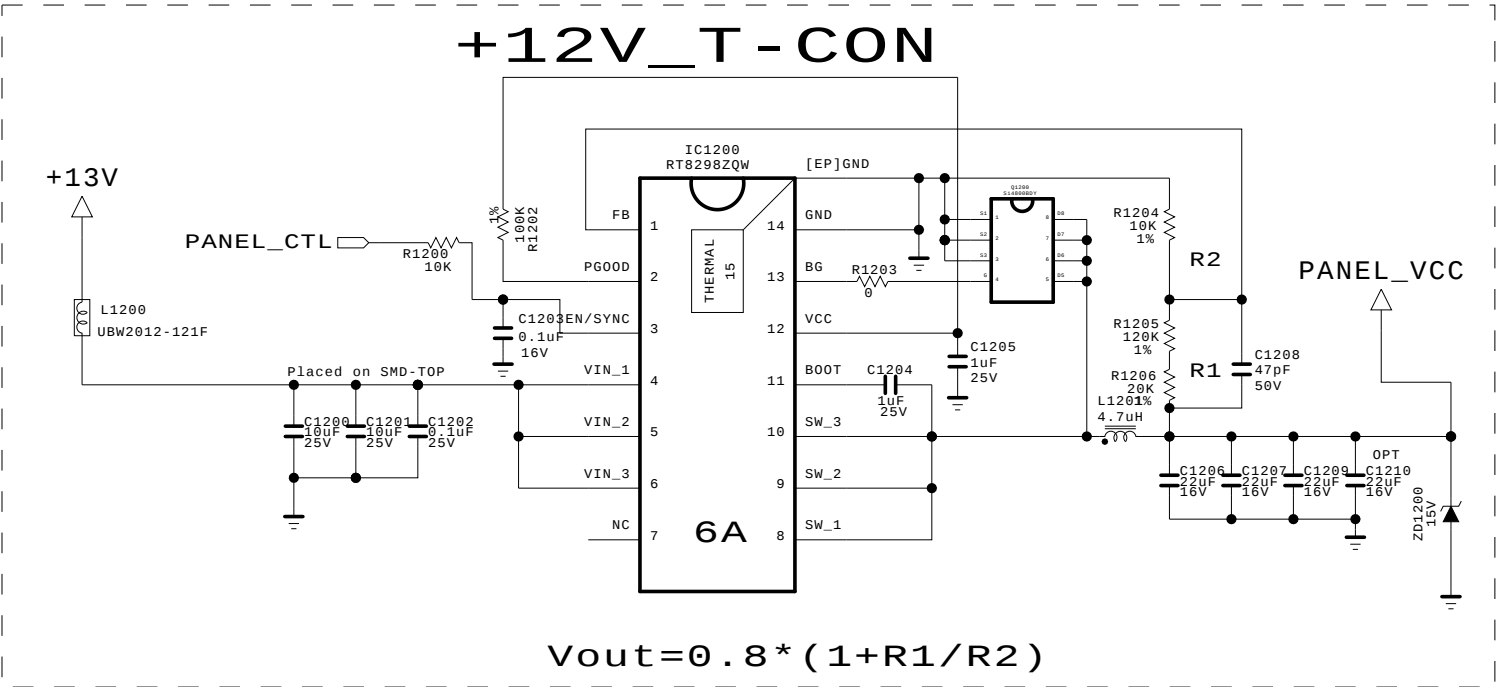

THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET	 LG ELECTRONICS
LGElectronics	


MODEL		DATE	
BLOCK		SHEET	/

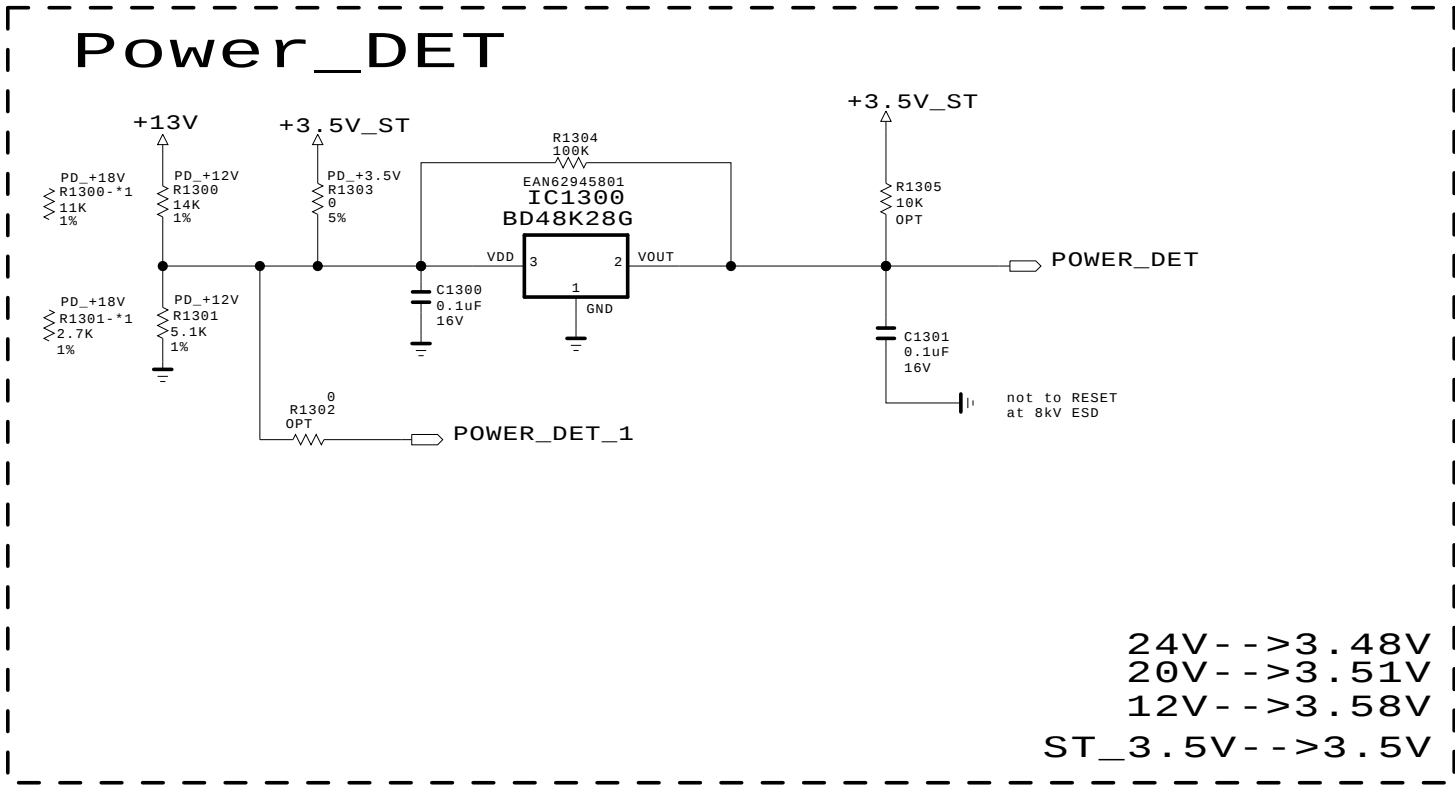

THE  SYMBOL MARK OF THIS SCHEMETIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMETIC.

SECRET	 LG ELECTRONICS
LGElectronics	

MODEL	Power det	DATE	15/06/13
BLOCK		SHEET	/

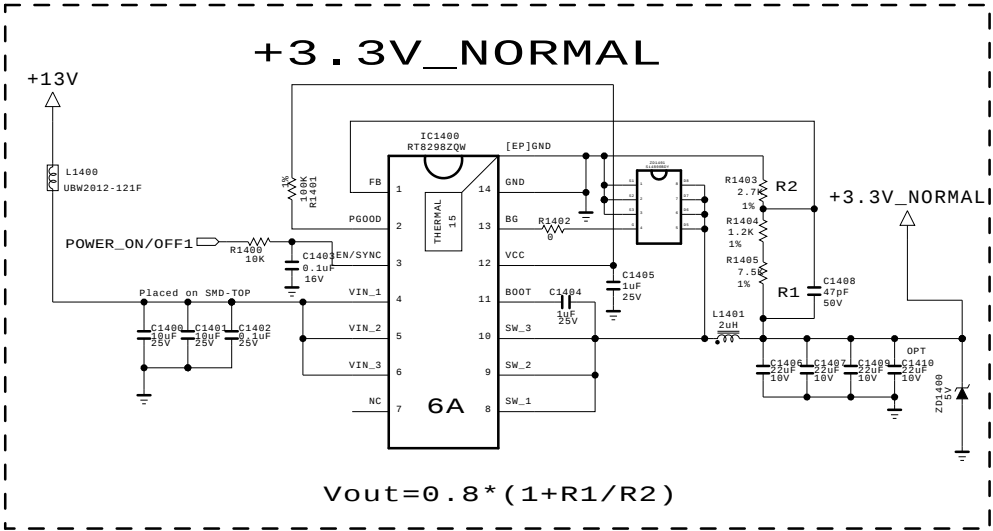


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics



MODEL	M16	DATE	2015.06.02
BLOCK	M16 UHD-mid Power	SHEET	14 / 100

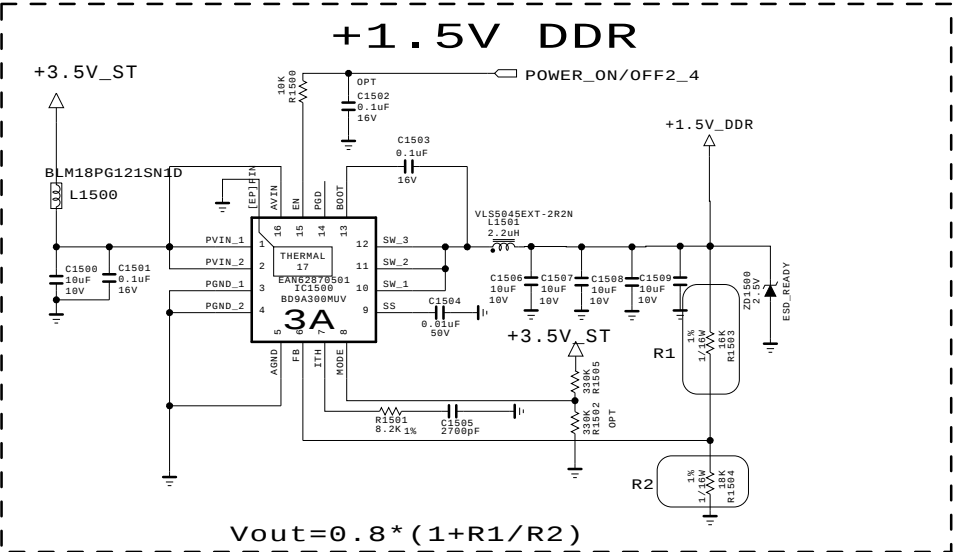


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics



MODEL	M16	DATE	2015.06.03
BLOCK	M16 UHD-mid Power	SHEET	15 / 100

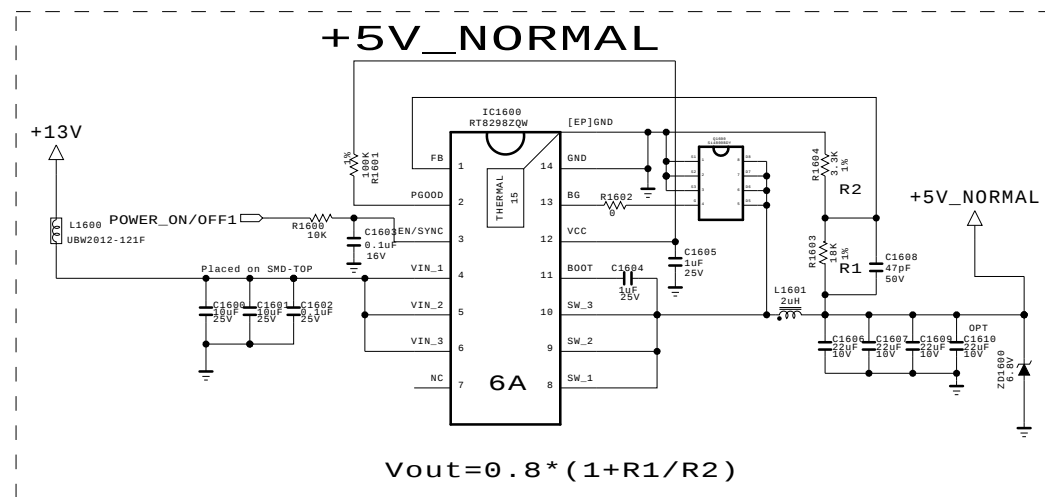


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURERS SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
LG Electronics



MODEL	M16	DATE	2015.06.03
BLOCK	5V normal	SHEET	16 / 100

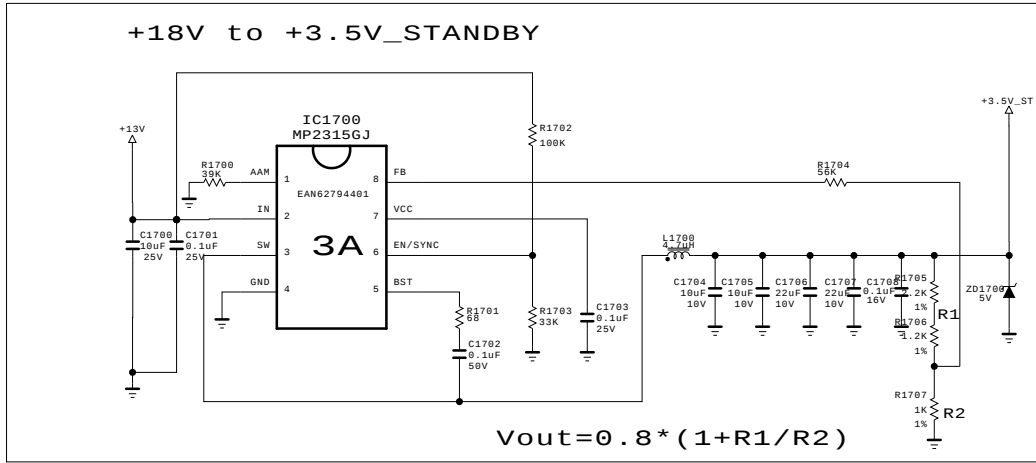


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURERS SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics



MODEL	M16	DATE	2015.07.15
BLOCK	3.5V ST	SHEET	17 / 100

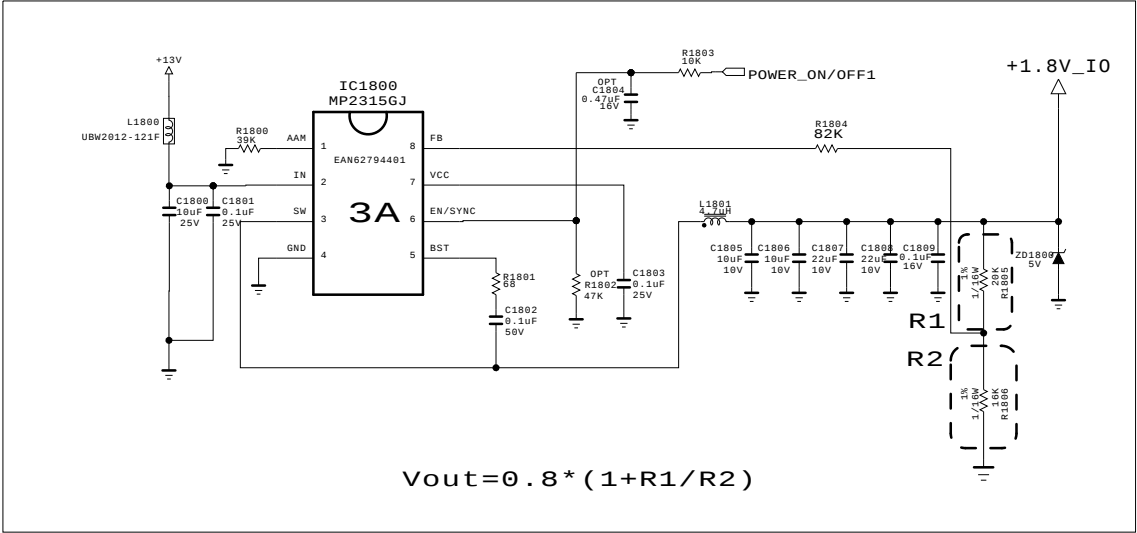


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics



MODEL	M16	DATE	2015.07.15
BLOCK	1.8V_IO	SHEET	18 / 100

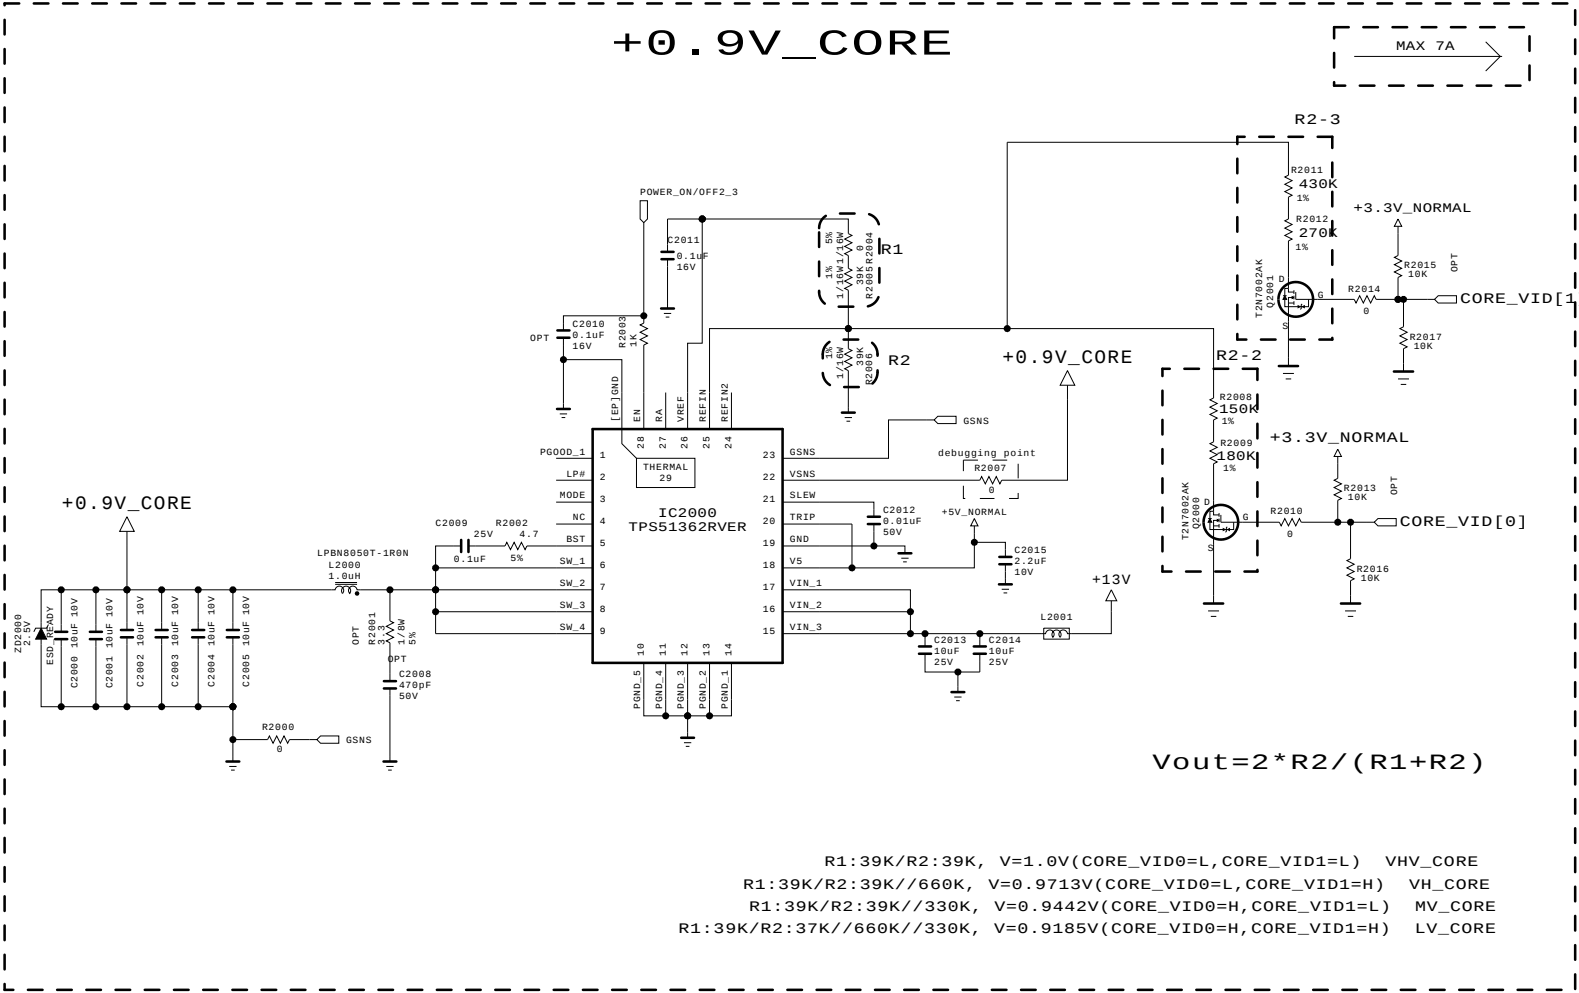

CORE_VID TABLE

CORE_VID0	CORE_VID1	VOUT	R2
L	L	1.0V	39 kohm
L	H	0.9713V	36.94 kohm
H	L	0.9442V	34.87 kohm
H	H	0.9185V	33.22 kohm


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics



MODEL		DATE	15/06/13
BLOCK	M16_0.9V Core	SHEET	19 / 73

020.sht

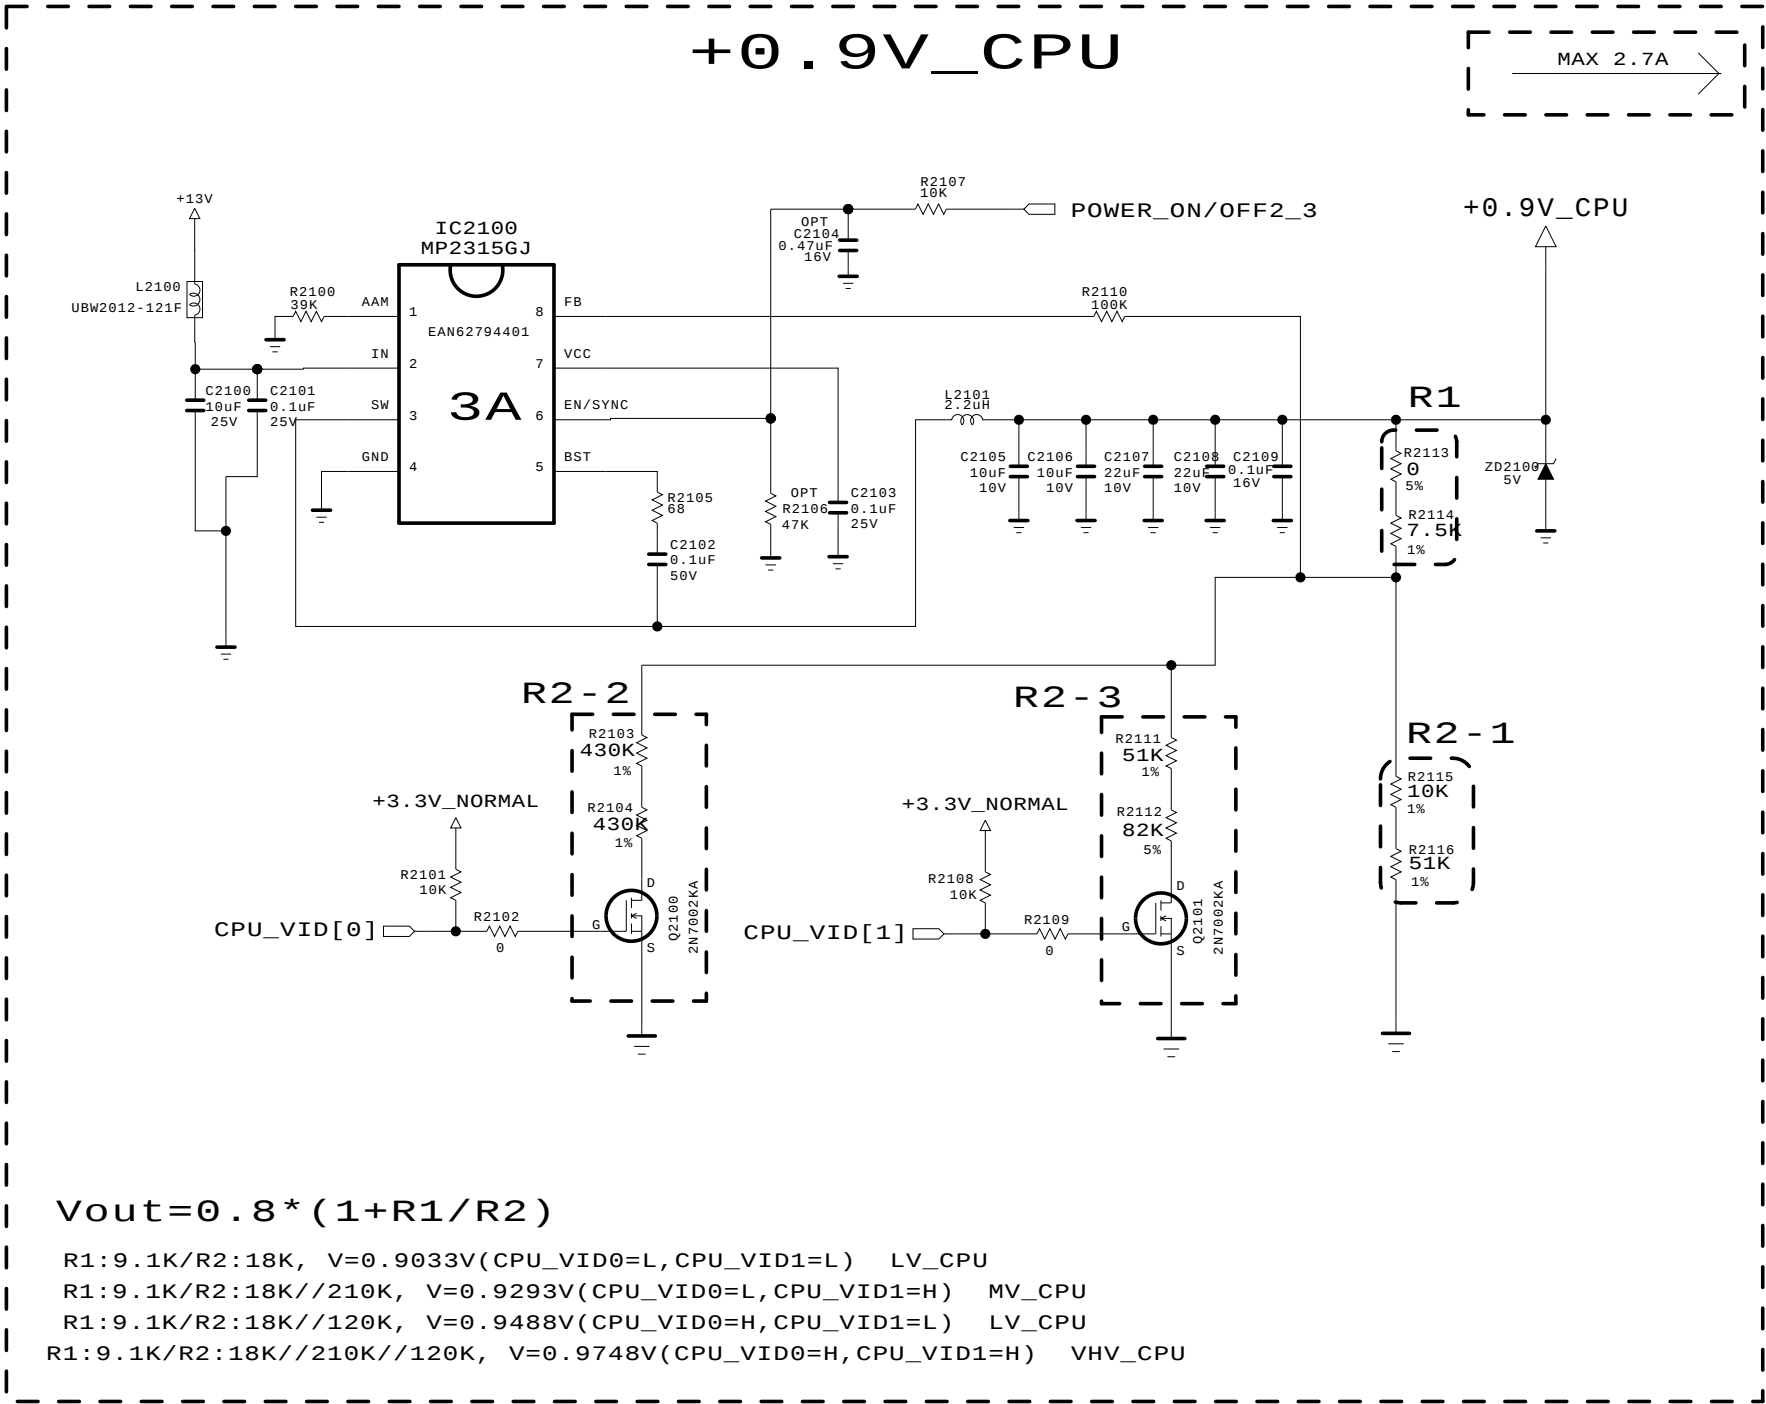

CPU_VID TABLE

CPU_VID0	CPU_VID1	VOUT	R2
L	L	0.9033V	18 kohm
L	H	0.9293V	16.57 kohm
H	L	0.9488V	15.65 kohm
H	H	0.9743V	14.56 kohm


THE ⚠ SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE ⚠ SYMBOL MARK OF THE SCHEMATIC.

SECRET

LGElectronics


LG ELECTRONICS

MODEL		DATE	
BLOCK		SHEET	/

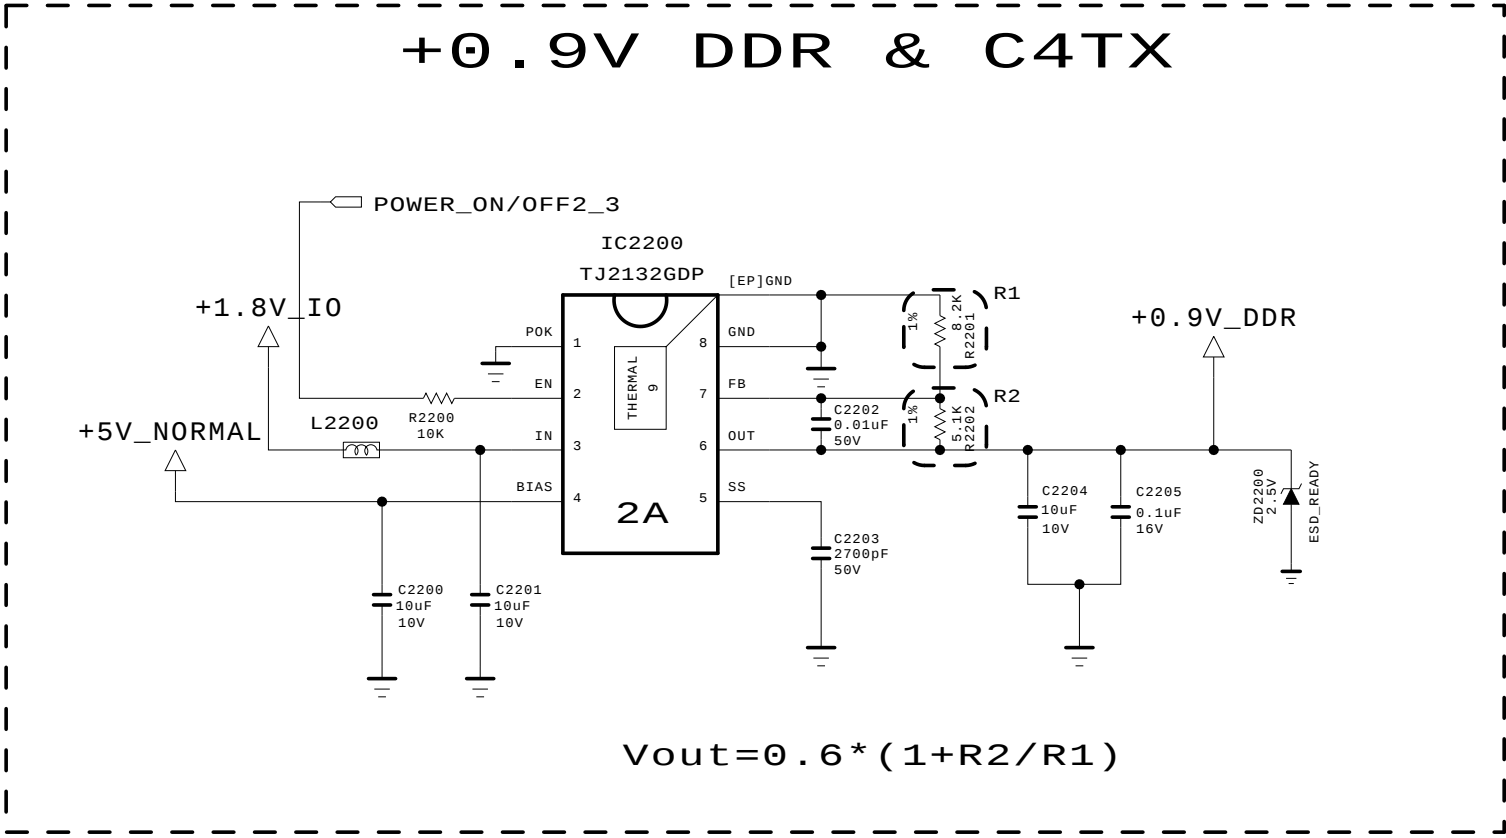


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics

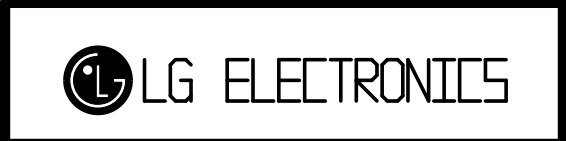


MODEL		DATE	15/09/24
BLOCK	M16_0.9V DDR & C4TX	SHEET	21 / 73

022.sht

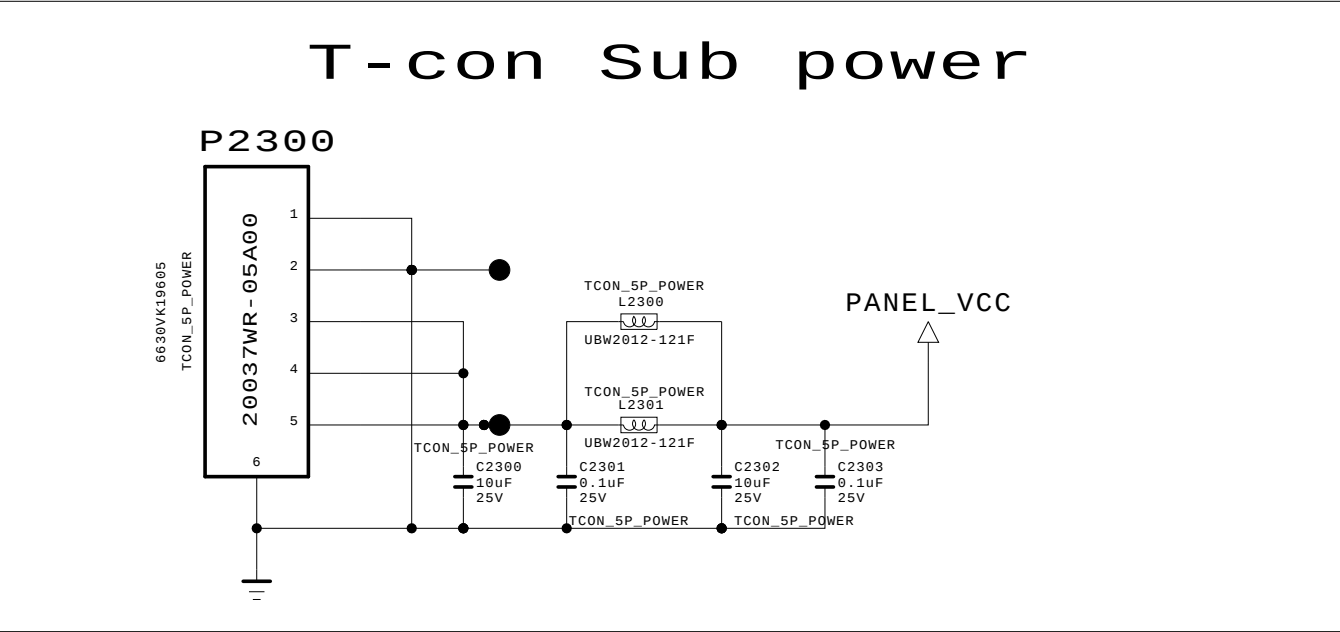

THE  SYMBOL MARK OF THIS SCHEMETIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMETIC.

SECRET
LGElectronics

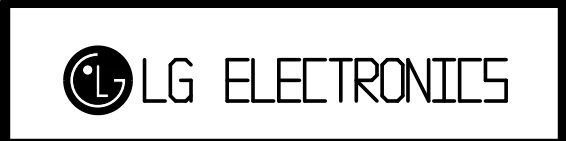

MODEL		DATE	15/06/13
BLOCK	T-con power wafer	SHEET	73

DEBUG_MICOM

P3000

12587WS-04L

1

2

3

4

5

+3.5V_ST

DEBUG_MICOM

R3016 10K

R3020 1K

Don't remove R3016, not making float P40

MICOM_DEBUG

MICOM_RESET

```

graph TD
    A[POWER_ON/OFF1] --> B[POWER_ON/OFF2_3]
    B --> C[POWER_ON/OFF2_4]
    C --> D[POWER_ON/OFF2_1]
    D --> E[POWER_ON/OFF2_3]
    E --> F[SOC_RESET]


```

	MODEL_OPT_0	MODEL_OPT_1	MODEL_OPT_2	MODEL_OPT_3	
				FHD	UHD/8K
00 (0.72V)	NON LOGO/LCD	TV-NON EPI	FHD	M16	M16
	R3003-1 2.7K  MICOM_NON_LOGO_LCD	R3006-1 2.7K  MICOM_TV_NONEPI	R3008-1 2.7K  MICOM_FHD	R3010-1 2.7K  MICOM_M16	
01 (1.53V)	LOGO/LCD	BOX	-	-	RTK
	R3003-2 8.2K  MICOM_LOGO_LCD	R3006-2 8.2K  MICOM_BOX_NONEPI_OLED	R3008-2 8.2K  NOT USE	R3010-2 8.2K  MICOM_RTK	
10 (2.27V)	NON LOGO/OLED	TV-EPI	UHD	A5LR	H15
	R3003-3 20K  MICOM_NONLOGO_OLED	R3006-3 20K  MICOM_TV_EPI	R3008-3 20K  MICOM_UD	R3010-3 20K  MICOM_H15/A5LR	
11 (3.0V)	LOGO/OLED	BOX	8K	M2	-
	R3003-4 75K  MICOM_LOGO_OLED	R3006-4 75K  MICOM_BOX_RGB_Sensor	R3008-4 75K  MICOM_8K	R3010-4 75K  MICOM_M2	


SECRET
LGElectronics




MODEL	M16	DATE	2015.06.27
BLOCK	MICOM_NEC	SHEET	30 / 99

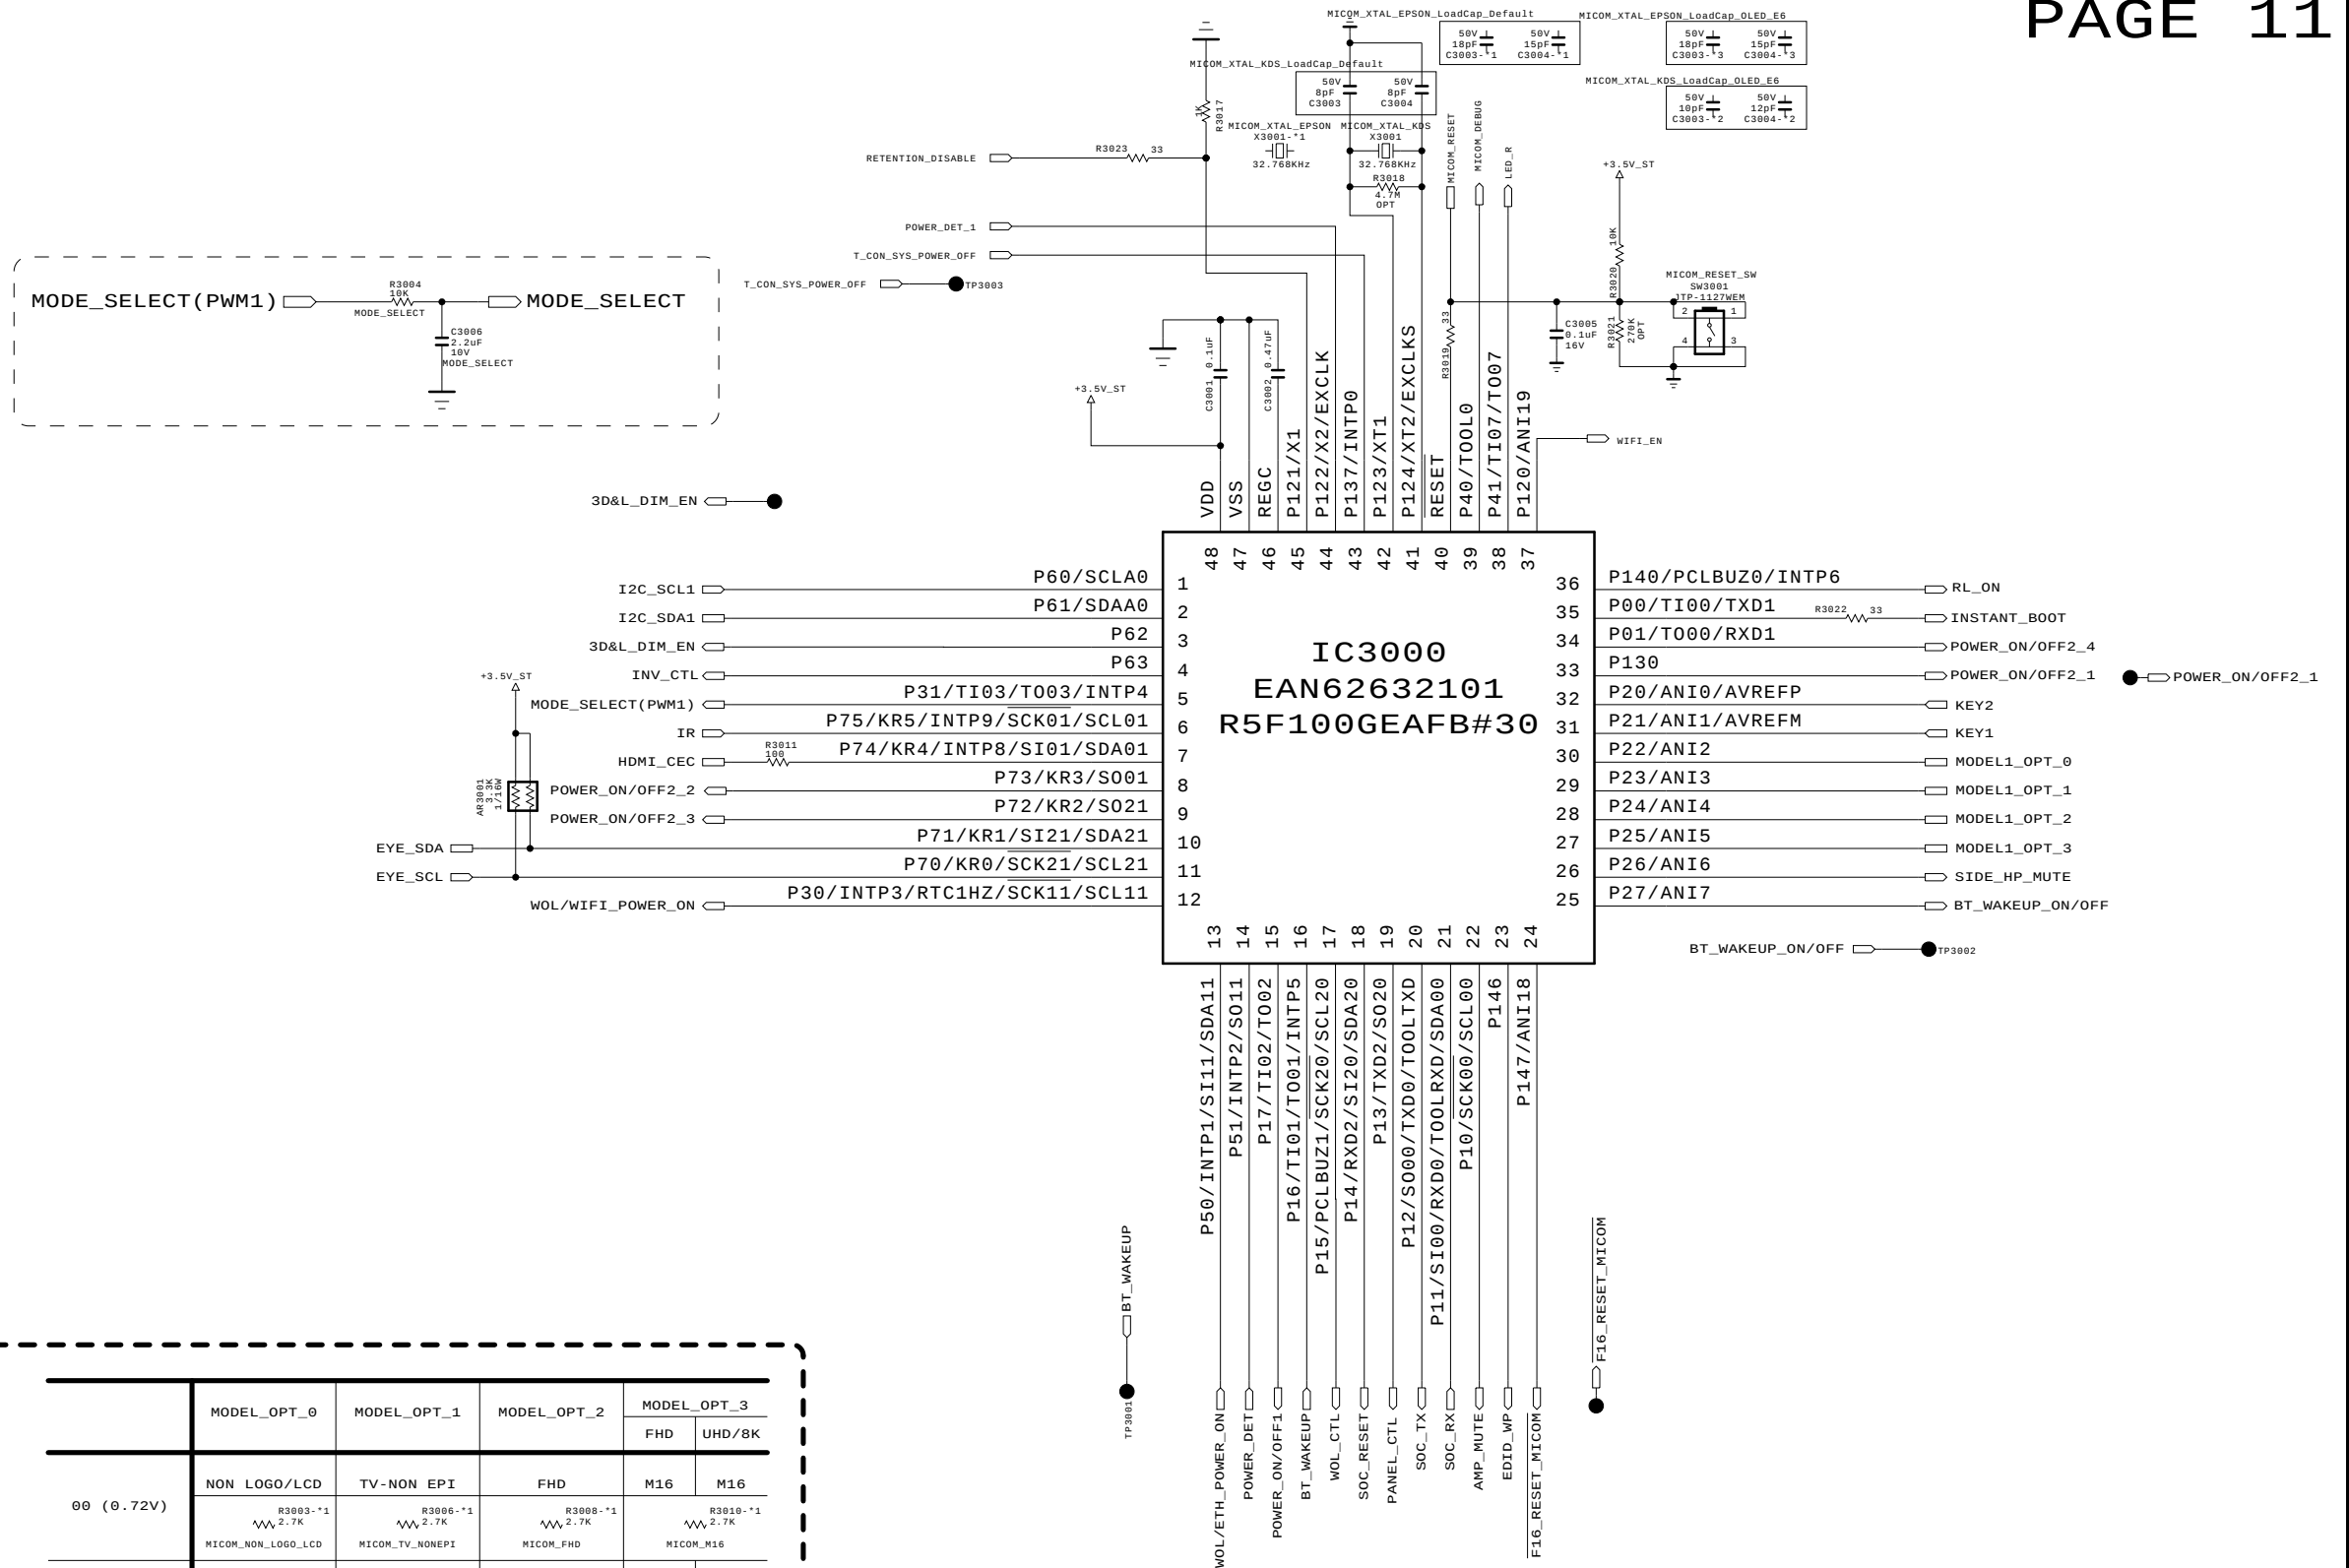


HDMI1 (2.0)

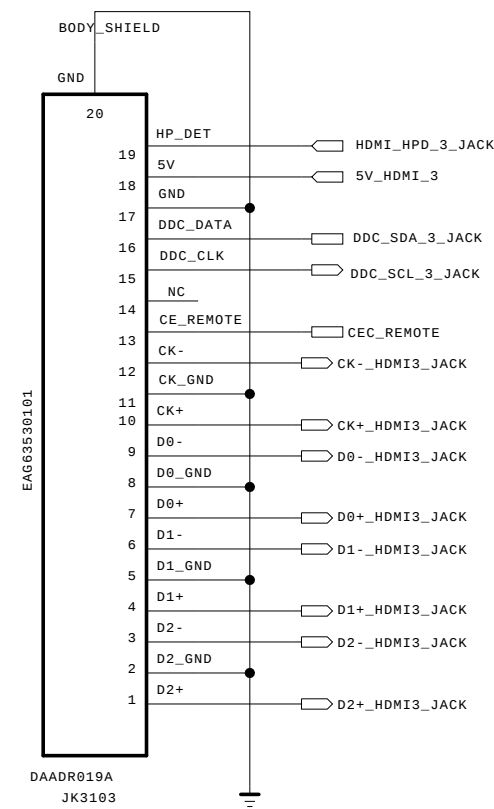

HDMI2 With ARC (2.0)

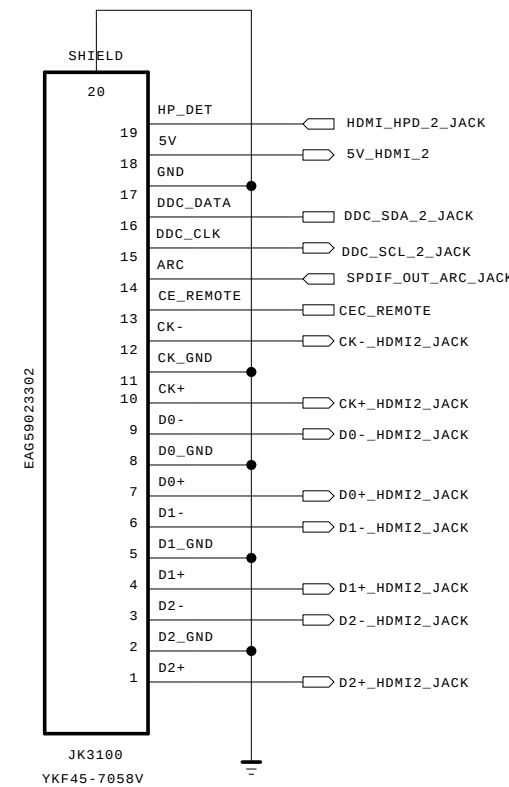

HDMI3 with Ext.EDID (1.4)

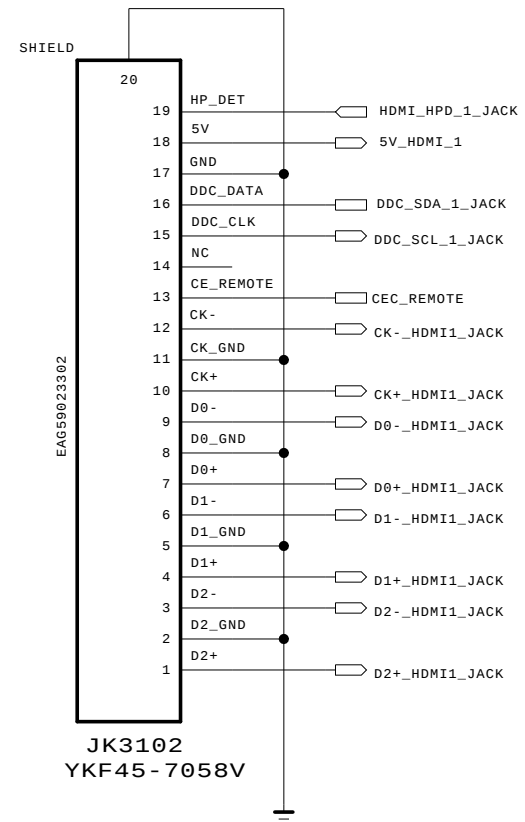

THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.



SECRET

LG Electronics


 LG ELECTRONICS

MODEL		DATE	15/07/15
BLOCK	HDMI SYMBOL	SHEET	24 / 73


HDMI1 (2.0)

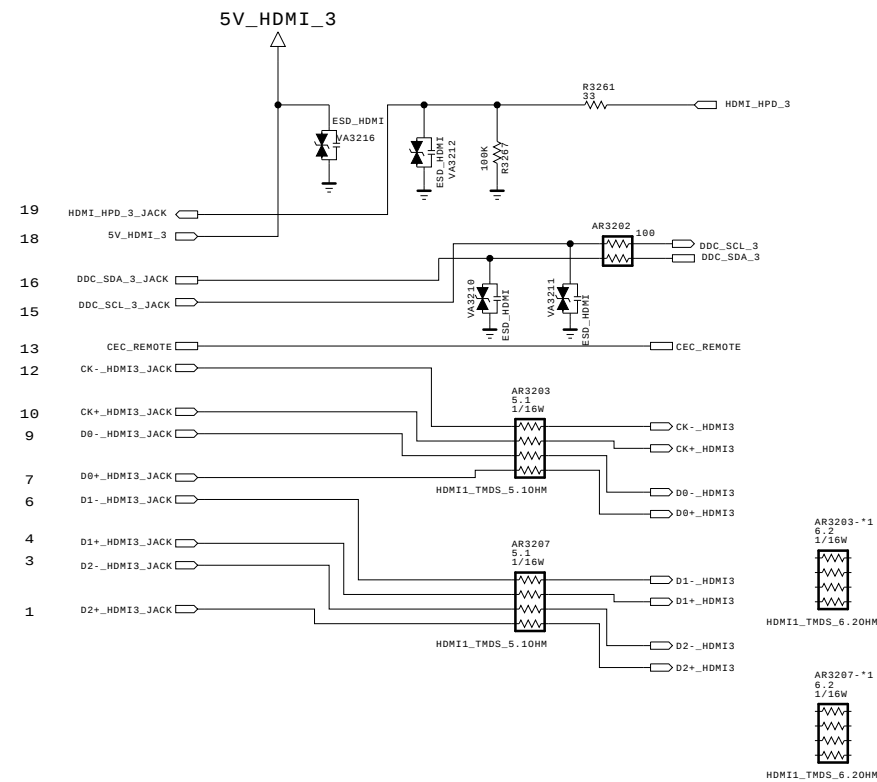


External EDID

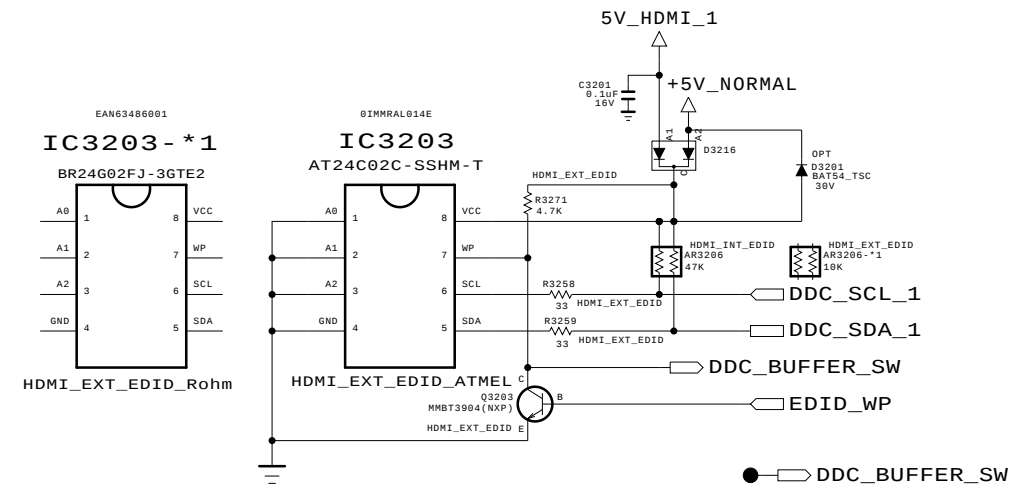


HDMI2 With ARC (2.0)

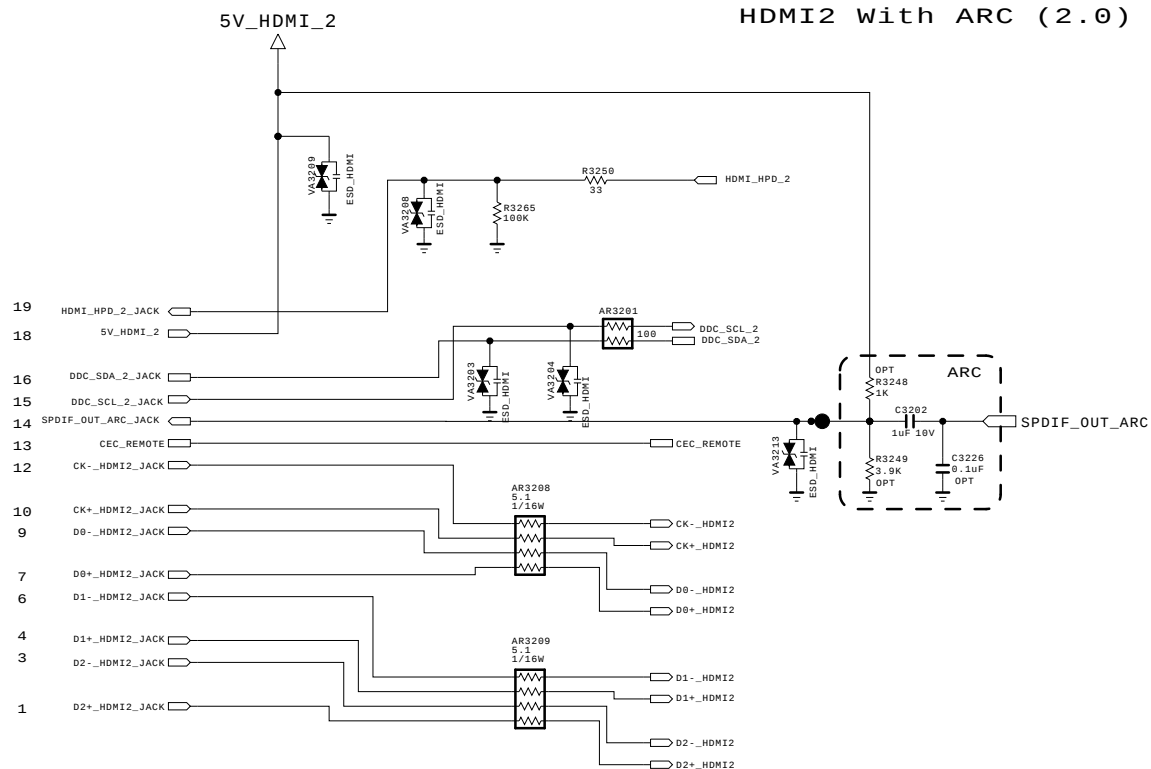

DDC I2C Pull-up



HDMI3 with Ext.EDID (2.0) |

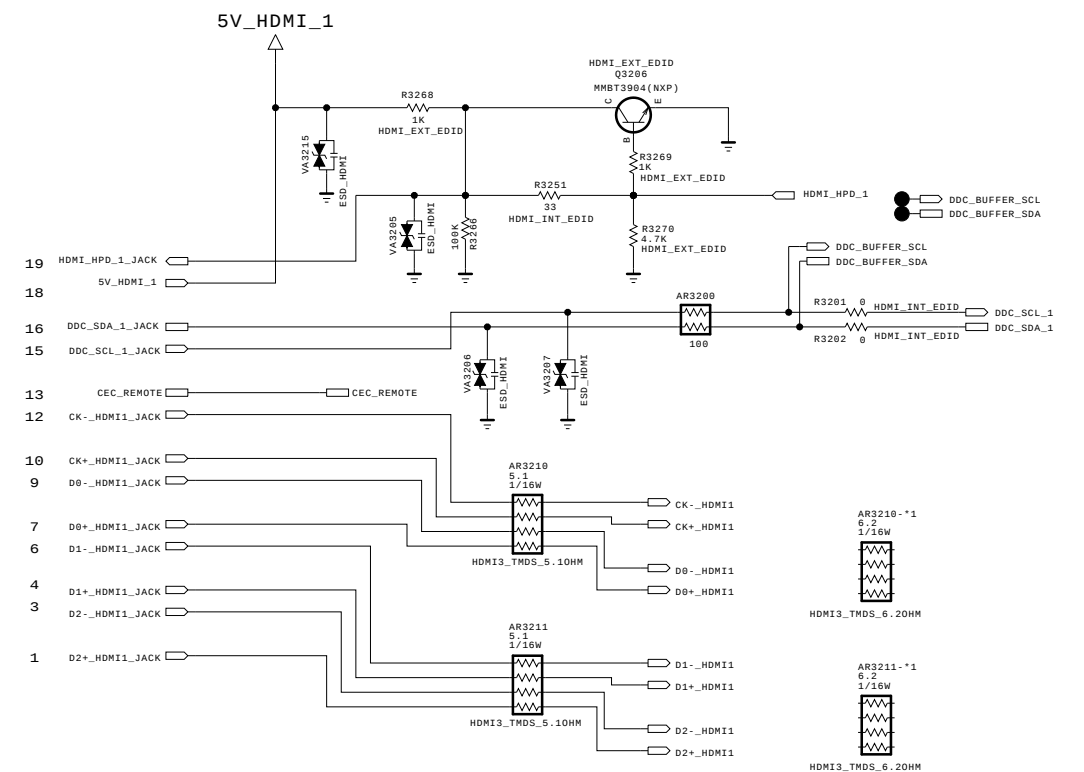

THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.


SECRET
LGElectronics



MODEL	M16	DATE	2015.12.07
BLOCK	HDMI Rx	SHEET	32 / 99

EDID external EEPROM & DDC BUFFER for HDMI3



The schematic diagram illustrates the EDID external EEPROM & DDC BUFFER for HDMI3. The circuit includes a 5V_NORMAL supply, a 5V_HDMI_1 supply, and an HDMI_EXT_EDID signal. A 0.1uF 16V capacitor is connected to the 5V_HDMI_1 supply. A 1N4148 diode (D3310) is connected between the 5V_HDMI_1 supply and the HDMI_EXT_EDID signal. A 10k resistor (R3304) is connected between the HDMI_EXT_EDID signal and ground. A 10k resistor (R3301) is connected between the DDC_BUFFER_SCL signal and the HDMI_EXT_EDID signal. A 10k resistor (R3300) is connected between the DDC_BUFFER_SDA signal and the HDMI_EXT_EDID signal. A 10k resistor (R3302) is connected between the EN pin of the IC3302 and the HDMI_EXT_EDID signal. The IC3302 is a PCA9517DGKR, a 1:1 I2C to 1-Wire level shifter. The IC3302 is connected to the DDC_BUFFER_SCL and DDC_BUFFER_SDA signals. The IC3302 is also connected to the EN pin of the IC3302. The IC3302 is connected to the DDC_BUFFER_SW signal. The IC3302 is connected to the DDC_BUFFER_SCL and DDC_BUFFER_SDA signals. The IC3302 is connected to the EN pin of the IC3302. The IC3302 is connected to the DDC_BUFFER_SW signal.

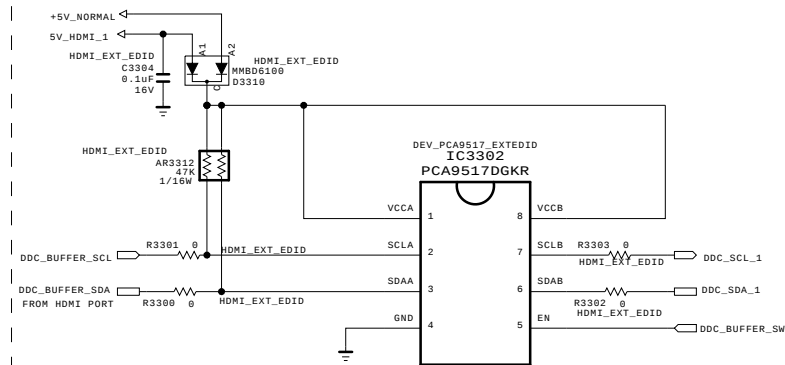



SECRET
LGElectronics




CVBS 1 PHONE JACK

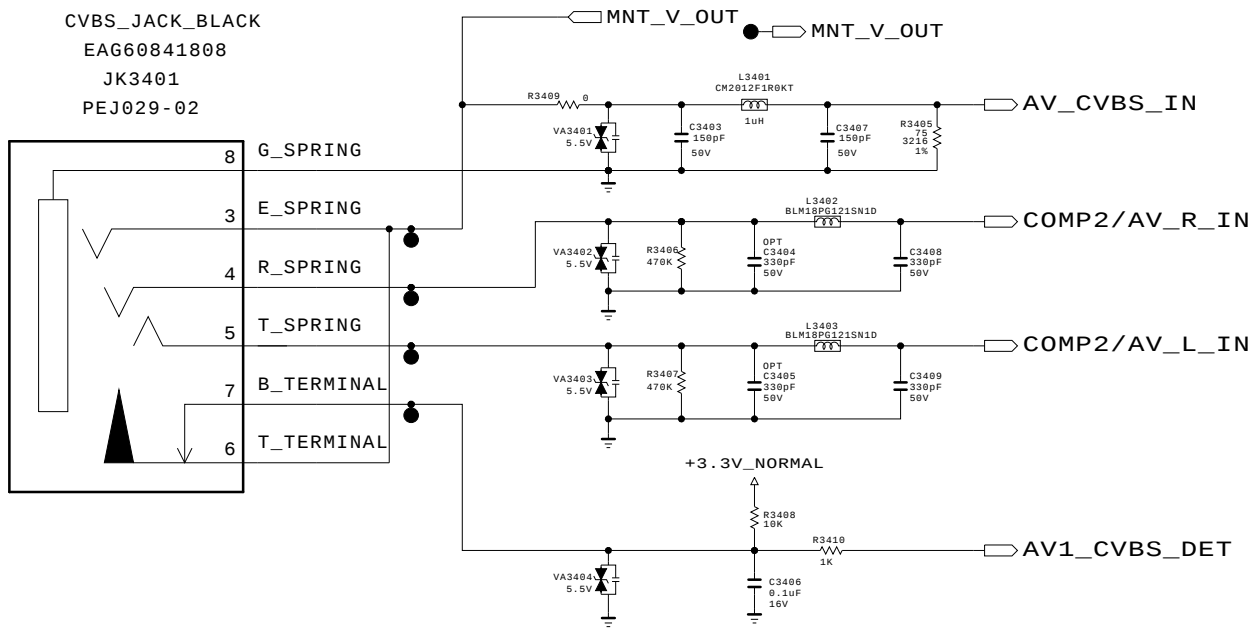


COMPONENT 1 PHONE JACK

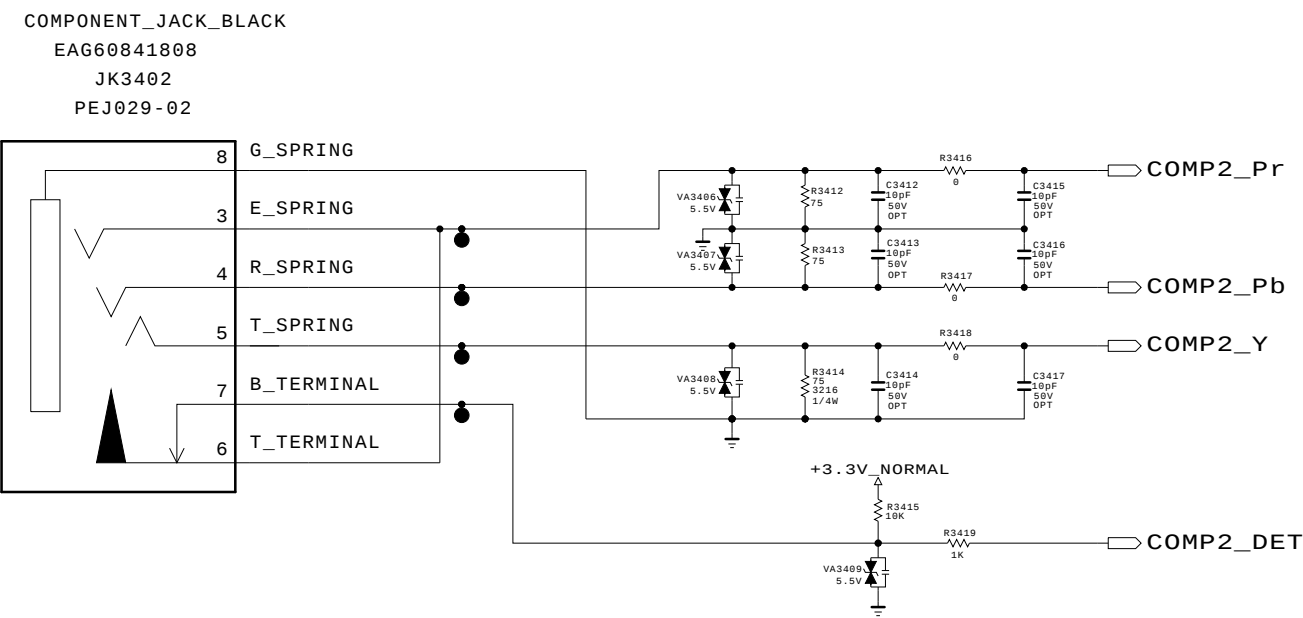

SPDIF OUT

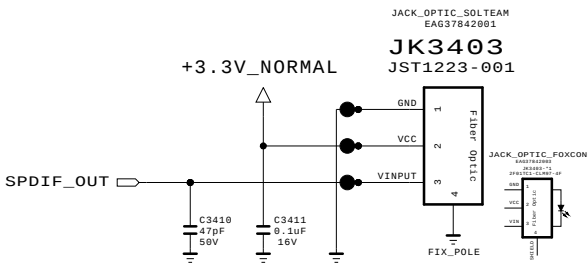

UART for Debug

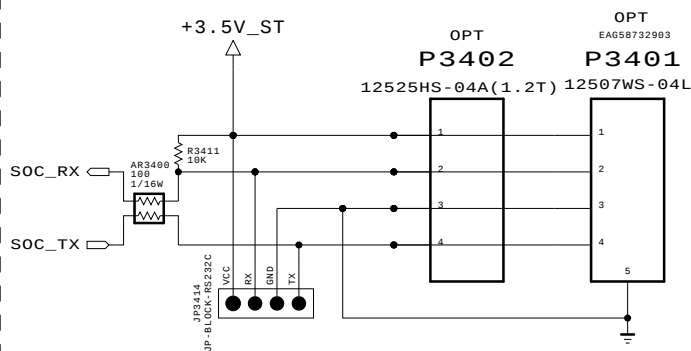


THE SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics



MODEL	M16	DATE	2015.12.22
BLOCK	JACK_HORIZONTAL	SHEET	34 / 99

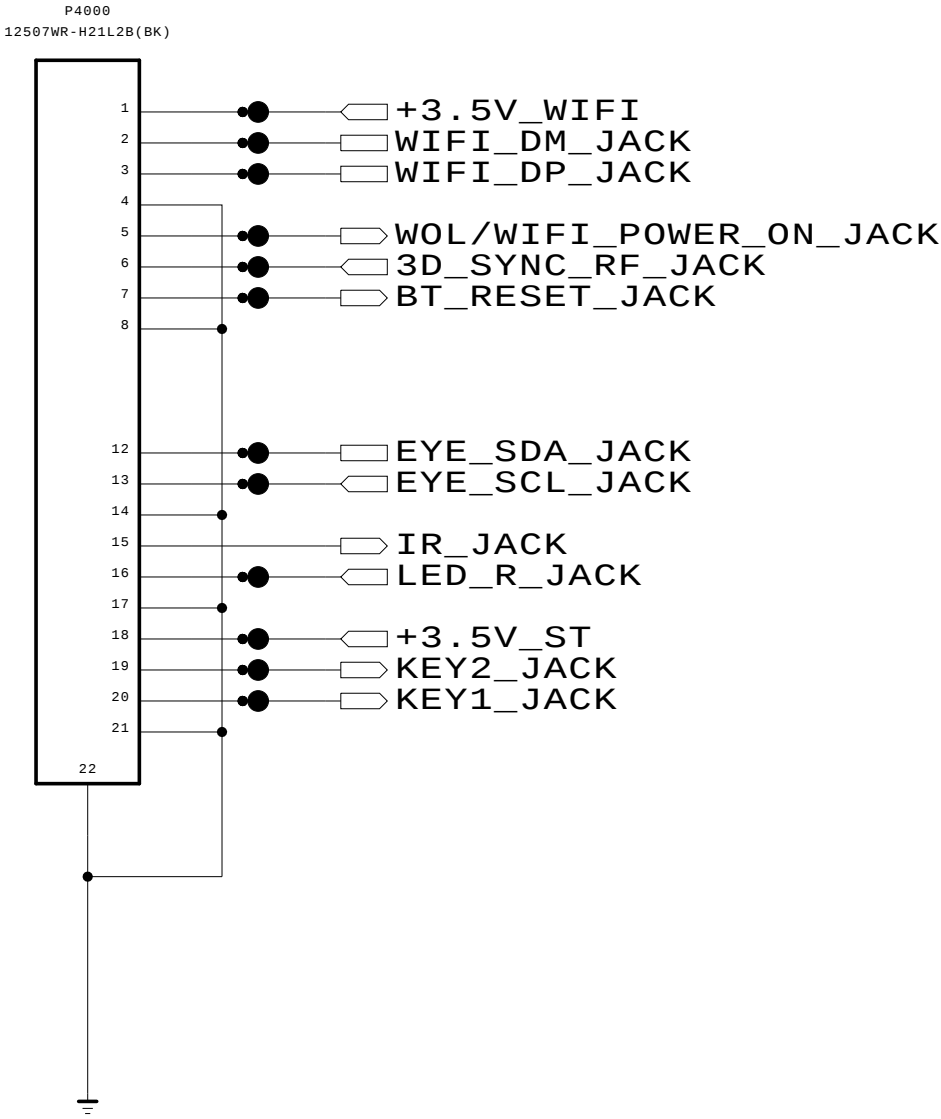


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET

LGElectronics

 LG ELECTRONICS

MODEL	M16	DATE	2015.12.22
BLOCK	WAFER_IR/KEY/WIFI/BT	SHEET	40 / 99

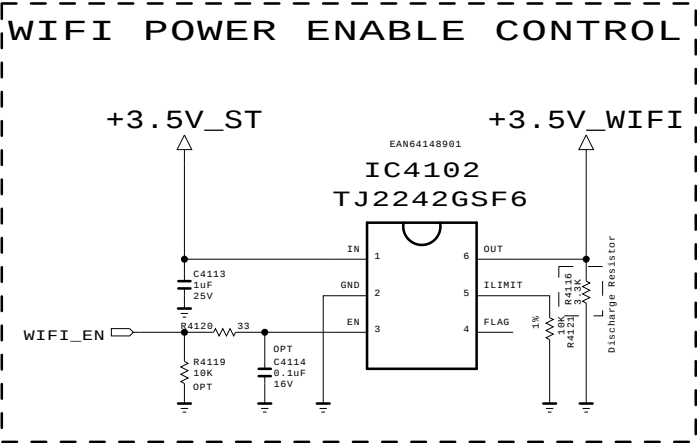



SECRET
LGElectronics



USB3 . 0
MAX 1 . 5A

EAG63374203
JK4200
5205 - 56209

EAG63374205
JK4200 - * 1
3AG009S - 106N3R6003 (1.2T PCB)

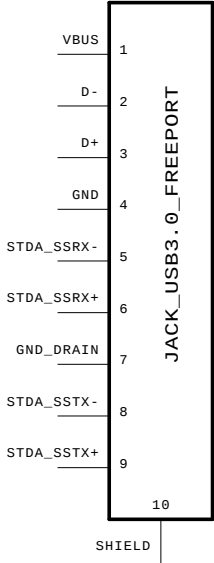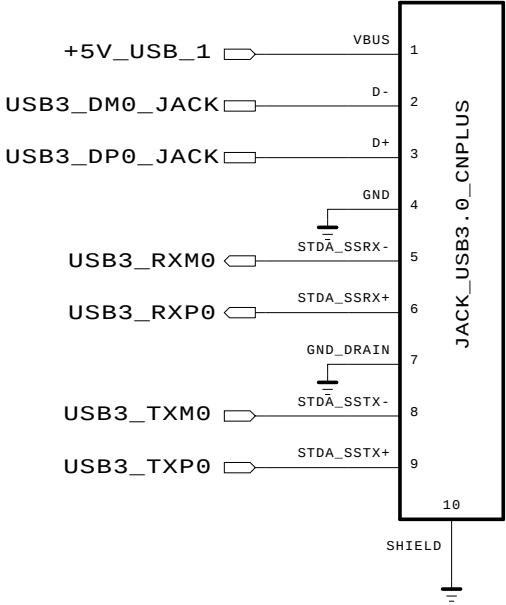


THE  SYMBOL MARK OF THIS SCHEMETIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMETIC.


SECRET	 LG ELECTRONICS
LGElectronics	

MODEL	M16	DATE	2015.12.22
BLOCK	JACK_USB1_3.0	SHEET	42 / 99

USB3 . 0
MAX 1 . 5A

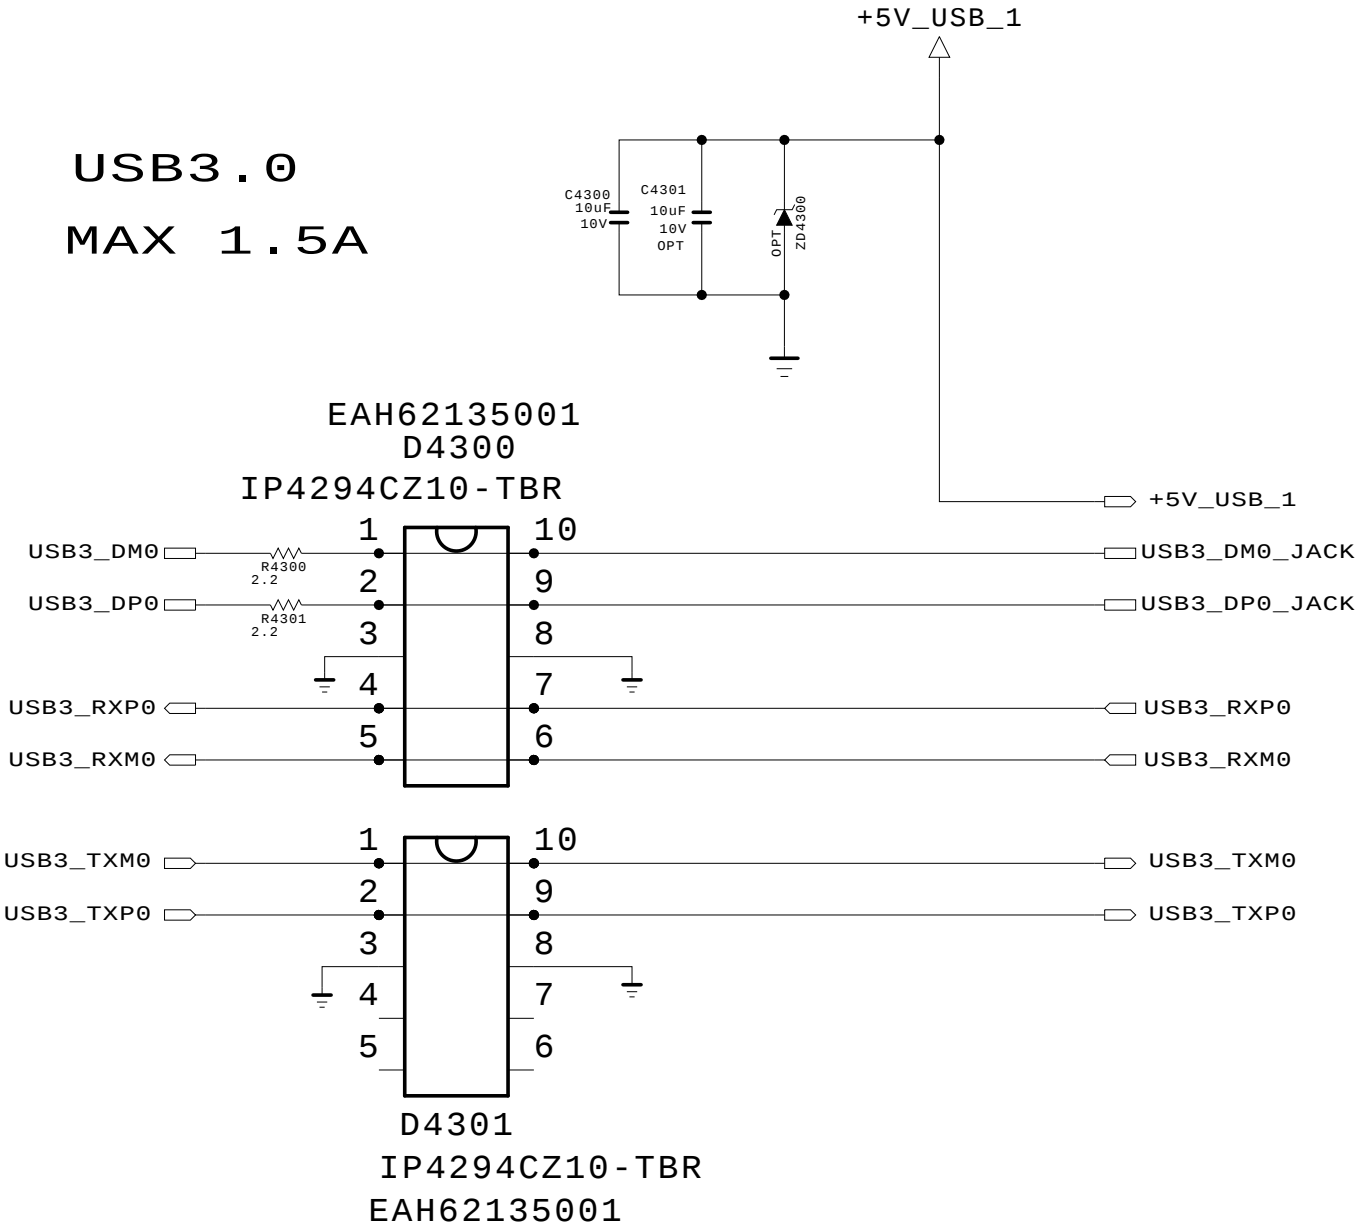



OCP USB3 . 0

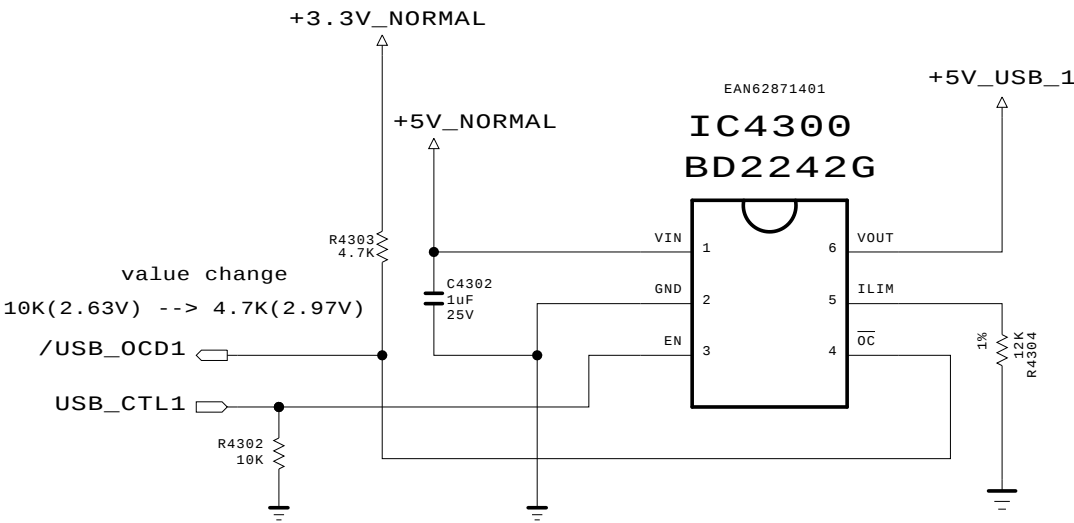

THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET	 LG ELECTRONICS
LGElectronics	


MODEL	M16	DATE	2015.11.23
BLOCK	USB1_3.0	SHEET	43 / 99

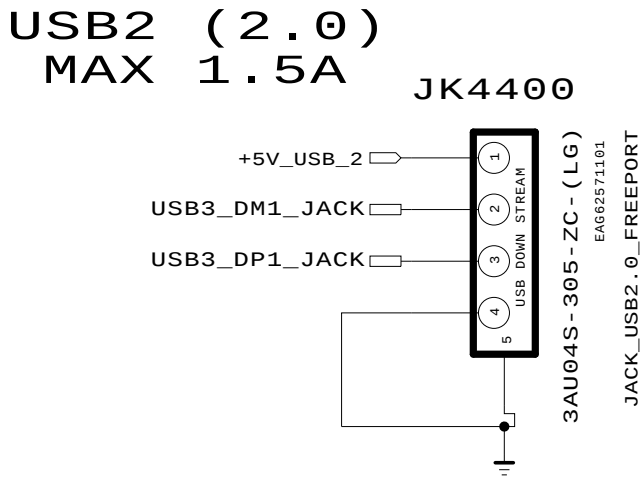


THE  SYMBOL MARK OF THIS SCHEMETIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMETIC.

SECRET	 LG ELECTRONICS
LGElectronics	

MODEL	M16	DATE	2015.12.22
BLOCK	JACK_USB2_2.0	SHEET	44 / 99

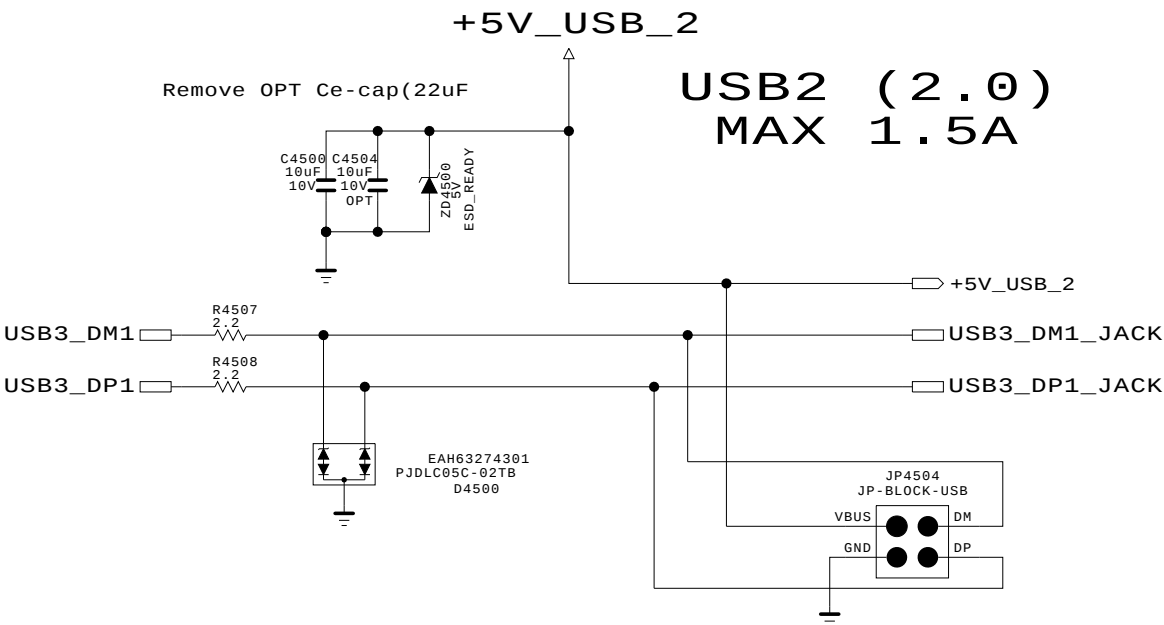

OCP USB2_2.0

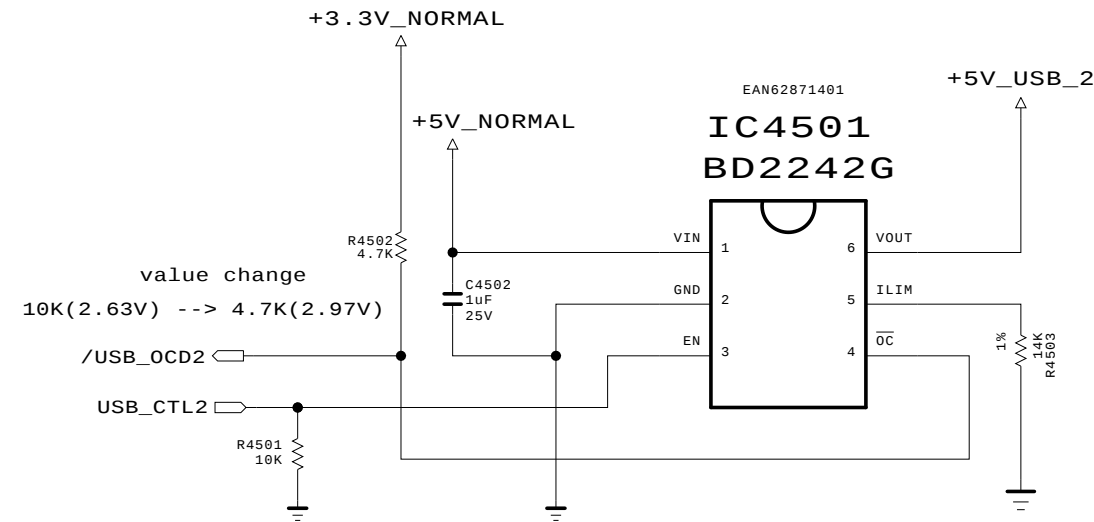


THE  SYMBOL MARK OF THIS SCHEMETIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMETIC.

SECRET

LGElectronics

 LG ELECTRONICS


MODEL	M16	DATE	2015.11.23
BLOCK	USB2_2.0	SHEET	45 / 99

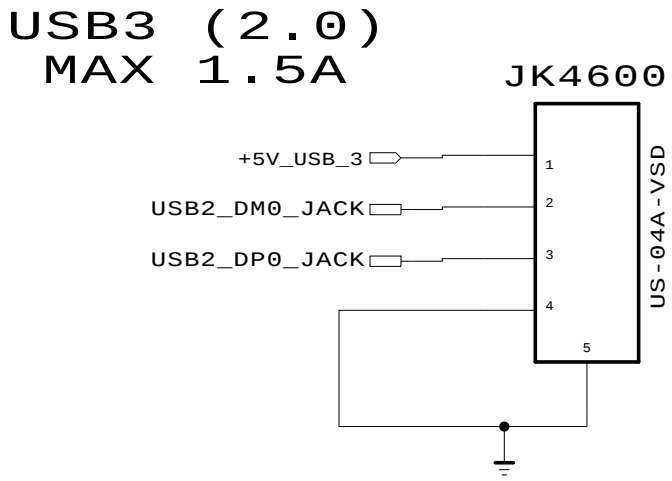


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET	 LG ELECTRONICS
LGElectronics	

MODEL		DATE	15/06/13
BLOCK	JACK_USB3_2.0	SHEET	/ 73

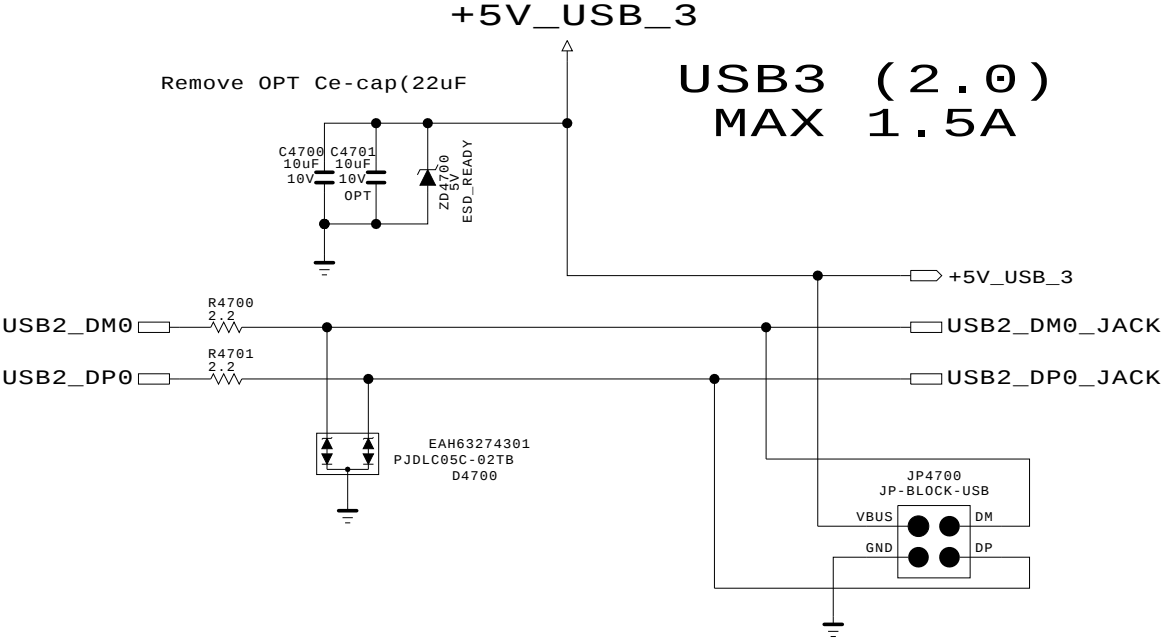

OCP USB3_2.0

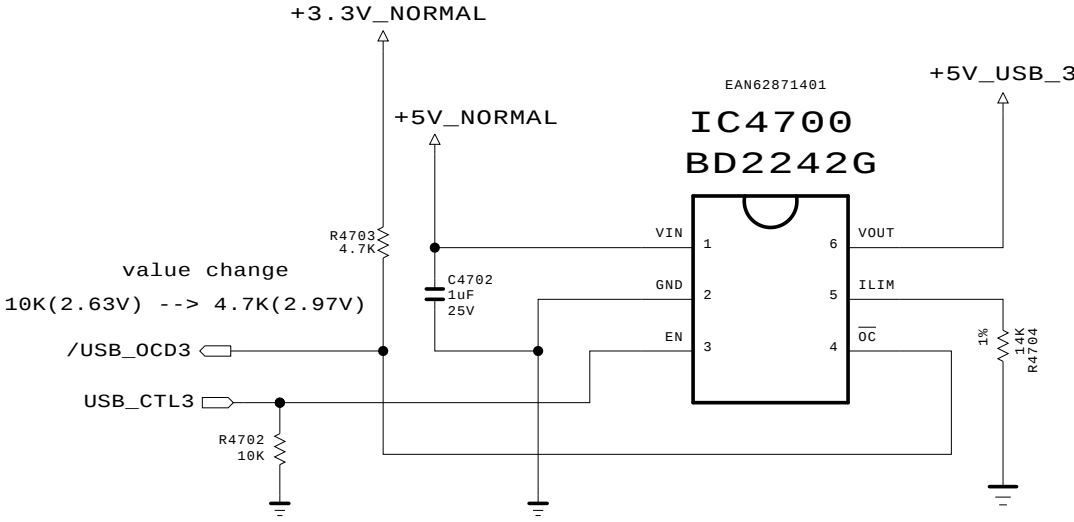

THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.


SECRET

LGElectronics

 LG ELECTRONICS

MODEL	M16	DATE	2015.11.23
BLOCK	USB3_2.0	SHEET	47 / 99

Ethernet Block

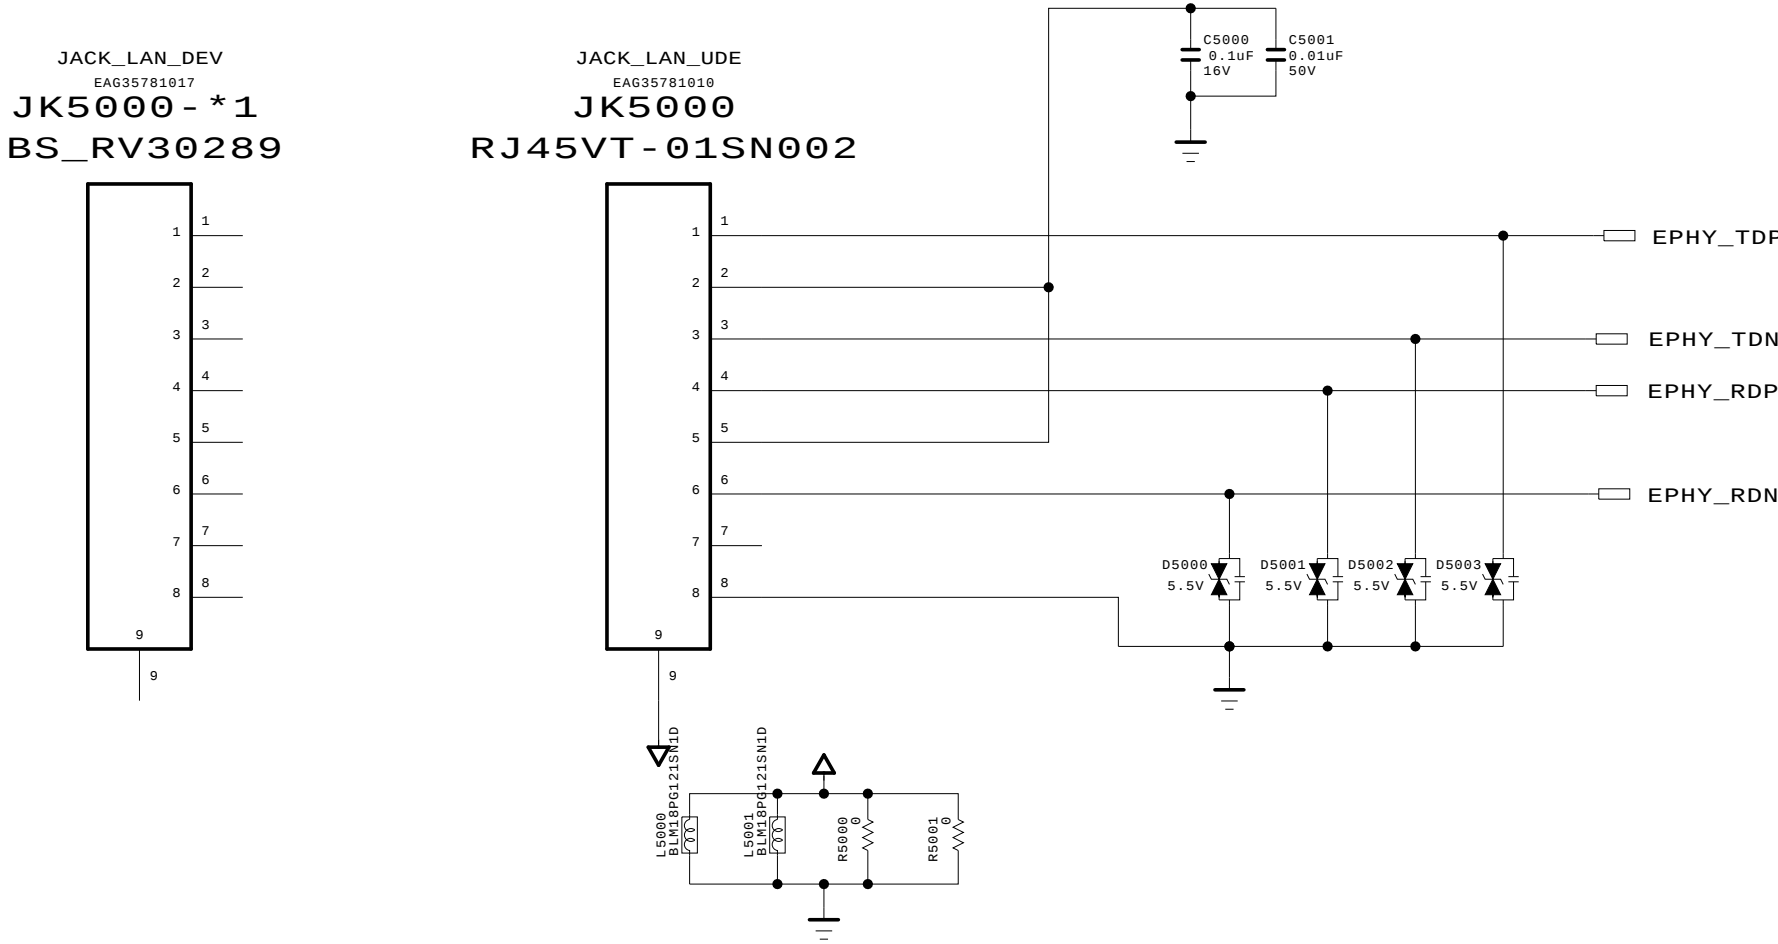

THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.


SECRET

LGElectronics

 LG ELECTRONICS

MODEL	M16	DATE	2015.02.09
BLOCK	ETHERNET JACK	SHEET	18 / 26

050.sht

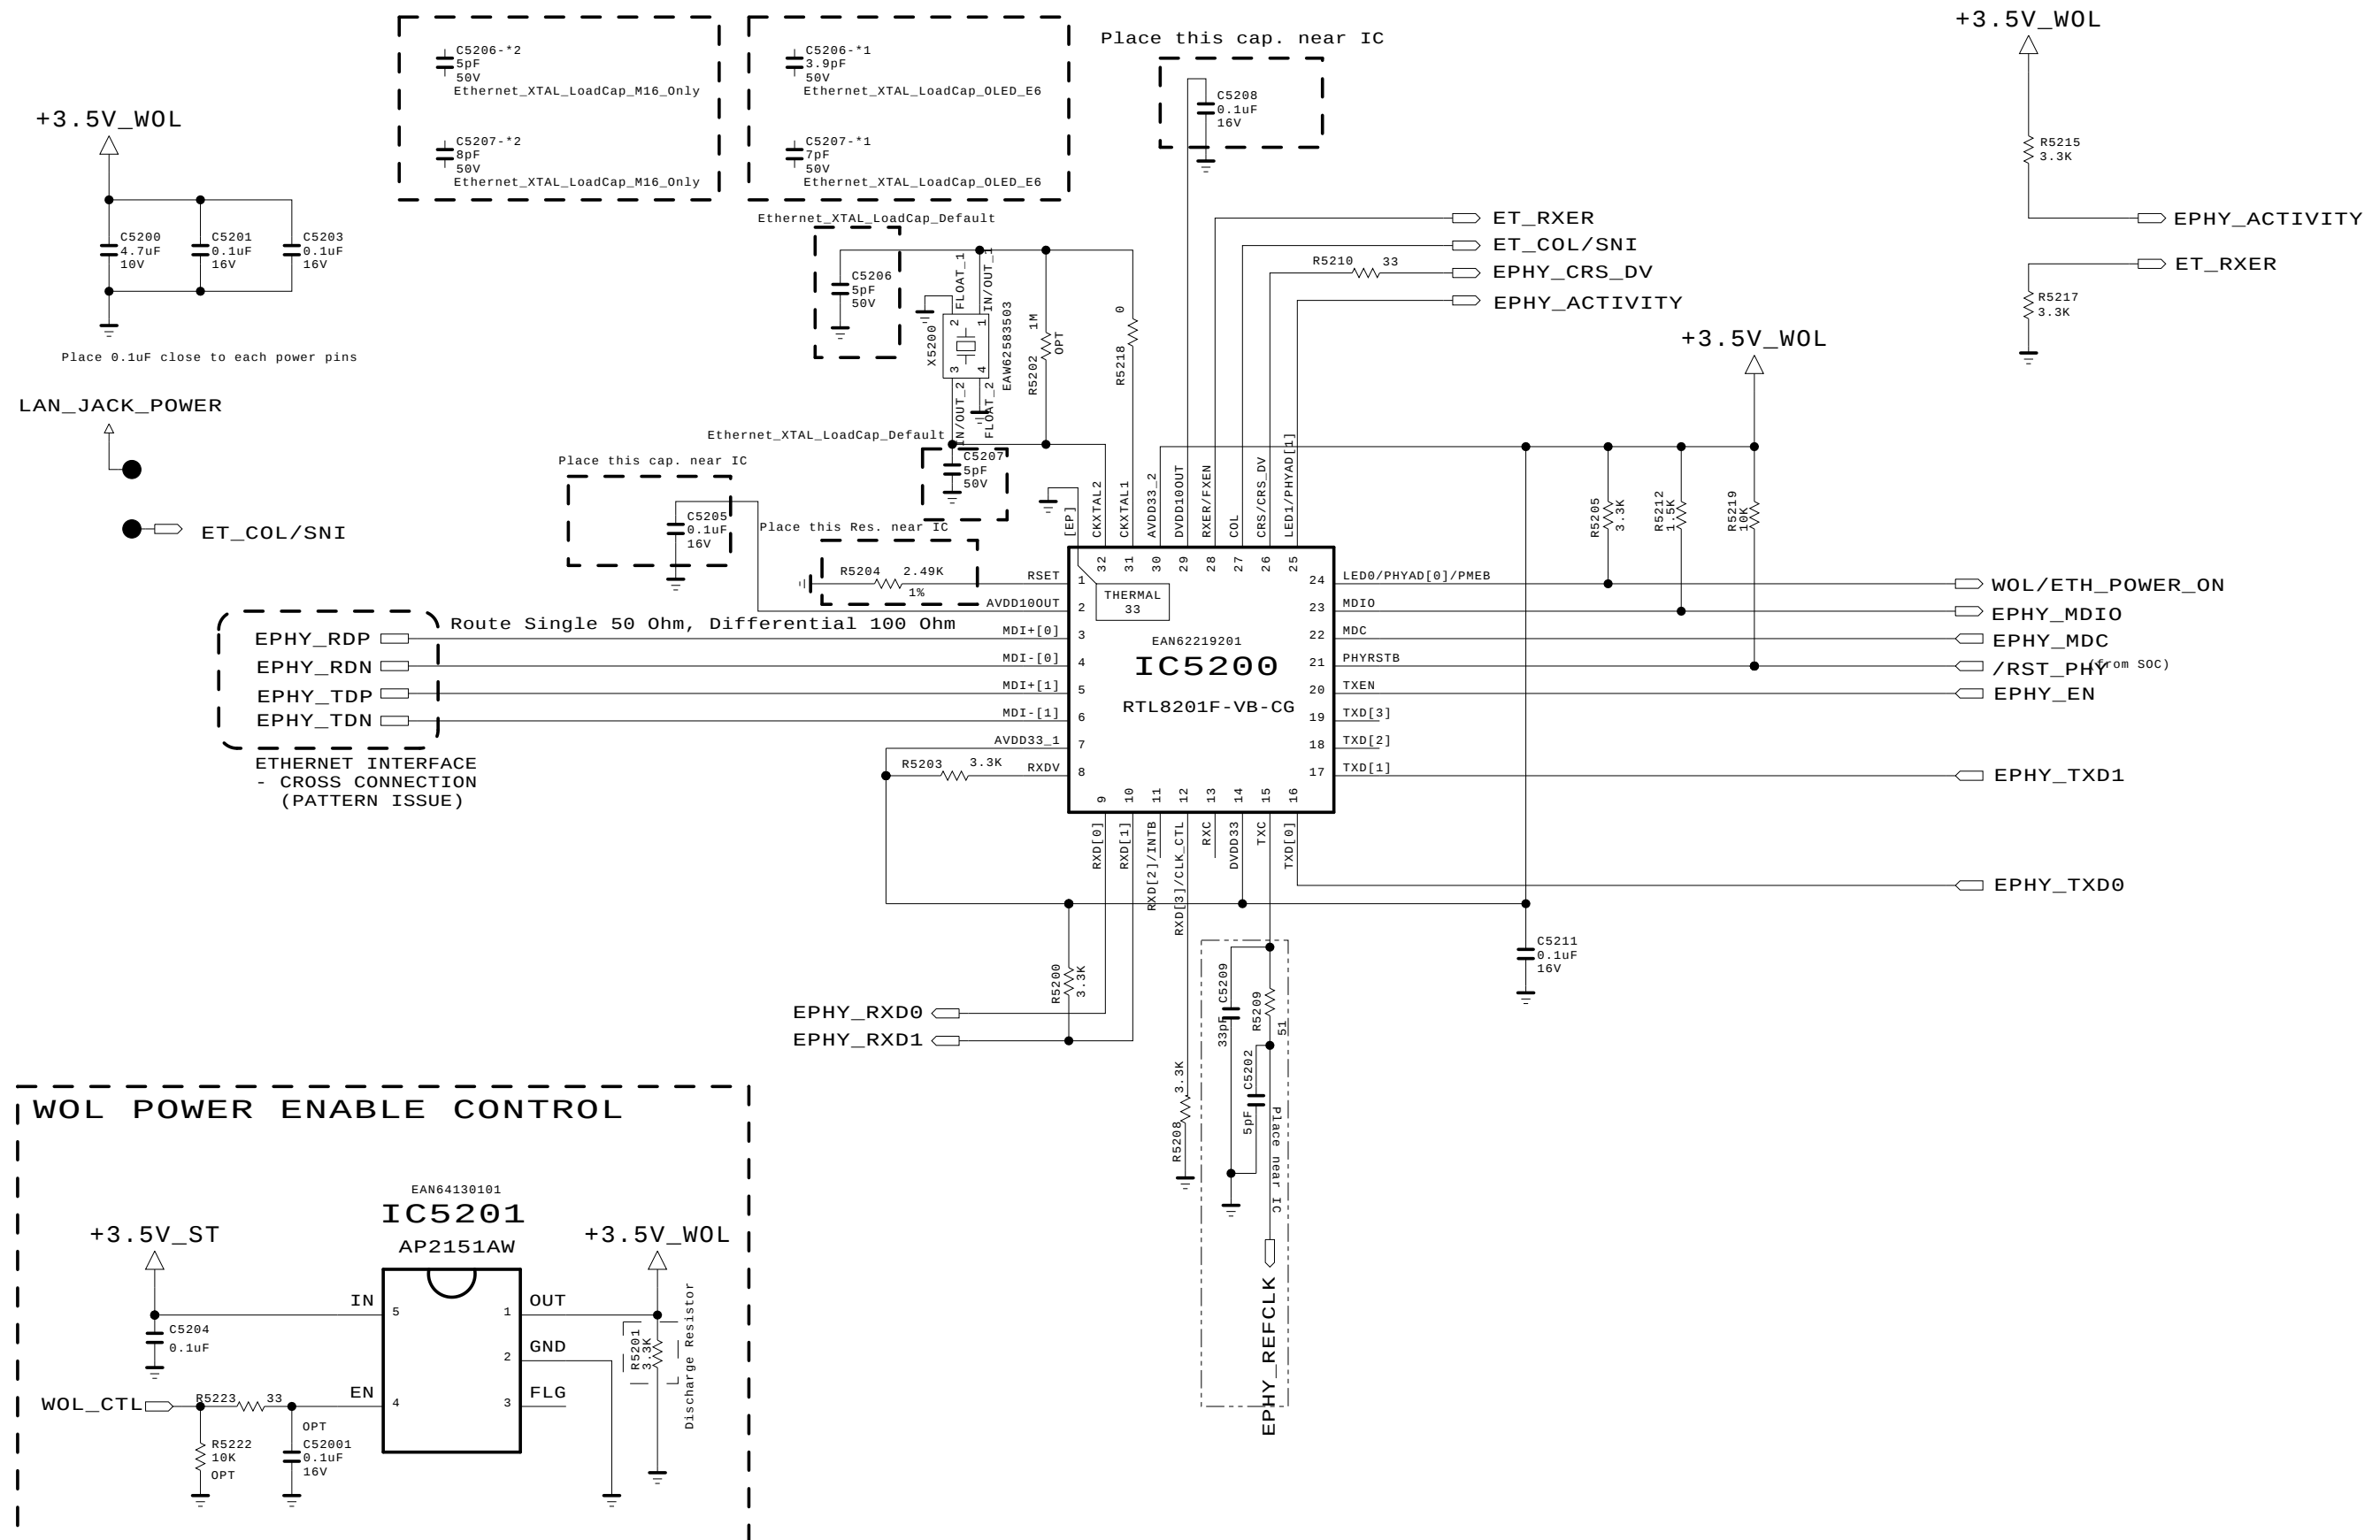


THE ⚠ SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES
 SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION.
 FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS
 ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR
 THE CRITICAL COMPONENTS IN THE ⚠ SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics




MODEL	M16	DATE	2015.11.04
BLOCK	LAN	SHEET	52 / 100

NTP_AMP_Front

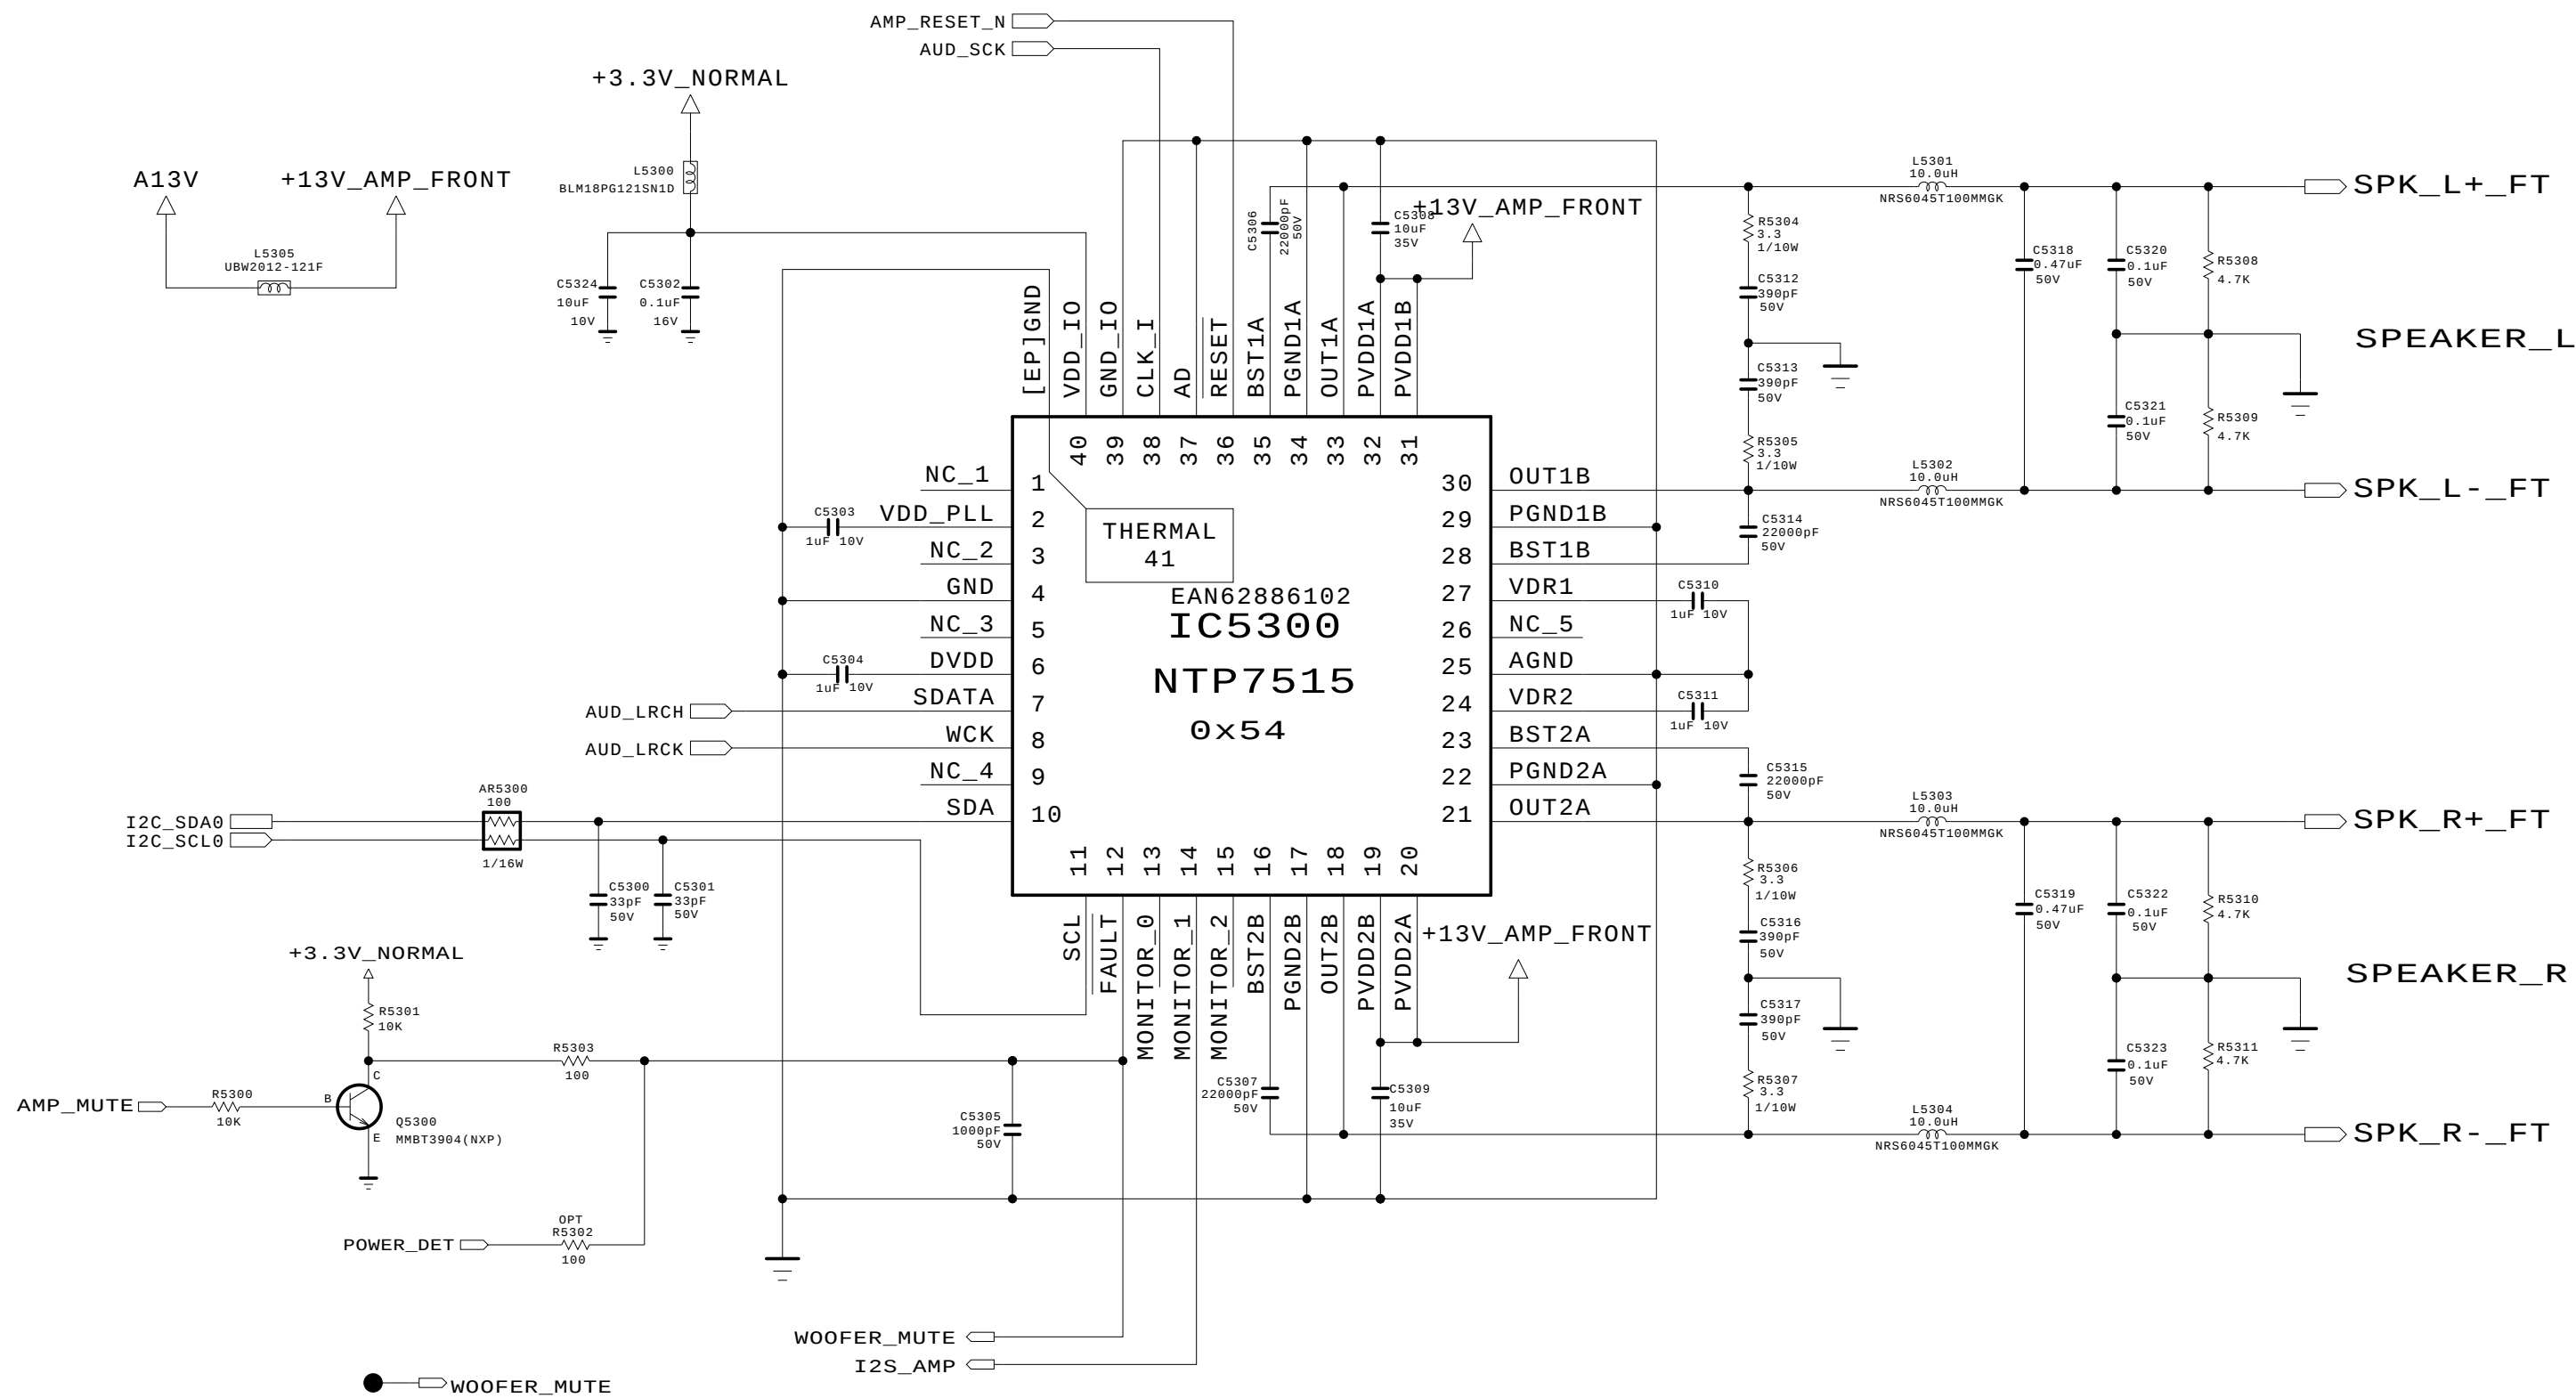

THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics

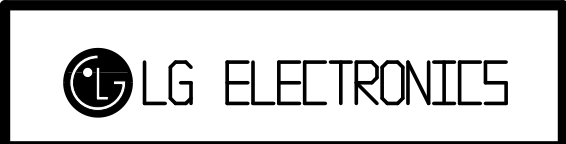


MODEL	M16	DATE	2015.02.24
BLOCK	NTP AMP	SHEET	20 / 26

AMP - Center(Upper 75") Woofers(Below 65") Tweeter(EH92)

Option Description

1. SDATA_TWEETER : Use the AMP for Tweeter (EH92)

2. SDATA_WOOFER/CENTER : Use this AMP for Center (upper 75inch model) or Woofer STEREO (below 65 inch model)

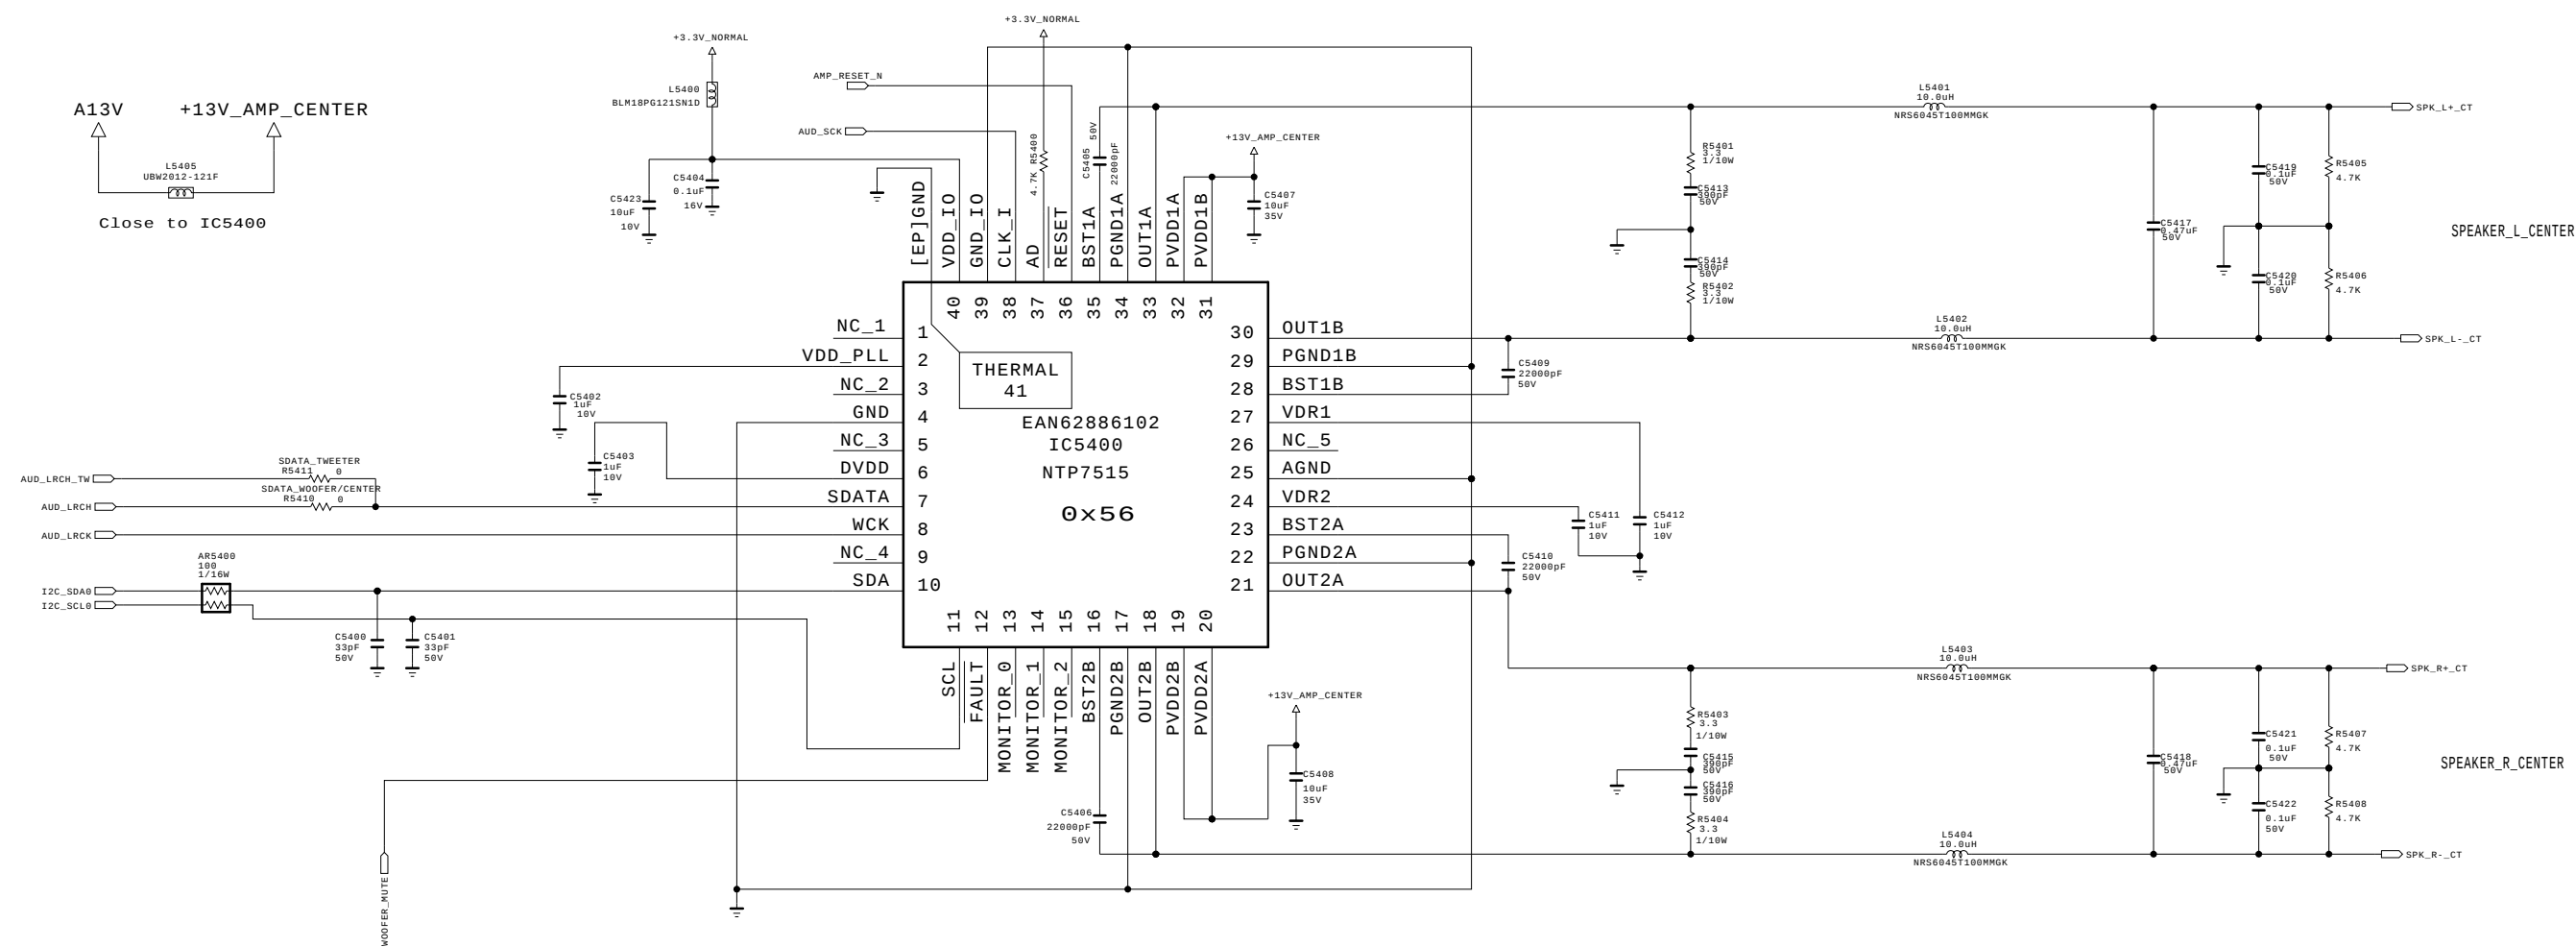


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics



MODEL	M16	DATE	2015.06.27
BLOCK	AMP_CENTER/WOOFER	SHEET	54 / 99

WAFER_SPK_4P_8P (49/55/60/65UH80)

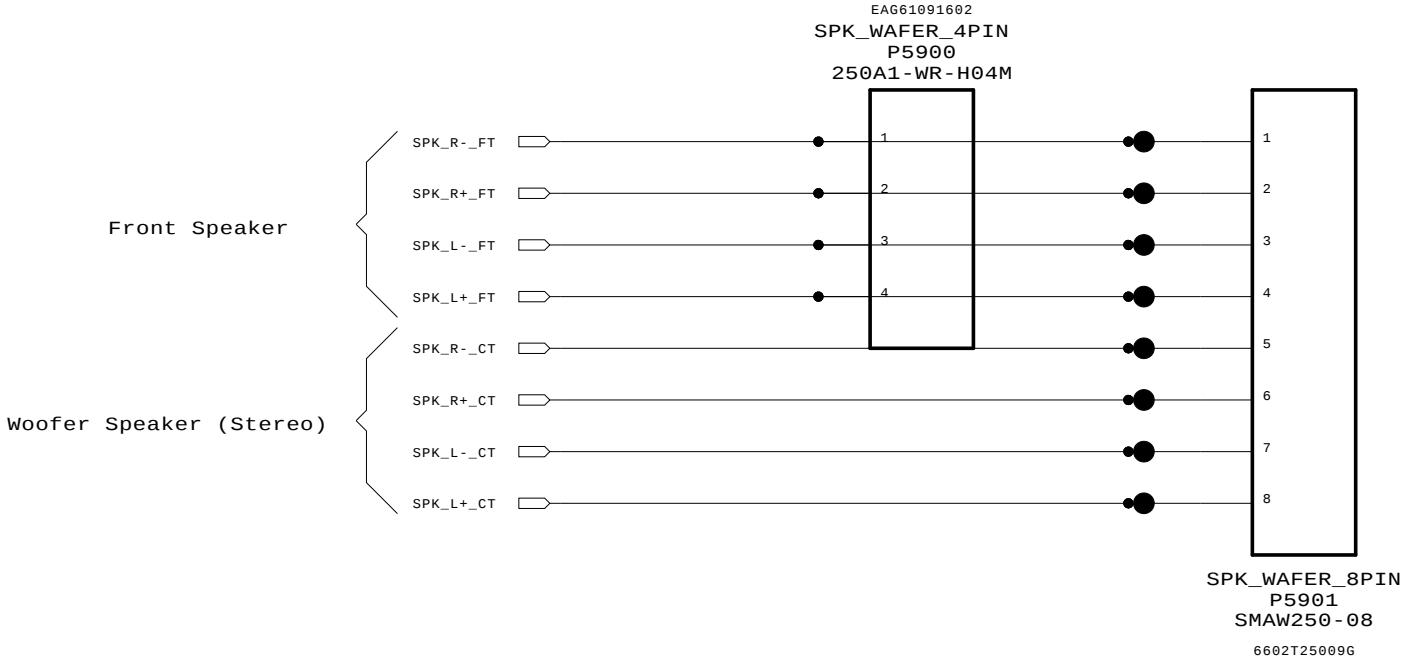

THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.


SECRET

LGElectronics

 LG ELECTRONICS

MODEL	M16	DATE	2015.06.27
BLOCK	SPEAKER WAFER	SHEET	59 / 99


059.sht

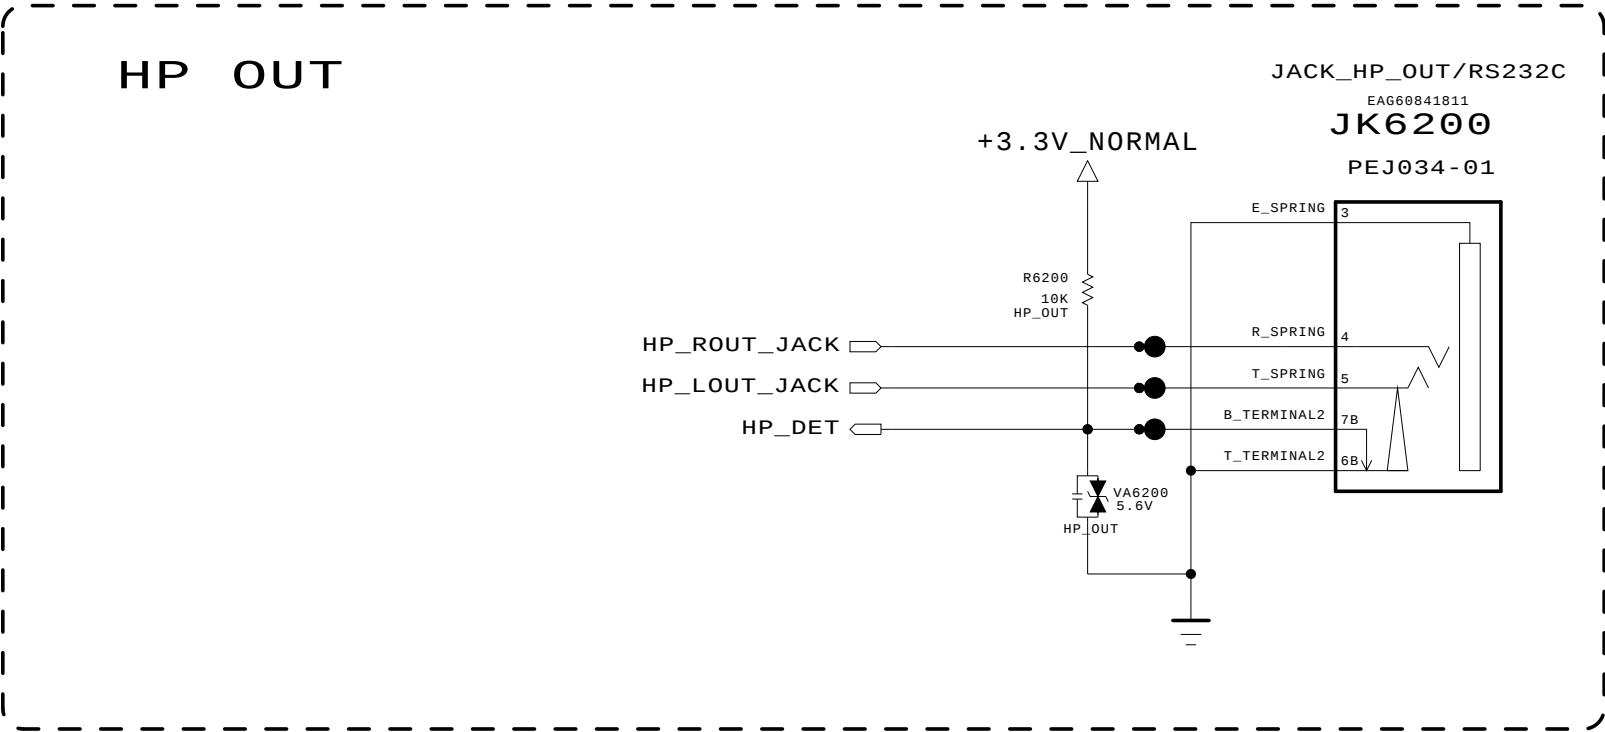

THE  SYMBOL MARK OF THIS SCHEMETIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMETIC.

SECRET	 LG ELECTRONICS
LGElectronics	

MODEL		DATE	15/06/13
BLOCK	HP JACK	SHEET	23 / 73

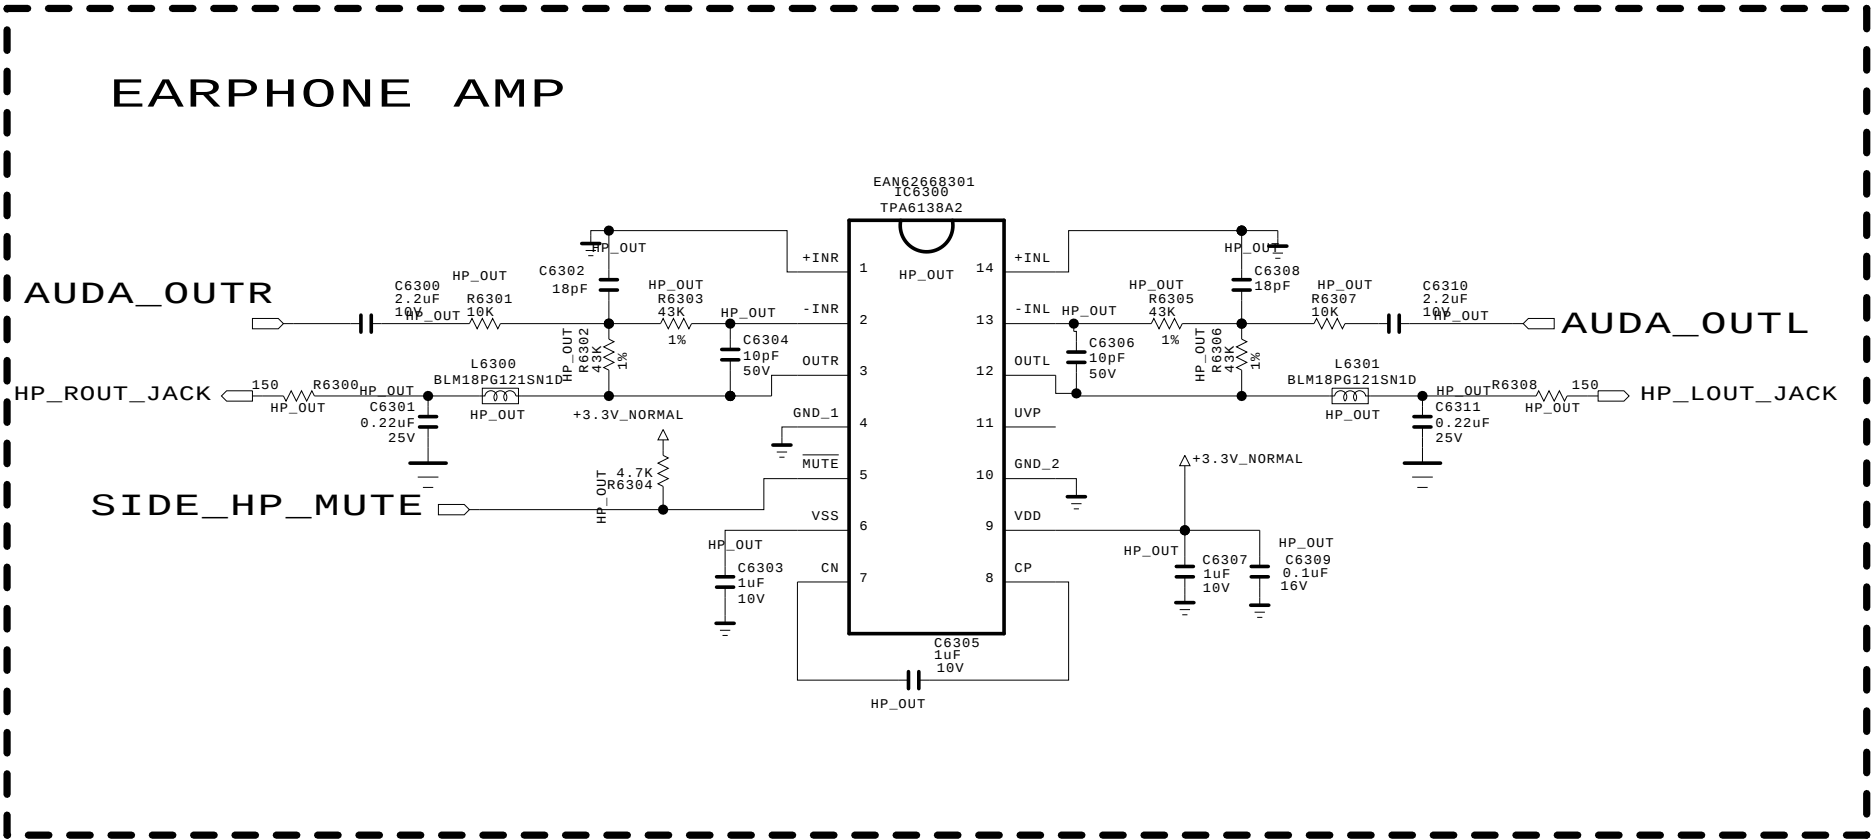

THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.


SECRET

LGElectronics

 LG ELECTRONICS

MODEL	M16	DATE	2015.02.09
BLOCK	HEADPHONE AMP	SHEET	23 / 73

B-CAS (SMART CARD) INTERFACE

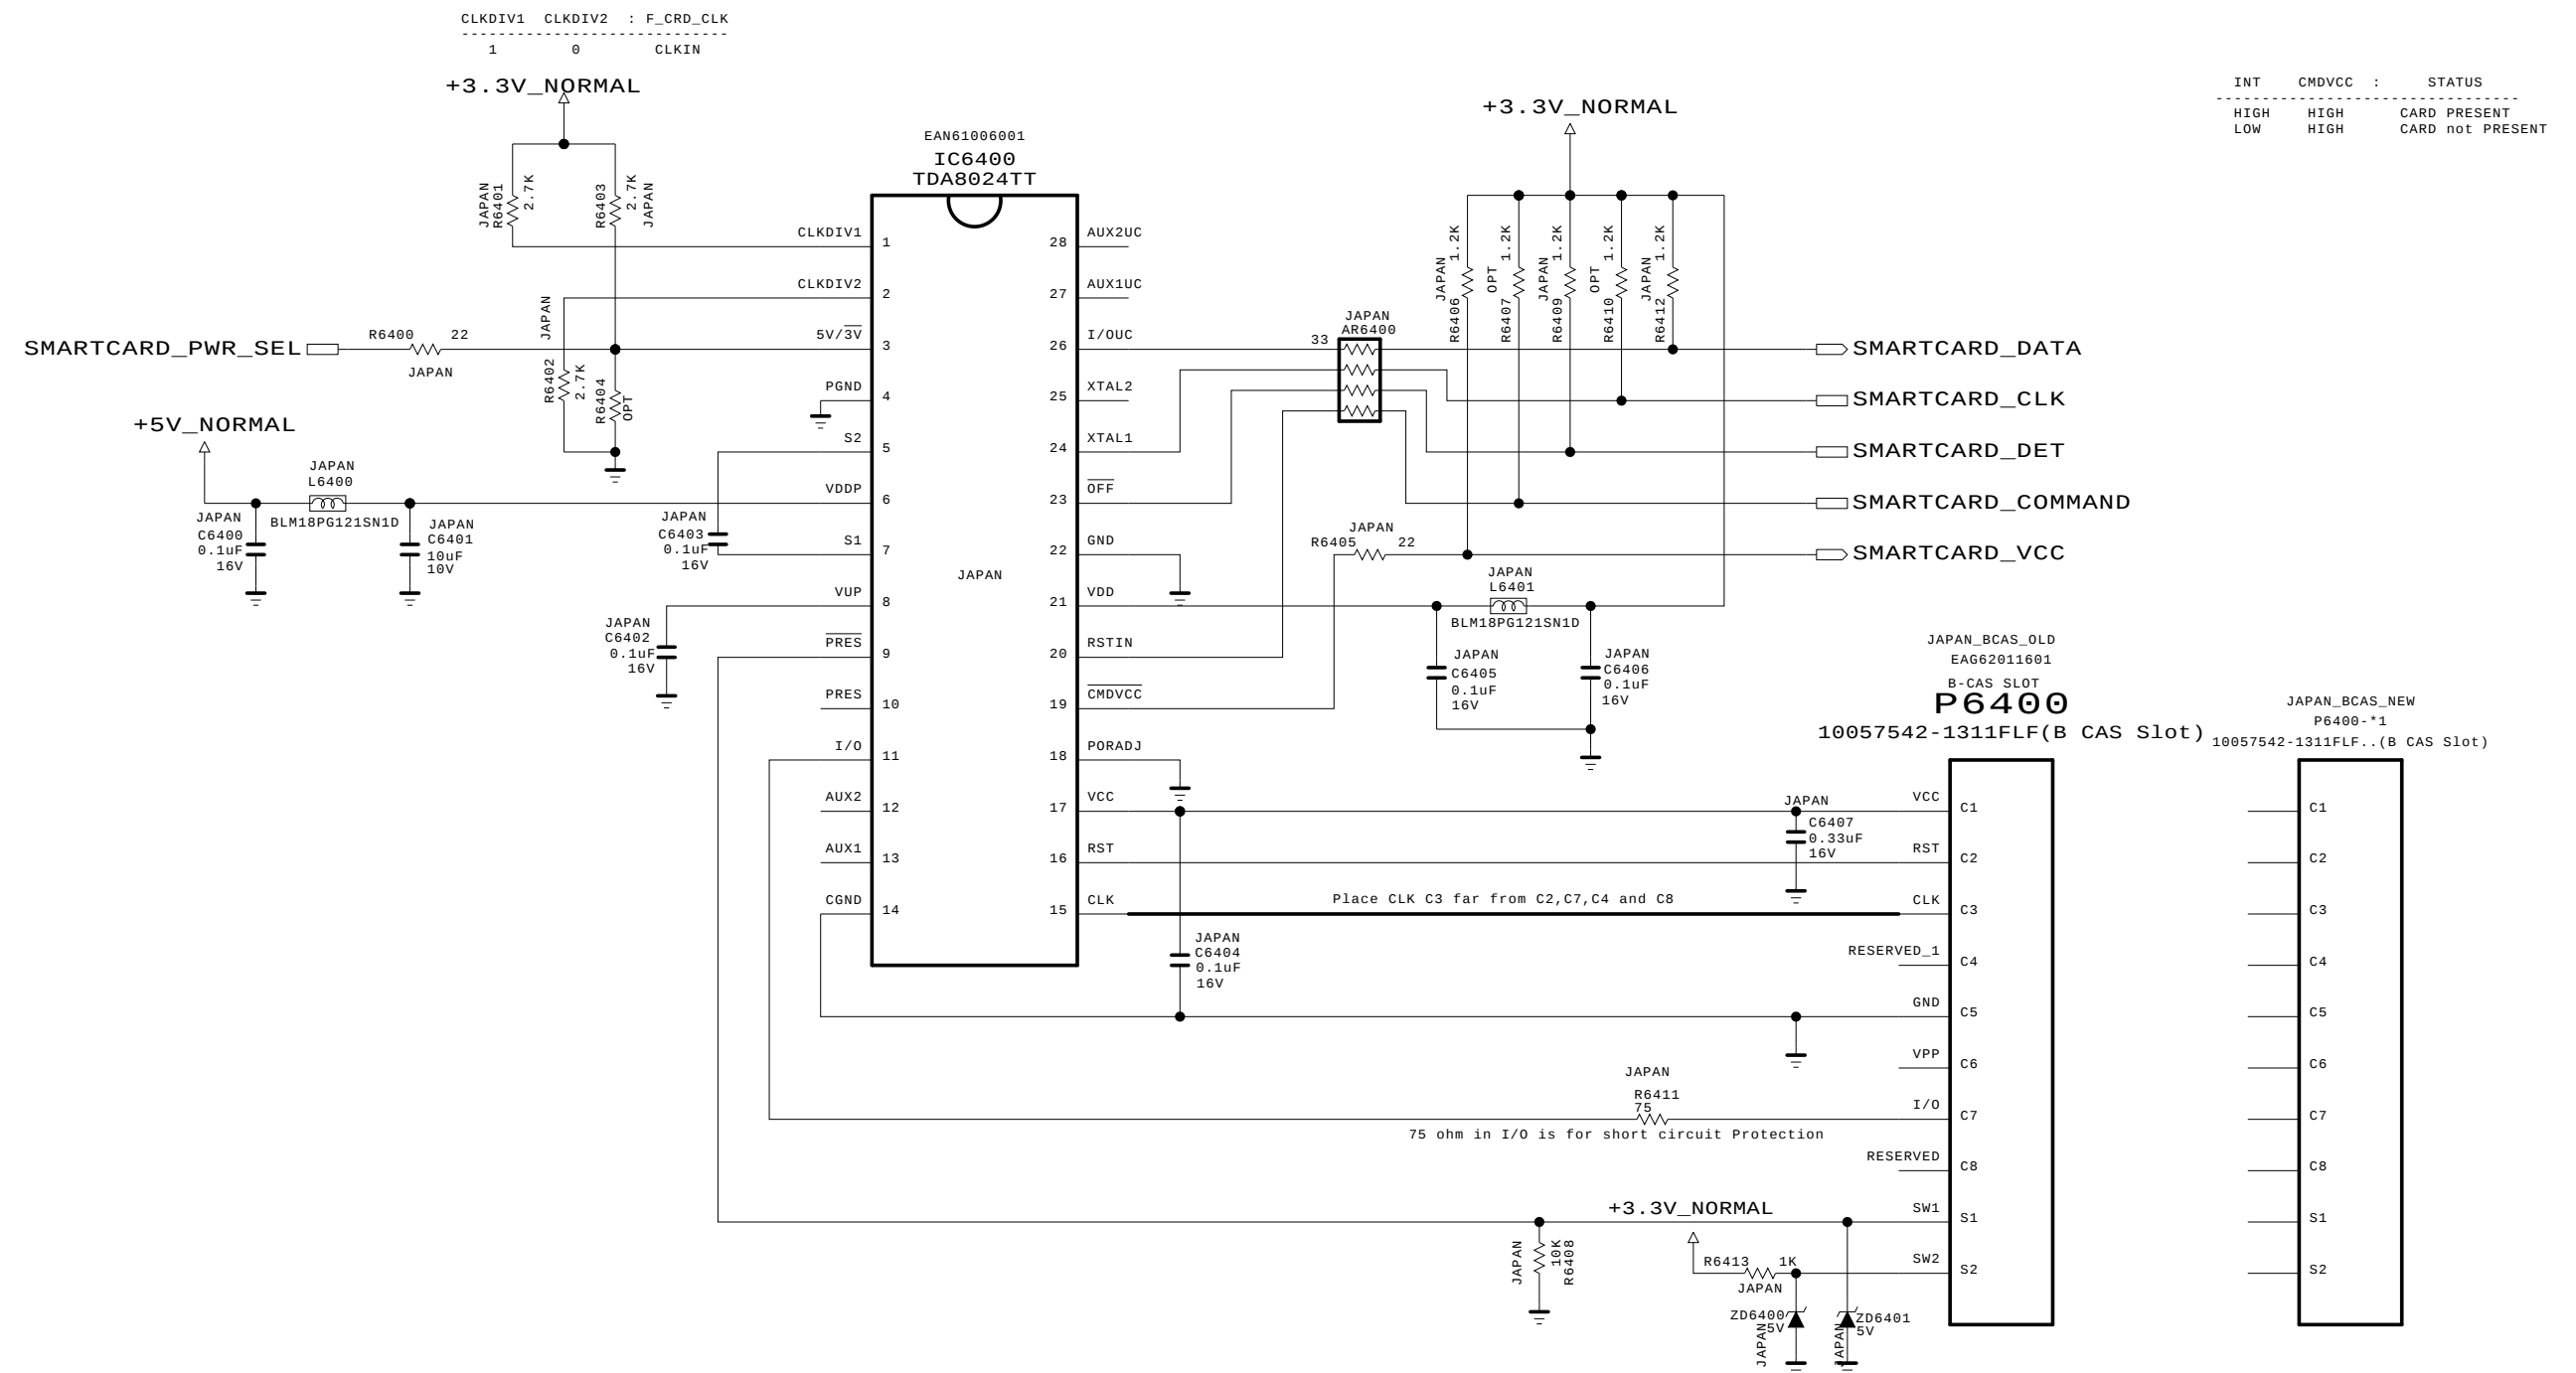


THE ⚠ SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE ⚠ SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics




MODEL	M16	DATE	2015.02.09
BLOCK	JAPAN B-CAS	SHEET	23 / 26

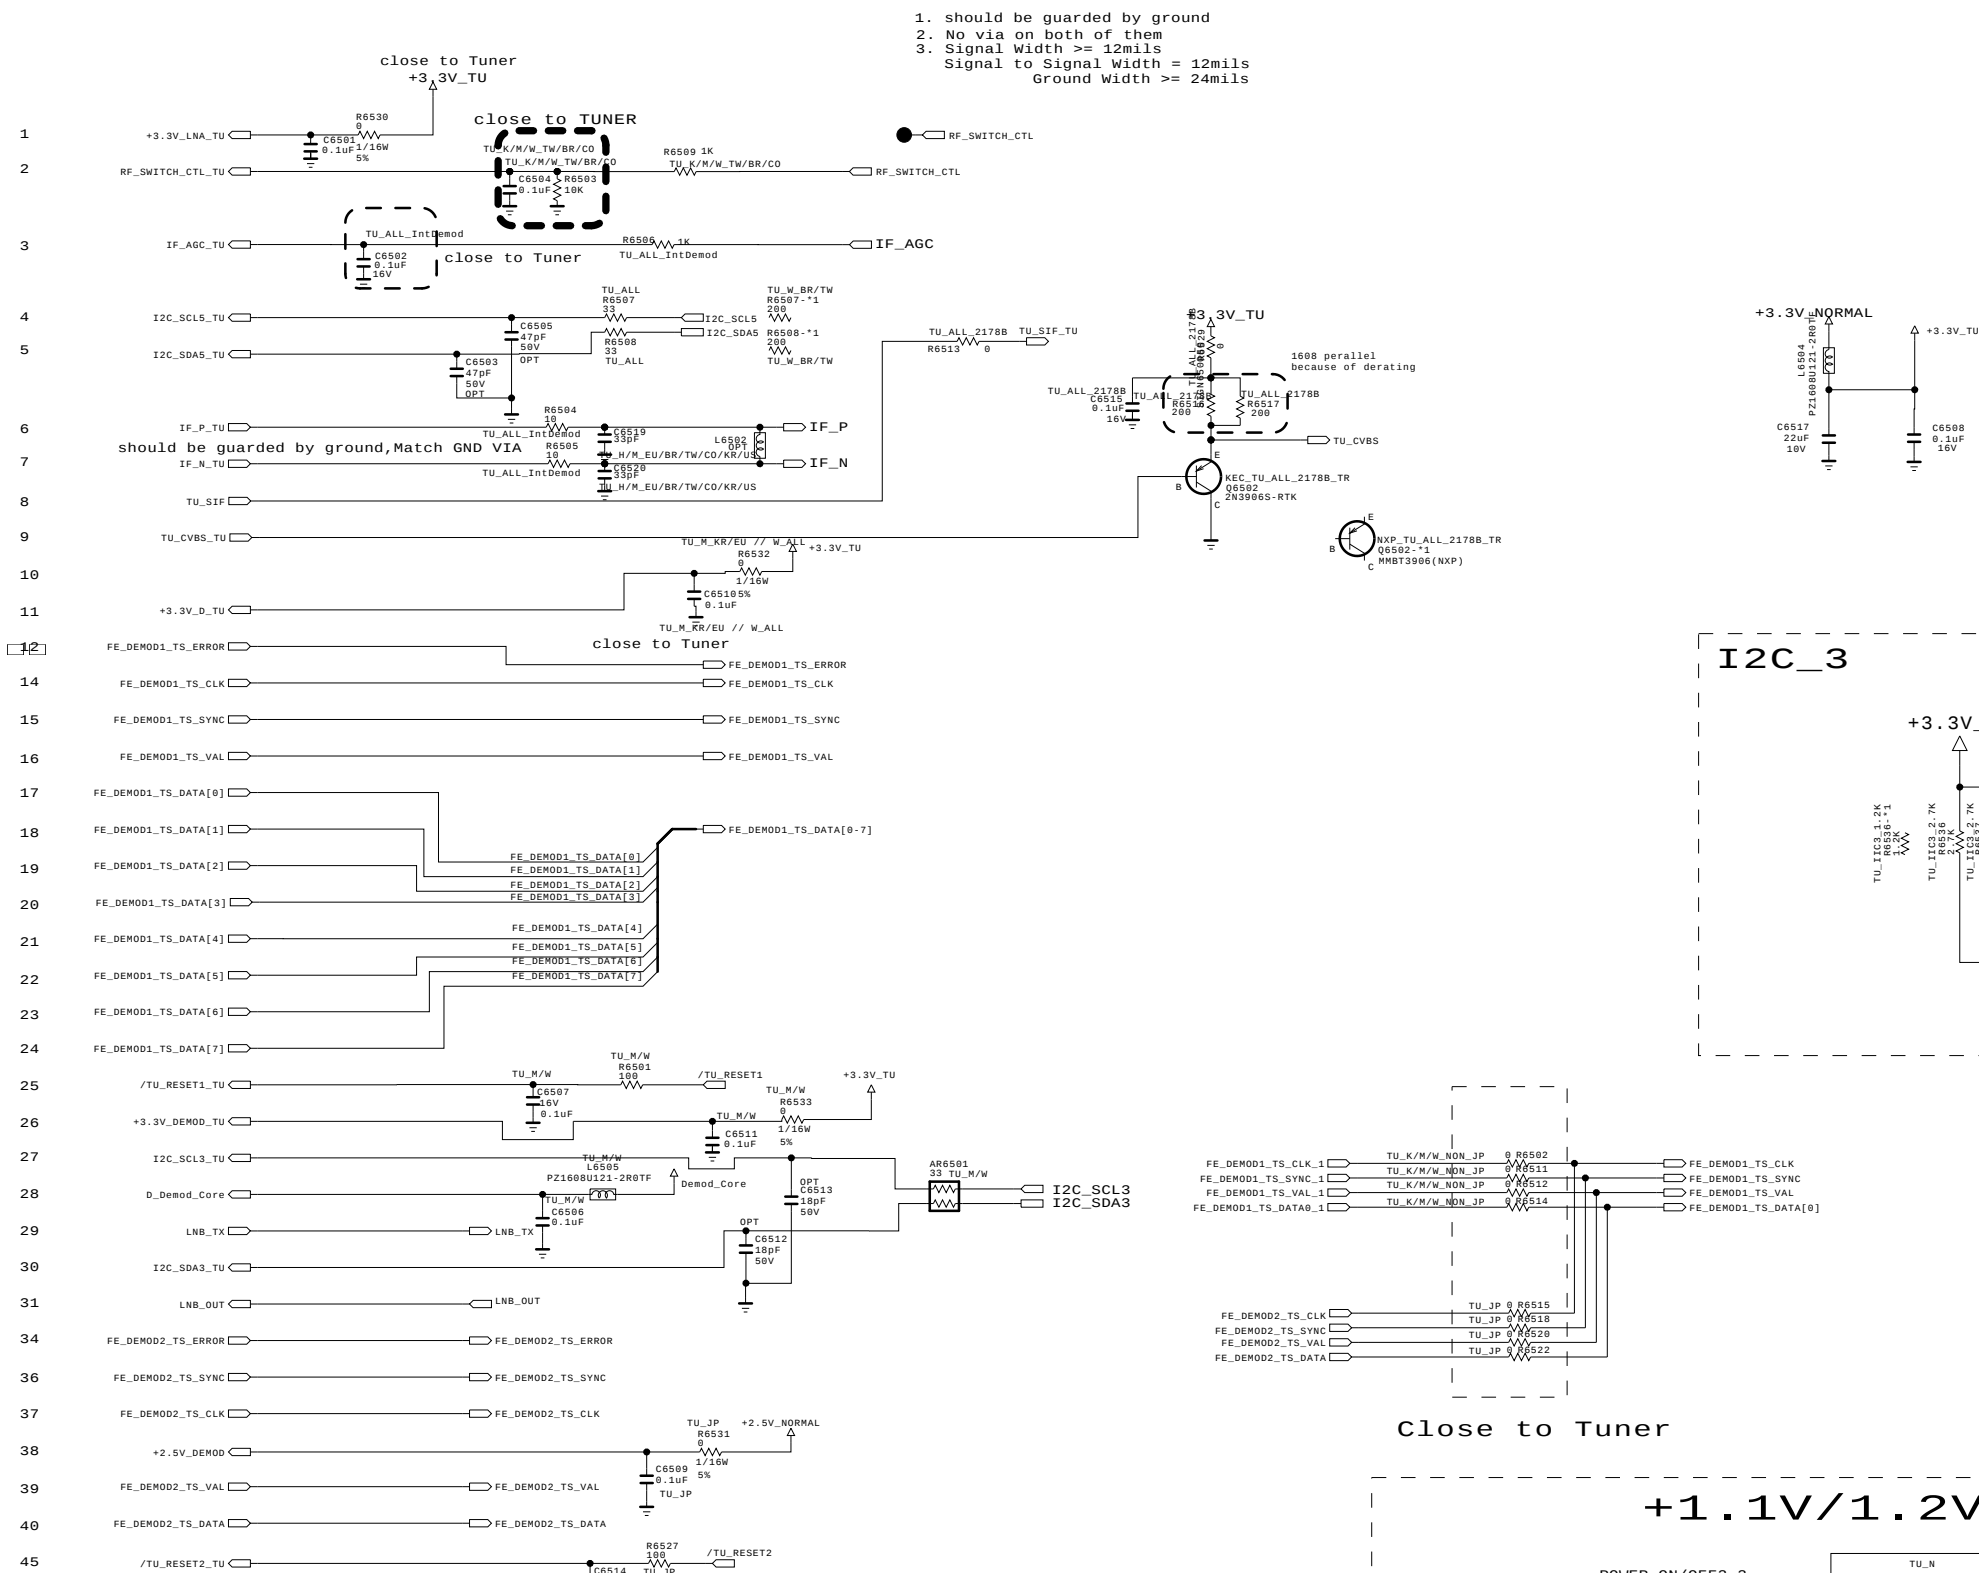


```

14' Tuner Type for Global
TDJ'H'-G101D : Half NIM for EU,AJJA
TDJ'H'-H101F : Half NIM for US, KR
TDJ'K'-T101F : Half NIM for TW
TDJ'M'-C301D,F : FULL NIM for China
TDJ'M'-B101F : Brazil NIM with Isolator Type
TDJ'M'-K101F : colombia NIM
TDJ'M'-G101D,G105D,G151D : EU Combo&Full NIM
TDJ'M'-H101F,H151F : Korea PIP tuner
TDJ'W'-A151D : AJJA T2 PIP

```

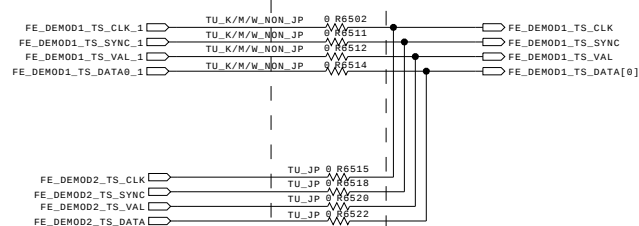


Close to Tuner

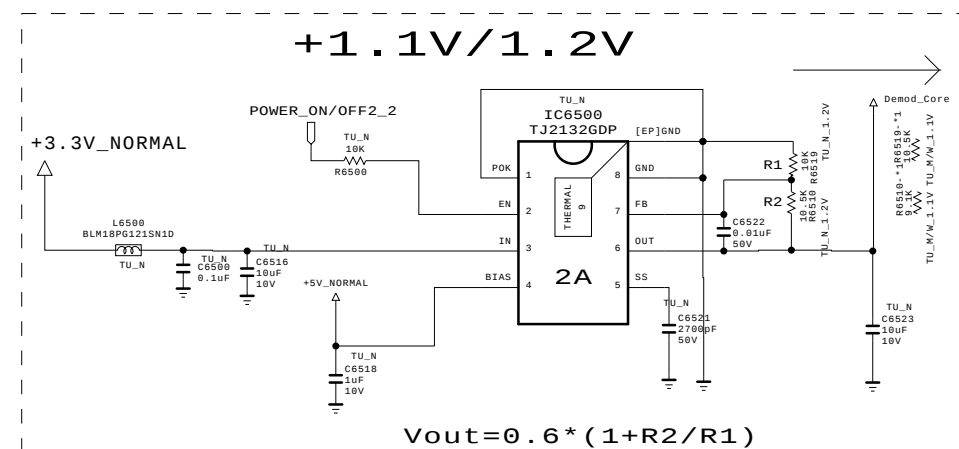

SECRET
LGElectronics



MODEL	TUNER	DATE	2015.04.20
BLOCK		SHEET	65 /

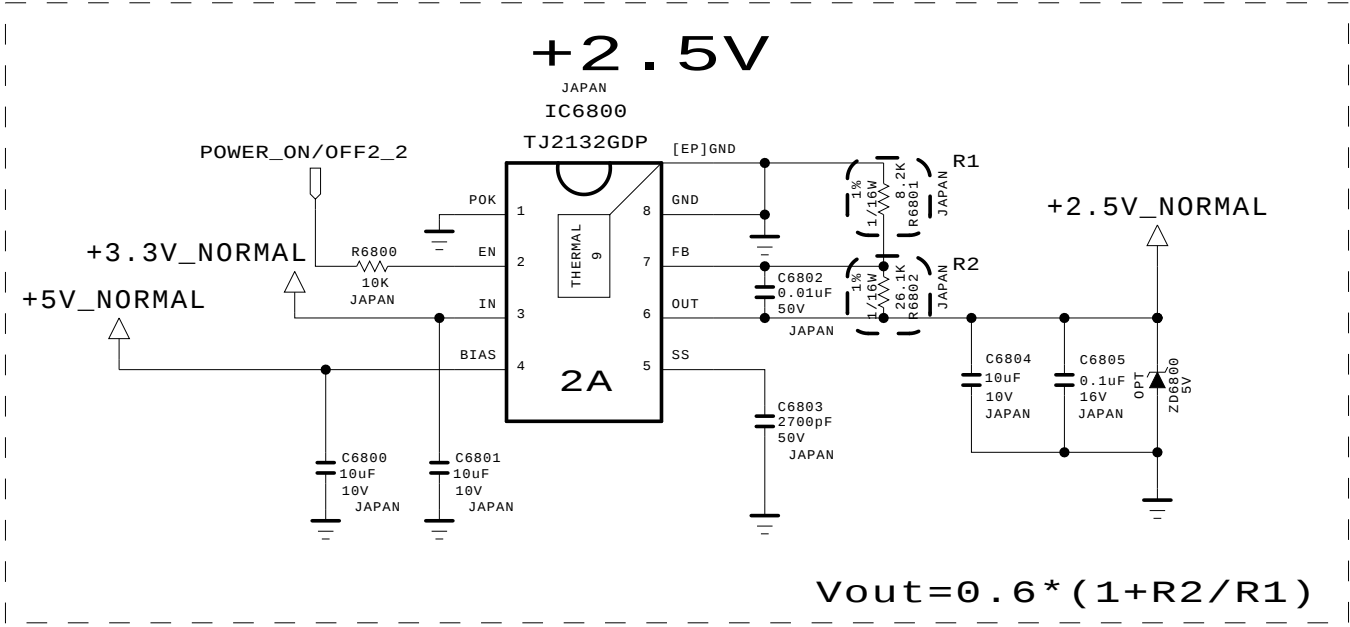

THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics




MODEL	M16	DATE	2015.06.27
BLOCK	Tuner_2.5V	SHEET	68 / 99

068.sht

DVB-S2 LNB Part Allegro

(Option: LNB)

```
Input trace widths should be sized to conduct at least 3A
Output trace widths should be sized to conduct at least 2A
```

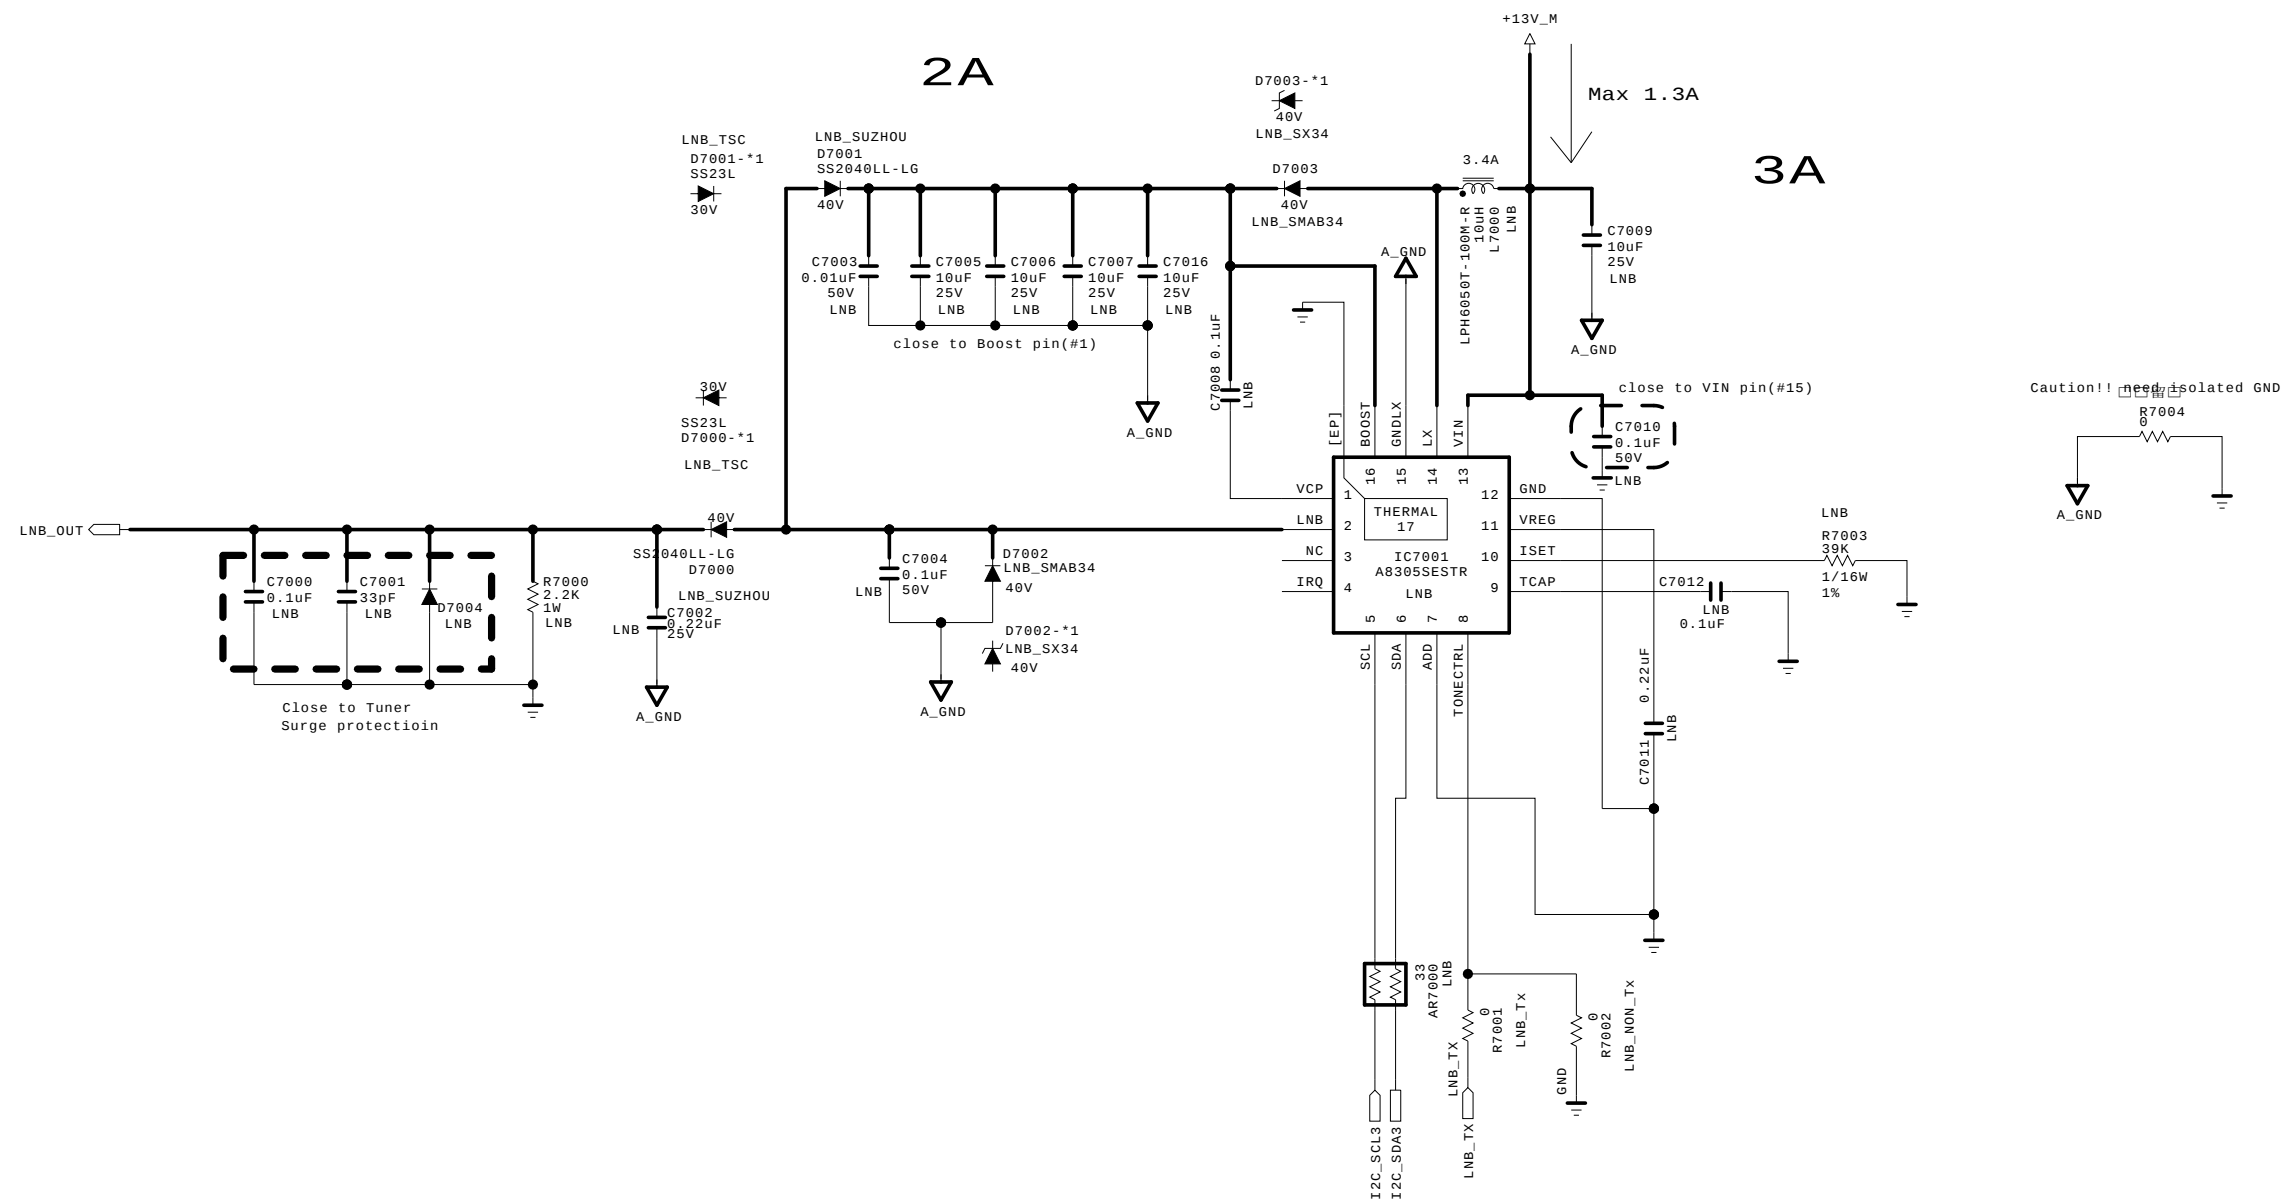


THE ⚠ SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES
 SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION.
 FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS
 ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR
 THE CRITICAL COMPONENTS IN THE ⚠ SYMBOL MARK OF THE SCHEMATIC.

SECRET

LG Electronics



MODEL	M16	DATE	2015.06.05
BLOCK	LNB	SHEET	70 / 100

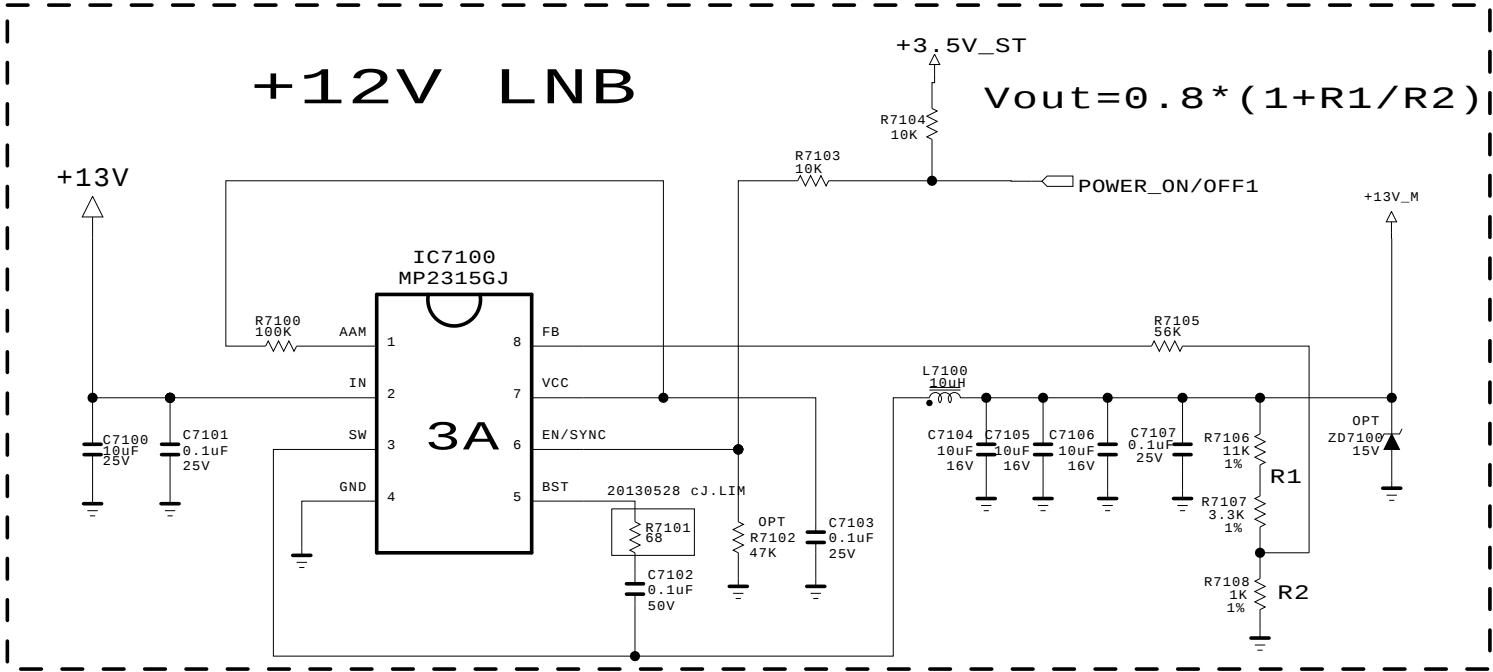


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics



MODEL	M16	DATE	2015.06.05
BLOCK	LNB	SHEET	70 / 100

RS-232C Control INTERFACE

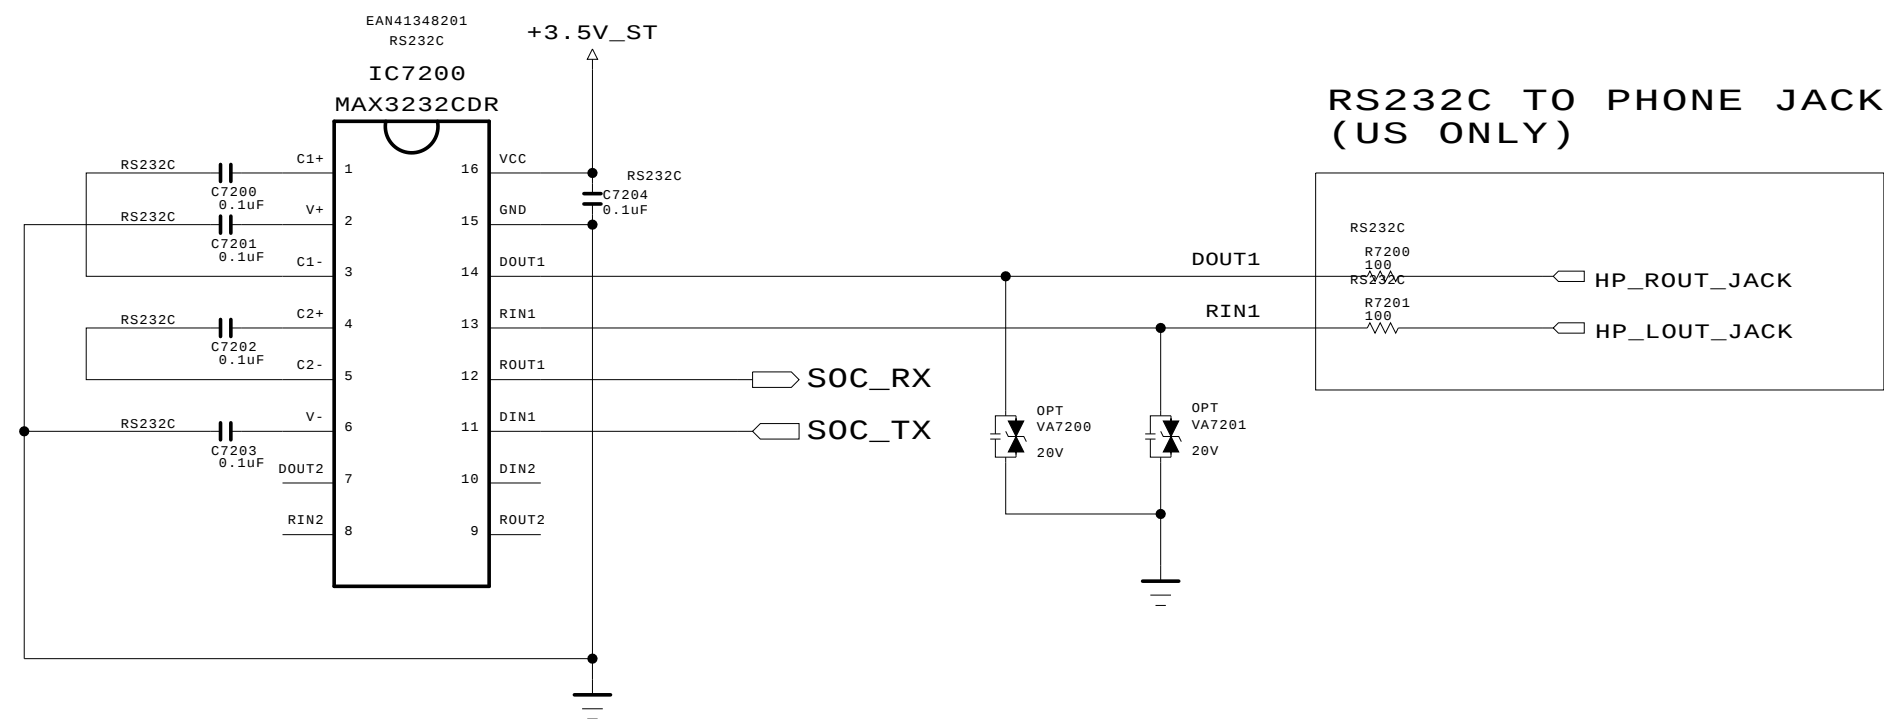

THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.



SECRET
LGElectronics




MODEL		DATE	15/06/13
BLOCK	RS232C	SHEET	/ 73

Non - Reverse

```
[51P Vx1
output wafer]
```

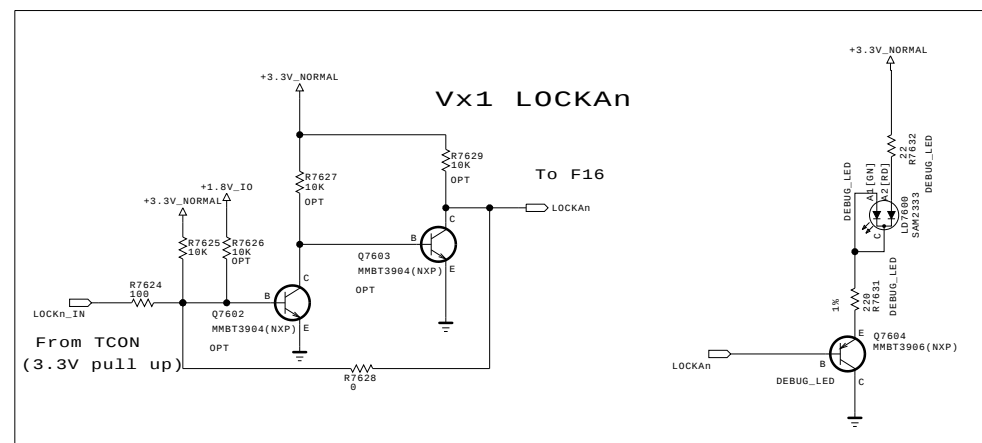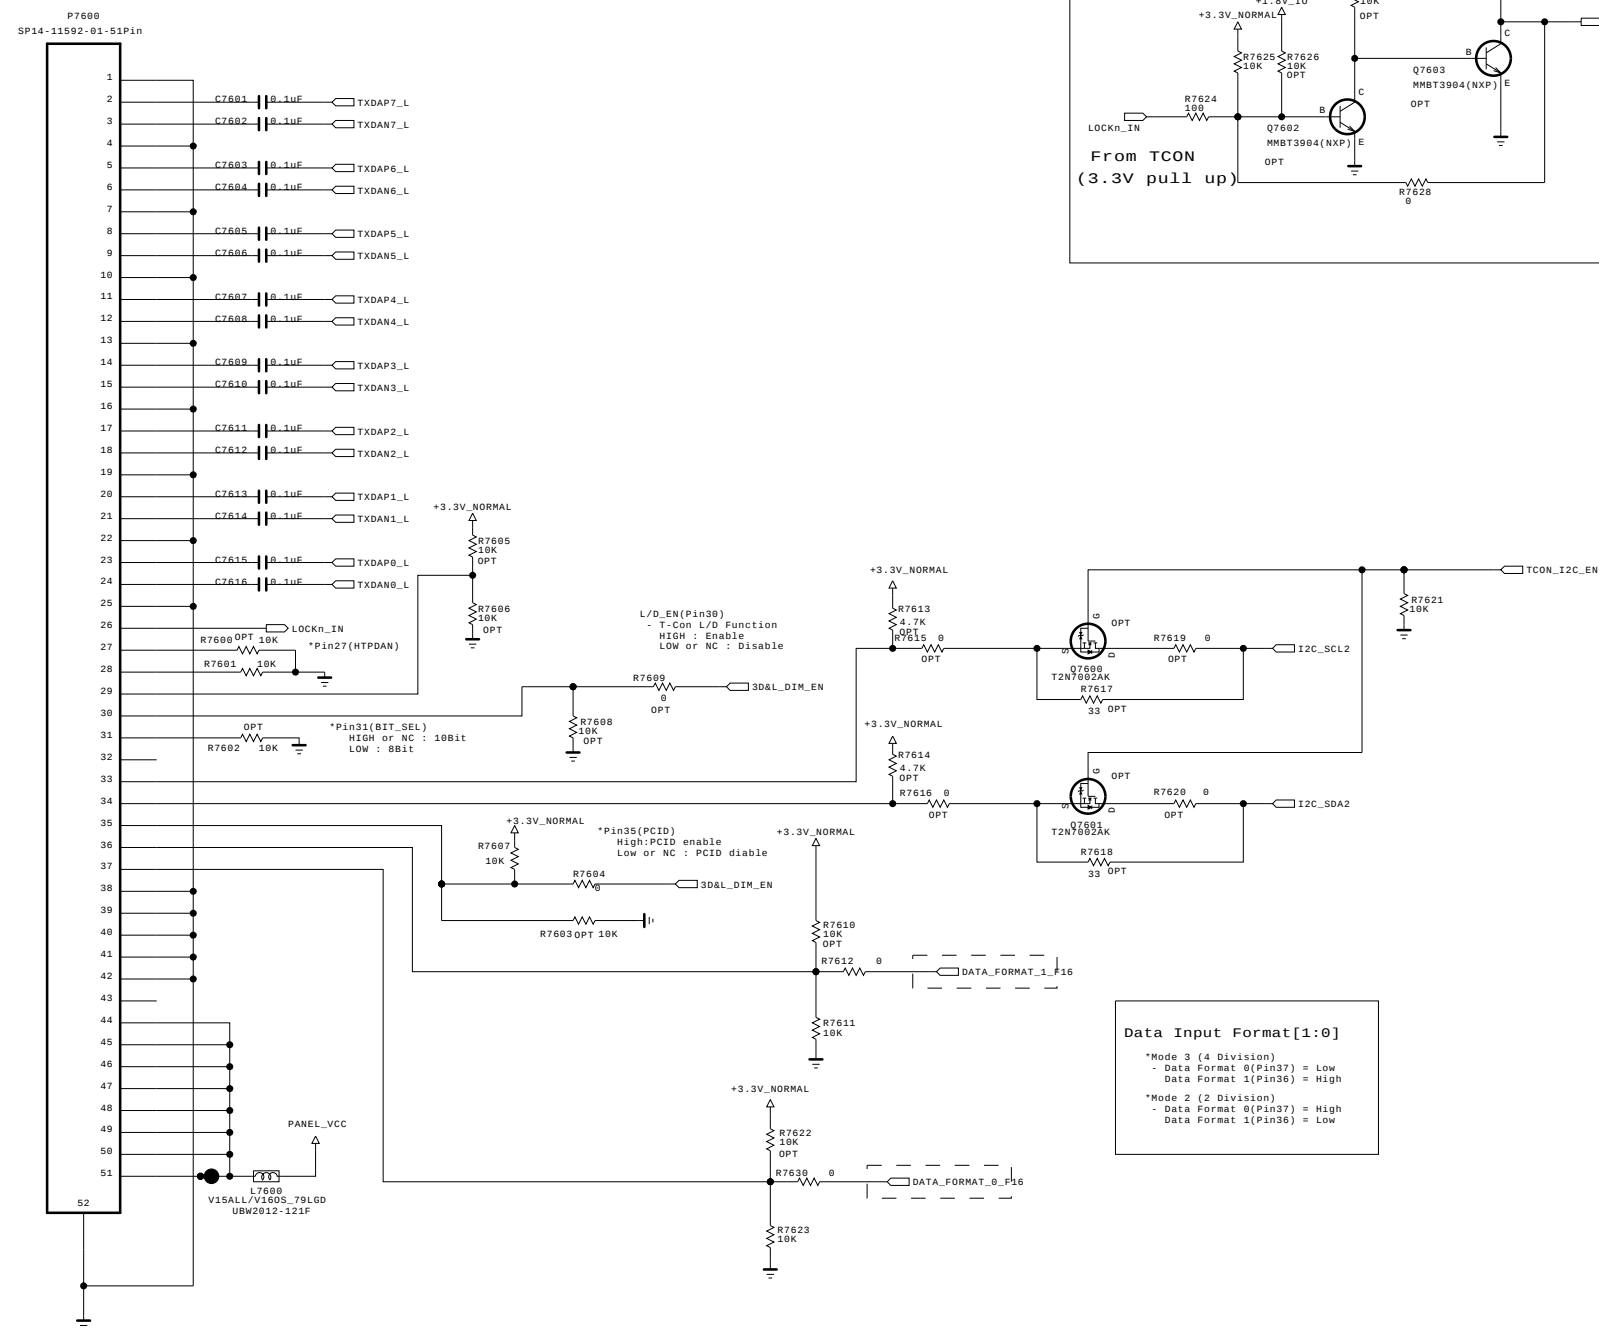

```
[41P Vx1
output wafer]
```

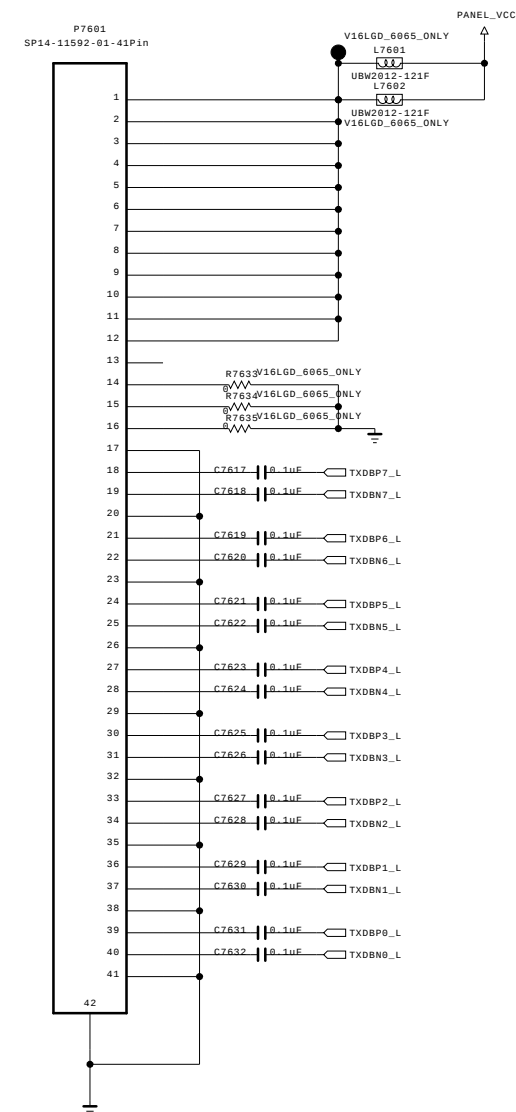


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET
G Electronics



MODEL	F16	DATE	2015.6.13
BI OFK	Output wafer	SHEET	76 / 100

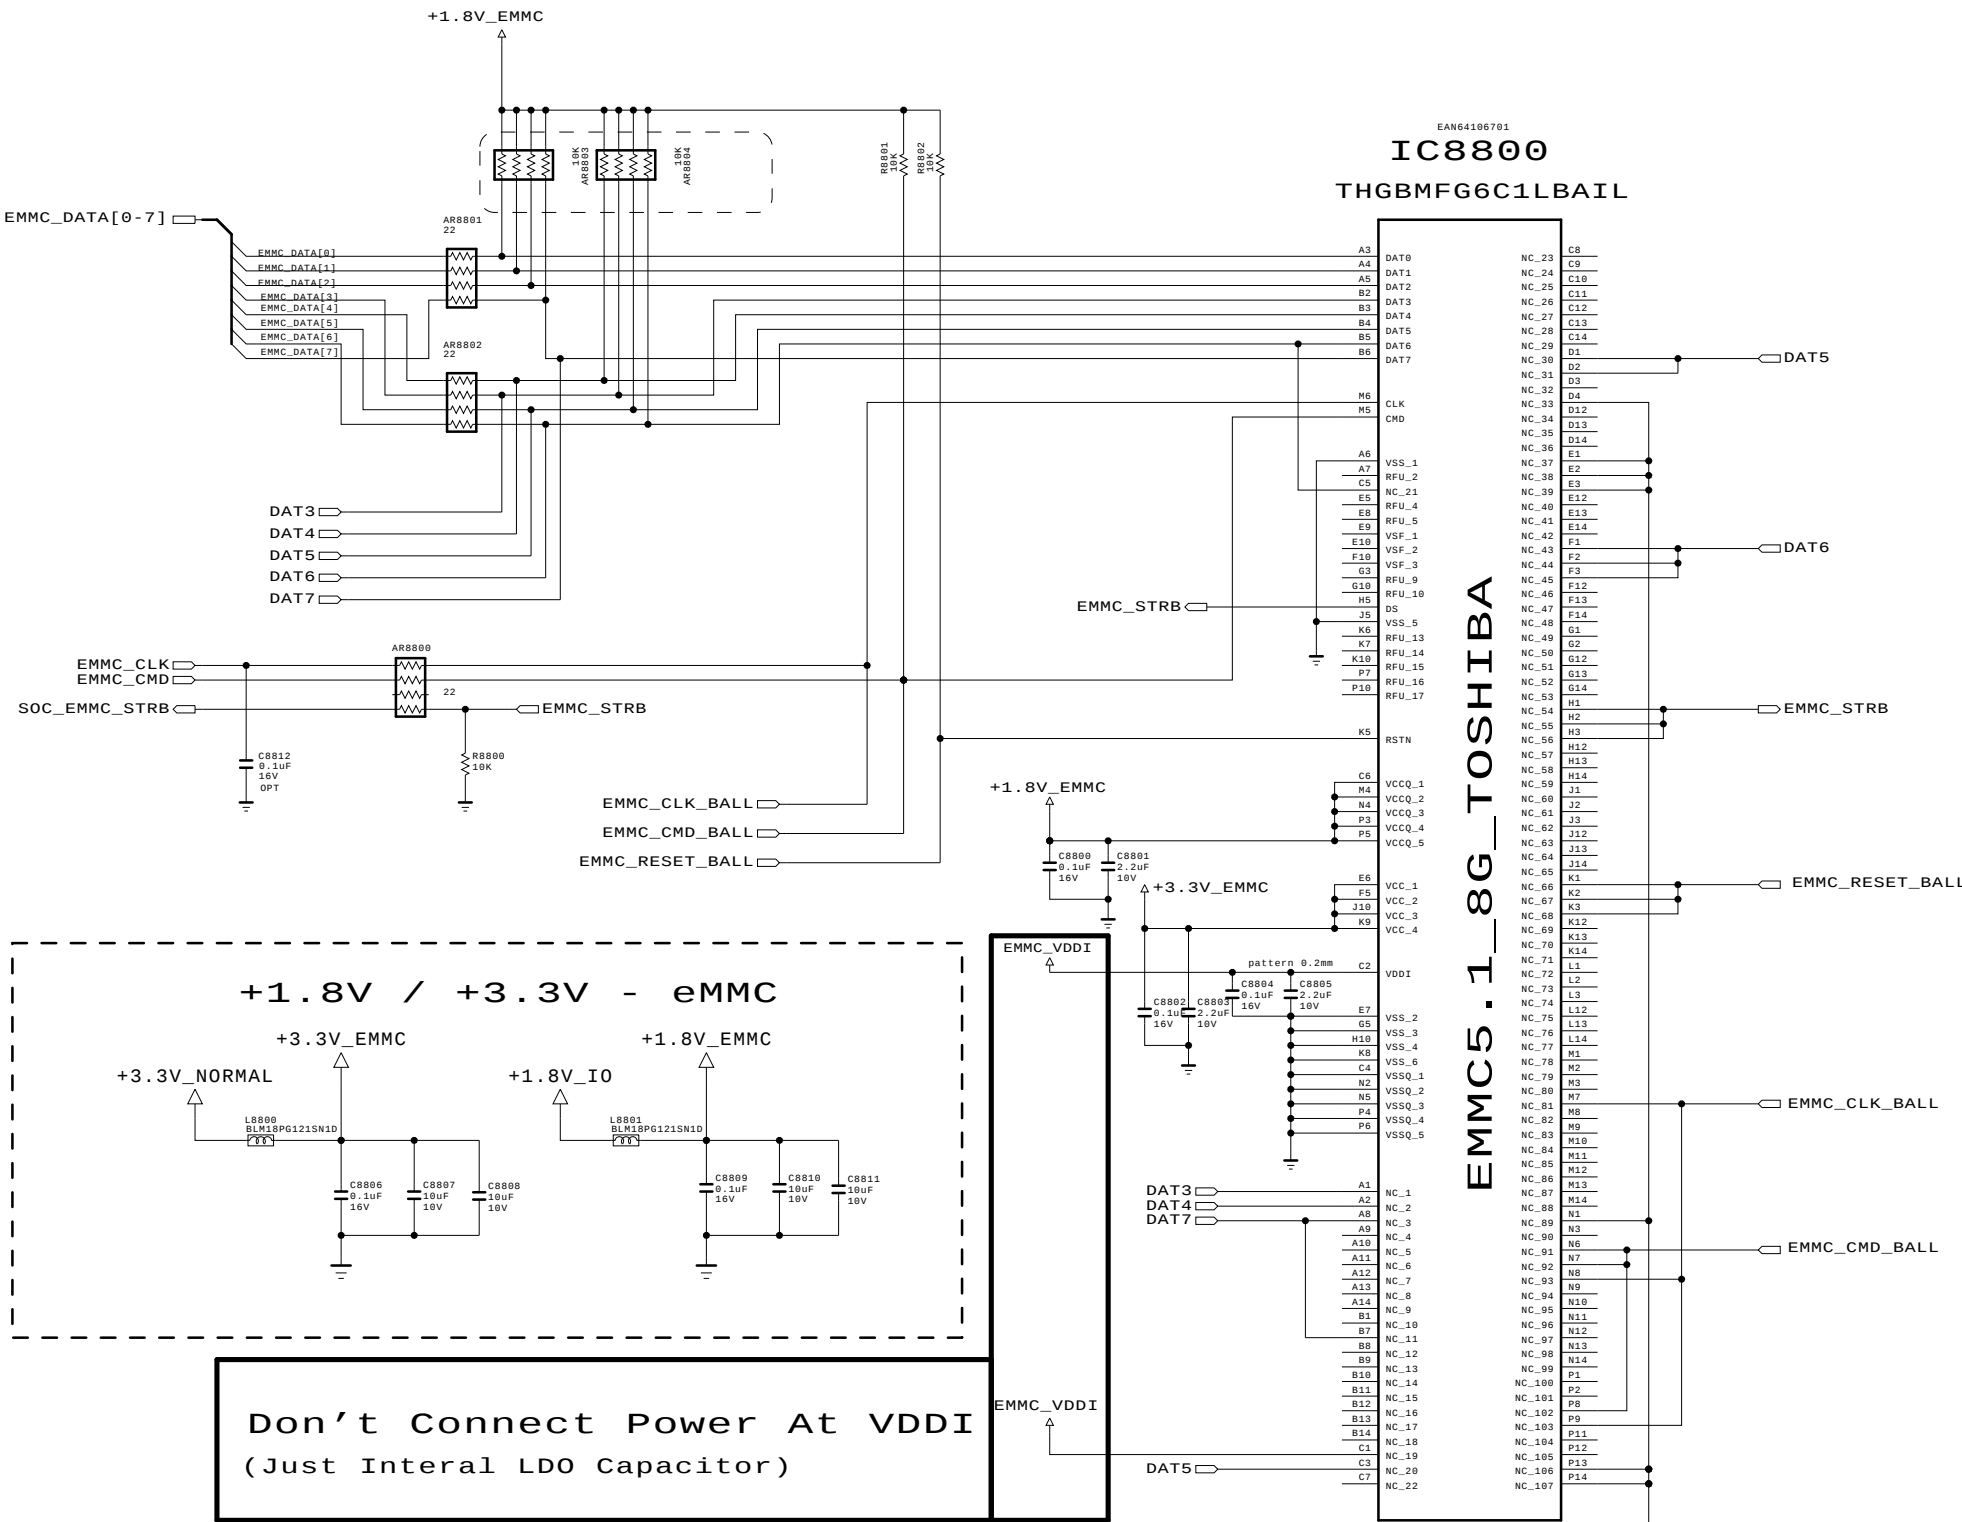



THE SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE SYMBOL MARK OF THE SCHEMATIC.

SECRET
LGElectronics




MODEL	M16	DATE	2015.02.09
BLOCK	eMMC 5.0	SHEET	26 / 26

081.sht

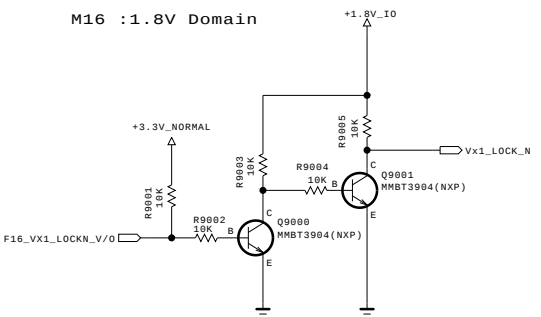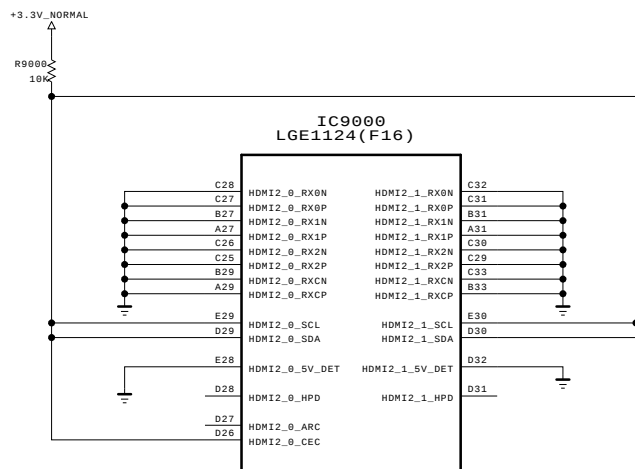

Vx1 Rx Vide
(8 lane)
From M16

Vx1 Rx OSD
(2 lane)
From M16

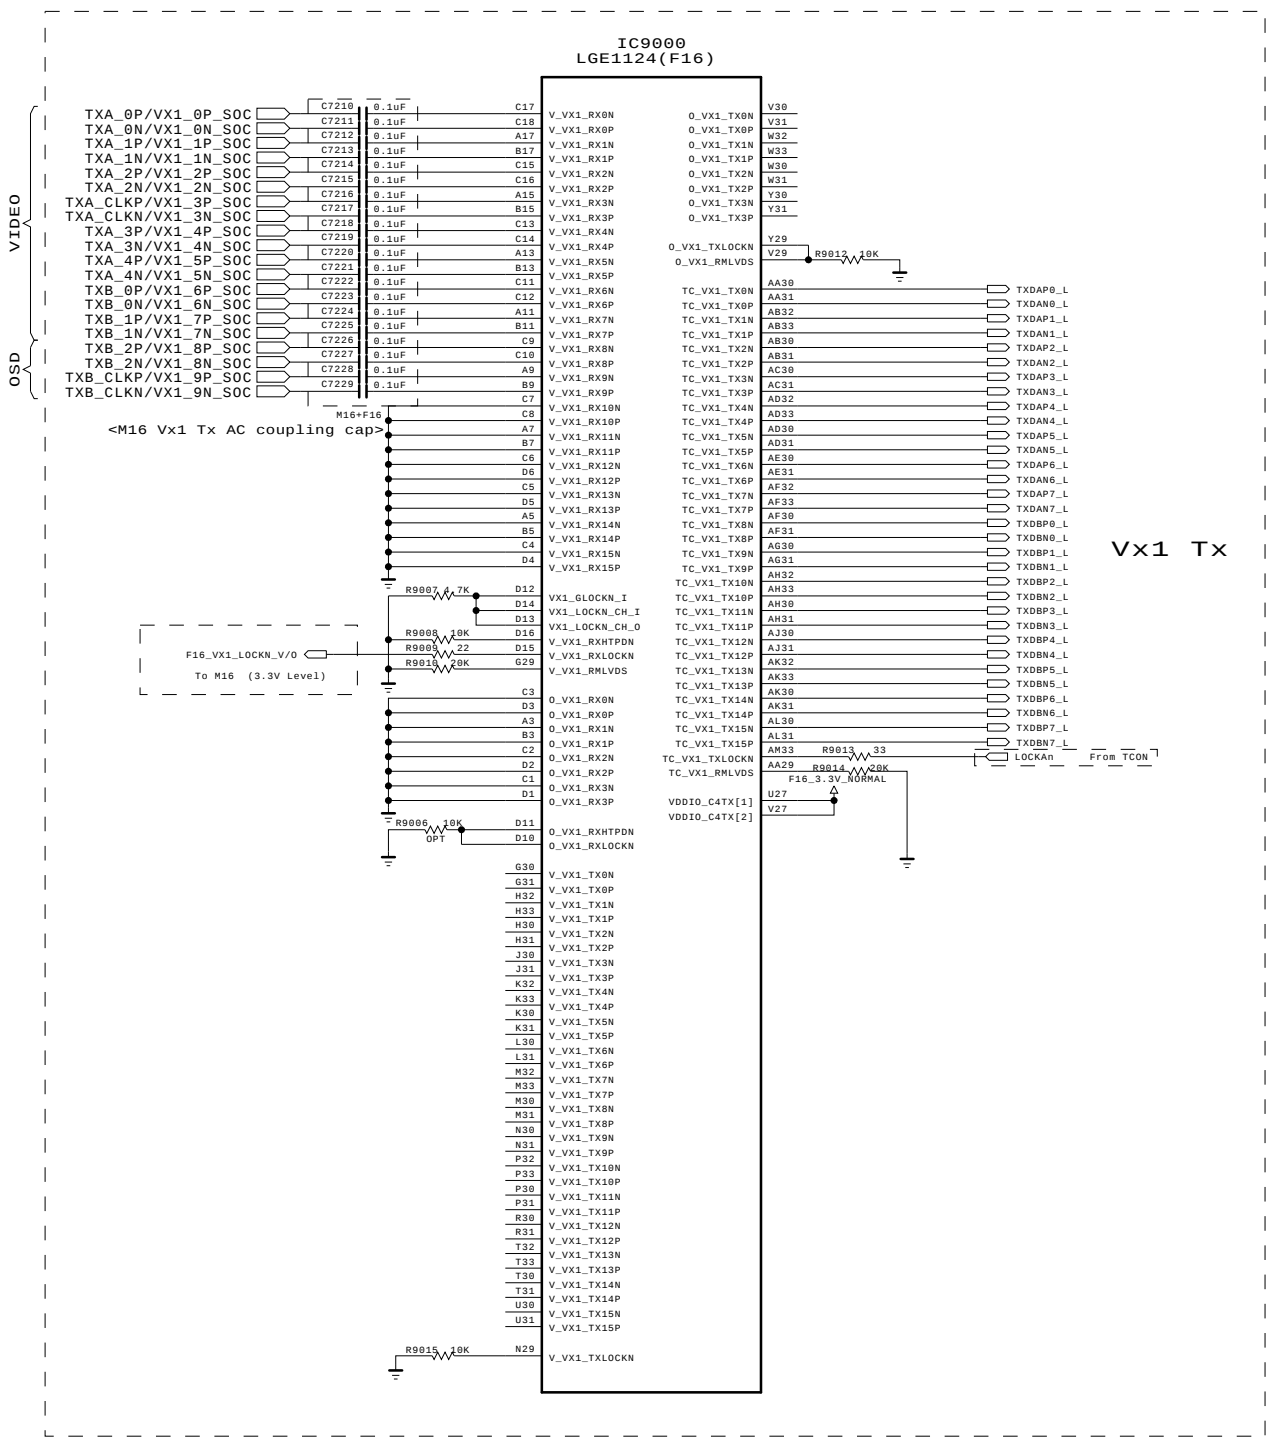


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.


SECRET
LGElectronics



MODEL		DATE	2015.4.27
BLOCK	Vx1, HDMI IF	SHEET	/



+0.9V F16 Core


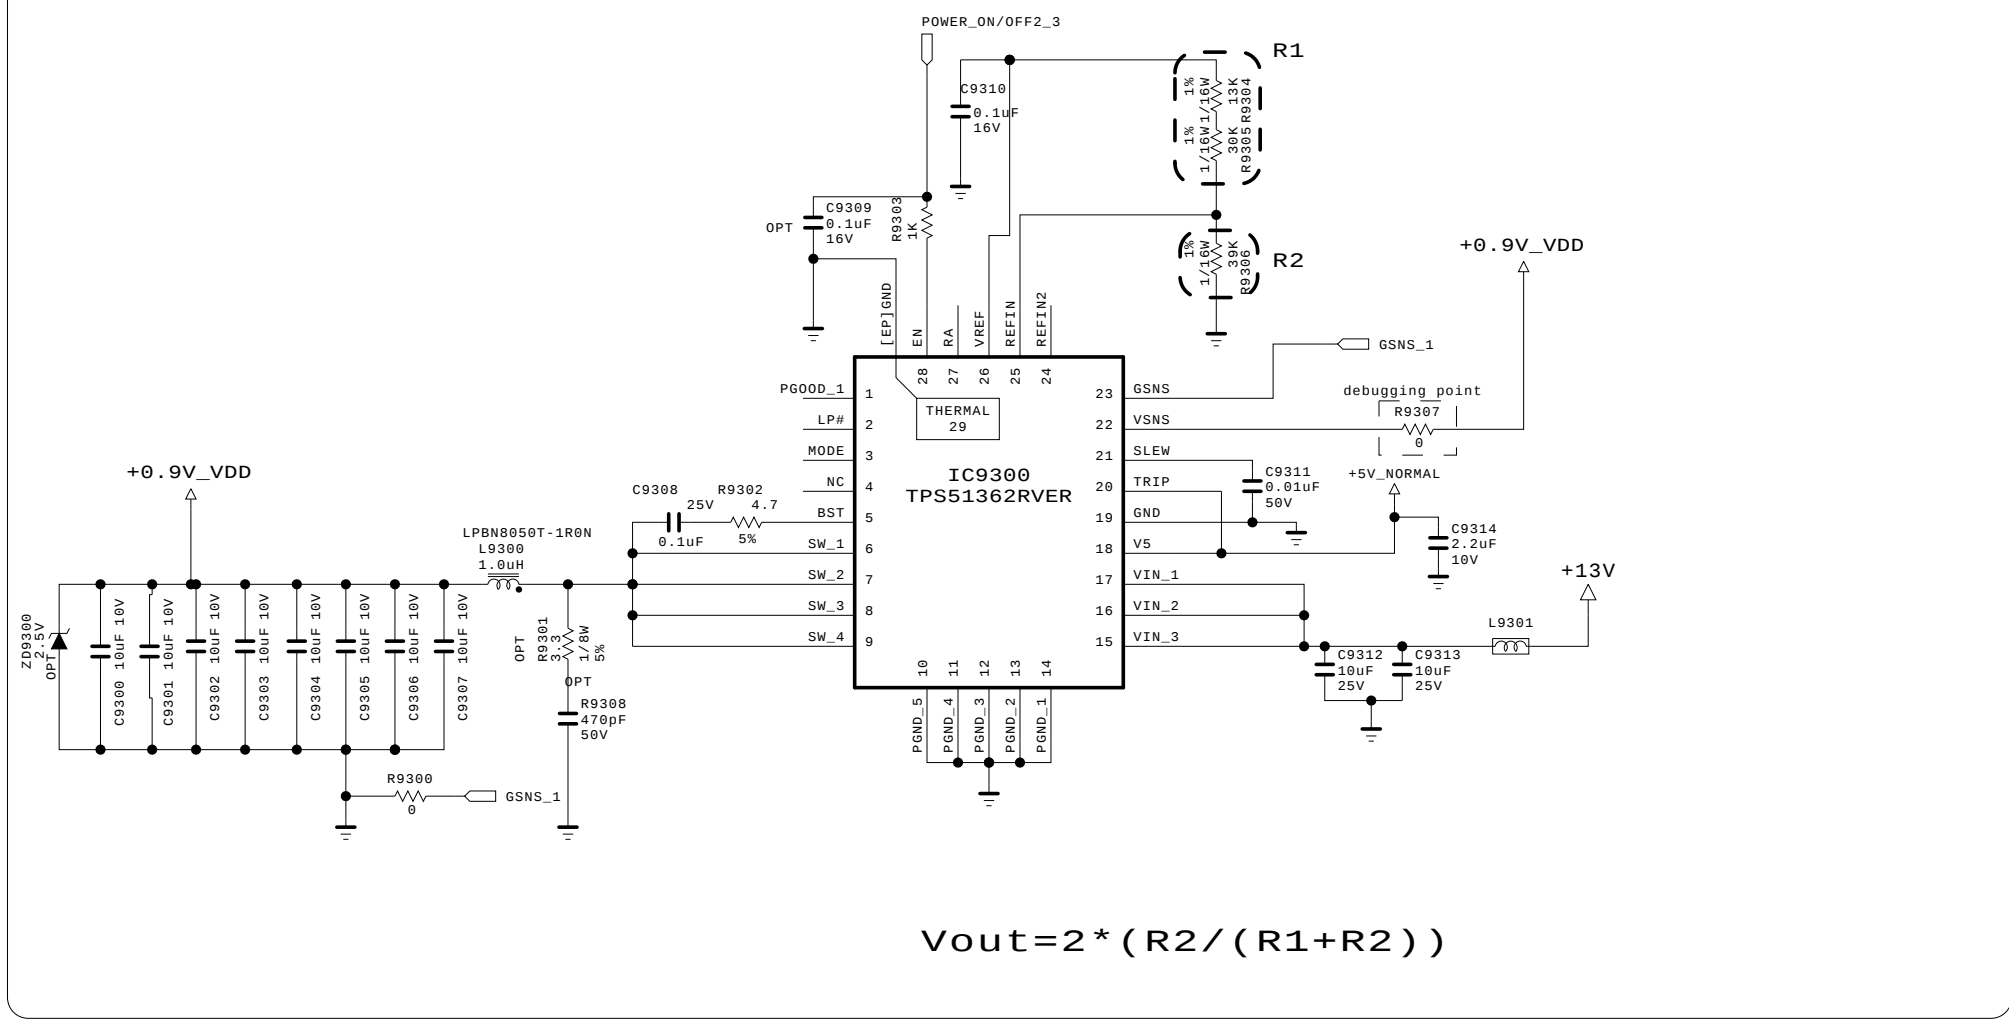


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET	 LG ELECTRONICS
LGElectronics	

MODEL	F16	DATE	2015.6.10
BLOCK	F16_0.9V Core	SHEET	93 / 100

+1.5V F16 DDR

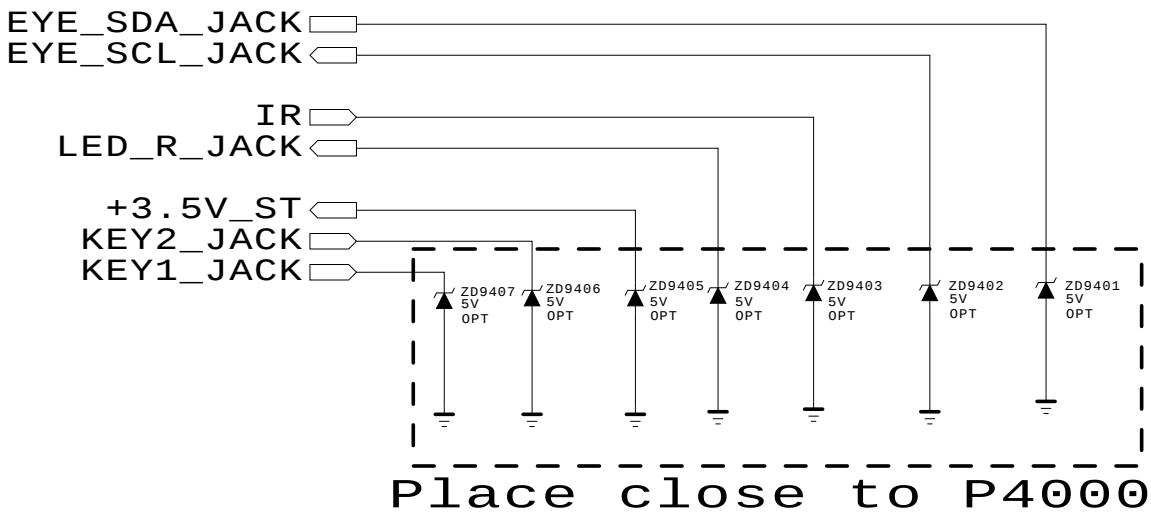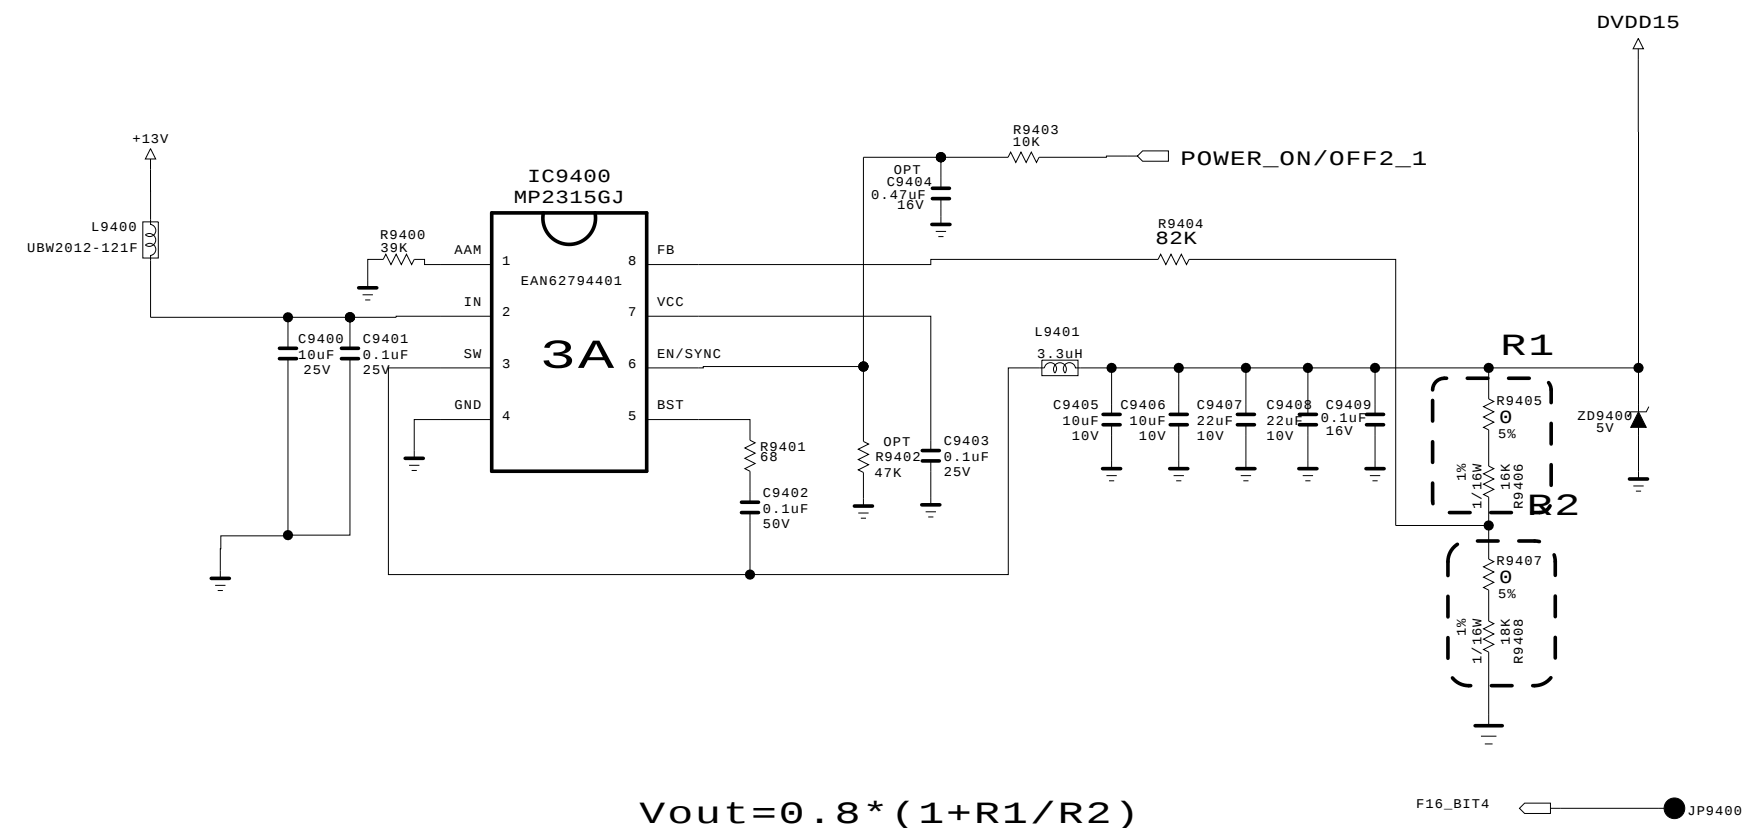


THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET

LGElectronics




 LG ELECTRONICS

MODEL	F16	DATE	2015.6.10
BLOCK	F16 1.5V_DDR	SHEET	94 / 100

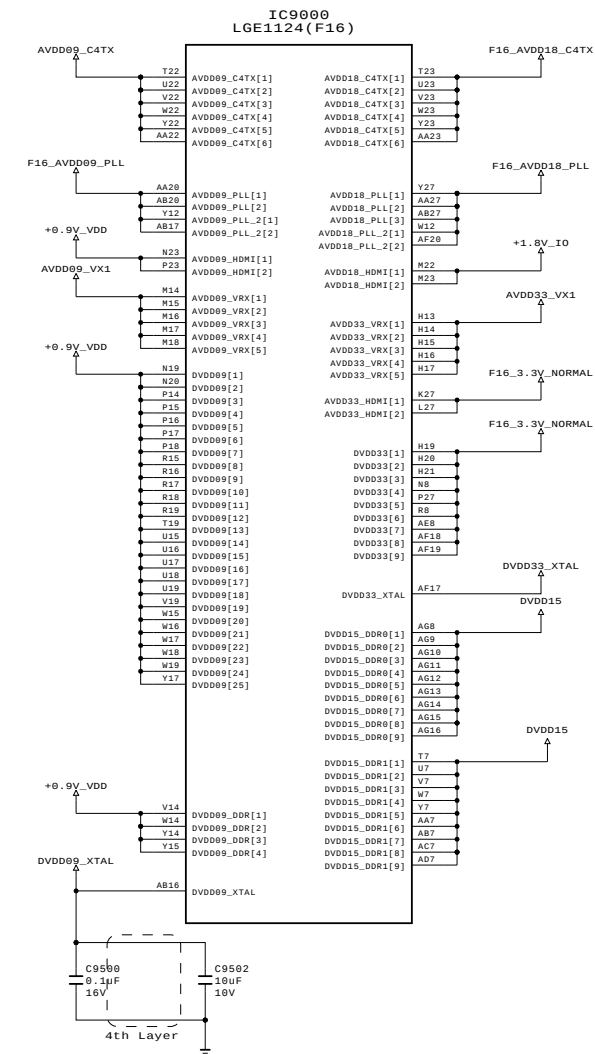

2. Power Off Sequence

1.5V -> 0.9V -> 1.8V -> 3.3V

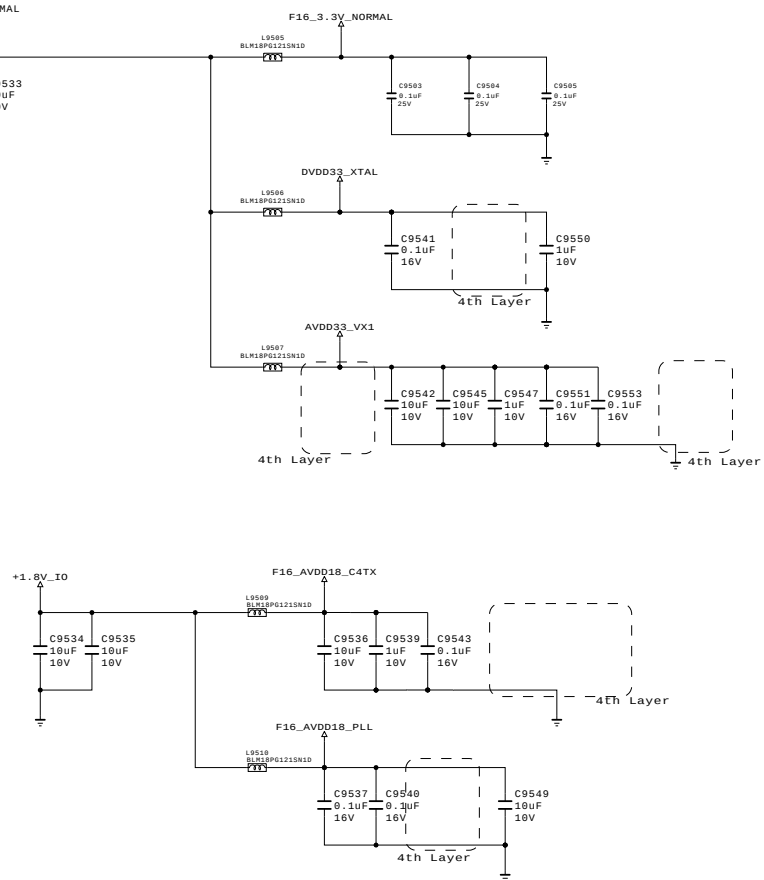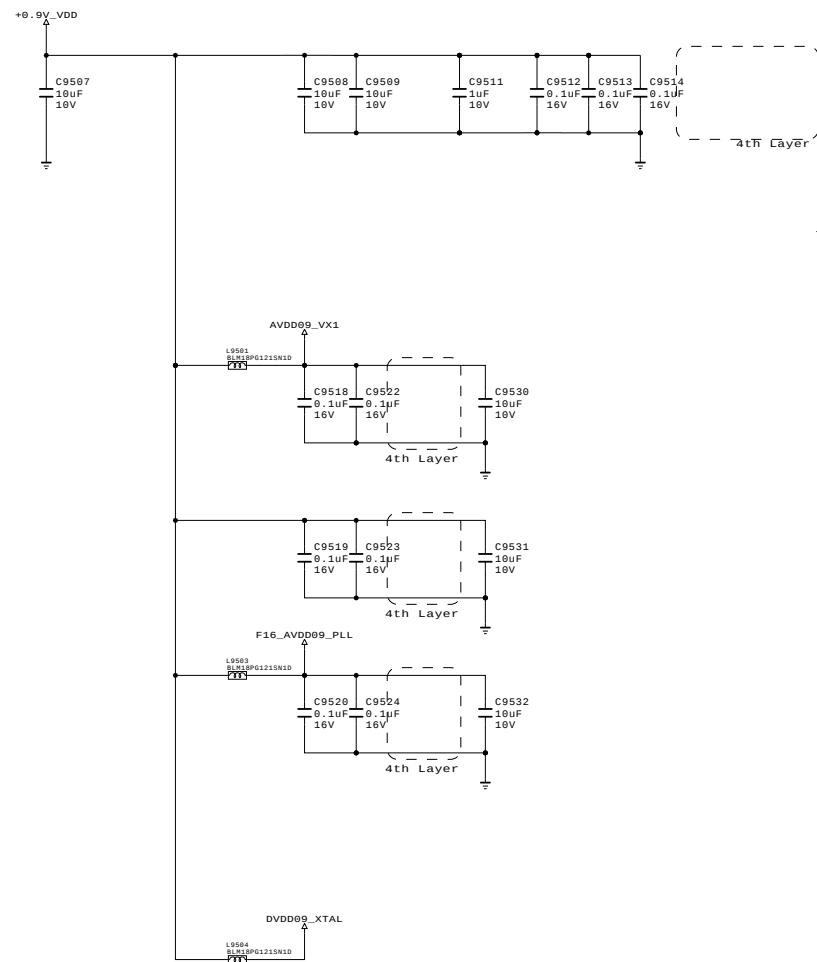

IC9000		LGE1124 (F16)		#optio	
D7	GND[1]			GND[156]	R23
D8	GND[2]			GND[157]	R27
D9	GND[3]			GND[158]	R29
D25	GND[4]			GND[159]	T6
D33	GND[5]			GND[160]	T12
E5	GND[6]			GND[161]	T8
E6	GND[7]			GND[162]	T13
E7	GND[8]			GND[163]	T14
E8	GND[9]			GND[164]	T15
E9	GND[10]			GND[165]	T16
E11	GND[11]			GND[166]	T17
E12	GND[12]			GND[167]	T18
E13	GND[13]			GND[168]	T20
E14	GND[14]			GND[169]	T21
E15	GND[15]			GND[170]	T27
E16	GND[16]			GND[171]	T28
E26	GND[17]			GND[172]	T29
E27	GND[18]			GND[173]	U6
E31	GND[19]			GND[174]	U8
E32	GND[20]			GND[175]	U12
E33	GND[21]			GND[176]	U13
F5	GND[22]			GND[177]	U14
F6	GND[23]			GND[178]	U26
F7	GND[24]			GND[179]	U28
F8	GND[25]			GND[180]	U29
F9	GND[26]			GND[181]	U29
F16	GND[27]			GND[182]	V6
F11	GND[28]			GND[183]	V8
F12	GND[29]			GND[184]	V12
F13	GND[30]			GND[185]	V13
F14	GND[31]			GND[186]	V15
F15	GND[32]			GND[187]	V16
F16	GND[33]			GND[188]	V17
F26	GND[34]			GND[189]	V18
F27	GND[35]			GND[190]	V21
F28	GND[36]			GND[191]	V28
F29	GND[37]			GND[192]	V28
F30	GND[38]			GND[193]	W6
F39	GND[39]			GND[194]	W8
F31	GND[40]			GND[195]	W8
G5	GND[41]			GND[196]	W20
G6	GND[42]			GND[197]	W21
G7	GND[43]			GND[198]	W27
G8	GND[44]			GND[199]	W29
G9	GND[45]			GND[200]	W29
G10	GND[46]			GND[201]	Y6
G11	GND[47]			GND[202]	Y8
G12	GND[48]			GND[203]	Y8
G13	GND[49]			GND[204]	Y10
G14	GND[50]			GND[205]	Y18
G15	GND[51]			GND[206]	Y19
G16	GND[52]			GND[207]	Y20
G17	GND[53]			GND[208]	Y21
G18	GND[54]			GND[209]	Y28
G19	GND[55]			GND[210]	Y28
G20	GND[56]			GND[211]	Y28
G21	GND[57]			GND[212]	Y28
G22	GND[58]			GND[213]	Y28
G23	GND[59]			GND[214]	Y28
G24	GND[60]			GND[215]	Y28
G25	GND[61]			GND[216]	Y28
G26	GND[62]			GND[217]	Y28
G27	GND[63]			GND[218]	Y28
G28	GND[64]			GND[219]	Y28
H3	GND[65]			GND[220]	Y28
H4	GND[66]			GND[221]	Y28
H5	GND[67]			GND[222]	Y28
H6	GND[68]			GND[223]	Y28
H7	GND[69]			GND[224]	Y28
H8	GND[70]			GND[225]	Y28
H9	GND[71]			GND[226]	Y28
H10	GND[72]			GND[227]	Y28
H11	GND[73]			GND[228]	Y28
H12	GND[74]			GND[229]	Y28
H13	GND[75]			GND[230]	Y28
H14	GND[76]			GND[231]	Y28
H15	GND[77]			GND[232]	Y28
H16	GND[78]			GND[233]	Y28
H17	GND[79]			GND[234]	Y28
H18	GND[80]			GND[235]	Y28
H19	GND[81]			GND[236]	Y28
H20	GND[82]			GND[237]	Y28
H21	GND[83]			GND[238]	Y28
H22	GND[84]			GND[239]	Y28
H23	GND[85]			GND[240]	Y28
H24	GND[86]			GND[241]	Y28
H25	GND[87]			GND[242]	Y28
H26	GND[88]			GND[243]	Y28
H27	GND[89]			GND[244]	Y28
H28	GND[90]			GND[245]	Y28
H29	GND[91]			GND[246]	Y28
H30	GND[92]			GND[247]	Y28
H31	GND[93]			GND[248]	Y28
H32	GND[94]			GND[249]	Y28
H33	GND[95]			GND[250]	Y28
H34	GND[96]			GND[251]	Y28
H35	GND[97]			GND[252]	Y28
H36	GND[98]			GND[253]	Y28
H37	GND[99]			GND[254]	Y28
H38	GND[100]			GND[255]	Y28
H39	GND[101]			GND[256]	Y28
H40	GND[102]			GND[257]	Y28
H41	GND[103]			GND[258]	Y28
H42	GND[104]			GND[259]	Y28
H43	GND[105]			GND[260]	Y28
H44	GND[106]			GND[261]	Y28
H45	GND[107]			GND[262]	Y28
H46	GND[108]			GND[263]	Y28
H47	GND[109]			GND[264]	Y28
H48	GND[110]			GND[265]	Y28
H49	GND[111]			GND[266]	Y28
H50	GND[112]			GND[267]	Y28
H51	GND[113]			GND[268]	Y28
H52	GND[114]			GND[269]	Y28
H53	GND[115]			GND[270]	Y28
H54	GND[116]			GND[271]	Y28
H55	GND[117]			GND[272]	Y28
H56	GND[118]			GND[273]	Y28
H57	GND[119]			GND[274]	Y28
H58	GND[120]			GND[275]	Y28
H59	GND[121]			GND[276]	Y28
H60	GND[122]			GND[277]	Y28
H61	GND[123]			GND[278]	Y28
H62	GND[124]			GND[279]	Y28
H63	GND[125]			GND[280]	Y28
H64	GND[126]			GND[281]	Y28
H65	GND[127]			GND[282]	Y28
H66	GND[128]			GND[283]	Y28
H67	GND[129]			GND[284]	Y28
H68	GND[130]			GND[285]	Y28
H69	GND[131]			GND[286]	Y28
H70	GND[132]			GND[287]	Y28
H71	GND[133]			GND[288]	Y28
H72	GND[134]			GND[289]	Y28
H73	GND[135]			GND[290]	Y28
H74	GND[136]			GND[291]	Y28
H75	GND[137]			GND[292]	Y28
H76	GND[138]			GND[293]	Y28
H77	GND[139]			GND[294]	Y28
H78	GND[140]			GND[295]	Y28
H79	GND[141]			GND[296]	Y28
H80	GND[142]			GND[297]	Y28
H81	GND[143]			GND[298]	Y28
H82	GND[144]			GND[299]	Y28
H83	GND[145]			GND[300]	Y28
H84	GND[146]			GND[301]	Y28
H85	GND[147]			GND[302]	Y28
H86	GND[148]			GND[303]	Y28
H87	GND[149]			GND[304]	Y28
H88	GND[150]			GND[305]	Y28
H89	GND[151]			GND[306]	Y28
H90	GND[152]			GND[307]	Y28
H91	GND[153]			GND[308]	Y28
H92	GND[154]			GND[309]	Y28
H93	GND[155]			GND[310]	Y28


SECRET
LGElectronics



MODEL	F16	DATE	2015.6.13
BLOCK	F16 Power	SHEET	95 / 100

F16 AVDD09_C4TX

Sheet separation
Vx1 : 96_00
EPI : 96_01

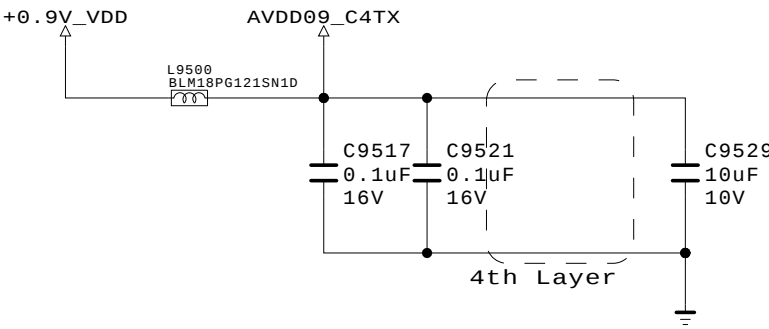

THE  SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION. FIRE AND ELECTRICAL SHOCK HAZARDS, WHEN SERVICING IF IS ESSENTIAL THAT ONLY MANUFACTURES SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE  SYMBOL MARK OF THE SCHEMATIC.

SECRET	 LG ELECTRONICS	MODEL	M16	DATE	2015.09.22
LGElectronics		BLOCK	F16 AVDD09_C4TX	SHEET	/



TROUBLE SHOOTING GUIDE


Contents of Standard Repair Process

No.	Error symptom (High category)	Error symptom (Mid category)	Page	Remarks
1	A. Video error	No video/Normal audio	1	
2		No video/No audio	2	
3		Picture broken/ Freezing	3	
4		Color error	4	
5		Vertical/Horizontal bar, residual image, light spot, external device color error	5	
6	B. Power error	No power	6	
7		Off when on, off while viewing, power auto on/off	7	
8	C. Audio error	No audio/Normal video	8	
9		Wrecked audio/discontinuation/noise	9	
10	D. Function error	Remote control & Local switch checking	10	
11		MR15R operating checking	11	
12		Wifi operating checking	12	
13		Camera operating checking	13	
14		External device recognition error	14	
15	E. Noise	Circuit noise, mechanical noise	15	
16	F. Exterior error	Exterior defect	16	

First of all, Check whether there is SVC Bulletin in GSCS System for these model.

	Error symptom	A. Video error	Established date		
		No video/ Normal audio	Revised date		1/16


First of all, Check whether all of cables between board is inserted properly or not.
(Main B/D↔ Power B/D, Vx1/EPI Cable, Speaker Cable, IR B/D Cable,,,))

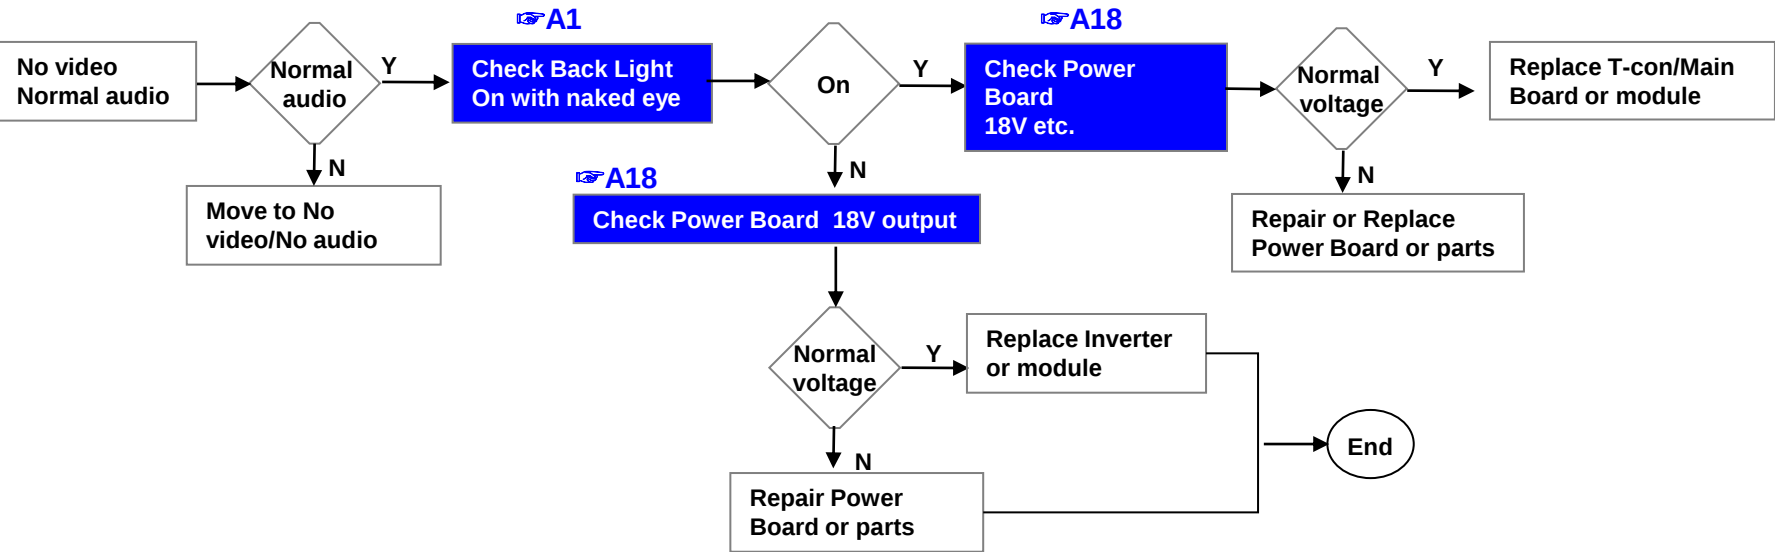

※Precaution A4 & A2



	Error symptom	A. Video error	Established date		
		No video/ No audio	Revised date		2/16

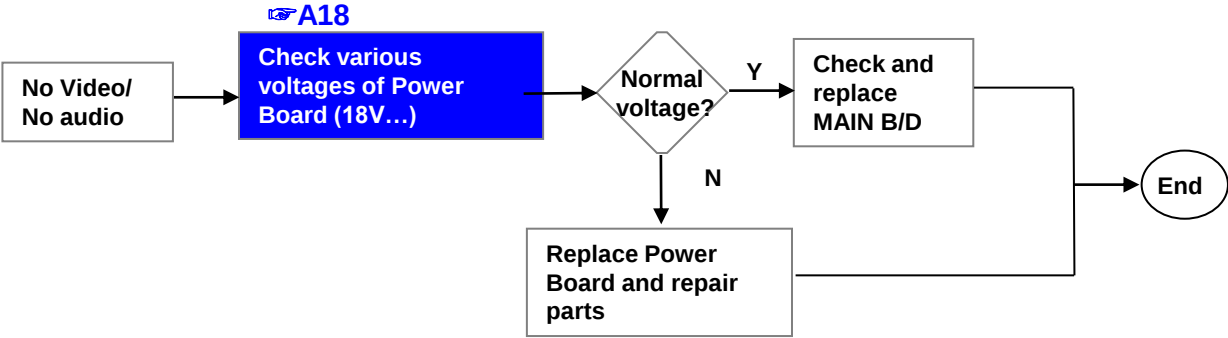


	Error symptom	A. Video error	Established date		
		Picture broken/ Freezing	Revised date		3/16


👉 A3

Check RF Signal level

- . By using Digital signal level meter
- . By using Diagnostics menu on OSD
(All Settings → Programmes → Programmes Tuning & Settings → Manual Tuning → Check the Signal)
- Signal strength (Normal : over 50%)
- Signal Quality (Normal: over 50%)

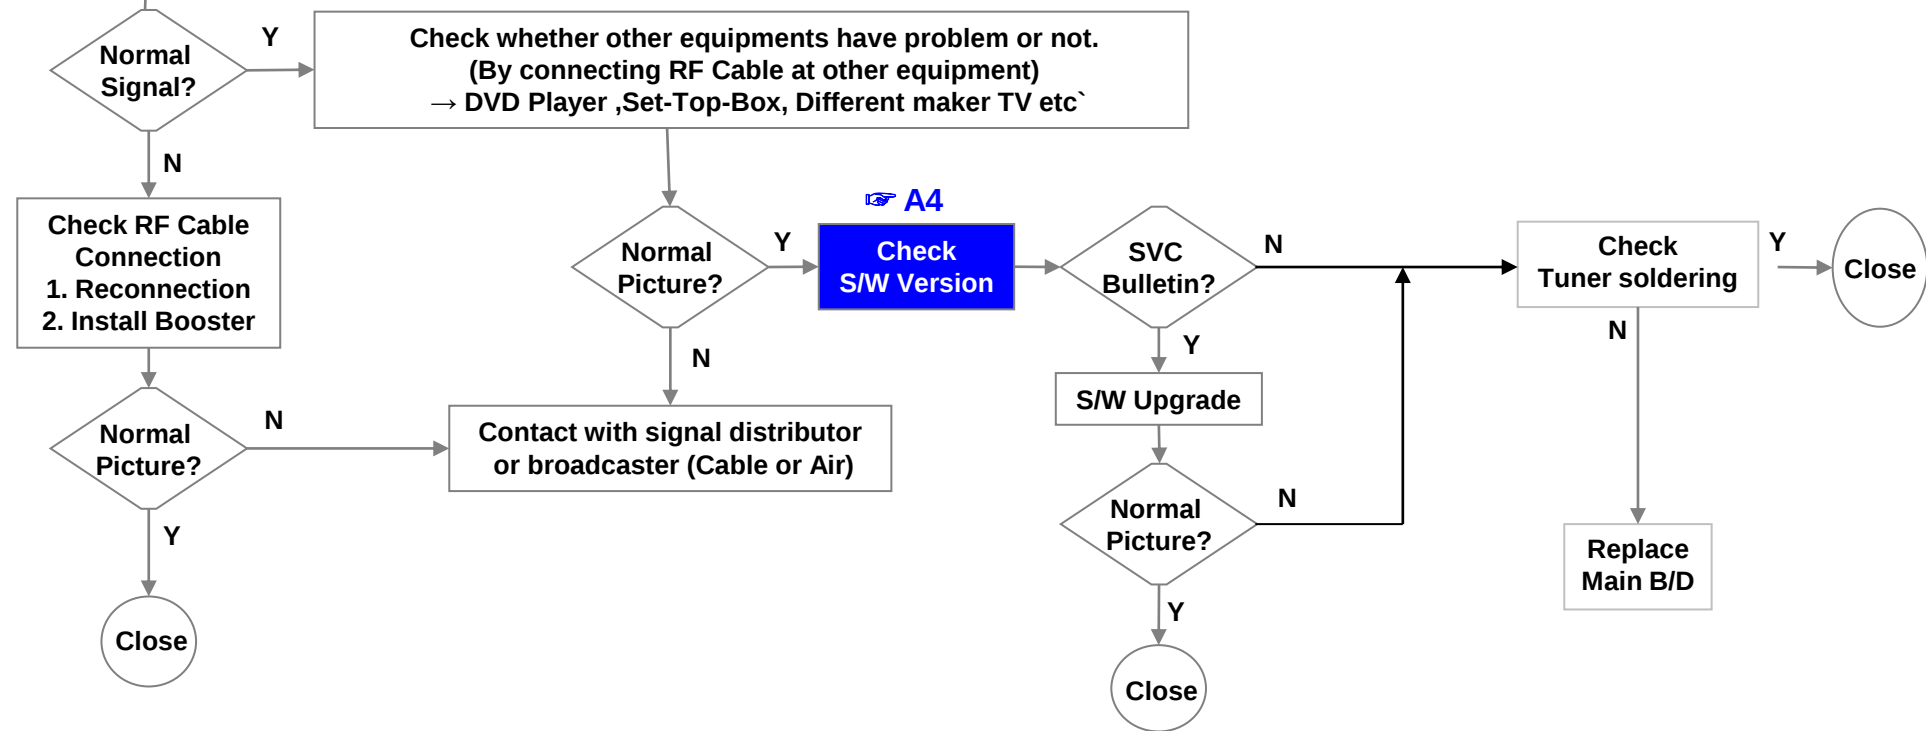


	Error symptom	A. Video error	Established date		
		Color error	Revised date		4/16

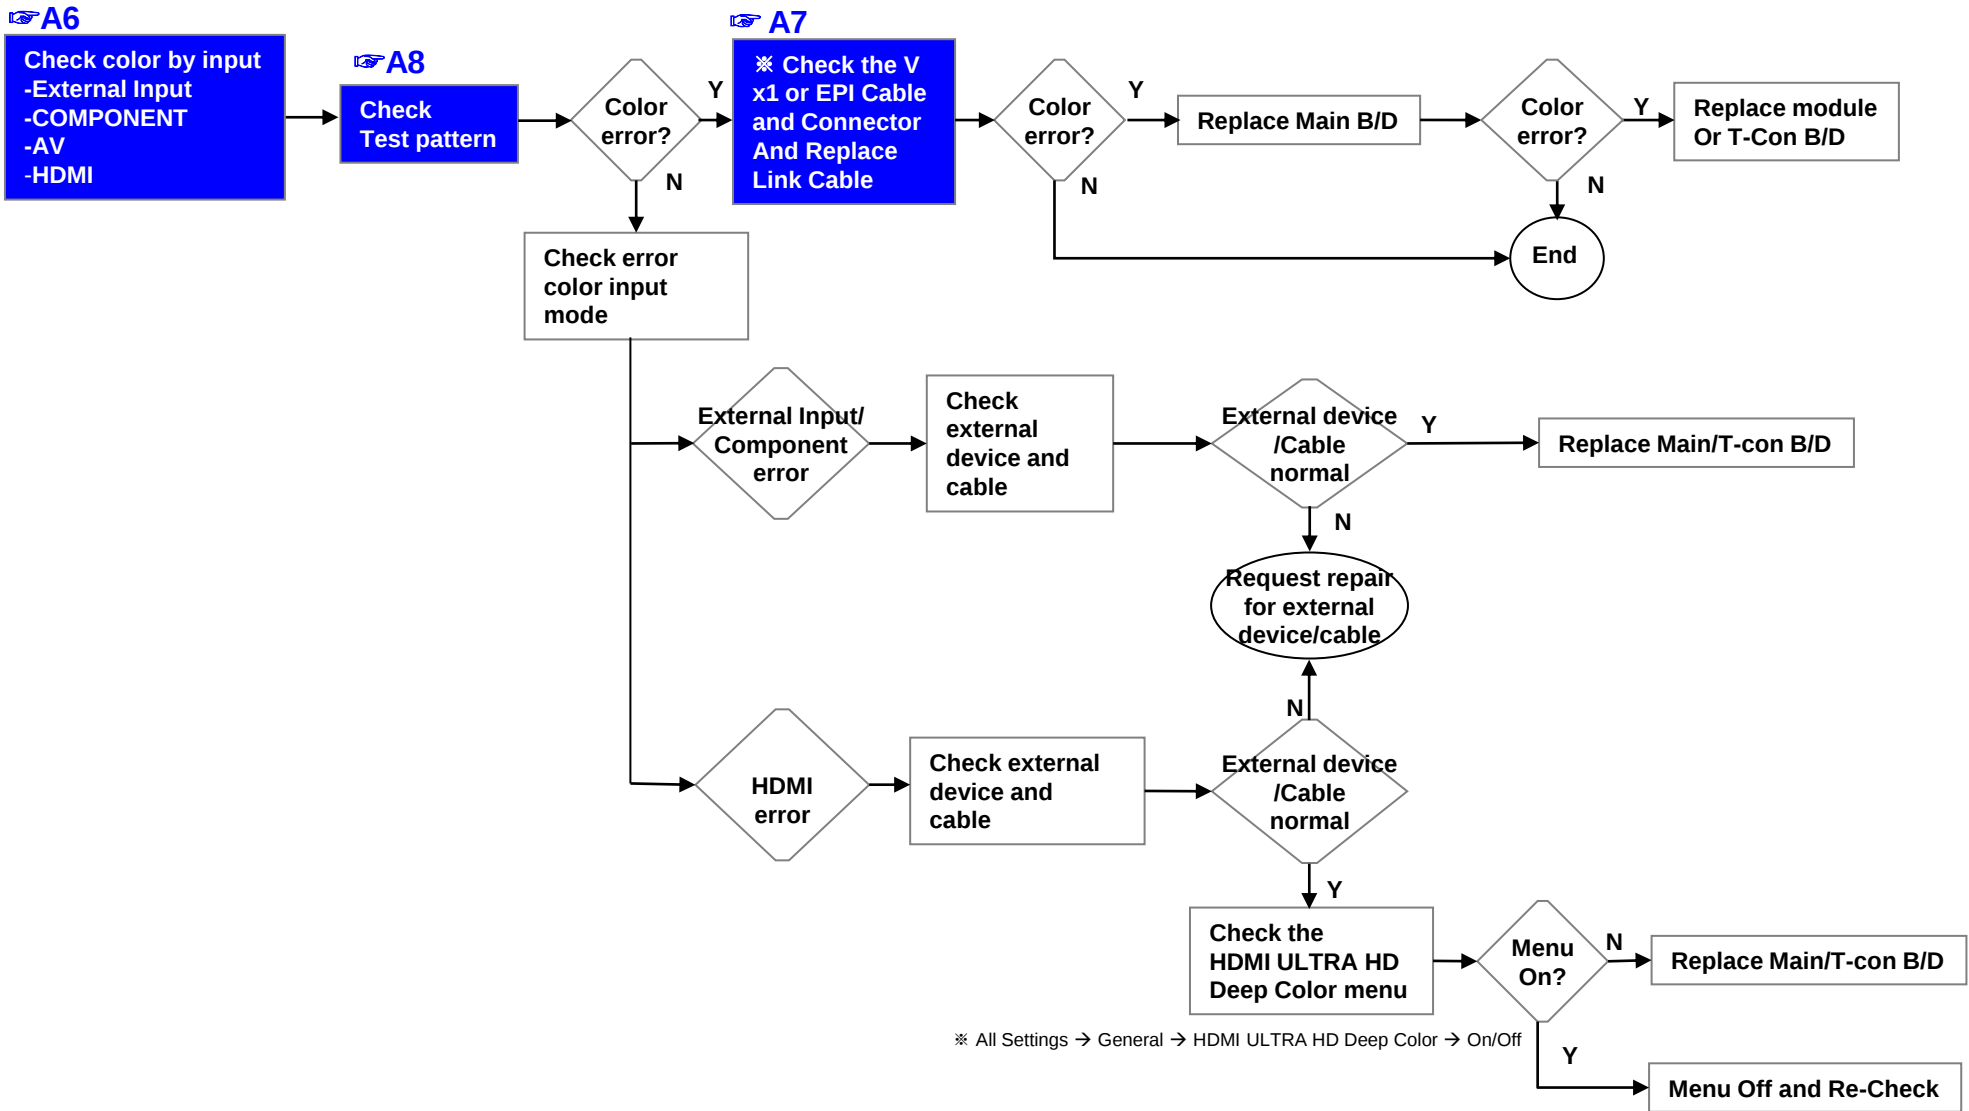


	Error symptom	A. Video error	Established date		
		Vertical / Horizontal bar, residual image, light spot, external device color error	Revised date		5/16


Vertical/Horizontal bar, residual image, light spot

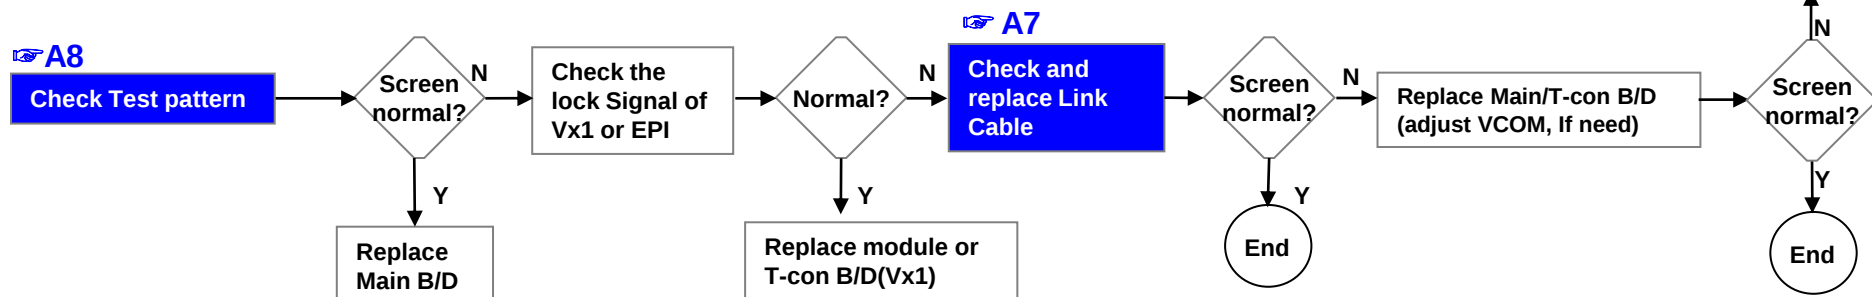


External device screen error-Color error

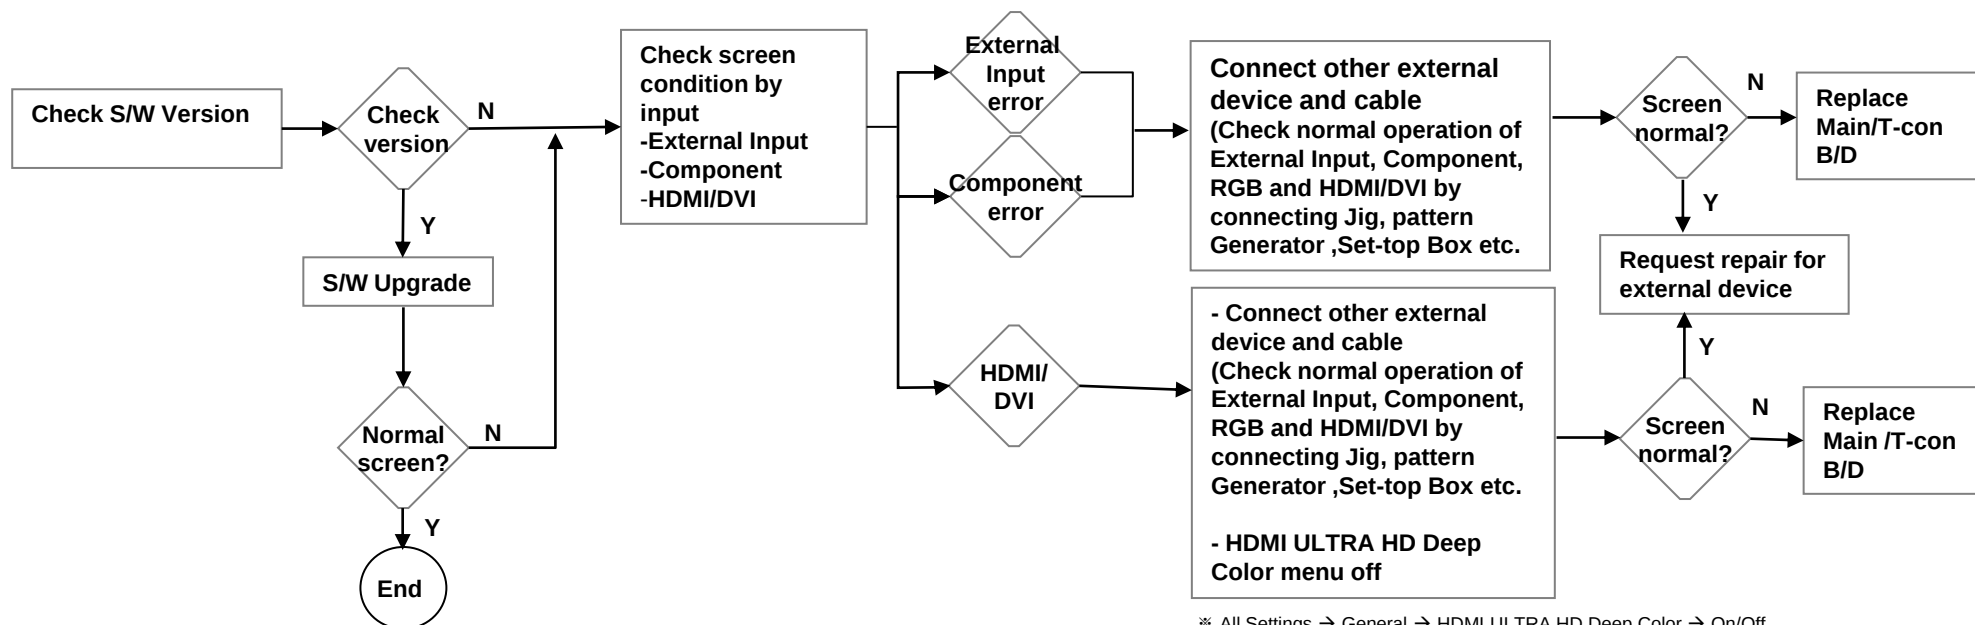

	Error symptom	B. Power error	Established date		
		No power	Revised date		6/16

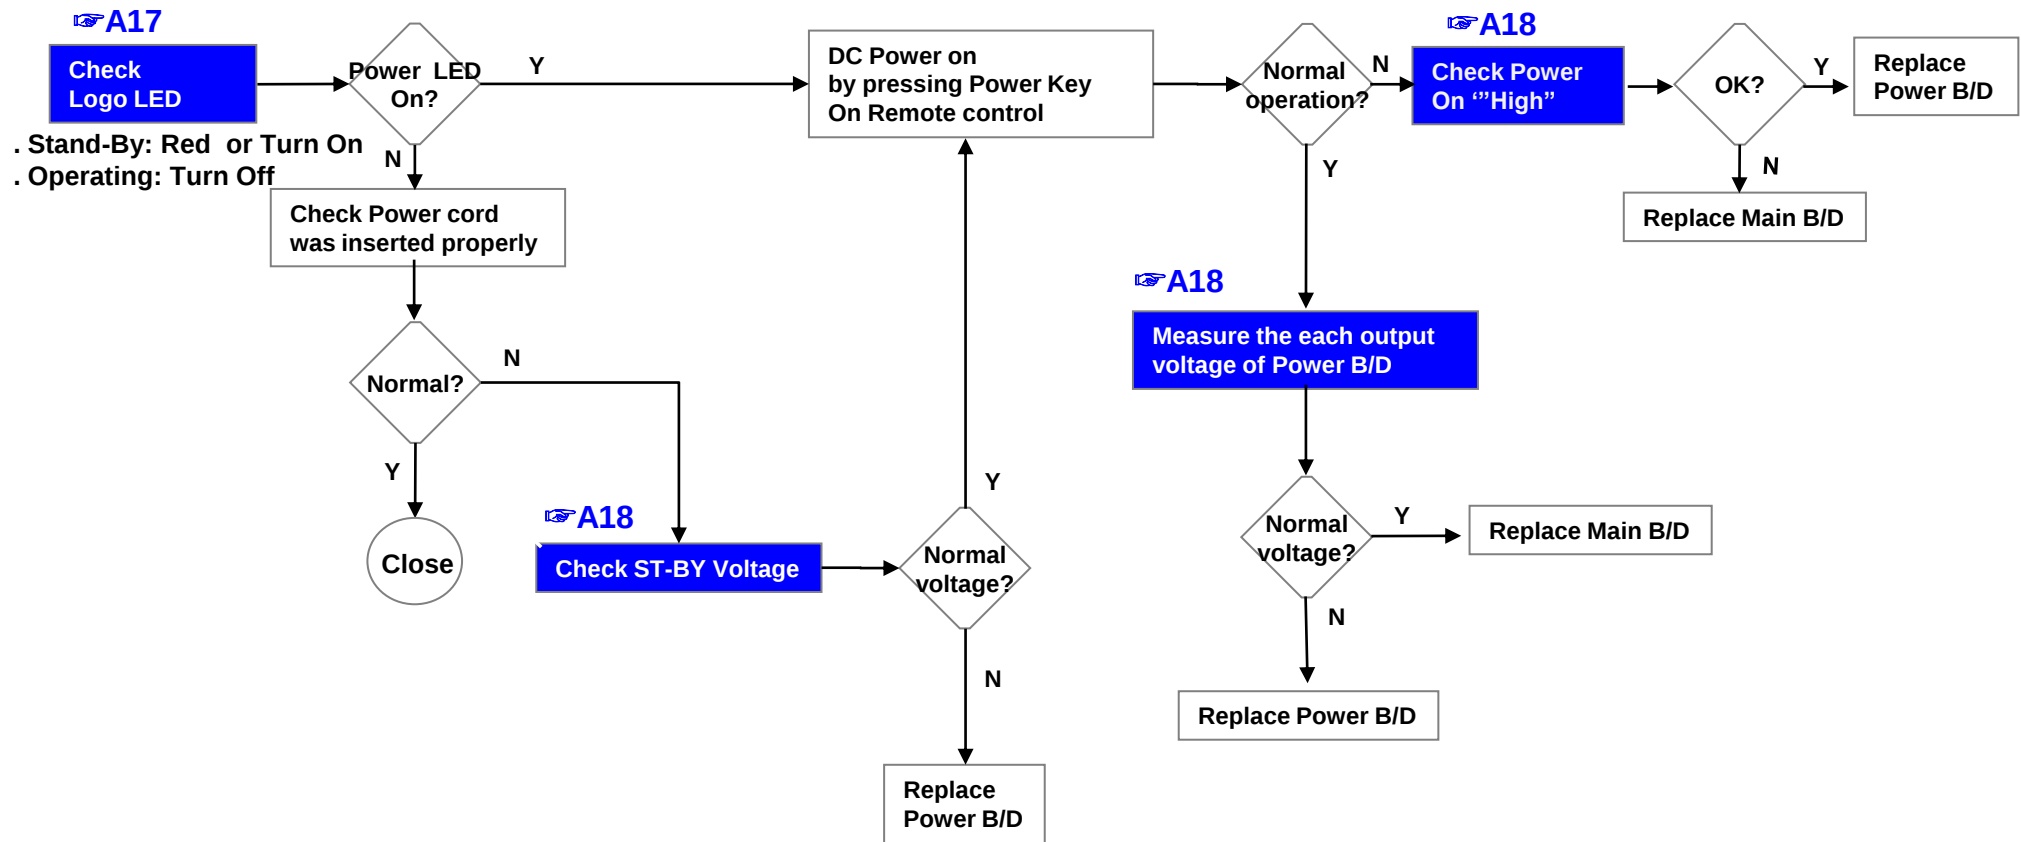


	Error symptom	B. Power error	Established date		
		Off when on, off while viewing, power auto on/off	Revised date		7/16

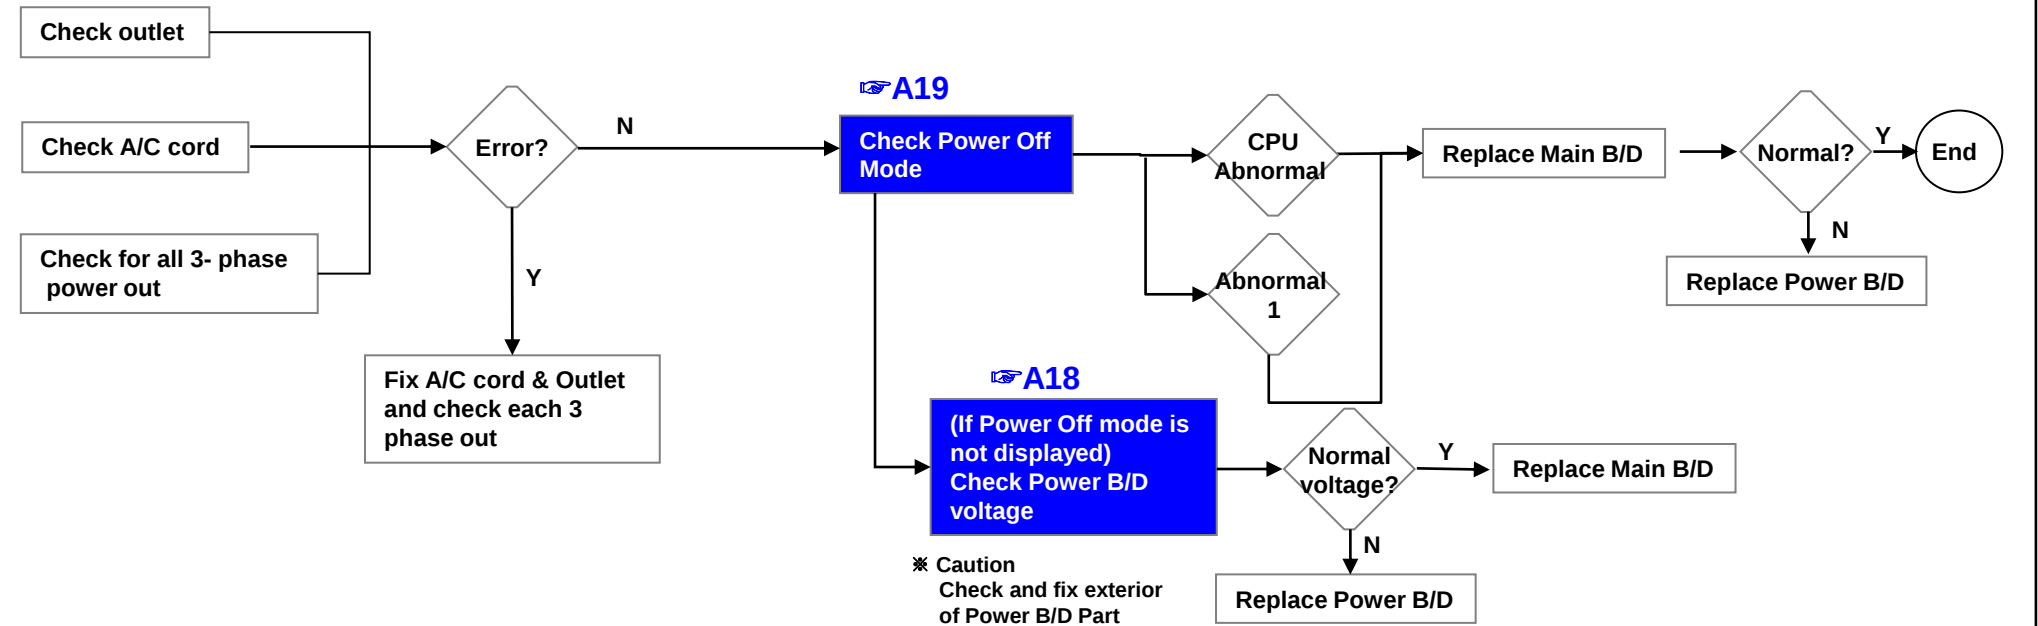

* Please refer to the all cases which can be displayed on power off mode.


Status	Power off List	Explanation
Normal	"POWEROFF_REMOTEKEY"	Power off by REMOTE CONTROL
	"POWEROFF_OFFTIMER"	Power off by OFF TIMER
	"POWEROFF_SLEEPTIMER"	Power off by SLEEP TIMER
	"POWEROFF_INSTOP"	Power off by INSTOP KEY
	"POWEROFF_AUTOOFF"	Power off by AUTO OFF
	"POWEROFF_ONTIMER"	Power off by ON TIMER
	"POWEROFF_RS232C"	Power off by RS232C
	"POWEROFF_RESREC"	Power off by Reserved Record
	"POWEROFF_RECEND"	Power off by End of Recording
	"POWEROFF_SWDOWN"	Power off by S/W Download
	"POWEROFF_UNKNOWN"	Power off by unknown status except listed case
Abnormal	"POWEROFF_ABNORMAL1"	Power off by abnormal status except CPU trouble
	"POWEROFF_CPUABNORMAL"	Power off by CPU Abnormal

	Error symptom	C. Audio error	Established date		
		No audio/ Normal video	Revised date		8/16

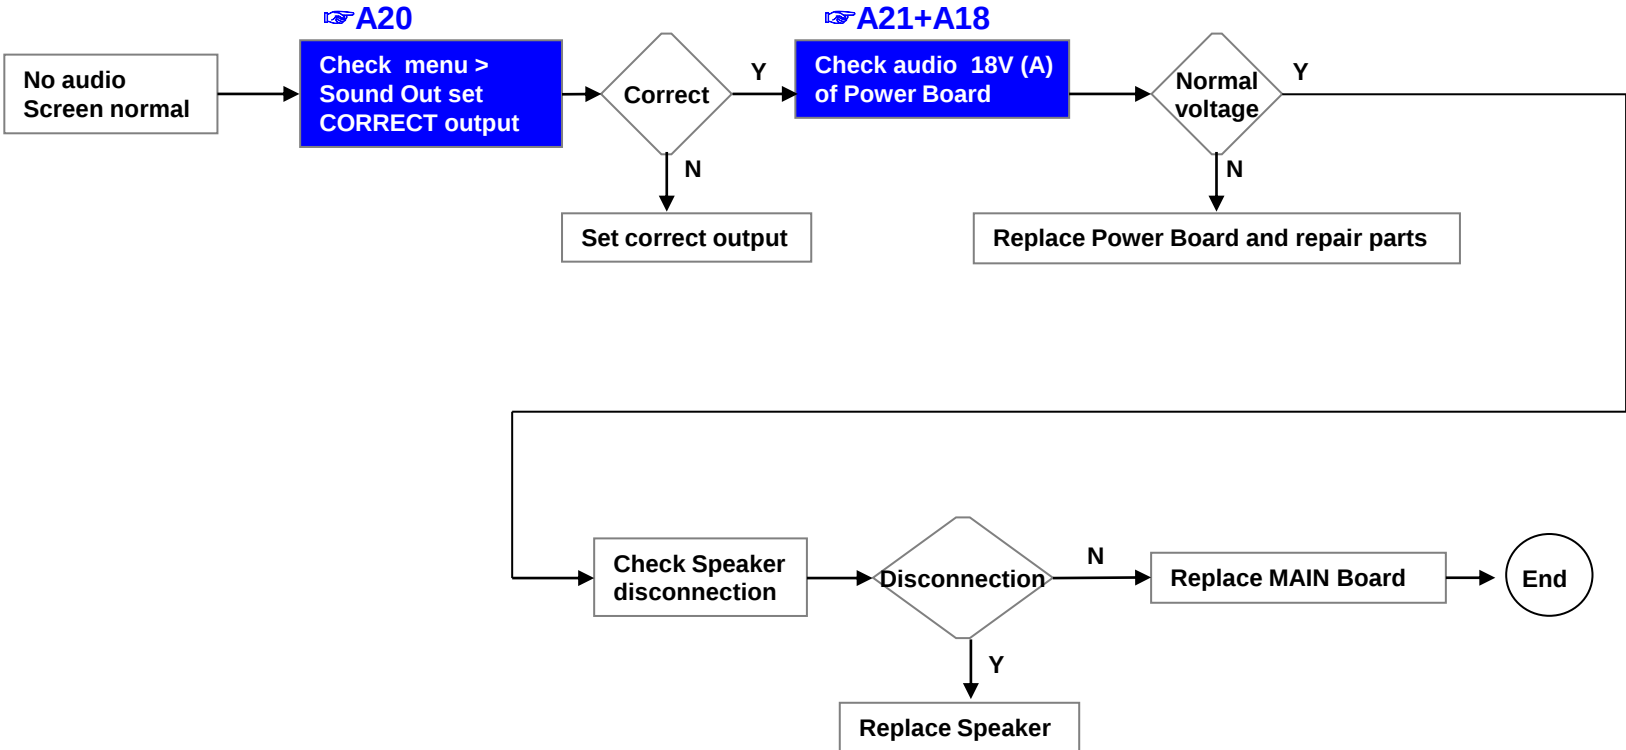


	Error symptom	C. Audio error	Established date		
		Wrecked audio/ discontinuation/noise	Revised date		9/16

→ abnormal audio/discontinuation/noise is same after “Check input signal” compared to No audio

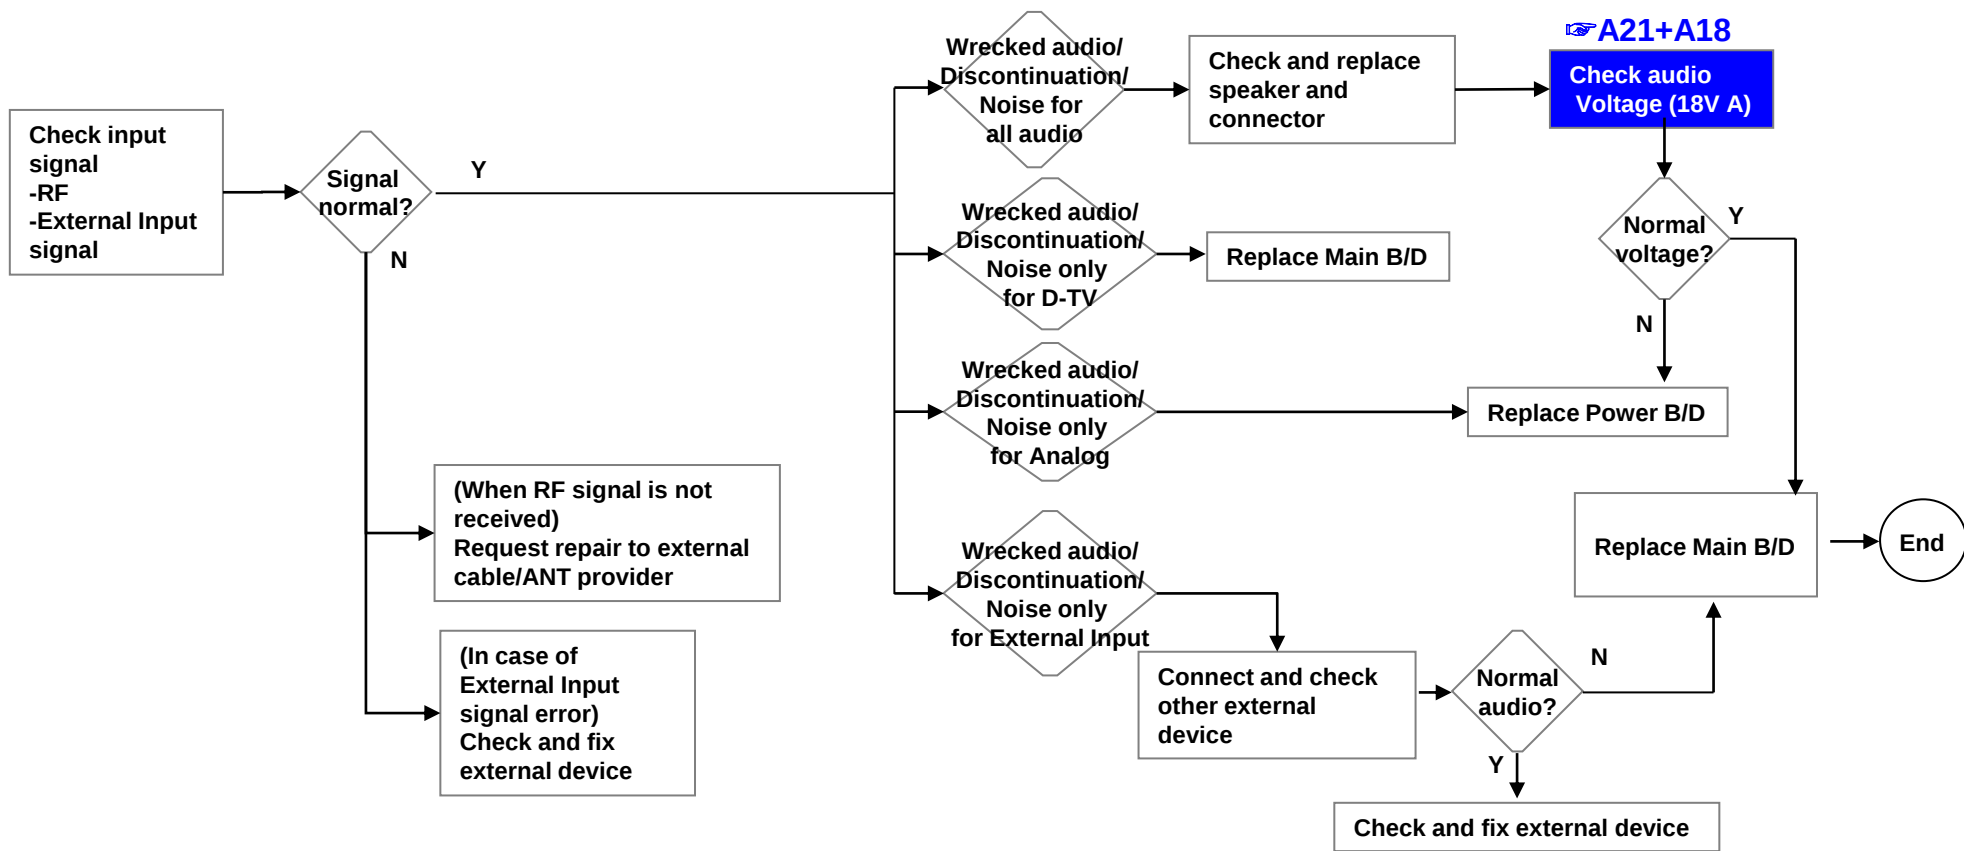


	Error symptom	D. Function error	Established date		
		Remote control & Local switch checking	Revised date		10/16

1. Remote control(R/C) operating error

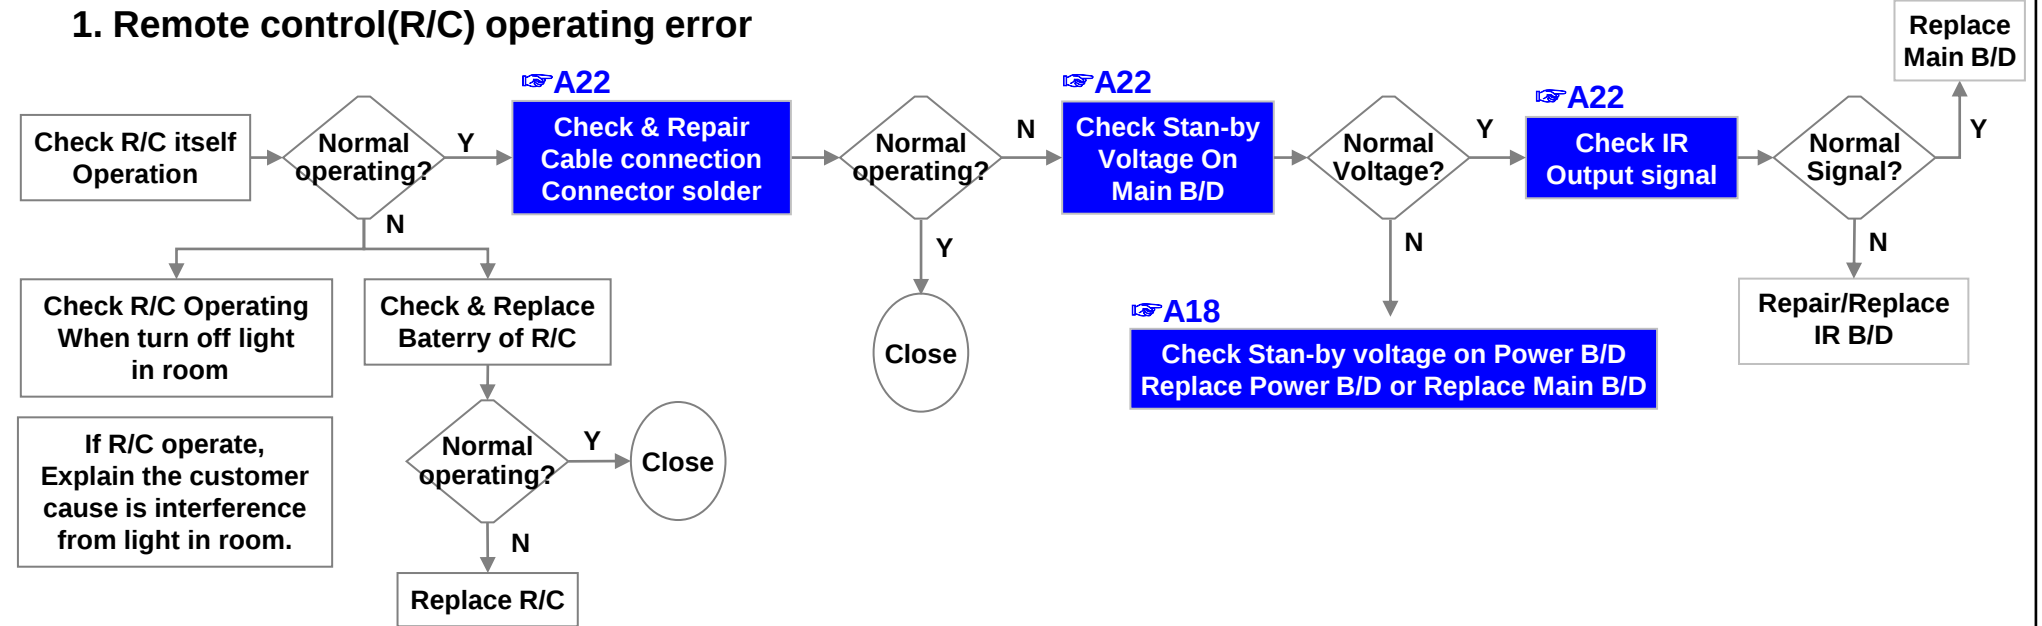

	Error symptom	D. Function error	Established date		
		MR15R operating checking	Revised date		11/16


2. MR15R(Magic Remocon) operating error

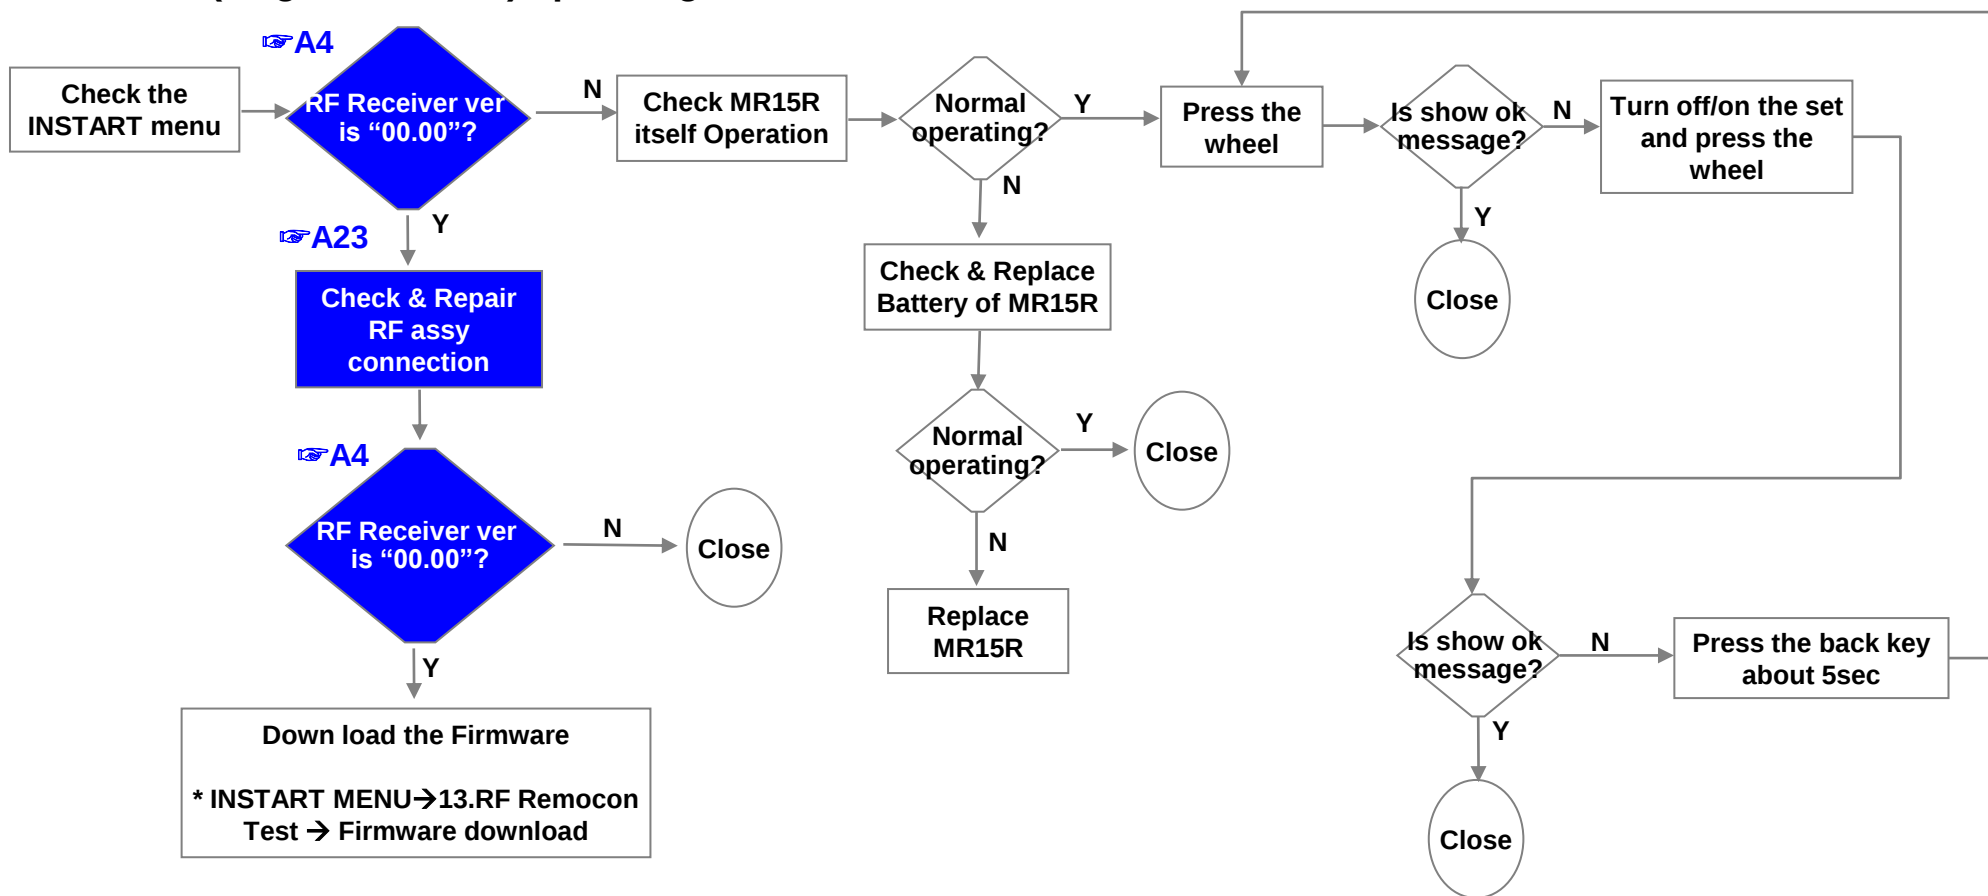

* If you conduct the loop at 3times, change the MR15R.


	Error symptom	D. Function error	Established date		
		Wifi operating checking	Revised date		12/16

3.Wifi operating error

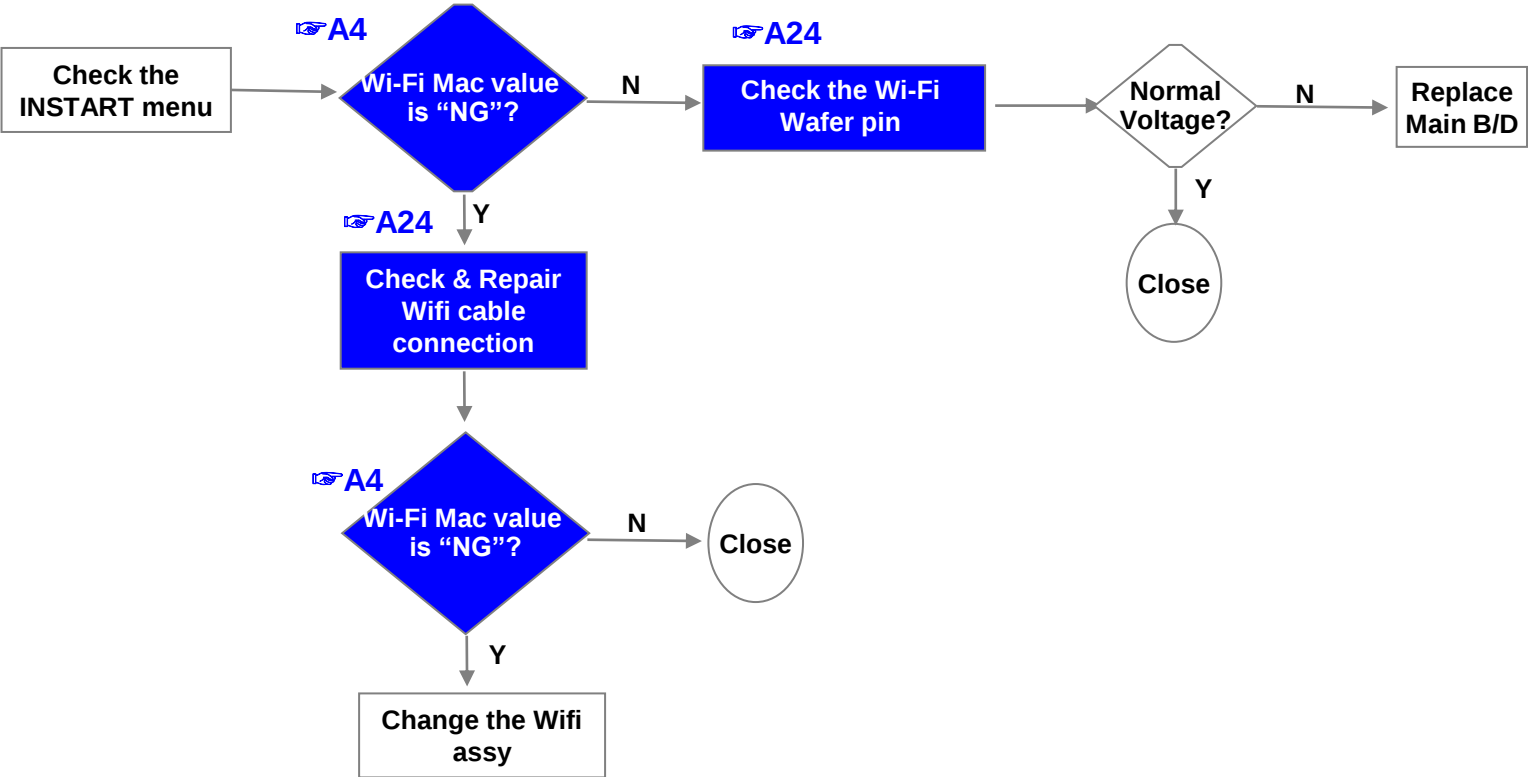


	Error symptom	D. Function error	Established date		
		Camera operating checking	Revised date		13/16


4.Camera operating error
(Only Camera Build-in model)

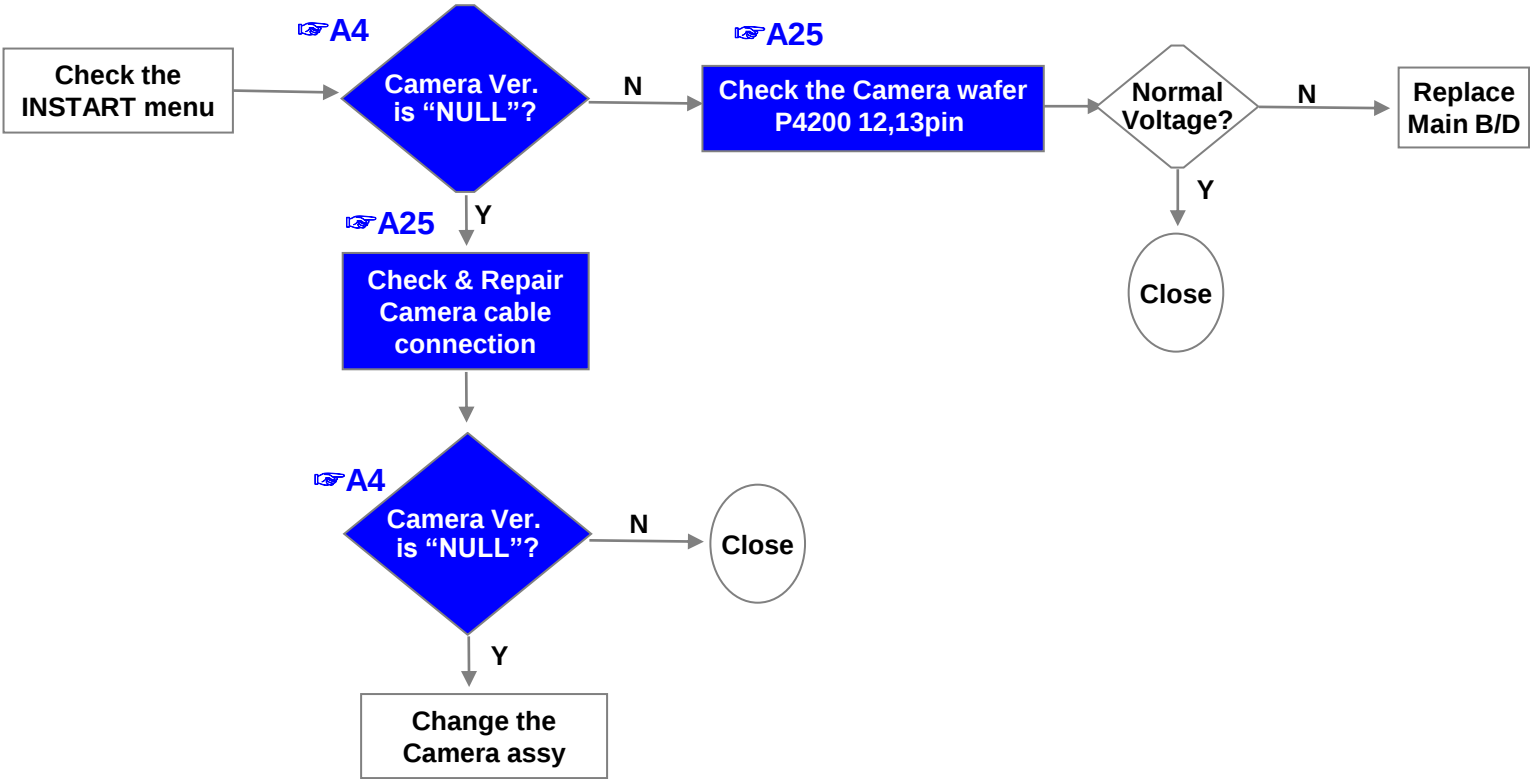


	Error symptom	D. Function error	Established date		
		External device recognition error	Revised date		14/16

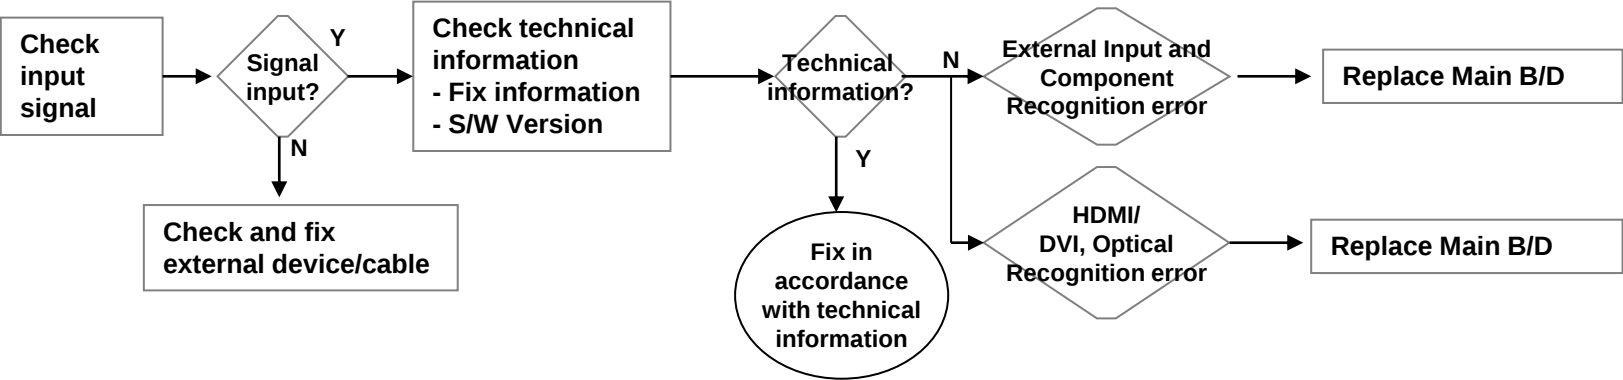

	Error symptom	E. Noise	Established date		
		Circuit noise, mechanical noise	Revised date		15/16

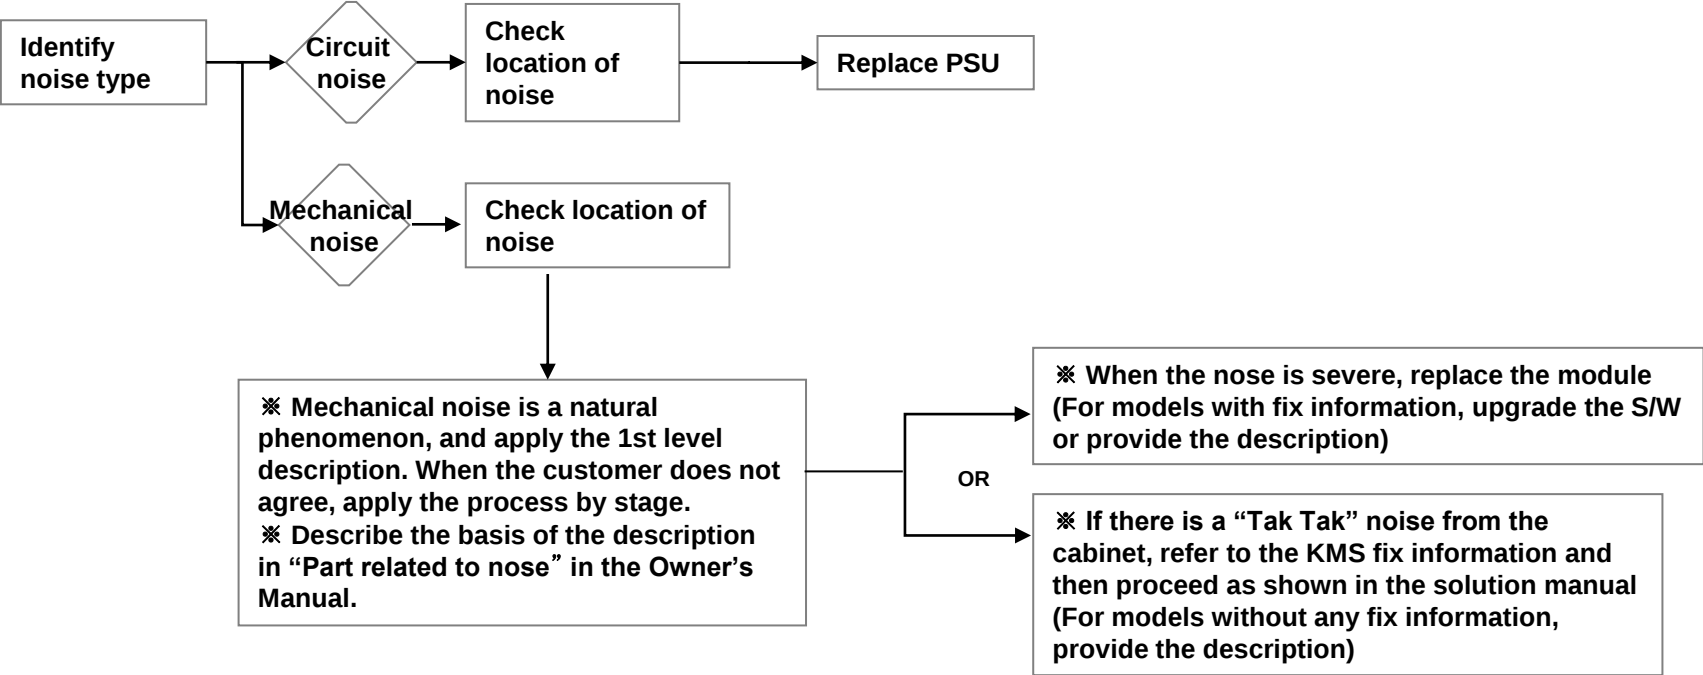

	Error symptom	F. Exterior defect	Established date		
		Exterior defect	Revised date		16/16

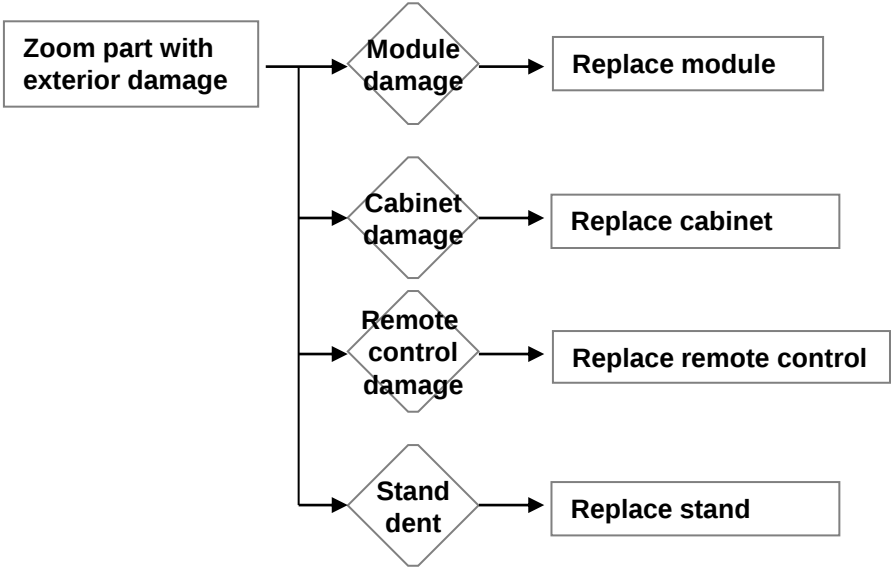

Contents of Standard Repair Process Detail Technical Manual


No.	Error symptom	Content	Page	Remarks
1	A. Video error_ No video/Normal audio	Check LCD back light with naked eye	A1	
2		Check White Balance value	A2	
3	A. Video error_ video error /Video lag/stop	TUNER input signal strength checking method	A3	
4		Version checking method	A4	
5		Tuner Checking Part	A5	
6	A. Video error _Vertical/Horizontal bar, residual image, light spot	connection diagram	A6	
7	A. Video error_ Color error	Check Link Cable (EPI) reconnection condition	A7	
8		Adjustment Test pattern - ADJ Key	A8	
9	<Appendix> Defected Type caused by T-Con/ Inverter/ Module	Exchange Main Board (1)	A-1/5	
10		Exchange Main Board (2)	A-2/5	
11		Exchange Power Board (PSU)	A-3/5	
12		Exchange Module (1)	A-4/5	
13		Exchange Module (2)	A-5/5	

Contents of Standard Repair Process Detail Technical Manual

No.	Error symptom	Content	Page	Remarks
14	B. Power error_ No power	Check front display Indicator	A17	
15		Check power input Voltage & ST-BY 3.5V	A18	
16	B. Power error_Off when on, off while viewing	POWER OFF MODE checking method	A19	
17	C. Audio error_ No audio/Normal video	Checking method in menu when there is no audio	A20	
18		Voltage and speaker checking method when there is no audio	A21	
19	D. Function error	Remote control operation checking method	A22	
20		Motion Remote operation checking method	A23	

Standard Repair Process Detail Technical Manual

	Error symptom	A. Video error_No video/Normal audio	Established date		
	Content	Check LCD back light with naked eye	Revised date		A1

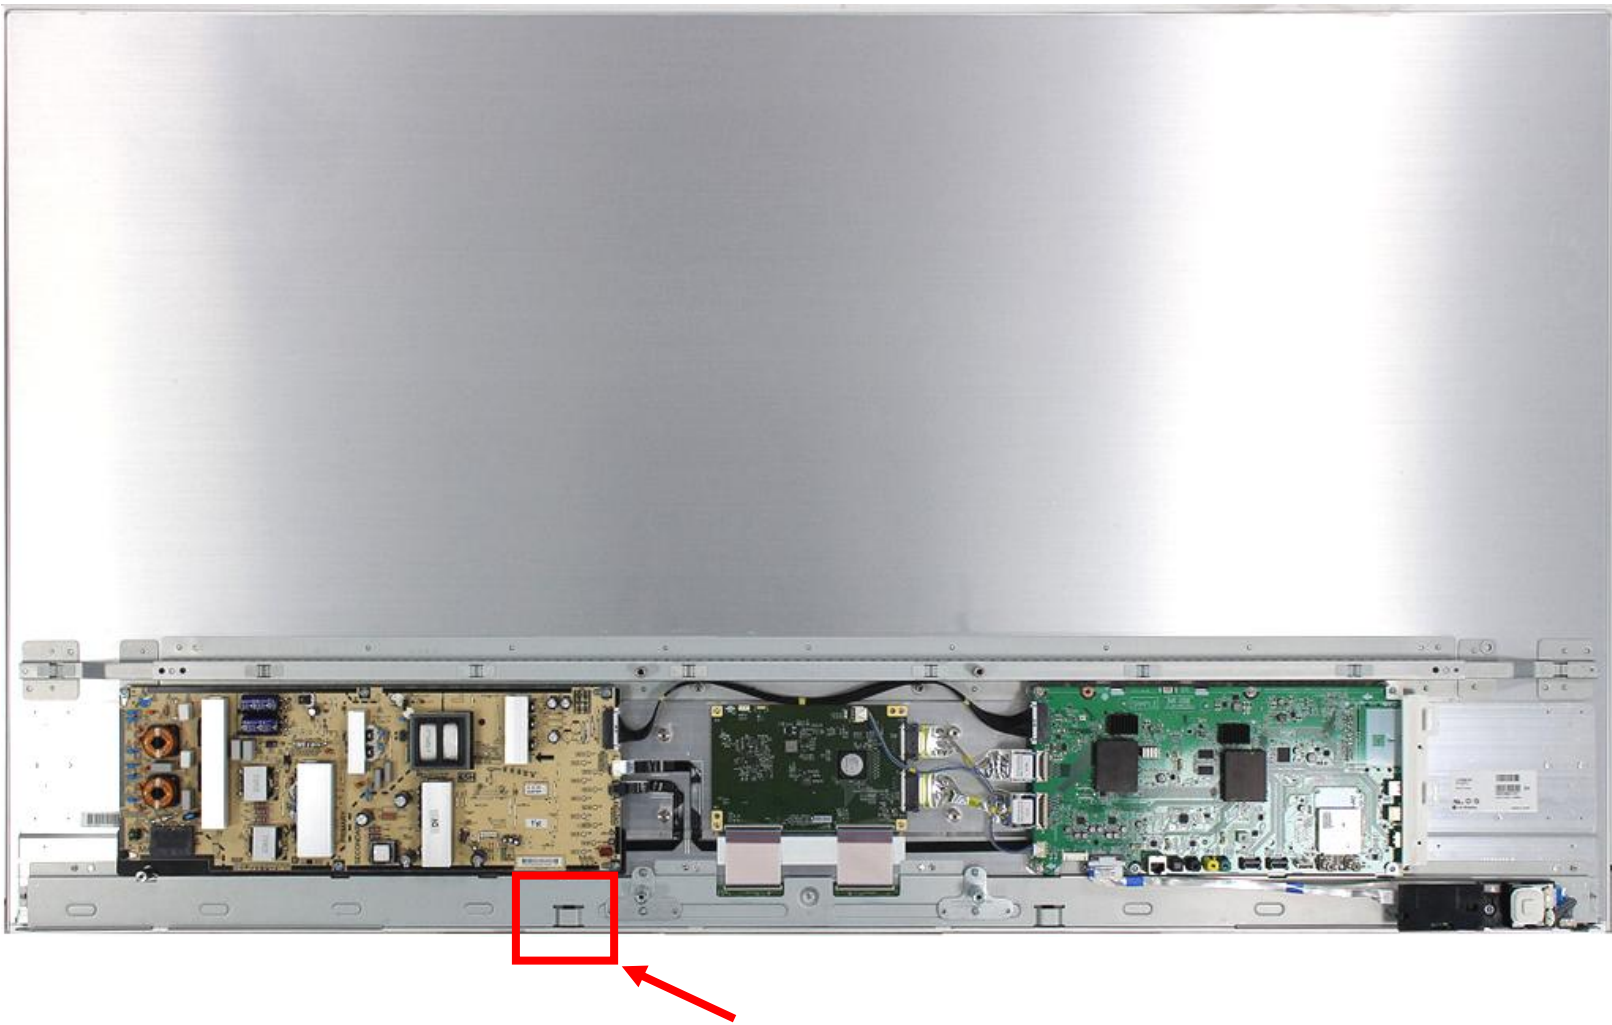




After turning on the power and disassembling the case, check with the naked eye, whether you can see light from locations.

A1

Standard Repair Process Detail Technical Manual

	Error symptom	A. Video error_No video/Normal audio	Established date		
	Content	Check White Balance value	Revised date		A2

<ALL MODELS>

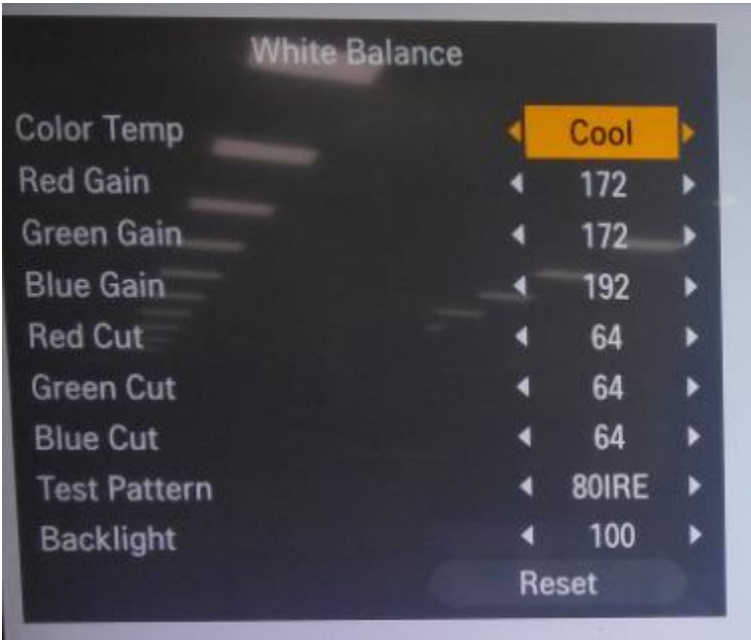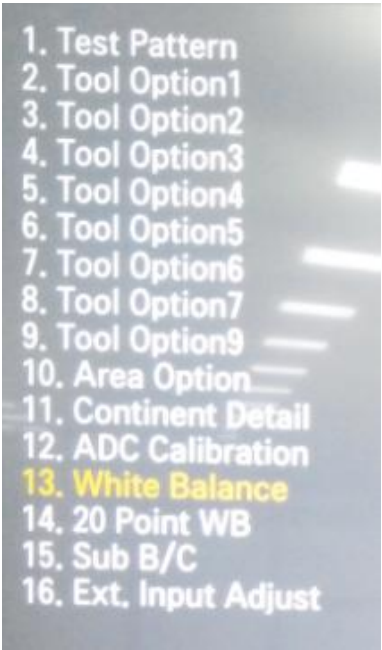



Entry method

- 1. Press the ADJ button on the remote control for adjustment.
- 2. Enter into White Balance of item 13.
- 3. After recording the R, G, B (GAIN, Cut) value of Color Temp (Cool/Medium/Warm), re-enter the value after replacing the MAIN BOARD.

Standard Repair Process Detail Technical Manual

	Error symptom	A. Video error_Video error, video lag/stop	Established date		
	Content	TUNER input signal strength checking method	Revised date		A3

<ALL MODELS>

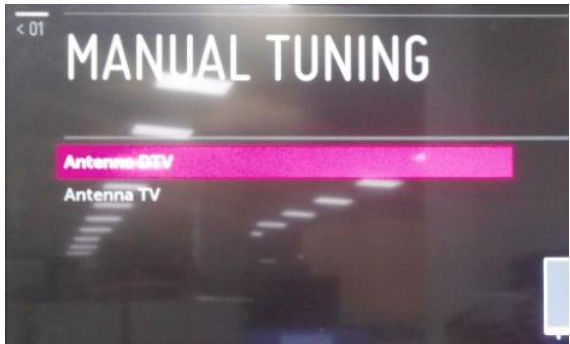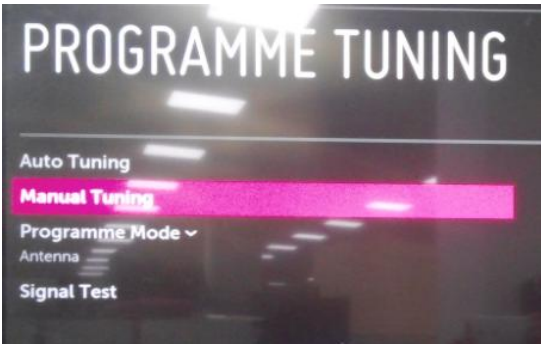

All Settings → Programmes → Programmes Tuning & Settings → Manual Tuning → Antenna DTV

Signal Strength is too strong : Use attenuator (-10dB, -15dB, -20dB etc.)
Signal Strength is too weak : Use Signal Booster




Standard Repair Process Detail Technical Manual

	Error symptom	A. Video error_Video error, video lag/stop	Established date		
	Content	Version checking method	Revised date		A4

<ALL MODELS>

1. Checking method for remote control for adjustment

Version

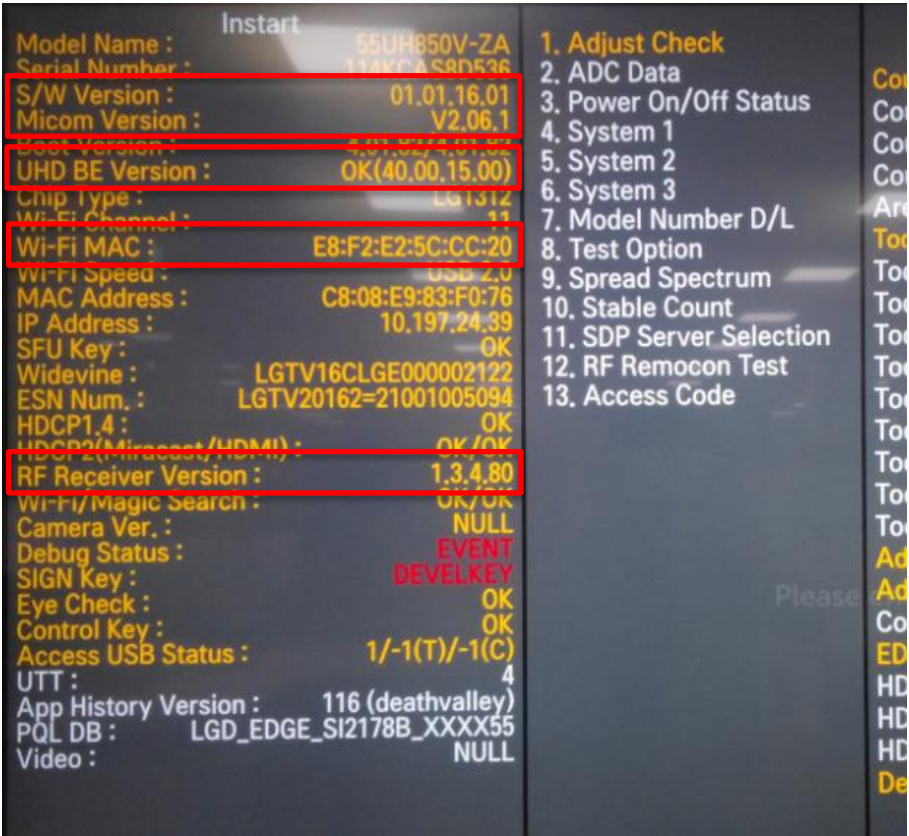


Press the IN-START with the remote control for adjustment

Standard Repair Process Detail Technical Manual

	Error symptom	A. Video error_Video error, video lag/stop	Established date		
	Content	TUNER checking part	Revised date		A5

<ALL MODELS>

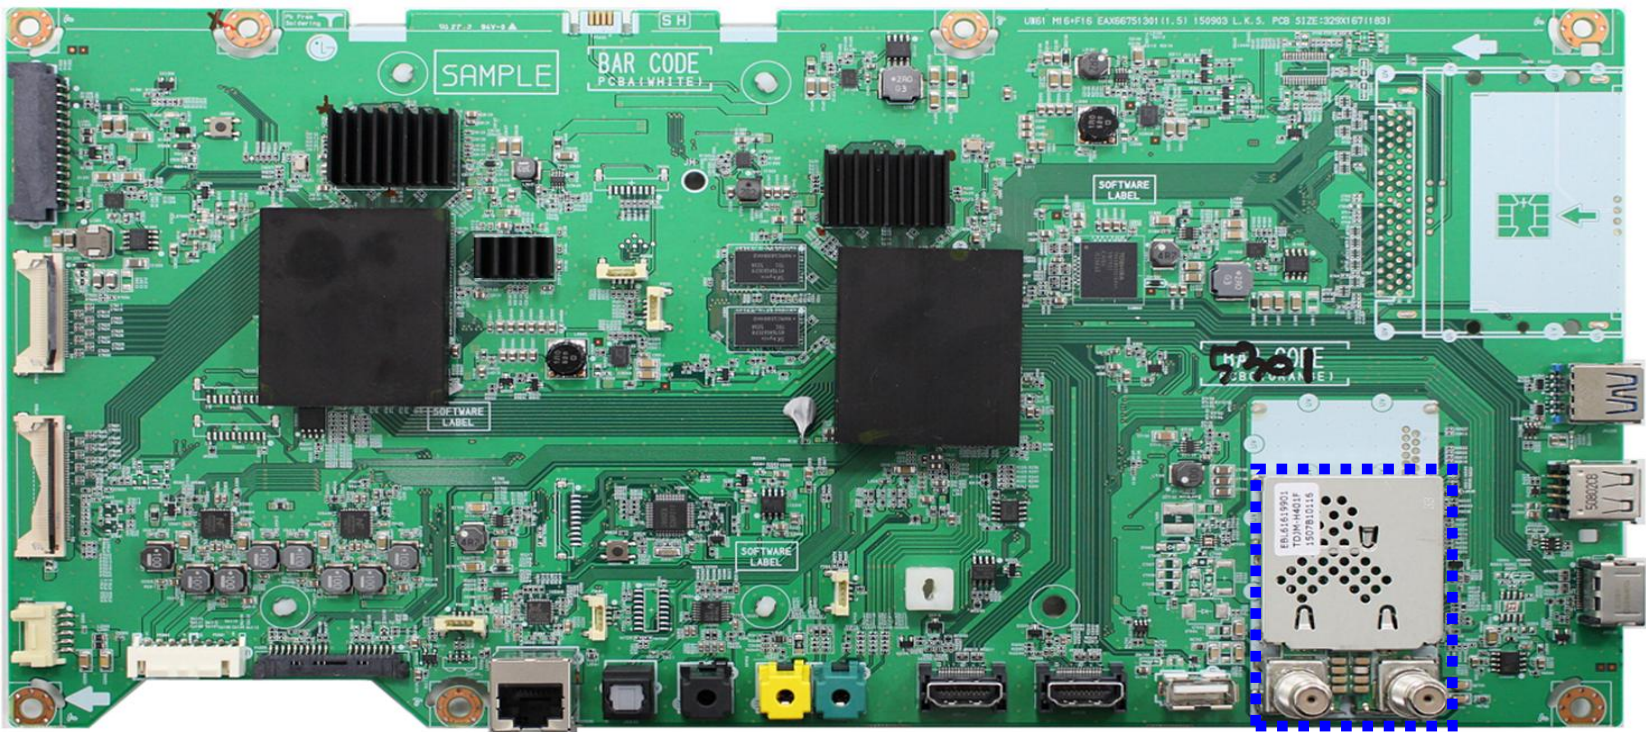


Checking method:

- 1. Check the signal strength or check whether the screen is normal when the external device is connected.
- 2. After measuring each voltage from power supply, finally replace the MAIN BOARD.

Standard Repair Process Detail Technical Manual

	Error symptom	A. Video error _Vertical/Horizontal bar, residual image, light spot	Established date		
	Content	connection diagram (1)	Revised date		A6

<ALL MODELS>

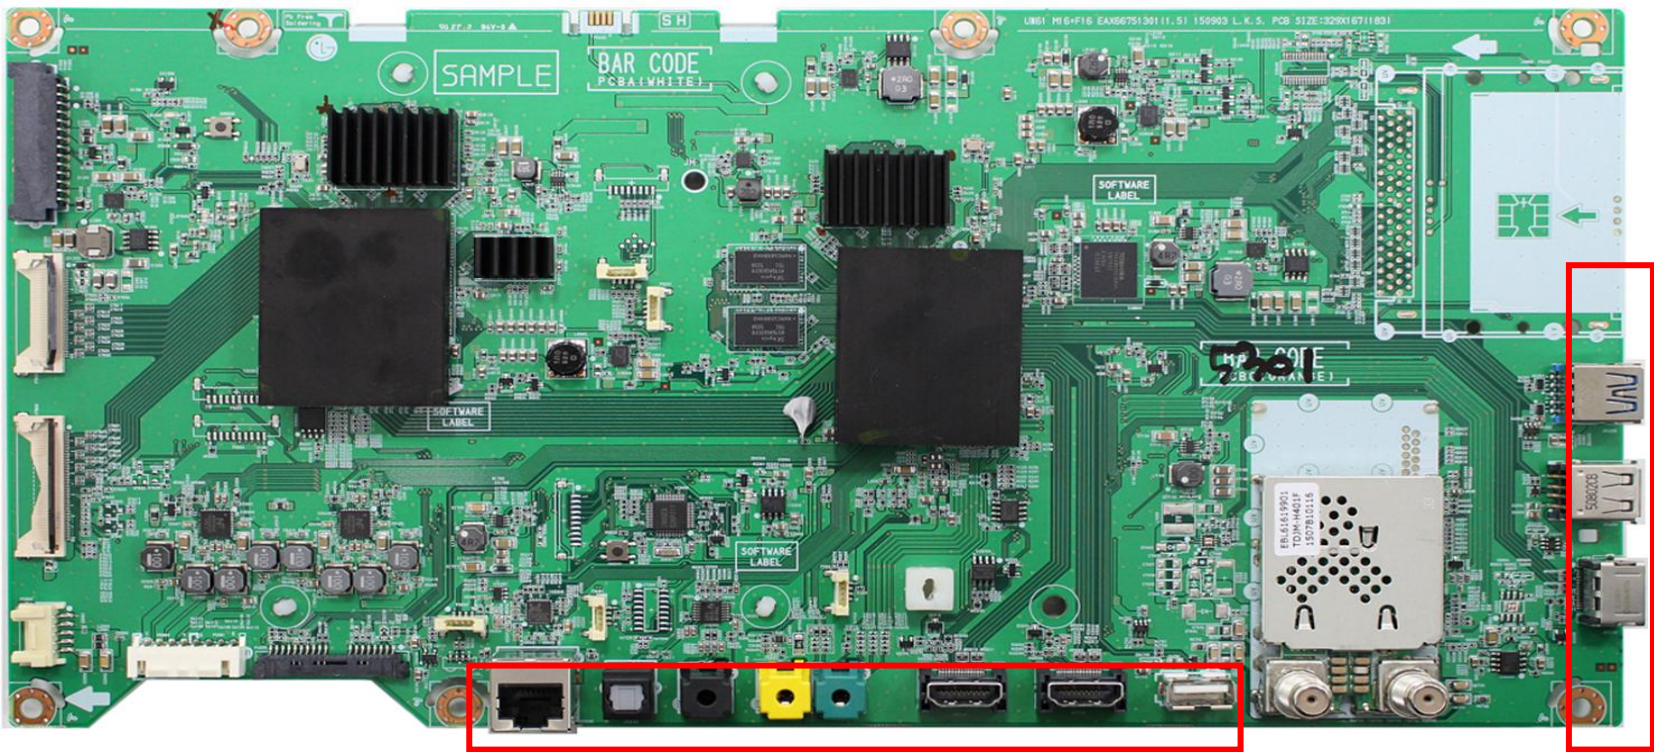


As the part connecting to the external input, check the screen condition by signal

Standard Repair Process Detail Technical Manual

	Error symptom	A. Video error_Color error	Established date		
	Content	Check Link Cable (EPI) reconnection condition	Revised date		A7








<ALL MODELS>

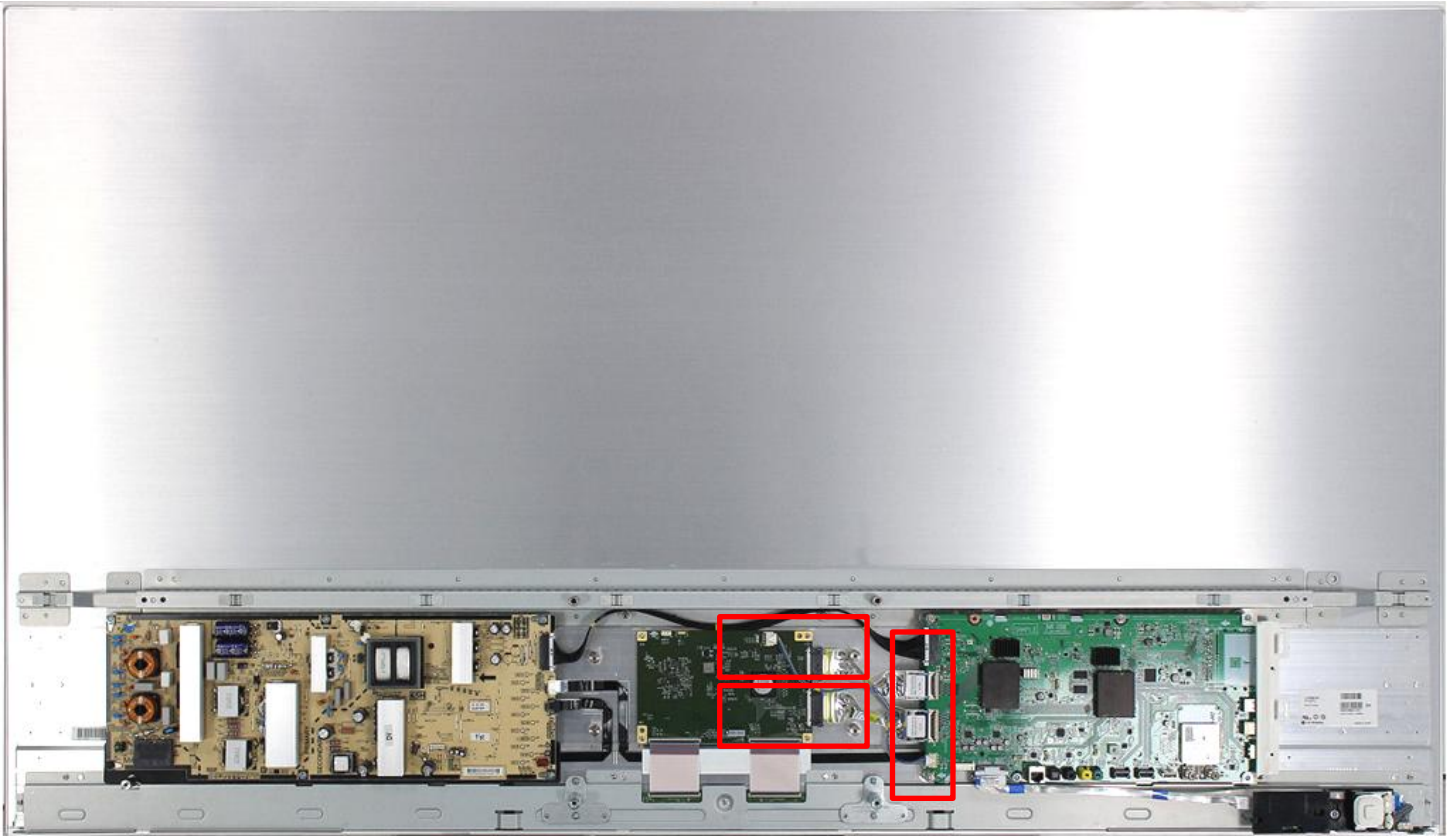

Check the contact condition of the Link Cable, especially dust or mis insertion.

Standard Repair Process Detail Technical Manual

	Error symptom	A. Video error_Color error	Established date		
	Content	Adjustment Test pattern - ADJ Key	Revised date		A8

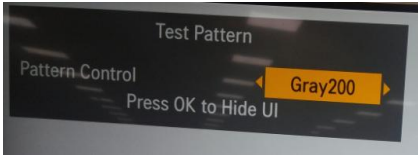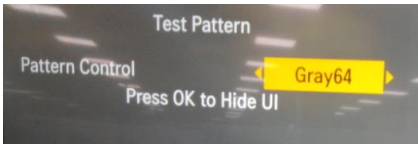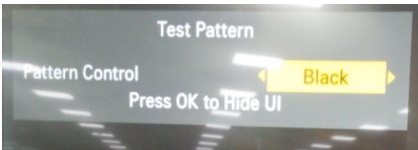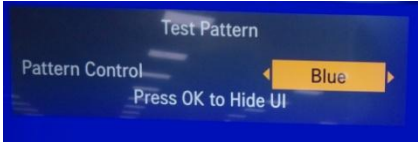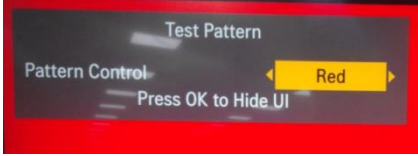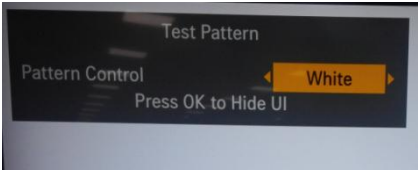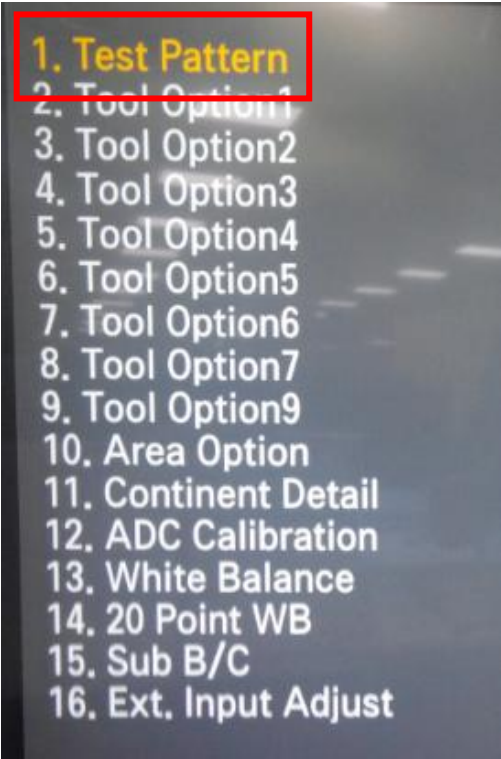


You can view 8 types of patterns using the ADJ Key

Checking item : 1. Defective pixel 2. Residual image 3. MODULE error (ADD-BAR,SCAN BAR..)
4.Video error (Classification of MODULE or Main-B/D)


Appendix : Exchange Main Board (1)



Solder defect, CNT Broken

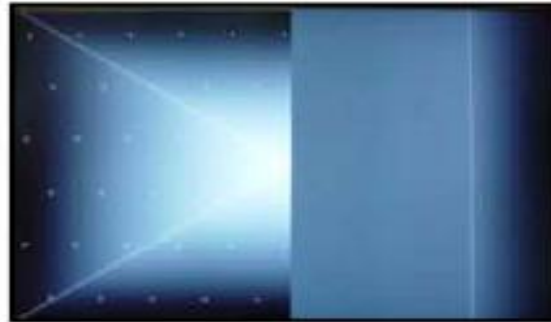


Solder defect, CNT Broken

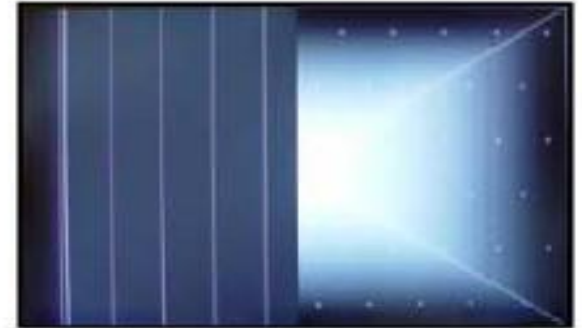

Solder defect, CNT Broken




Solder defect, CNT Broken

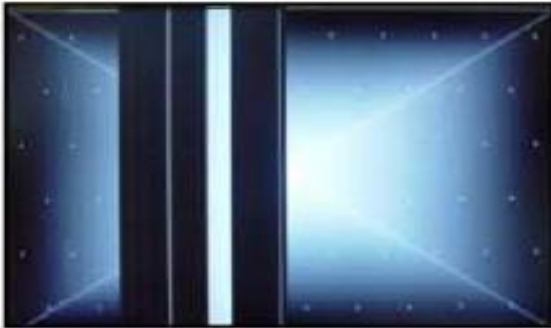

Solder defect, CNT Broken



Abnormal Power Section

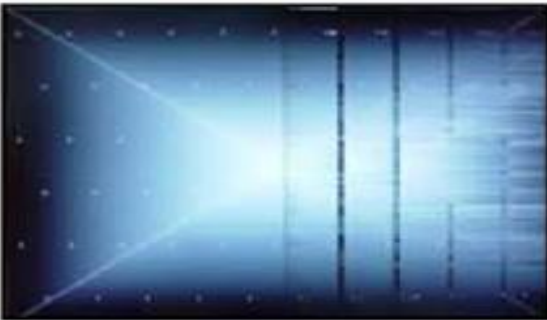

Solder defect, Short/Crack



Abnormal Power Section



Solder defect, Short/Crack

Appendix : Exchange Main Board (2)



Abnormal Power Section



Abnormal Power Section



Solder defect, Short/Crack




Solder defect, Short/Crack



Fuse Open, Abnormal power section



Abnormal Display

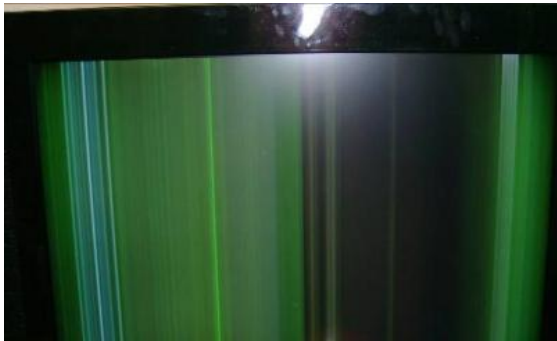

GRADATION



Noise



GRADATION

Appendix : Exchange Power Board (PSU)




No Light



Dim Light



Dim Light

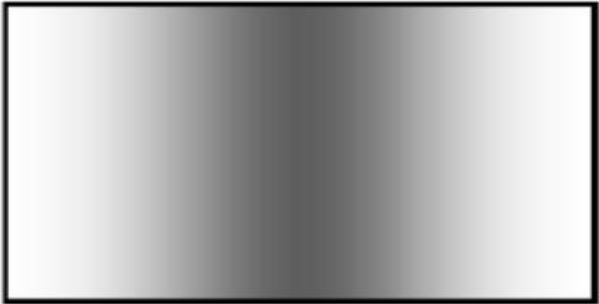


Dim Light



No picture/Sound Ok

Appendix : Exchange the Module (1)

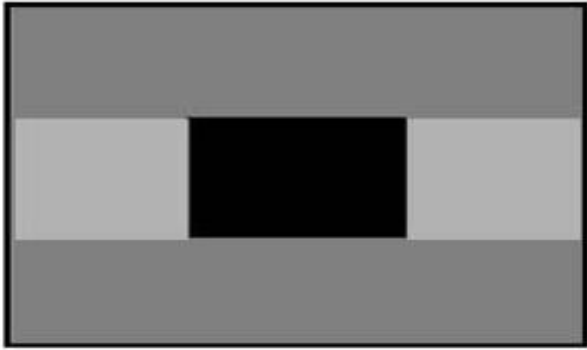

Crosstalk



Press damage



Crosstalk




Press damage



Press damage

Un-repairable Cases
In this case please exchange the module.

Appendix : Exchange the Module (2)

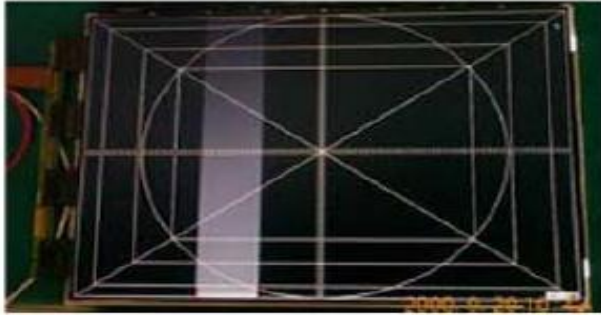

**Vertical Block
Source TAB IC Defect**



**Vertical Line
Source TAB IC Defect**



**Vertical Block
Source TAB IC Defect**



**Horizontal Block
Gate TAB IC Defect**



**Horizontal Block
Gate TAB IC Defect**



**Horizontal line
Gate TAB IC Defect**



**Horizontal Block
Gate TAB IC Defect**



Un-repairable Cases
In this case please exchange the module.

Standard Repair Process Detail Technical Manual

	Error symptom	B. Power error _No power	Established date		
	Content	Check front Power Indicator	Revised date		A17

(Depending on model)

You can simply operate the TV functions, pressing or moving the button.

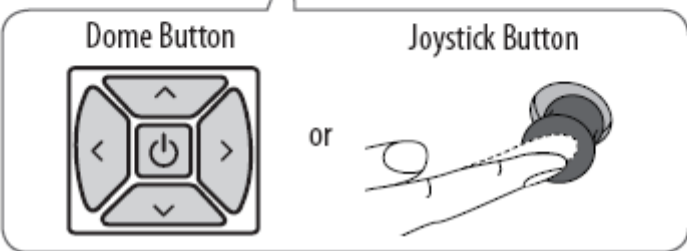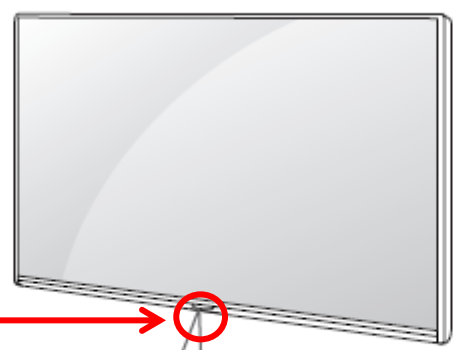

ST-BY condition: On or Off
Power ON condition: Turn Off

Basic functions

		Power On (Press) Power Off (Press and hold)
		Volume Control
		Programmes Control

! NOTE

- When the TV is turned on, place your finger on the button and press it once for a few seconds and release it. All running apps will close, and any recording in progress will stop.

Adjusting the menu

When the TV is turned on, press the button one time. You can adjust the Menu items pressing or moving the buttons.

	Turns the power off.
	Clears on-screen displays and returns to TV viewing.
	Changes the input source.
	Accesses the settings menu.


! NOTE

- When your finger over the joystick button and push it to the up, down, left or right, be careful not to press the joystick button. If you press the joystick button first, you may not be able to adjust the volume level and saved programmes.

Standard Repair Process Detail Technical Manual

	Error symptom	B. Power error _No power	Established date		
	Content	Check power input voltage and ST-BY 3.5V	Revised date		A18

Check the DC 18V

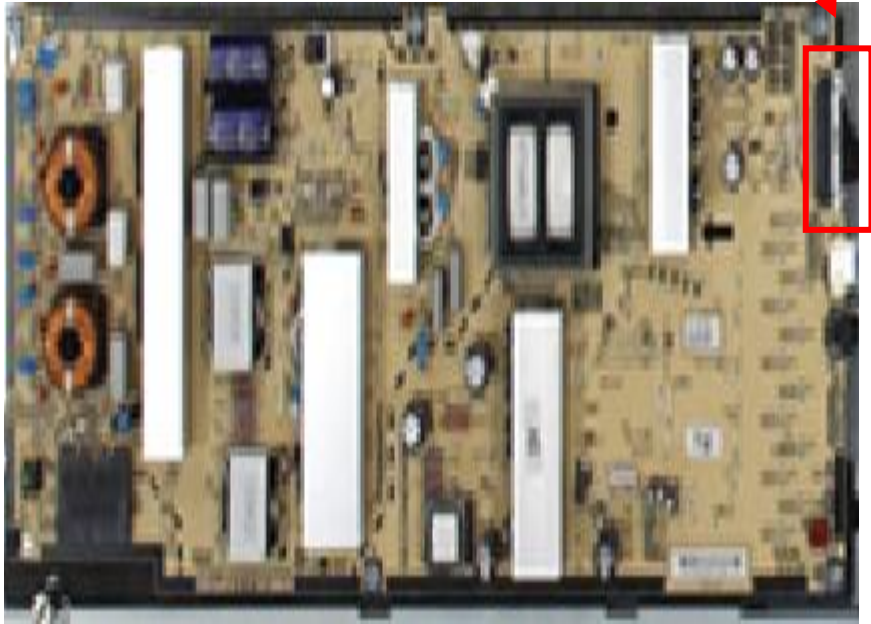


28Pin map (LPB)

P201			
Type : SMAW200-H28S5K (BLACK)			
Maker : YEON-HO			
Pin No.	Signal	Pin No.	Signal
1	18V(A)	2	18V(A)
3	18V(A)	4	18V(A)
5	GND(A)	6	GND(A)
7	18V	8	18V
9	GND	10	GND
11	GND	12	GND
13	PWR-ON	14	PDIM2
15	GND	16	18V
17	18V	18	18V
19	18V(A)	20	18V(A)
21	GND(A)	22	GND(A)
23	DRV-ON	24	PDIM
25	GND	26	SCLK
27	VSYNC	28	SIN

Standard Repair Process Detail Technical Manual

	Error symptom	B. Power error _Off when on, off whiling viewing	Established date		
	Content	POWER OFF MODE checking method	Revised date		A19

<ALL MODELS>

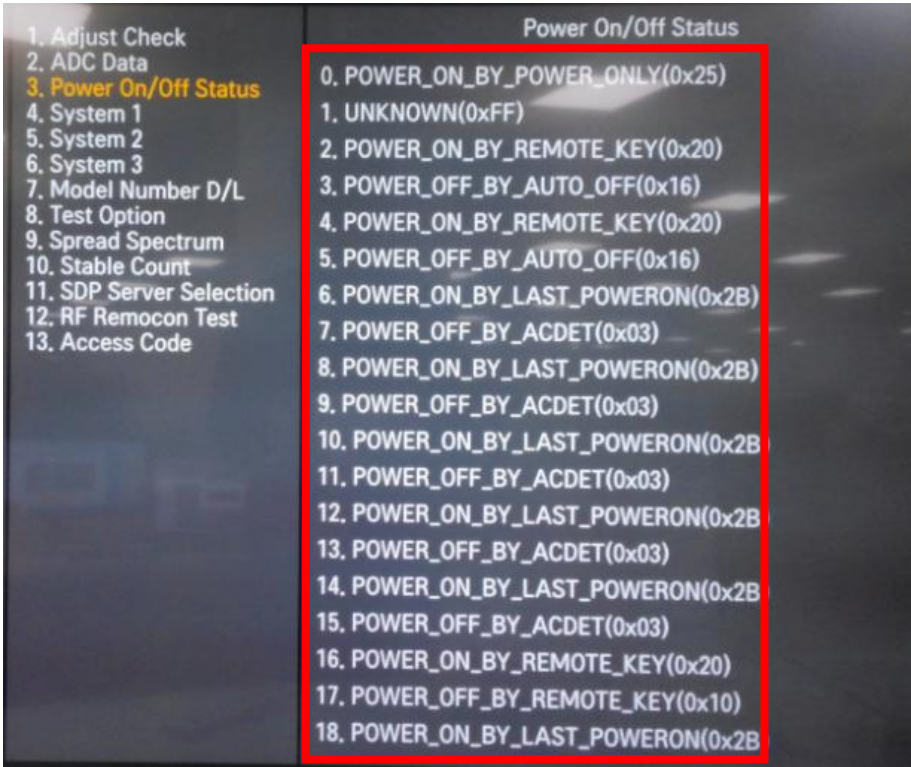


Entry method

1. Press the IN-START button of the remote control for adjustment
2. Check the entry into adjustment item 3`

Standard Repair Process Detail Technical Manual

	Error symptom	C. Audio error_No audio/Normal video	Established date		
	Content	Checking method in menu when there is no audio	Revised date		A20

<ALL MODELS>

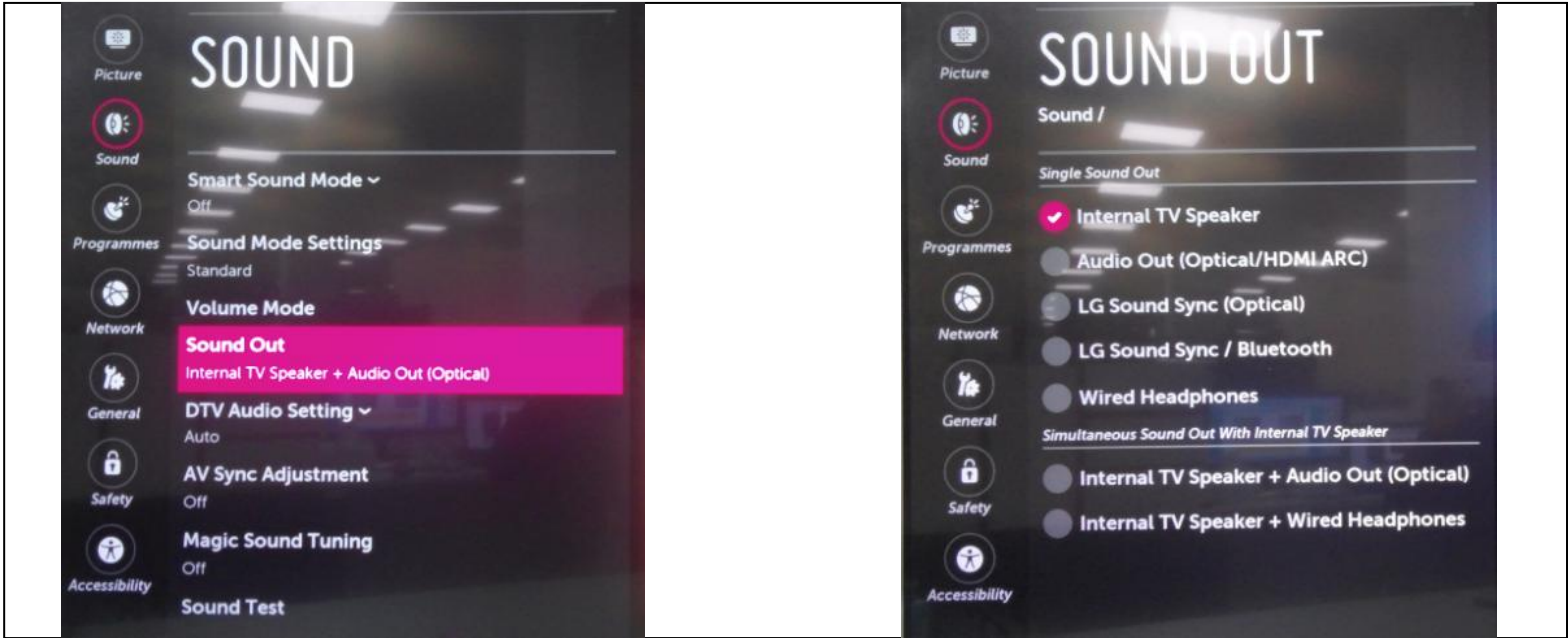

Checking method

1. Press the Setting button on the remote control
2. Select the Sound function of the Menu
3. Select the Sound Out
4. Select TV Speaker


Standard Repair Process Detail Technical Manual

	Error symptom	C. Audio error_No audio/Normal video	Established date		
	Content	Voltage and speaker checking method when there is no audio	Revised date		A21



P201			
Type : SMAW200-H28S5K (BLACK)			
Maker : YEON-HO			
Pin No.	Signal	Pin No.	Signal
1	18V(A)	2	18V(A)
3	18V(A)	4	18V(A)
5	GND(A)	6	GND(A)
7	18V	8	18V
9	GND	10	GND
11	GND	12	GND
13	PWR-ON	14	PDIM2
15	GND	16	18V
17	18V	18	18V
19	18V(A)	20	18V(A)
21	GND(A)	22	GND(A)
23	DRV-ON	24	PDIM
25	GND	26	SCLK
27	VSYNC	28	SIN

①
Main B/D Side
Pin map reversed

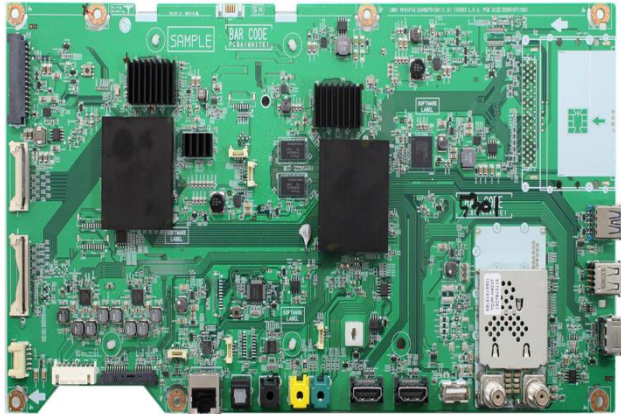

1	SPK_R-_FT	2	SPK_R+_FT
3	SPK_L-_FT	4	SPK_L+_FT
5	SPK_R-_CT	6	SPK_R+_CT
7	SPK_L-_CT	8	SPK_L+_CT

Checking order when there is no audio

- ① Check the contact condition of cable or connector
- ② Measure the 24V input voltage supplied from Power Board
(If there is no input voltage, remove and check the connector)

Standard Repair Process Detail Technical Manual

	Error symptom	D. Function error	Established date		
	Content	Remote control operation checking method	Revised date		A22




P4000 Pin map			
1	+3.5V_WIFI	12	EYE_SCL
2	WIFI_DM	13	EYE_SDA
3	WIFI_DP	14	GND
4	GND	15	IR
5	WOL_Power_On	16	LED_R
6	3D_Sync	17	GND
7	BT_Reset	18	+3.5_ST
8	GND	19	KEY2
		20	KEY1
		21	GND

Checking order

1. Check IR cable condition between IR & Main board.
2. Check the st-by 3.5V on the pin 18

Standard Repair Process Detail Technical Manual

	Error symptom	D. Function error	Established date		
	Content	Motion Remote, Wi-Fi operation checking method	Revised date		A23

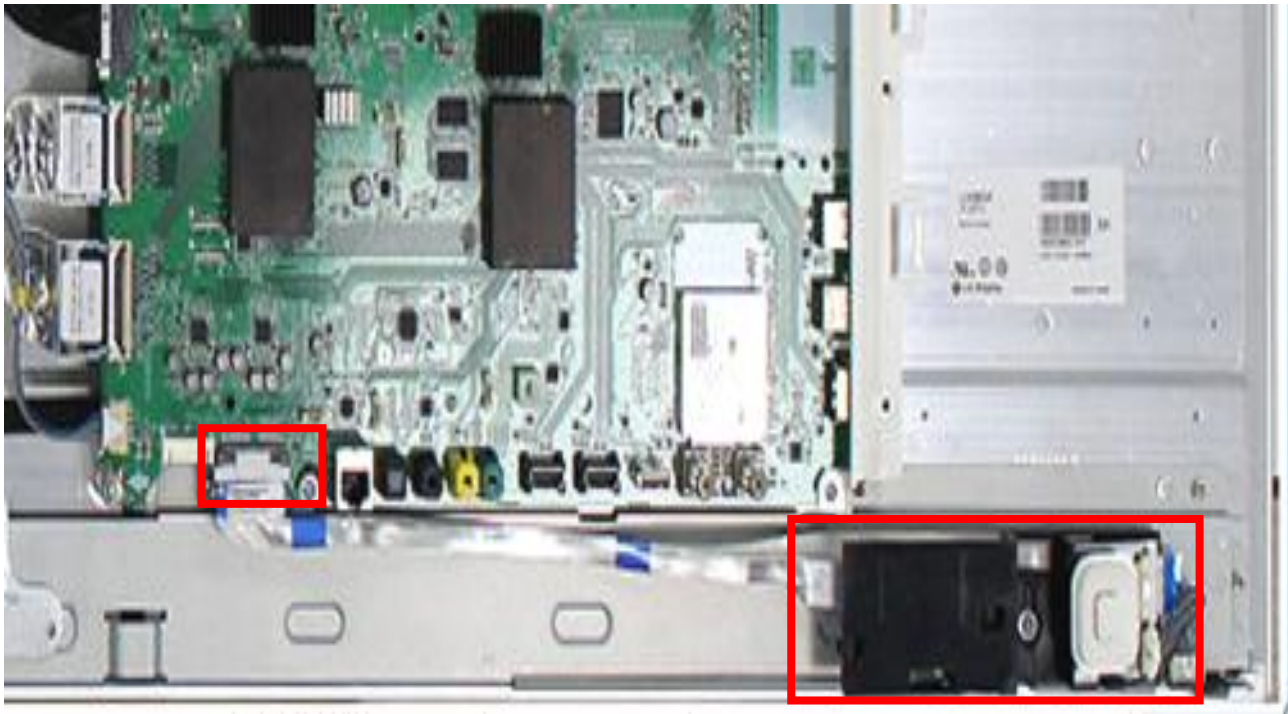

P4000 Pin map		
1	+3.5V_WIFI	12 EYE_SCL
2	WIFI_DM	13 EYE_SDA
3	WIFI_DP	14 GND
4	GND	15 IR
5	WOL_Power_On	16 LED_R
6	3D_Sync	17 GND
7	BT_Reset	18 +3.5_ST
8	GND	19 KEY2
		20 KEY1
		21 GND

Checking order

1. Check Motion cable condition between Motion assy & Main board.
2. Check the 3.5V on the pin 1.