


SHARP SERVICE MANUAL

No. S6840CDC451H/

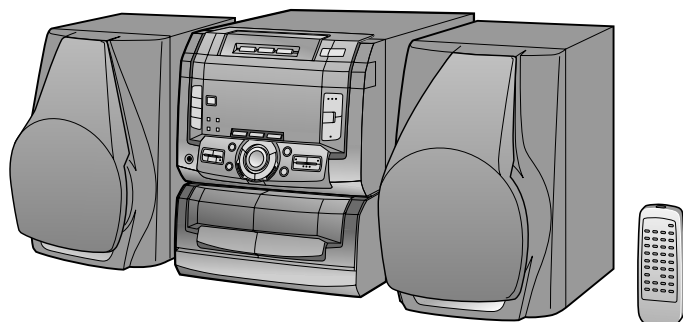

CD-C451H

CD-C451H mini component system consisting of
CD-C451H mini component system and
CP-C451H Speaker System.

• In the interests of user-safety the set should be restored to its original condition and only parts identical to those specified be used.

COMPACT
disc
DIGITAL AUDIO

R-D-SEON

DOLBY SURROUND
PRO • LOGIC

Manufactured under license from Dolby Laboratories Licensing Corporation.

DOLBY, the double-D symbol **DD** and "PRO LOGIC" are trademarks of Dolby Laboratories Licensing Corporation.

- QSOUND and the QLogo are registered trademarks of QSound Labs, Inc.
- QSound is protected under US Patent Nos. 5,105,462 and 5,208,860 and foreign counterparts.

CONTENTS

	Page
SAFETY PRECAUTION FOR SERVICE MANUAL	2
IMPORTANT SERVICE NOTES (U.K. ONLY)	2
SPECIFICATIONS	3
NAMES OF PARTS	4
OPERATION MANUAL	6
DISASSEMBLY	7
REMOVING AND REINSTALLING THE MAIN PARTS	10
ADJUSTMENT	11
NOTES ON SCHEMATIC DIAGRAM	18
TYPE OF TRANSISTOR AND LED	18
BLOCK DIAGRAM	19
SCHEMATIC DIAGRAM / WIRING SIDE OF P.W.BOARD	22
WAVEFORMS OF CD CIRCUIT	44
TROUBLESHOOTING (CD CHANGER CONTROL / CD SECTION)	45
FUNCTION TABLE OF IC	49
FL DISPLAY	59
REPLACEMENT PARTS LIST/EXPLODED VIEW	
PACKING OF METHOD (FOR U.K. ONLY)	

SAFETY PRECAUTION FOR SERVICE MANUAL

Precaution to be taken when replacing and servicing the Laser Pickup.

The AEL (Accessible Emission Level) of Laser Power Output for this model is specified to be lower than Class I Requirements. However, the following precautions must be observed during servicing to protect your eyes against exposure to the Laser beam

- (1) When the cabinet has been removed, the power is turned on without a compact disc, and the Pickup is on a position outer than the lead-in position, the Laser will light for several seconds to detect a disc. Do not look into the Pickup Lens.
- (2) The Laser Power Output of the Pickup inside the unit and replacement service parts have already been adjusted prior to shipping.
- (3) No adjustment to the Laser Power should be attempted when replacing or servicing the Pickup.
- (4) Under no circumstances look directly into the Pickup Lens at any time.
- (5) CAUTION - Use of controls or adjustments, or performance of procedures other than those specified herein may result in hazardous radiation exposure.


Laser Diode Properties

Material: GaAlAs
Wavelength: 780 nm
Emission Duration: continuous
Laser Output: max. 0.6 mW


VAROITUS! LAITTEEN KÄYTTÄMINEN MUULLA KUIN TÄSSÄ KÄYTTÖOHJEESSA MAINITULLA TAVALLA SAATTAA ALTISTAA KÄYTTÄJÄN TURVALLISUUSLUOKAN 1 YLITTÄVÄLLE NÄKYMÄTTÖMÄLLE LASERSÄTEILYLLE.

WARNING - OM APPARATEN ANVÄNDS PÅ ANNAT SÄTT ÄN DENNA BRUKSANVISNING SPECIFICERAS. KANANVÄNDAREN UTSÄTTAS FÖR OSYNLIG LASERSTRÅLNING, SOM ÖVERSKRIDER GRÄNSEN FÖR LASERKLASS 1.

(Except For U.K./Australia/New Zealand)

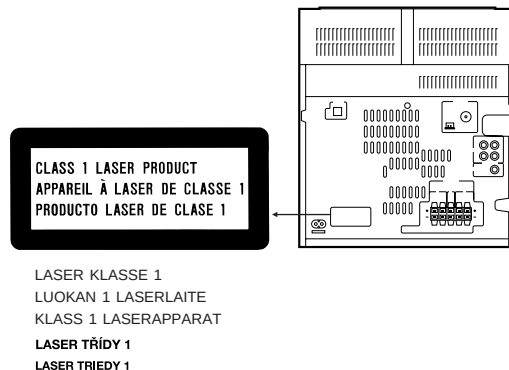

(FOR U.K./Australia/New Zealand)

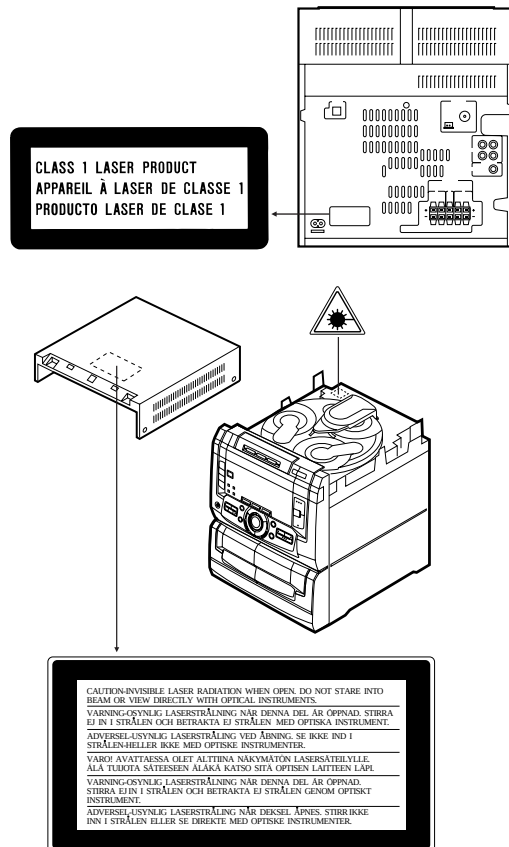


IMPORTANT SERVICE NOTES (FOR U.K. ONLY)

Before returning the unit to the customer after completion of a repair or adjustment it is necessary for the following withstand voltage test to be applied to ensure the unit is safe for the customer to use.

Setting of Withstanding Voltage Tester and set.

Set name	set value
Withstanding Voltage Tester	
Test voltage	4,240 VPEAK 3,000 VRMS
Set time	6 secs
Set current(Cutoff current)	4 mA
Unit	
Judgment	
OK: The "GOOD" lamp lights.	
NG: The "NG" lamp lights and the buzzor sounds.	

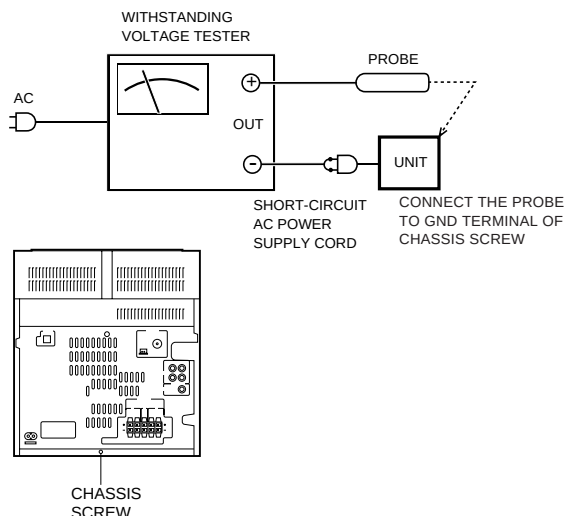

FOR A COMPLETE DESCRIPTION OF THE OPERATION OF THIS UNIT, PLEASE REFER TO THE OPERATION MANUAL.

SPECIFICATIONS

CD-C451H

● General

Power source: AC 230-240 V, 50 Hz
Power consumption: 81 W
Dimensions: Width; 270 mm (10-5/8")
 Height; 303 mm (11-13/16")
 Depth; 350 mm (13-13/16")
Weight: 6.6 kg (14.2 lbs.)

● Amplifier section

Output power: MPO; 176 W (88 W + 88 W)
 (Except FOR GERMANY) (10 % T.H.D.)
 RMS; 80 W (40 W + 40 W)
 (10 % T.H.D.)

Output power: PMPO; 352 W (total)
 (FOR GERMANY) MPO; 176 W (88 W + 88 W)
 (DIN 45 324)
 RMS; 80 W (40 W + 40 W)
 (DIN 45 324)

Input terminals: Video/Auxiliary (audio signal) ¥ 2; 500 mV/47 kohms

Output terminals: Speakers; 6 ohms
 Headphones; 16-50 ohms (recommended; 32 ohms)
 Pre-output; 500 mV/47 kohms

● Compact disc player section

Type: 3-disc multi-play compact disc player
Signal readout: Non-contact, 3-beam semiconductor laser pickup
D/A converter: 1-bit D/A converter
Frequency response: 20 - 20,000 Hz
Dynamic range: 90 dB (1 kHz)

● Tuner section

Frequency range: FM; 87.5 - 108 MHz
 MW; 522 - 1,620 kHz
 LW; 153 - 281 kHz

● Cassette deck section

Type: Compact cassette tape
Frequency response: 50 - 14,000 Hz (Normal tape)
Motor: DC motor with electronic governor ¥ 1
Signal/noise ratio: 55 dB (TAPE 1, playback)
 50 dB (TAPE 2, recording/playback)
Bias and erasure system: AC

Tape speed: 4.76 cm/sec. (1-7/8 ips.)
Wow and flutter: 0.15 % (WRMS)
 (Except FOR GERMANY)

Wow and flutter: 0.2 % (DIN 45 511, playback)
 (FOR GERMANY)

Heads: TAPE-1: Playback 1
 TAPE-2: Record/playback ¥ 1
 Erase ¥ 1

CP-C451H

● Speaker section

Type: 3-way type [130 mm (5-1/8") woofer, 50 mm (2") tweeter and super tweeter]
Maximum input power: 80 W
Impedance: 6 ohms
Dimensions: Width; 200 mm (7-7/8")
 Height; 300 mm (11-13/16")
 Depth; 253 mm (10")
Weight: 2.7 kg (5.8 lbs.)/each






Specifications for this model are subject to change without prior notice.

NAMES OF PARTS

CD-C451H

■ Front panel

1. Disc Tray
2. Disc Number Selector Buttons
3. Disc Skip Button
4. Open/Close Button
5. (CD) Play Indicator
6. (CD) Repeat Indicator
7. (CD) Pause Indicator
8. (CD) Disc Number Indicators
9. RDS Indicator
10. EON Indicator
11. Traffic Announcement Indicator
12. Traffic Programme Indicator
13. Traffic Information Indicator
14. Programme Type Indicator
15. Dolby Pro Logic Indicator
16. Sleep Indicator
17. FM Stereo Mode Indicator
18. FM Stereo Indicator
19. Extra Bass Indicator
20. (CD/TUNER) Memory Indicator
21. (TAPE 2) Direction Indicators
22. (TAPE) Reverse Mode Indicator
23. (TAPE) Record Indicator
24. Timer Indicator
25. Spectrum Analyzer/Volume Level/Balance Indicator
26. Function Selector Buttons
27. On/Stand-by Button
28. Programme Type/Traffic Information Search Button
29. EON Button
30. Extra Bass Button
31. Volume Up/Down Buttons
32. ASPM Button
33. Display Mode Selector Button
34. Headphone Socket
35. Dolby Pro Logic Button
36. Virtual Surround Button
37. QSOUND Button
38. Clock Button
39. Timer/Sleep Button
40. (TAPE) Record Pause Button
41. Equalizer Selector/Demo Mode Button
42. (CD) Record Start Button
(TAPE) Dubbing Start Button
43. (TUNER) Beat Cancel Button
(TAPE) Dubbing Start Button
44. Tuning and Time Up/Down Buttons
45. Memory/Set Button
46. (CD) Track Down/Review Button
(TUNER) Preset Down Button
47. (TAPE 2) Reverse Play Button
48. (CD/TAPE) Stop Button
49. (TAPE 1) Play Button/(TAPE 2) Forward Play Button
(CD) Play/Repeat Button
50. (CD) Track Up/Cue Button
(TUNER) Preset Up Button
51. (TAPE 2) Reverse Mode Button
52. (TAPE 1) Cassette Compartment
53. (TAPE 2) Cassette Compartment

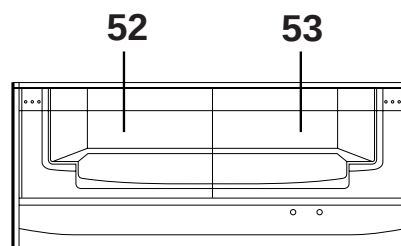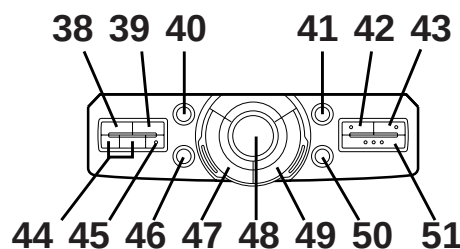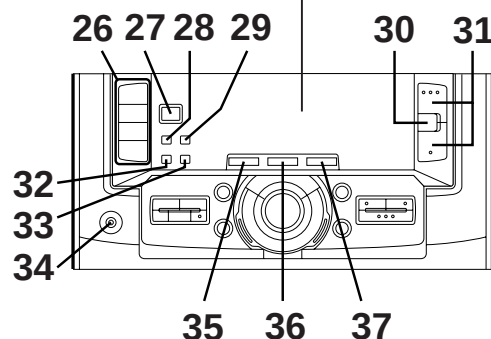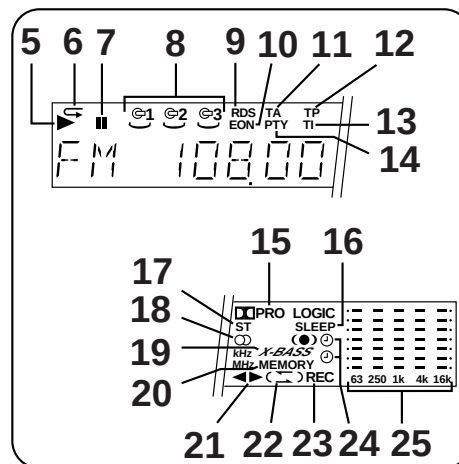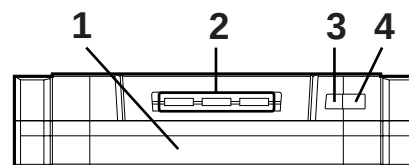

CD-C451H**■ Rear panel**

1. AC Power Input Socket
2. MW/LW Loop Aerial Input Socket
3. FM 75 Ohms Aerial Socket
4. Video/Auxiliary (Audio Signal) Input Sockets
5. Surround Output Socket
6. Centre Output Socket
7. Speaker Terminals

CP-C451H**■ Speaker section**

1. Super Tweeter
2. Tweeter
3. Woofer
4. Bass Reflex Duct
5. Speaker Wire

CD-C451H**■ Remote control**

1. Remote Control Transmitter LED
2. Centre Level Buttons
3. Dolby Pro Logic Button
4. Virtual Surround Button
5. QSOUND Button
6. Test Tone Button
7. Balance Control Buttons
8. Surround Level Buttons

● Tuner control section

9. Programme Type/Traffic Information Search Button
10. Preset Up/Down Buttons

● CD control section




11. Disc Skip Button
12. Play/Repeat Button
13. Memory Button
14. Clear Button
15. Pause Button
16. Track Down/Review Button
17. Track Up/Cue Button
18. Stop Button
19. Random Button

● Tape control section

20. (TAPE 2) Reverse Play Button
21. (TAPE 1/2) Stop Button
22. (TAPE 1) Play Button
- (TAPE 2) Forward Play Button
23. (TAPE 2) Record Pause Button
24. (TAPE 2) Rewind Button
25. (TAPE 2) Fast Forward Button



● Common section

26. Equalizer Mode Button
27. Function Selector Buttons
28. On/Stand-by Button
29. Extra Bass Buttons
30. Volume Up/Down Buttons

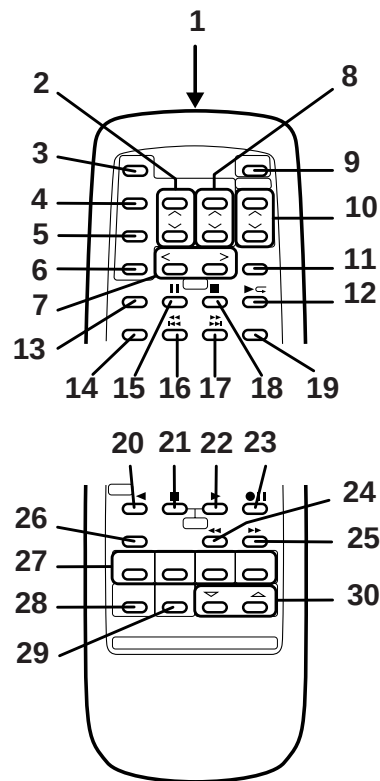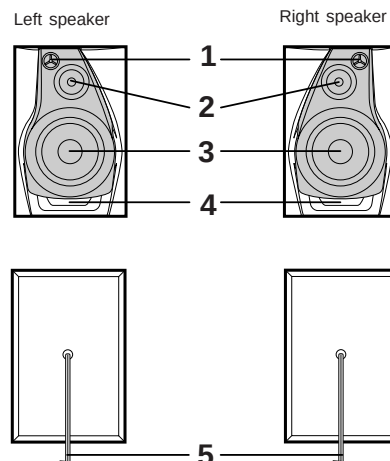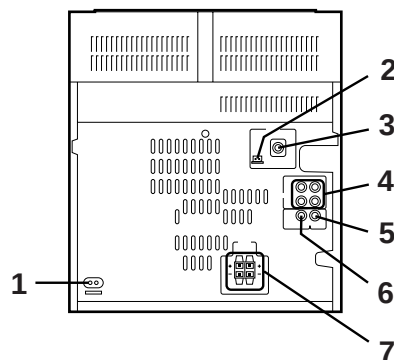

SETTING THE CLOCK

In this example, the clock is set for the 24-hour (0:00) system.

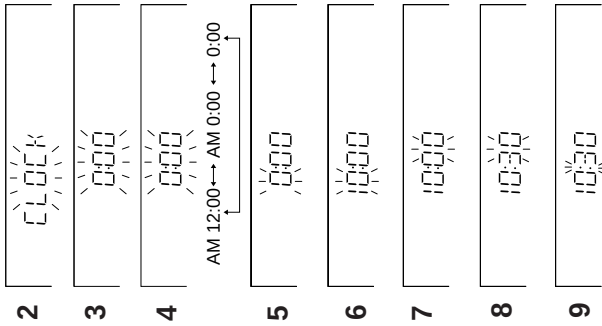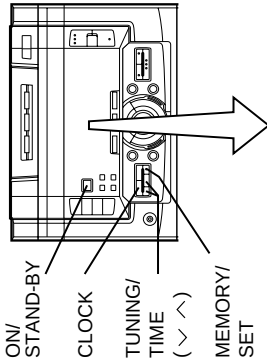

(Main unit operation)

- 1 Press the ON/STAND-BY button to enter the stand-by mode.
- 2 Press the CLOCK button.
- 3 Within 5 seconds, press the MEMORY/SET button.
- 4 Press the TUNING/TIME (✓ or ^) button to select the time display mode.
 - "0:00" → The 24-hour display will appear. (0:00 - 23:59)
 - "AM 12:00" → The 12-hour display will appear. (AM or PM 12:00 - 11:59)
 - "AM 0:00" → The 12-hour display will appear. (AM or PM 0:00 - 11:59)

• Note that this can only be set when the unit is first installed or it has been reset.

- 5 Press the MEMORY/SET button.
- 6 Press the TUNING/TIME (✓ or ^) button to adjust the hour.
- Press the TUNING/TIME (✓ or ^) button once to advance the time by 1 hour. Hold it down to advance continuously.
- When the 12-hour display is selected, "AM" will change automatically to "PM".
- 7 Press the MEMORY/SET button.
- 8 Press the TUNING/TIME (✓ or ^) button to adjust the minutes.

- Press the TUNING/TIME (✓ or ^) button once to advance the time by 1 minute. Hold it down to change the time in 5 minute intervals.
- The hour setting will not advance even if minutes advance from "59" to "00".
- 9 Press the MEMORY/SET button.
- The clock starts operating from "0" seconds. (Seconds are not displayed.)

Note:

- In the event of a power failure or when the AC power lead is disconnected, the clock display will go out. When the AC power supply is restored, the clock display will flash on and off to indicate the time when the power failure occurred or when the AC power lead was disconnected. If this happens, follow the procedure below to change the clock time.

To change the clock time:

When the unit is in the stand-by mode:

- ① Press the MEMORY/SET button.
- ② Perform steps 6 - 9 above.

When the unit is on:

- ① Press the CLOCK button.
- ② Within 5 seconds, press the MEMORY/SET button.
- ③ Perform steps 6 - 9 above.

To see the time display:

- Press the CLOCK button.
- The time display will appear for about 5 seconds.


To change the time display mode:

- ① Perform steps 1 - 2 in the section "RESETTING THE MICRO-COMPUTER".
- ② Perform steps 1 - 9 above.

PREPARATION FOR USE

Notes concerning use:

- Replace the batteries if the operating distance becomes reduced or if operation becomes erratic.
- Periodically clean the transmitter LED on the remote control and the sensor on the main unit with a soft cloth.
- Exposing the sensor on the main unit to strong light may interfere with operation. Change the lighting or the direction of the unit.
- Keep the remote control away from moisture, excessive heat, shock, and vibrations.

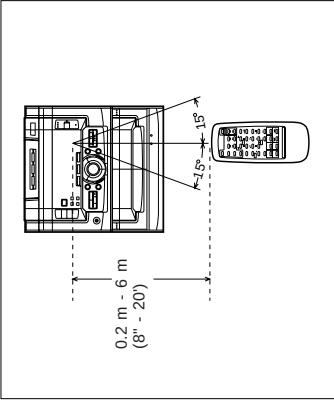

RESETTING THE MICROCOMPUTER


Reset the microcomputer under the following conditions:

- To erase all of the stored memory contents (clock and timer settings, and tuner and CD presets).
- If the display is not correct.
- If the operation is not correct.

- 1 Press the ON/STAND-BY button to enter the stand-by mode.
- 2 While pressing down the VOLUME ▽ button and the TUNING/TIME ^ button, hold down the ON/STAND-BY button for at least 1 second.

Caution:

- The operation explained above will erase all data stored in memory including clock and timer settings, and tuner and CD presets.

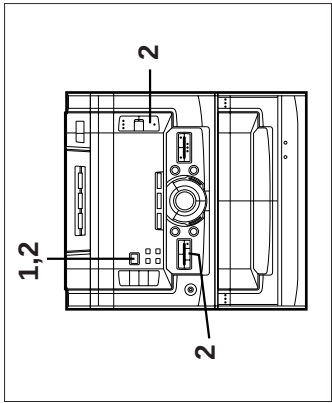

DISASSEMBLY

Caution on Disassembly

Follow the below-mentioned notes when disassembling the unit and reassembling it, to keep it safe and ensure excellent performance:

1. Take cassette tape and compact disc out of the unit.
2. Be sure to remove the power supply plug from the wall outlet before starting to disassemble the unit.
3. Take off nylon bands or wire holders where they need to be removed when disassembling the unit. After servicing the unit, be sure to rearrange the leads where they were before disassembling.
4. Take sufficient care on static electricity of integrated circuits and other circuits when servicing.

CD-C451H

STEP	REMOVAL	PROCEDURE	FIGURE
1	Top Cabinet	1. Screw (A1) x4	7-1
2	Side Panel (Left/right)	1. Screw (B1) x6	7-1
3	CD Player Unit/ CD Tray Cover	1. Turn on the power supply, open the disc tray, take out the CD cover, and close. (Note 1) 2. Hook (C1) x3 3. Hook (C2) x2 4. Screw (C3) x1 5. Socket (C4) x2	7-2
4	Back Board	1. Screw (D1) x12 2. Socket (D2) x1	8-1
5	Tuner PWB	1. Screw (E1) x1 2. Socket (E2) x1	8-1
6	Main PWB	1. Screw (F1) x1 2. Socket (F2) x2 3. Flat Wire (F3) x2 4. Tip Wire (F4) x1 5. Socket (F5) x1	8-2
7	Front Panel	1. Screw (G1) x2 2. Hook (G2) x2	8-2
8	Display PWB/ Switch PWB	1. Screw (H1) x12	8-3
9	Tape Mechanism	1. Open the cassette holder. 2. Screw (J1) x5	8-3
10	Power Amp. PWB	1. Screw (K1) x4 2. Socket (K2) x2 3. Push Rivet (K3) x4	8-4
11	CD Servo PWB	1. Screw (L1) x1 2. Cover (L2) x4	8-5
12	Turntable	1. Screw (M1) x1 2. Cover (M2) x1	8-6
13	CD Player Base	1. Screw (N1) x2 2. Guide (N2) x2	8-6
14	CD Changer Mechanism	1. Screw (P1) x4	8-7
15	CD Mechanism	1. Screw (Q1) x1	8-7

Note 1:

How to open the changer manually. (Fig.7-3)

1. Insert the tip of fine screwdriver into the hole of CD player base, and press down the worm wheel < A > .
2. Then, turn fully the lock lever in the arrow direction through the hole on the loading chassis bottom in this state.
After that, push forward the CD player base.

CD-C451H

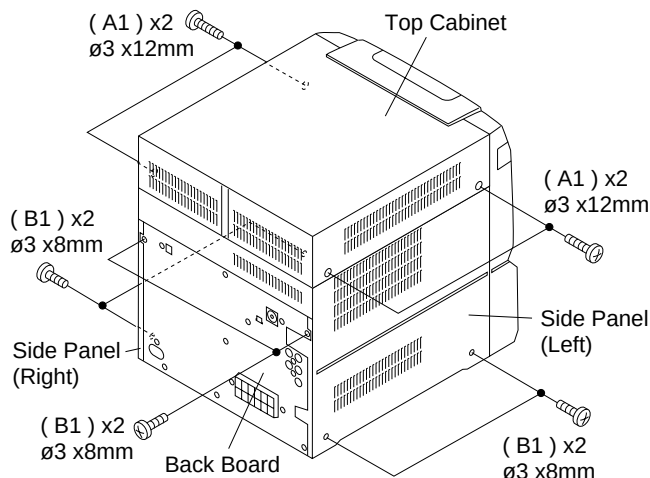


Figure 7-1

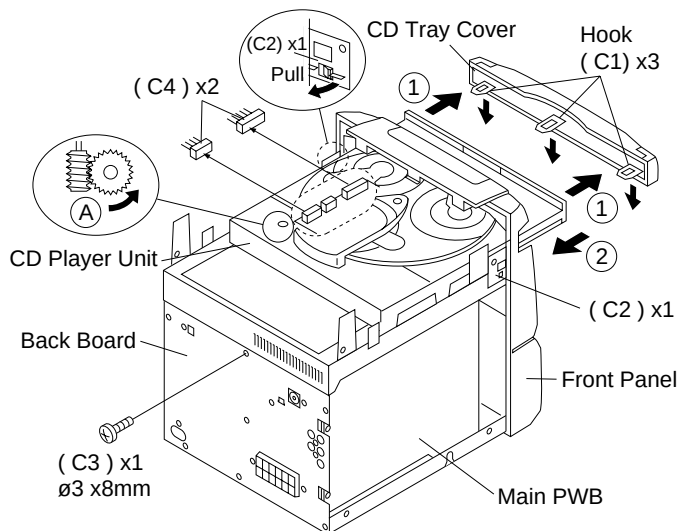


Figure 7-2

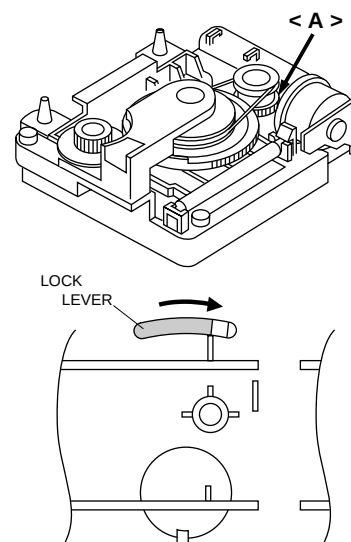


Figure 7-3

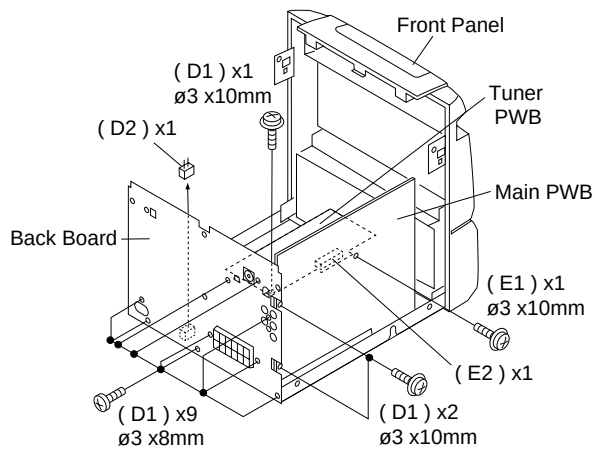


Figure 8-1

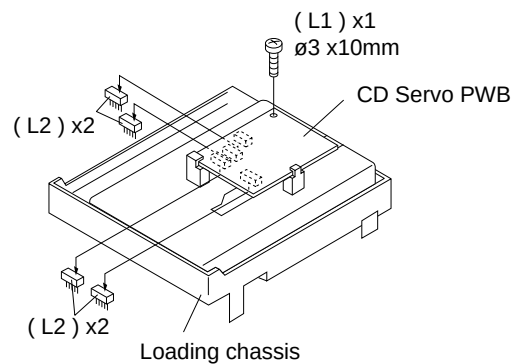


Figure 8-5

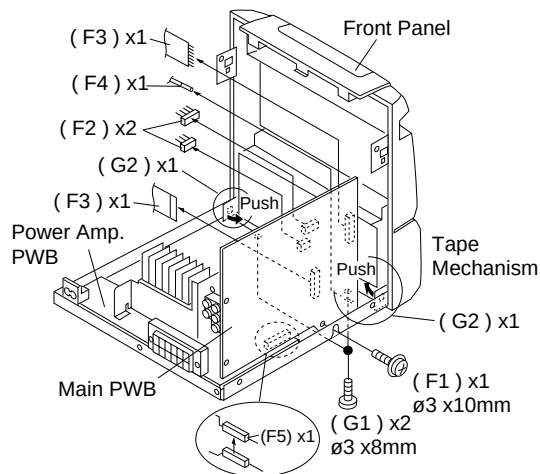


Figure 8-2

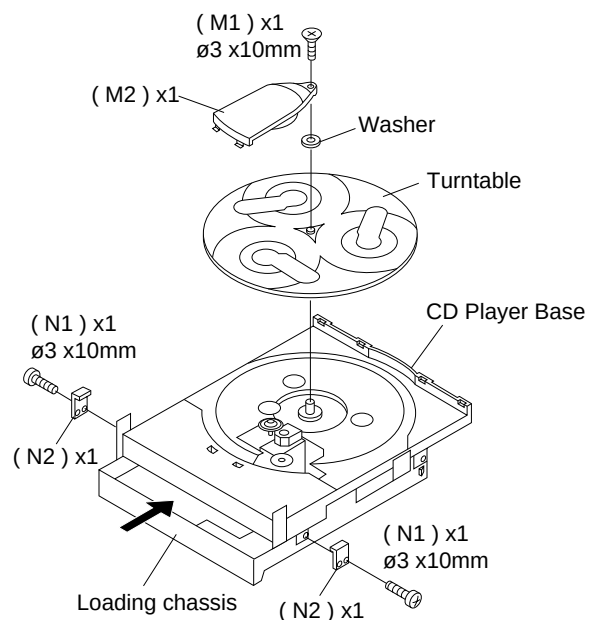


Figure 8-6

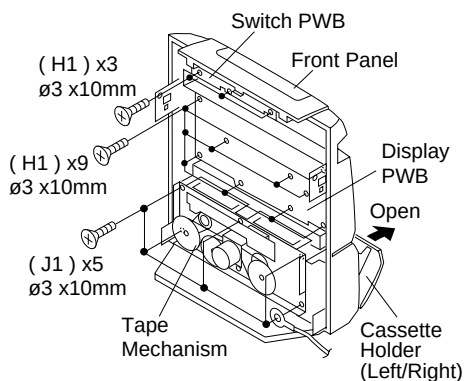


Figure 8-3

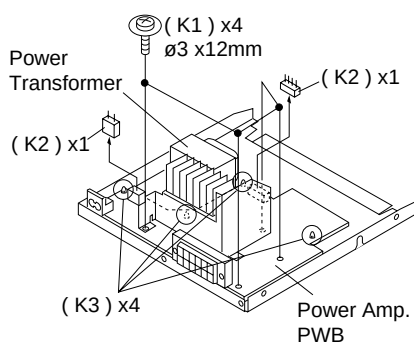


Figure 8-4

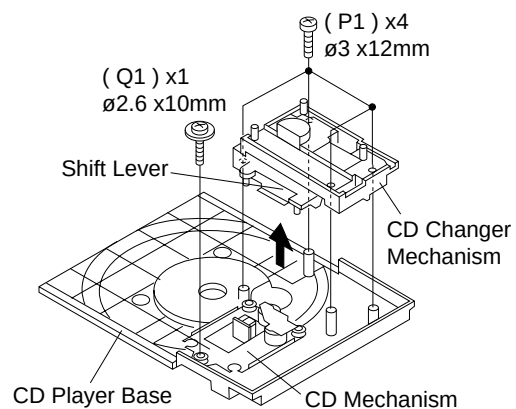


Figure 8-7

Be careful when installing the CD changer mechanism. Install the CD changer mechanism on the CD player base after the shift lever has been set in the highest position.

CP-C451H			
STEP	REMOVAL	PROCEDURE	FIGURE
1	Front Speaker	1. Net (A1) x1	9-1
		2. Front Panel (A2) x1	
		3. Screw (A3) x2	9-2
		4. Screw (A4) x4	
		5. Screw (A5) x2	

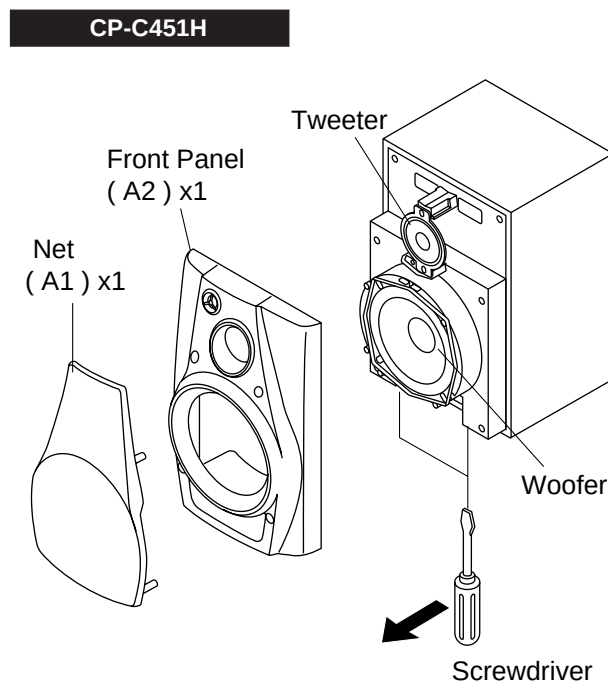


Figure 9-1

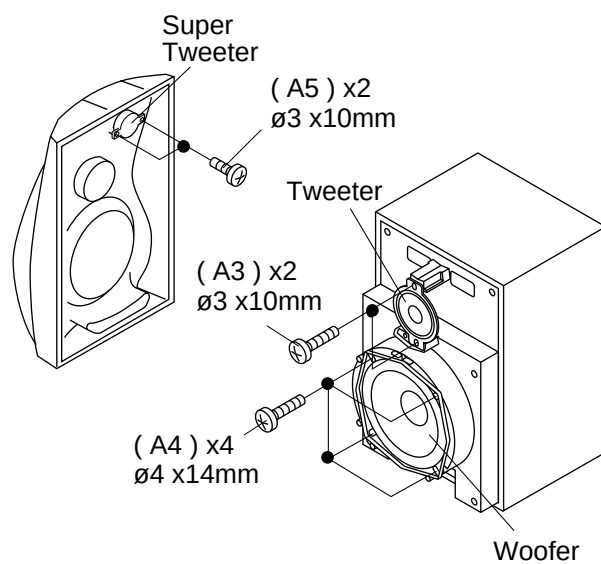


Figure 9-2

REMOVING AND REINSTALLING THE MAIN PARTS

CD MECHANISM SECTION

Perform steps 1, 2, 3, 14 and 15 of the disassembly method to remove the CD mechanism.

How to remove the turntable up/down motor (See Fig. 10-1)

1. Remove the screws (A1) x 2 pcs., to remove the turntable up/down motor.

Turntable Up/Down Motor

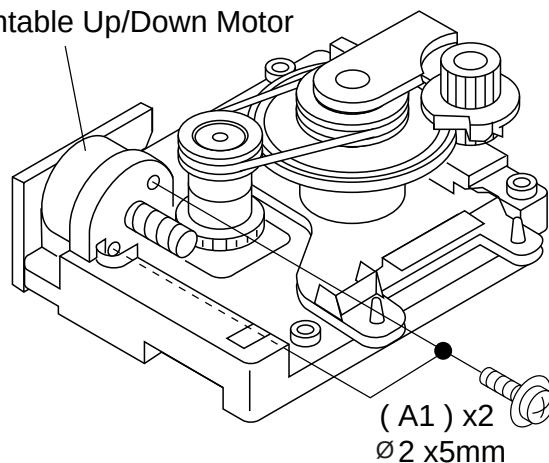


Figure 10-1

How to remove the pickup (See Fig. 10-2)

1. Remove the screws (B1) x 2 pcs., to remove the shaft (B2) x 1 pc.
2. Remove the stop washer (B3) x 1 pc., to remove the gear (B4) x 1 pc.
3. Remove the pickup.

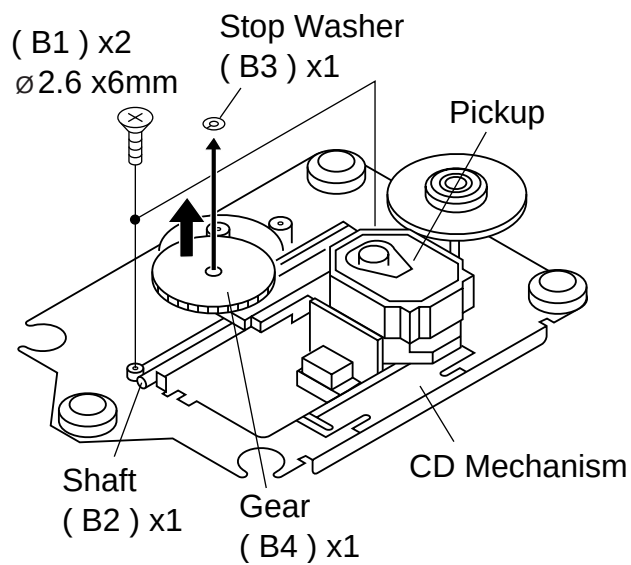


Figure 10-2

ADJUSTMENT

MECHANISM SECTION

• Driving Force Check


Torque Meter	Specified Value
Play: TW-2412	Tape 1: Over 80 g Tape 2: Over 80 g

• Torque Check

Torque Meter	Specified Value	
	Tape 1	Tape 2
Play: TW-2111	30 to 60 g. cm	30 to 100 g.cm
Fast forward: TW-2231	—	50 to 100 g.cm
Rewind: TW-2231	—	50 to 100 g.cm

• Tape Speed

	Test Tape	Adjusting Point	Specified Value	Instrument Connection
Normal speed	MTT-111	VRM1	3,000 ± 30 Hz	Speaker terminal

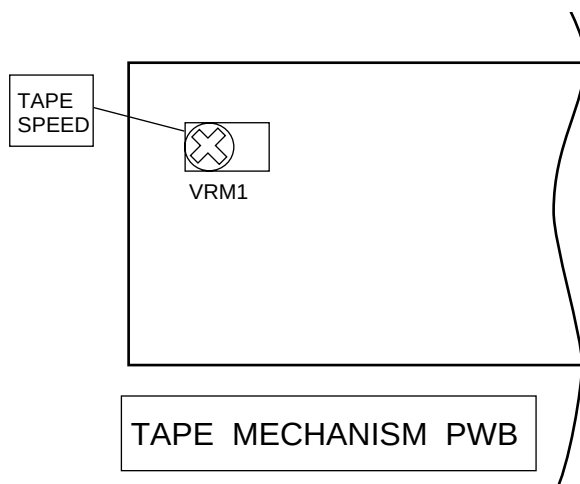

TUNER SECTION

fL: Low-range frequency

fH: High-range frequency

• AM IF/RF

Signal generator: 400 Hz, 30%, AM modulated

Test Stage	Frequency	Frequency Display	Setting/ Adjusting Parts	Instrument Connection
IF	450 kHz	1,620 kHz	T351	*1
MW Band Coverage	—	522 kHz	(fL): T306 1.1 ± 0.1 V	*2
MW Tracking	990 kHz	990 kHz	(fL): T302	*1
LW Band Coverage	—	153 kHz	(fL): T305 1.5 ± 0.1 V	*2
LW Tracking	225 kHz	225 kHz	(fL): T301	*1

*1. Input: Antenna, Output: TP302

*2. Input: Antenna, Output: TP301

• FM

Notes:

1: Description of the "FM IF Adjustment" is not carried on this Manual. It is because the IF coil in the FM front end section has been best adjusted in the factory so that its further adjustment is not needed at the field. When replacing the FM front end assembly, no adjustment is needed either.

2: The parts in the FM front end section are prepared in a complete unit, so you can't obtain each part individually

• FM Mute Level

Signal generator: 1 kHz, 40 kHz dev., FM modulated

Frequency	Frequency Display	Adjusting Parts	Instrument Connection
98.00 MHz (25 dBμV)	98.00 MHz	VR351	Input: Antenna Output: Speaker Terminal

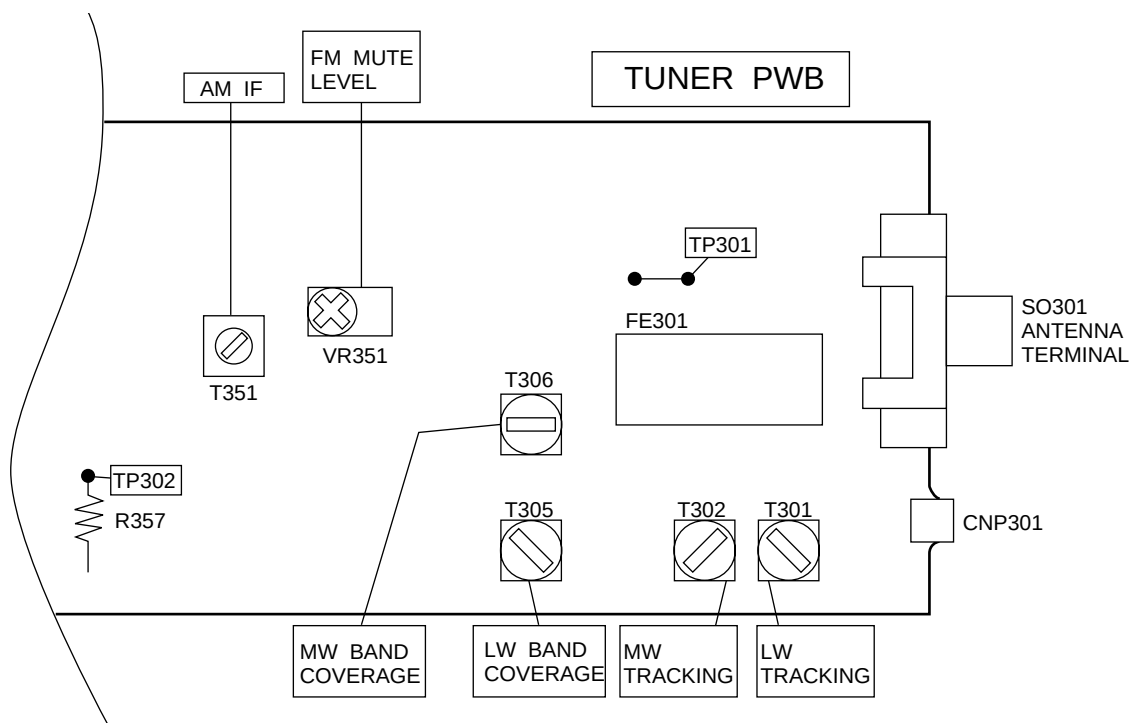


Figure 11 ADJUSTMENT POINTS

CD-C451H

TEST MODE

• Setting the test mode

Any one of test mode can be set by pressing several keys as follows.

<REC. PAUSE> + <CD> + <POWER> TEST: CD operation test

• TEST mode

Function — CD test mode

Setting of TEST mode

Indication of CD TST mode (Fig.12-1)

OPEN/CLOSE operation is manual operation.

The pickup can be moved by using the (▶▶) or (◀◀) key.

IL is not performed.

<MEMORY> LASER ON — <MEMORY> Tracking on the spot. SERVO OFF PLAY — <MEMORY> Tracking on the spot. SERVO ON PLAY — <STOP> STOP

<PLAY> key input — TOC. IL is performed, and the ordinary PLAY is performed. — Press <STOP> key. — Stop
If the following key is pressed during PLAY, it is possible to specify directly any Track No.
<Disc Number 1> key: Track 4
<Disc Number 2> key: Track 9
<Disc Number 3> key: Track 15

Note:

Only in STOP state it is possible to slide the pickup with the (▶▶) or (◀◀) key.

VOL. --- Last memory

BAL. --- CENTER

R.GEQ. --- FLAT

X-BAS --- OFF

Canceling method - POWER OFF

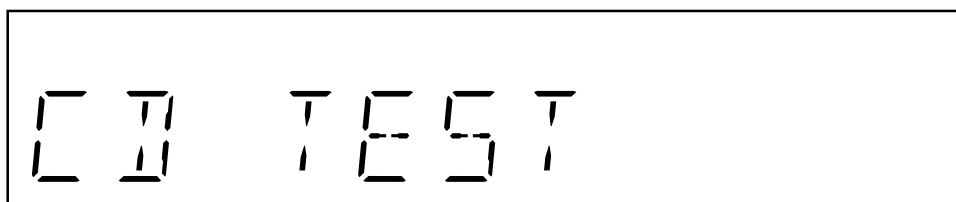


Figure 12-1

CD SECTION

Since this CD system incorporates the following automatic adjustment function, when the pickup is replaced, it is not necessary to readjust it.

Since this CD unit does not need adjustment, the combination of PWB and laser pickup unit is not restricted.

• Automatic adjustment item

1. Focus offset (Fig.12-2)
2. Tracking offset (Fig.12-3)
3. E/F balance (tracking error balance) (Fig.12-4)
4. RF level AGC function (HF level: constant)
5. RF level automatic follow-up of the tracking gain

This automatic adjustment is performed each time a disc is changed. Therefore, each disc is played back using the optimal settings.

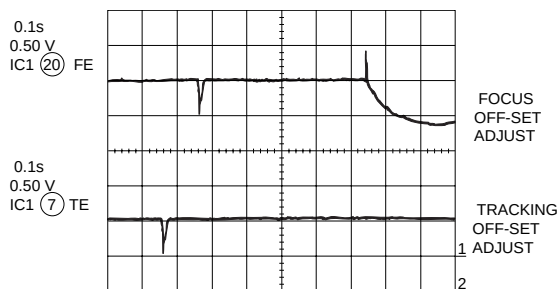


Figure 12-2

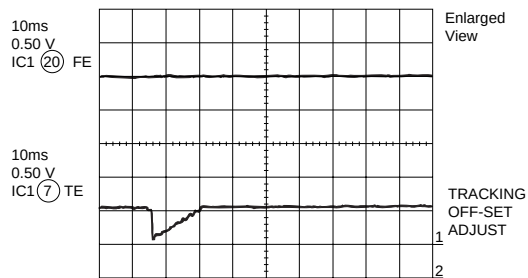


Figure 12-3

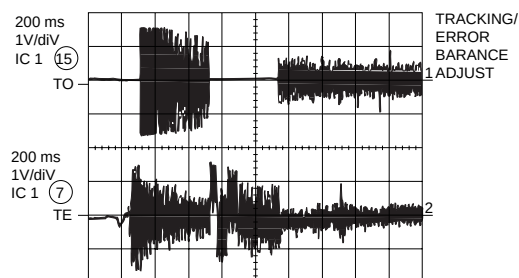


Figure 12-4

EXPLANATION OF DOLBY SURROUND PRO LOGIC AND EVALUATION METHOD

Outline

- Namely, two speakers are connected in parallel to one amplifier.
- In the Pro Logic BYPASS mode the amplifier for C-ch (center channel) and the amplifier for S-ch (surround channel) are in MUTE state. The SP output is cut.
- In the normal mode of Pro Logic ON mode the amplifiers for C-ch and S-ch are in operative state, so that the SP output appears.
- In the Phantom mode of Pro Logic ON mode the amplifier for C-ch is in MUTE state, so that the SP output is cut. The amplifier for S-ch (surround) is in operative state, so that the SP output appears

State of element output and terminal output in specific mode

State of set Output point		Dolby Pro Logic Bypass mode	Dolby Pro Logic On mode	
			Normal mode	Phantom mode
IC501	12 pin L-out	Output enabled state	Output enabled state	Output enabled state
	11 pin R-out	Output enabled state	Output enabled state	Output enabled state
IC501	9 pin C-out	No output	Output enabled state	No output
IC501	10 pin S-out	No output	Output enabled state	Output enabled state
SP OUT (SO901)	L-ch	Output enabled state	Output enabled state	Output enabled state
	R-ch	Output enabled state	Output enabled state	Output enabled state
SP OUT C-ch (SO901)		No output in MUTE (Q604) state	Output enabled state	No output in MUTE (Q604) state
SP OUT S-ch (SO901)		No output in MUTE (Q603) state	Output enabled state	Output enabled state

Test tone output

Pro Logic ON Normal mode

Press the remote control TEST TONE button.

→Output of only L-ch →Output of only C-ch

↑

Output of only S-ch ← Output of only R-ch

The test tone (noise) is repeatedly output for output period (2 sec).

In this case the following indication appears repeatedly.

→TEST →L-ch →C-ch

↑

S-ch ← R-ch

Pro Logic ON Phantom mode

Press the remote control TEST TONE button.

→Output of only L-ch →Output of only R-ch

↑

← Output of only S-ch

The test tone (noise) is repeatedly output for output period (2 sec).

In this case the following indication appears repeatedly.

→TEST →L-ch →R-ch

↑

← S-ch←

Relation between VIDEO IN input and output in Pro Logic ON state

(1) L-ch/R-ch same phase input into VIDEO IN input jack in VIDEO Function mode

Output point		Normal mode
SP out (SO901)	L-ch	Almost no output (only omitting component)
	R-ch	Almost no output (only omitting component)
(SO901) SP out C-ch		Input signal is output.
(SO901) SP out S-ch		Almost no output (only omitting component)

Output point		Phantom mode
SP out (SO901)	L-ch	Input signal is output.
	R-ch	Input signal is output.
(SO901) SP out C-ch		SP cut, no output
(SO901) SP out S-ch		Almost no output (only omitting component)

(2) L-ch/R-ch reverse phase input into VIDEO IN input jack in VIDEO Function mode

(Reverse phase: Phase difference between L and R is 180°)

Output point		Normal mode
SP out (SO901)	L-ch	Almost no output (only omitting component)
	R-ch	Almost no output (only omitting component)
(SO901) SP out C-ch		Almost no output (only omitting component)
(SO901) SP out S-ch		Input signal is output.


Output point		Phantom mode
SP out (SO901)	L-ch	Almost no output (only omitting component)
	R-ch	Almost no output (only omitting component)
(SO901) SP out C-ch		SP cut, no output
(SO901) SP out S-ch		Input signal is output.

- Accordingly, if you want to output signal waveform to C-ch SP out, give the same phase input into L-ch/R-ch INPUT in the Pro Logic Normal mode.

If one of channels receives input, C-ch does not output. Only L-ch or R-ch outputs.

- If you want to output signal waveform to S-ch SP out, you can use either Normal mode or Phantom mode. However, 180° reverse phase input must be given to L-ch/R-ch INPUT.

RDS (Radio Data System) OPERATION

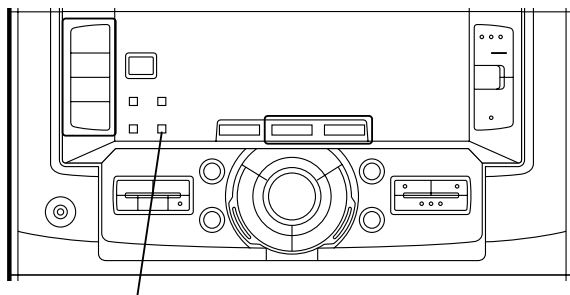

DISPLAY MODE

■ Receiving FM Stations with RDS (Radio Data System)

RDS is a broadcasting service which a growing number of FM stations are now providing. It allows these FM stations to send additional signals along with their regular programme signals. For example, the stations send their station names, and information about what type of programme they broadcast, such as sports or music, etc.

When tuned to an FM station which provides the RDS service, the RDS will appear, the station frequency (and then the station name if sent) is displayed.

The TP (Traffic Programme) will appear on the display when the received broadcast carries traffic announcements, and the TA (Traffic Announcement) will appear whilst a traffic announcement is being received. EON will appear whilst the EON (Enhanced Other Networks information) data is being broadcast.

Note:


When the TP and TA appear at the same time, an announcement is being made.

When only the TA appears, an announcement is not being made. (See page 17.)

■ Information Provided by RDS

With the CD-C451H, you can display two types of RDS service. To show them in the display, press the DISPLAY MODE button.

Each time you press the DISPLAY MODE button, the display will change to show the following information.

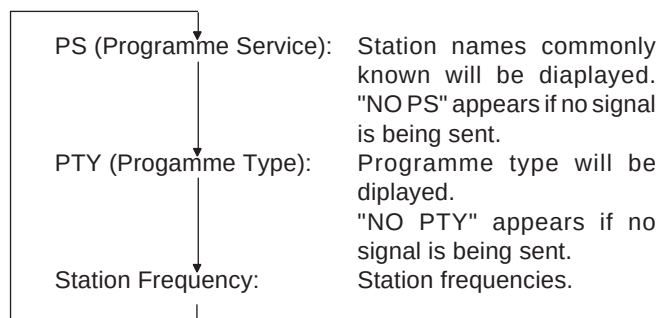

Descriptions of the PTY (Programme Type) codes, TP (Traffic Programme) and TA (Traffic Announcement)


With the CD-C451H, you can search for and receive the following PTY, TP and TA signals.

NEWS:	News
AFFAIRS:	Topical programme expanding on the current news or affairs
INFO:	Programmes on medical service, weather forecast, etc.
EDUCATE:	Educational programmes
DRAMA:	Radio plays
CULTURE:	Programmes on national or regional culture.
SCIENCE:	Programmes on national sciences and technology.
VARIED:	Other programmes like comedies or ceremonies
POP M:	Pop music
ROCK M:	Rock music
M.O.R. M:	Middle-of-the-road music (usually called "easy listening")
LIGHT M:	Light music
CLASSICS:	Classics
OTHER M:	Other music
ALARM:	Emergency broadcasts
NONE:	no Programme type (receive only)
TP:	Broadcasts which carry traffic announcements
TA:	Traffic announcements are being broadcast at present.

Note:

● When the unit is in the EON stand-by mode and a programme is selected, the unit will display "TI" instead of "TP" or "TA".

ASPM, summary operation

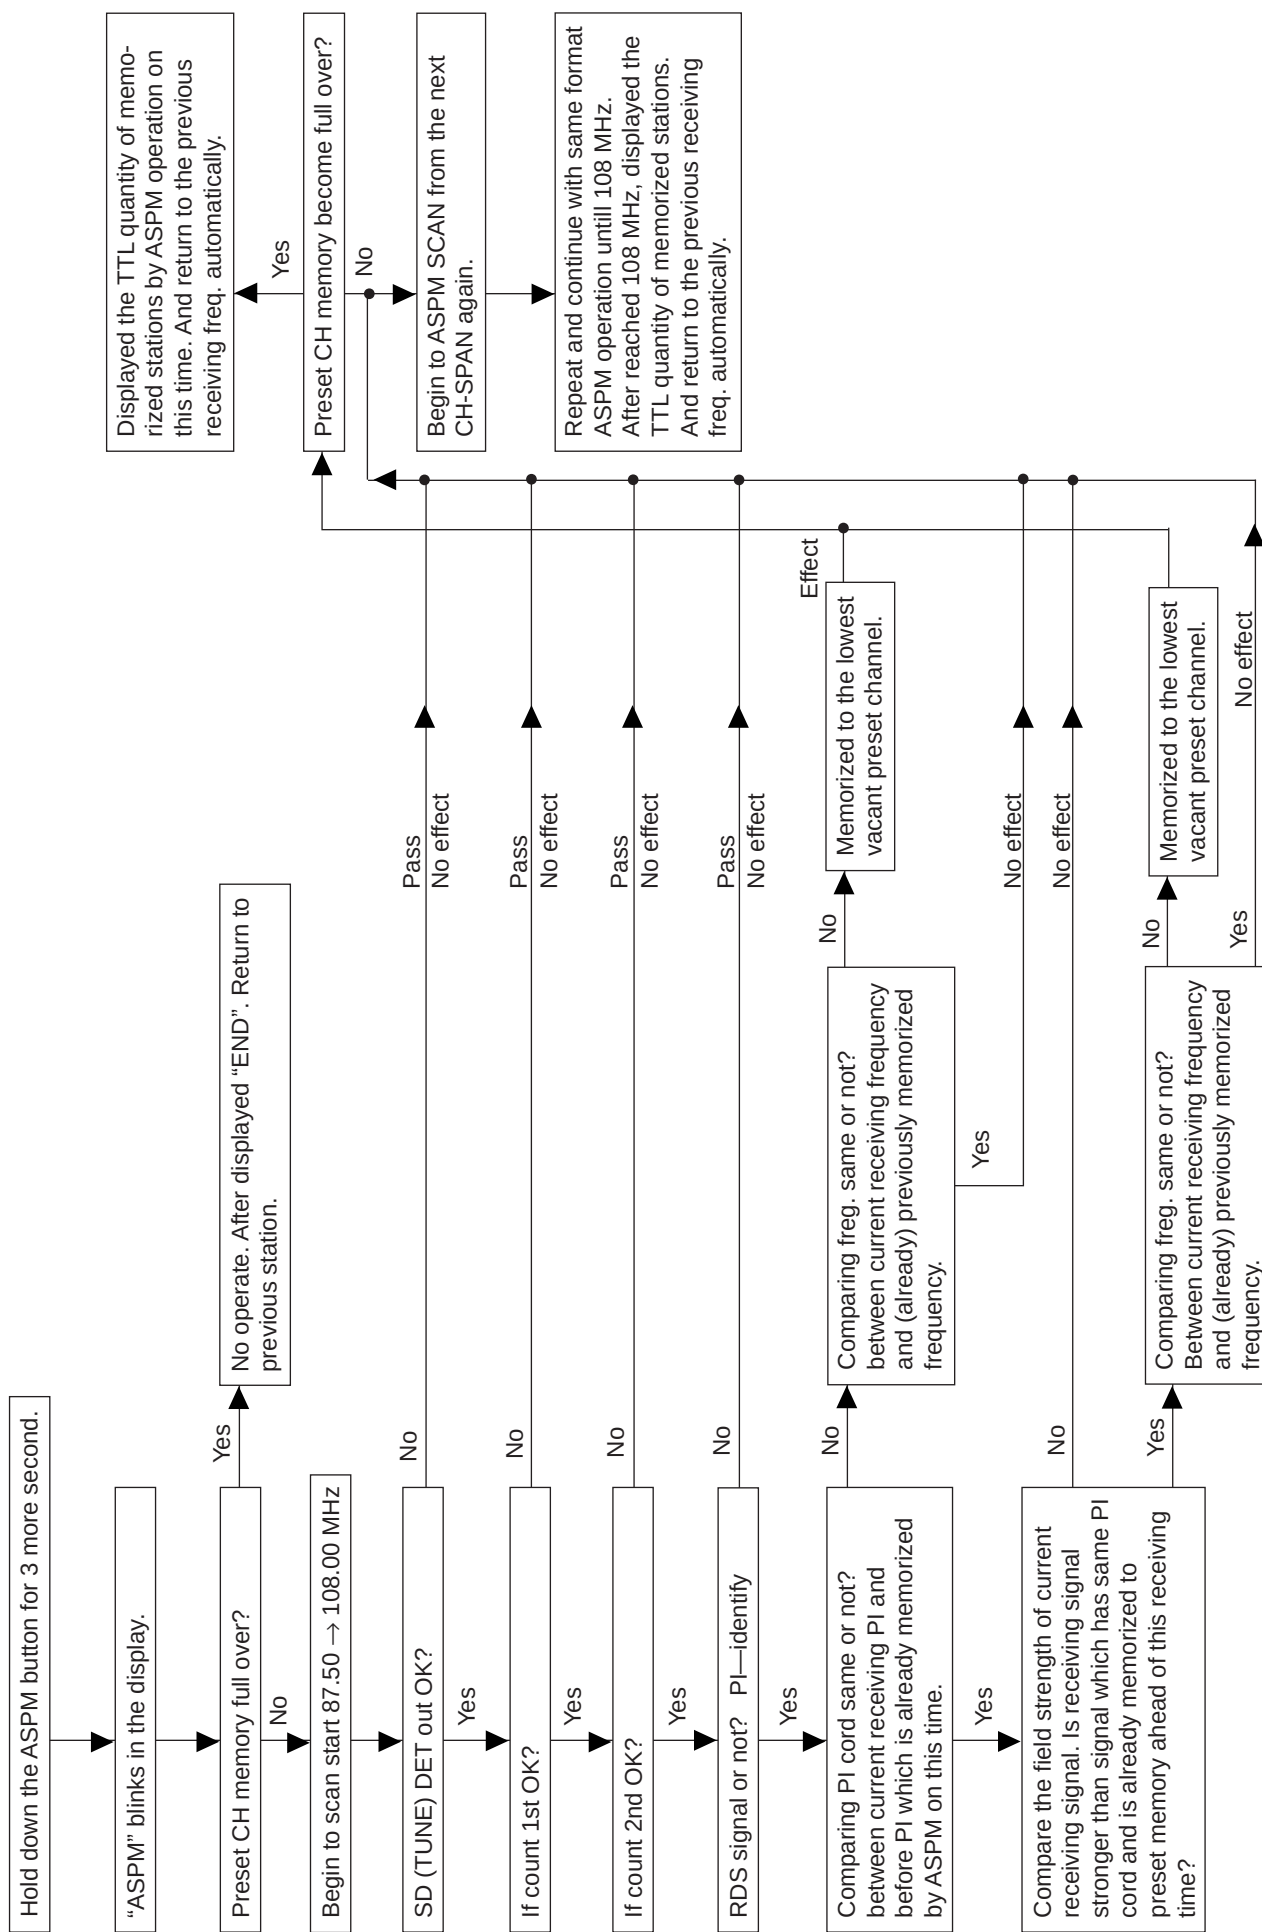


CD-C451H

- ASPM SCAN: 87.50MHz → 108.00 MHz.
- Only RDS signal is memorized by ASPM because RDS signal has PI code and is suitable and convenient for ASPM operation.

ASPM

Comparing field strength, only one strongest RDS station is memorized of all stations (repeater relay stations) that have same PI code.

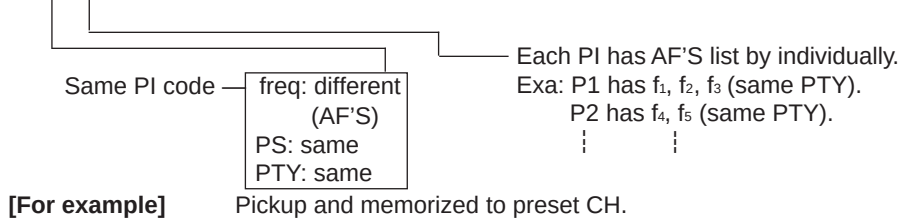

Select signals (f1, f5, f7, f10) are memorized in the preset memory by ASPM.

- If tentative - ASPM operation is repeated intentionally, never memorized (over write) at the same frequency. 1st time ASPM → strongest stations of each pi are memorized.

ASPM is not only very usefull for PTY search, but also EON operation.

2nd time ASPM → 2nd strong stations of each pi are memorized and so on.

PTY search function is equal to FM band search function as a result.

1. Introduction of RDS for CD-C451H

CD-C451H RDS function is equal to adding EON feature to the current CD-C75H RDS.

EON feature is EON—PTY and EON—TI.

Although PTY and TI indicators are separated, PTY contains TI in the PTY items (software) like current PTY search items.



EON—PTY and EON—TI are basically stand-by → receive the desired program of ON station.

2. The difference point from current CD-C75H RDS. (CD-C75H — CD-C451H)

1. PTY item: added TA.TTL 18 kind.
2. Each "TP", "TA" ind. light up or go out individually.
"TA" ind. doesn't light up on current model, CD-C75H due to none EON—TI.
3. Added 3 indicators(in FL) due to adding EON feature.
EON: Lights up only during receiving EON data (14A).
TI: During EON-TI stand-by → Light up
During receiving ON station. → blink.
PTY: During EON-PTY stanb-by → Light up
During receiving ON station. → blink.

4. No adjust type (None adjusting circuit.)
5. Added EON button.
6. Need to change RDS logo due to add EON feature.
7. Added EON—TI, EON—PTY function.

3. Summary of CD-C451H RDS—EON operation

EON—PTY: Select and set the desired "PTY" → stand-by → switch to ON(other network) Station at the start of desired PTY automatically → stay and listen to PTY of ON station → switch back to TN(This net) station automatically at the end of PTY(ON) i.e. after changing to another PTY(except AFFAIRS) or cancelling to receive PTY of ON station midway.

EON—TI: Select and set the "TI" → stand-by → switch to ON station at the start of traffic announcement automatically → stay and listen to TA of ON station → switch back to TN station automatically at the end of TA(ON). ie after TA(ON) is over or cancelled to receive TA of ON station midway.

When switching TN → ON station.

In case of exist 2 more stations having the desired(specified) "PTY" or "TI", the receiver will select and switch to ON station comparing field strength at the same time. But when the frequency of ON station exists in the preset-memory, then reciver switches straight to that ON station(CH), without comparing field strength so can make a quick switching from TN—ON station. Preset memory takes priority of switching TN—ON station.

therefore ASPM is usefull not only for PTY search but also for rapid EON switching. Anyway CD-C451H EON is basically stand-by and receiving method, along with the Guidelines for EON implementation.

EON summary notice for reference

1. EON-TI/PTY EON stand-by can be set, only when EON ind. lights up.
While EON ind. goes out (NO EON STATION), EON stand-by can't be set.
If the EON button is pressed, then "NO EON" is indication the display.
2. EON-TI/PTY Even if switch back ON→TN station continue to keep EON stand-by.
3. EON-TI Don't switch TN→ON during TN broadcast TA. (same item)
4. EON-TI/PTY EON can be cancelled during receiving ON station by pressing EON button if necessary and switch back ON→TN.
5. EON-TI/PTY EON stand-by is perfectly cancelled (cleared) by pressing EON button 2 times during stand-by or powerOFF or Tun Up/Down or change band or recall pre-set CH.
6. EON-TI/PTY After setting EON stand-by, stand-by items can be confirmed by pressing EON button one time.
7. EON-TI/PTY EON button function: •EON setting
•Confirm stand-by items
•Cancel (ON→TN)
•EON clear cancel (2 times)
8. EON-TI/PTY After setting EON-TI and EON-PTY stand-by, if when EON data is not transmitted, EON ind goes out and EON stand-by is automatically cancelled display "NO EON".
9. EON-TI EON-TI stand-by can't be set. When TP=0,TA=0(TN) even if EON ind. lights up and the EON button is pressed then "NO TI" is indication the display.
10. EON-PTY Don't switch TN→ON during TN broadcast same specified PTY. (same item of PTY)
11. EON-TI/PTY Switch TN→ON→ TN station one cycle.
Never switch TN→ON1→ON2→ Other net to other net station.
12. EON-TI/PTY After switch TN→ON station. When ON station is NO RDS, NO signal, TA=OFF or different PTY items. The receiver switch back ON→TN displaying "NO READY".
13. During receive ON station. when ON station become to be NO RDS, NO signal, TA=ON to OFF or different PTY item, The receiver switch back ON→TN.
14. EON-TI/PTY Switch TN→ON in case of 2 more stations exist, comparing field strength and switch to the strongest station, if these signals are same strength, switch to the first previous station.
If same frequency as AF'S exists in the preset memory, then switch TN→ON (preset memory station) straight.
In case of exist 2 more preset memories of AF'S, then switch to the preset CH which taken in EON DATA first, also in this case no concern to field strength.
15. Even if switch TN→ON preset memory straight, that ON station is very weak signal, then search another AF'S (ON) station comparing field strength and switch to the strongest station as a result. Of all stations of AF'S are very weak or no good condition, then, switch back ON→TN automatically display "NO READY".
16. EON-TI/PTY No linkage volume, power ON/OFF, and switch function.

Traffic Programme code (TP)	Traffic Announcement code (TA)	Applications
OFF	OFF	This programme does not carry traffic announcements nor does it refer, via EON, to a programme that does.
OFF	ON	This programme carries EON information about another programme which gives traffic information.
ON	OFF	This programme carries traffic announcements but none are being broadcast at present and may also carry EON information about other traffic announcements.
ON	ON	A traffic announcement is being broadcast on this programme at present.

NOTES ON SCHEMATIC DIAGRAM

- Resistor:

To differentiate the units of resistors, such symbol as K and M are used: the symbol K means 1000 ohm and the symbol M means 1000 kohm and the resistor without any symbol is ohm-type resistor. Besides, the one with "Fusible" is a fuse type.

- Capacitor:

To indicate the unit of capacitor, a symbol P is used: this symbol P means micro-micro-farad and the unit of the capacitor without such a symbol is microfarad. As to electrolytic capacitor, the expression "capacitance/withstand voltage" is used.

(CH), (TH), (RH), (UJ): Temperature compensation

(ML): Mylar type

(P.P.): Polypropylene type

- Schematic diagram and Wiring Side of P.W.Board for this model are subject to change for improvement without prior notice.

- The indicated voltage in each section is the one measured by Digital Multimeter between such a section and the chassis with no signal given.

- In the tuner section,

() indicates AM

< > indicates FM stereo

- In the main section, a tape is being played back.

- In the deck section, a tape is being played back.

() indicates the record state.


- In the power section, a tape is being played back.

- In the CD section, the CD is stopped.


- Parts marked with "△" (□ = = = □) are important for maintaining the safety of the set. Be sure to replace these parts with specified ones for maintaining the safety and performance of the set.

REF. NO	DESCRIPTION	POSITION
SW1	OPEN/CLOSE	ON—OFF
SW2	MECHA UP	ON—OFF
SW3	DISC NUMBER	ON—OFF
SW4	PICKUP IN	ON—OFF
SW701	ON/STAND-BY	ON—OFF
SW702	CLOCK	ON—OFF
SW703	TIMER/SLEEP	ON—OFF
SW704	DISC 1	ON—OFF
SW705	DISC 2	ON—OFF
SW706	DISC 3	ON—OFF
SW707	DISC SKIP	ON—OFF
SW708	OPEN/CLOSE	ON—OFF
SW709	CD	ON—OFF
SW710	TUNER/BAND	ON—OFF
SW711	TAPE	ON—OFF
SW712	VIDEO/AUX	ON—OFF
SW713	EON	ON—OFF
SW714	PTY. /TI SEARCH	ON—OFF
SW715	ASPM	ON—OFF
SW716	DISPLAY MODE	ON—OFF
SW718	CENTER MODE/PHANTOM	ON—OFF
SW719	CENTER MODE/NORMAL	ON—OFF
SW721	DOLBY PRO LOGIC BYPASS	ON—OFF

REF. NO	DESCRIPTION	POSITION
SW723	REC PAUSE	ON—OFF
SW724	TUNING UP/TIME	ON—OFF
SW725	VOLUME UP	ON—OFF
SW726	X-BASS	ON—OFF
SW728	STOP	ON—OFF
SW729	FWD	ON—OFF
SW730	FF/PRESET UP	ON—OFF
SW731	MEMORY SET	ON—OFF
SW732	TUNING DOWN/TIME	ON—OFF
SW733	VOLUME DOWN	ON—OFF
SW734	EQUALIZER/DEMO	ON—OFF
SW736	REVERSE MODE	ON—OFF
SW737	REV	ON—OFF
SW738	REW/PRESET DOWN	ON—OFF
SW739	CD/TAPE1 EDIT	ON—OFF
SW740	BEAT CANCEL (TAPE1 EDIT)	ON—OFF
SWM 3	REC FWD	ON—OFF
SWM 4	REC RVS	ON—OFF
SWM 5	F.A.S.	ON—OFF
SWM 6	CAM	ON—OFF



2SC2236 Y
2SC2878 A
KRC102 M
KRC104 M
KRC107 M
KTA1266 GR
KTA1268 GR
KTA1271 Y
KTC3199 GR
KTC3203 Y




2SC1845 F
2SD2012
2SD468 C
KRA107 M
KTA1273 Y

FRONT VIEW



KV1236Z23F



333GTH2

Figure 18 TYPES OF TRANSISTOR AND LED

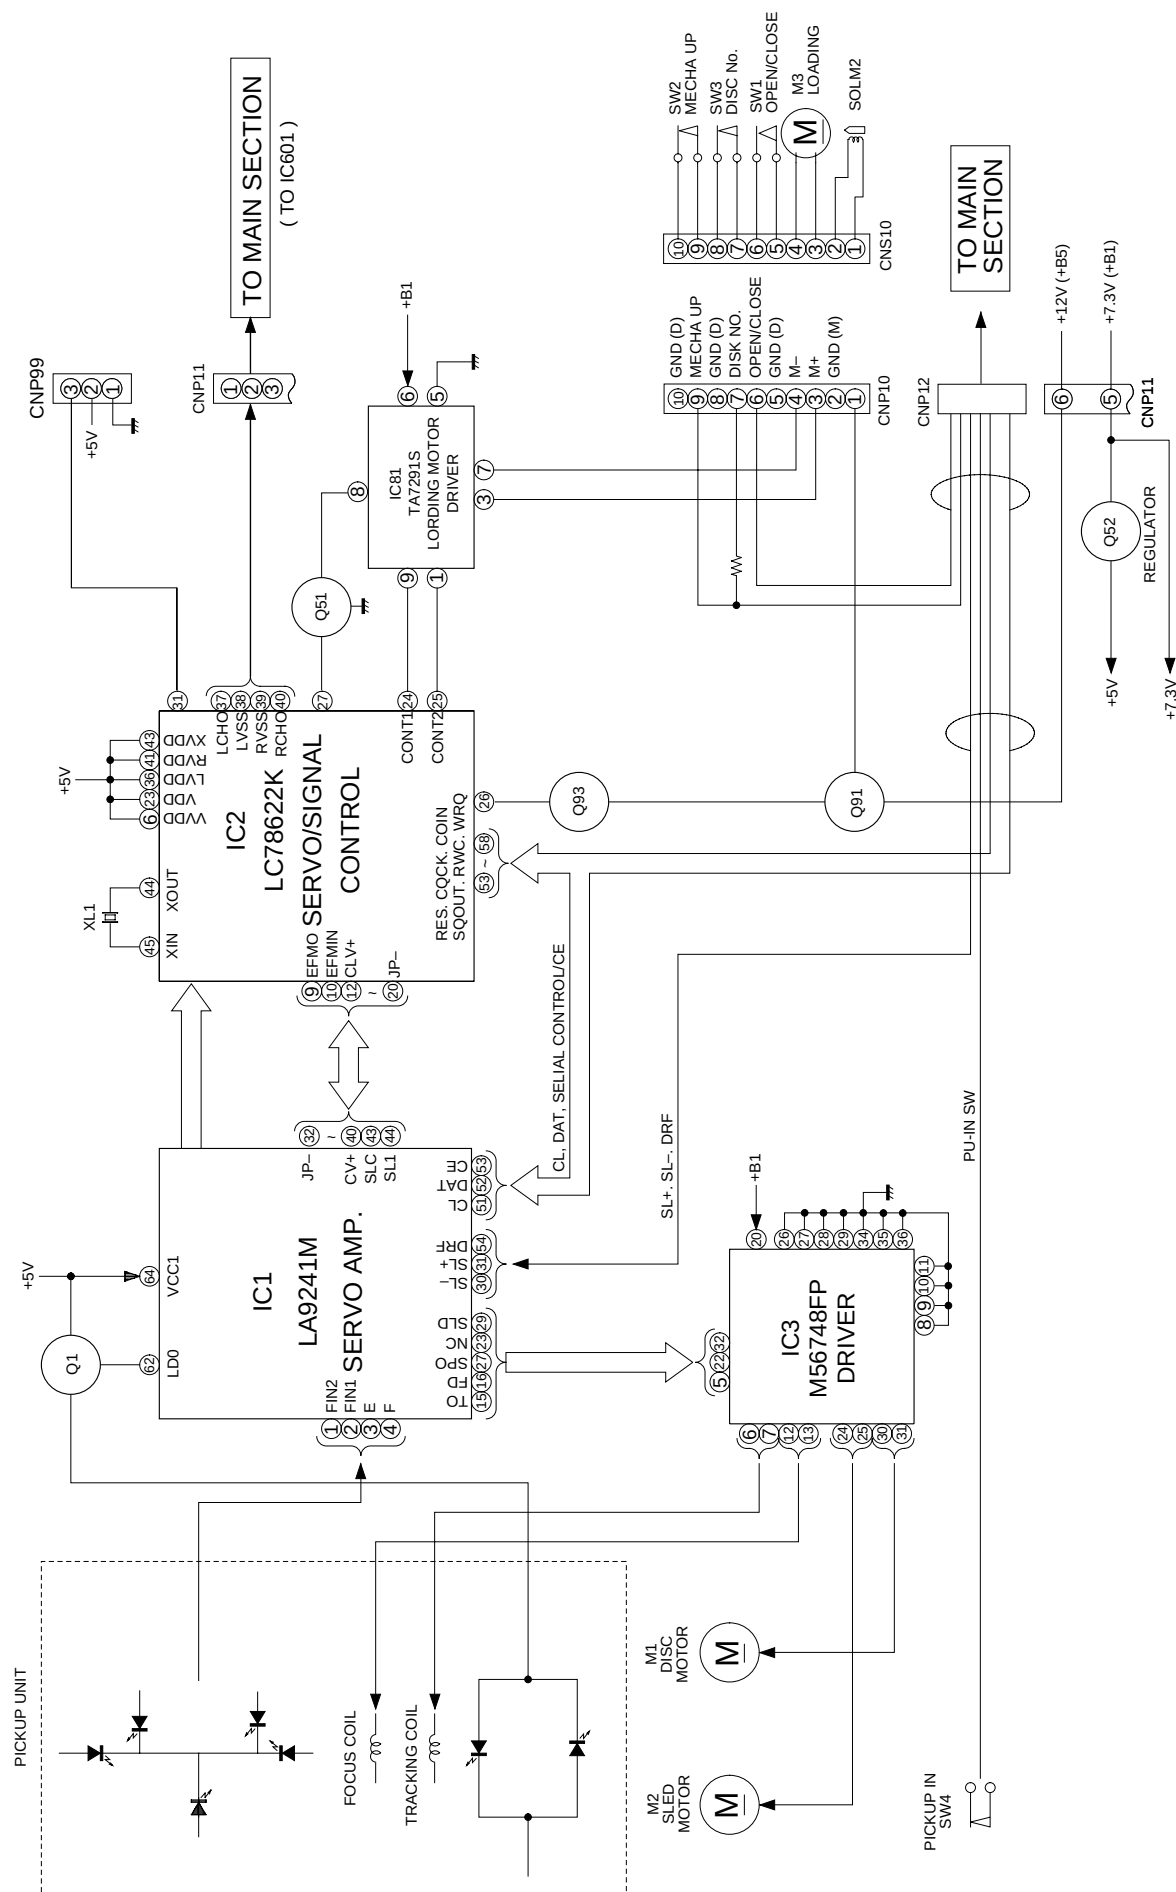


Figure 19 BLOCK DIAGRAM (1/3)

– 20 –



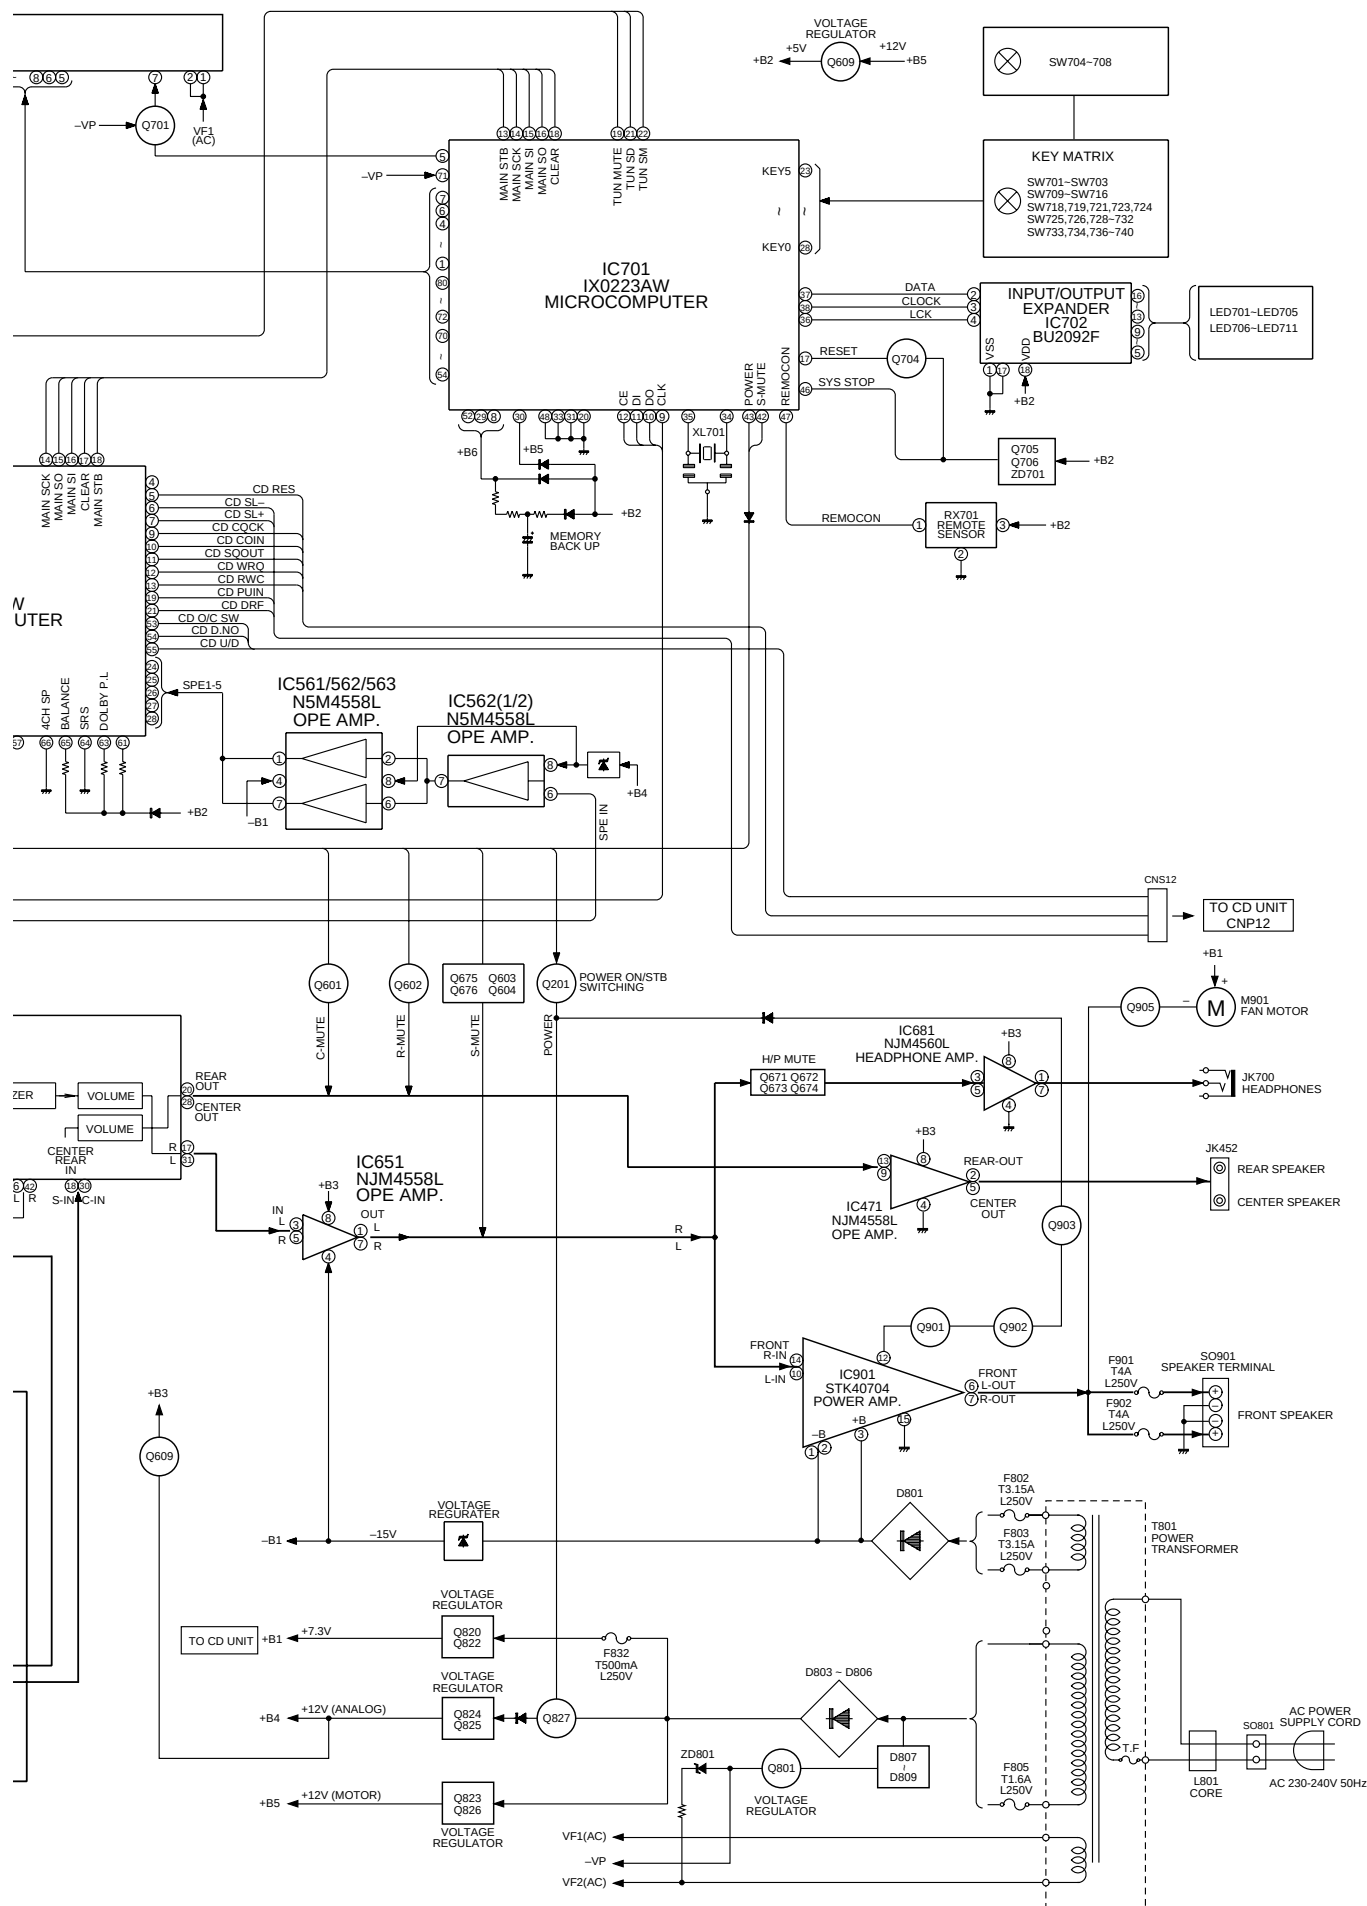


Figure 21 BLOCK DIAGRAM (3/3)



- 22 -



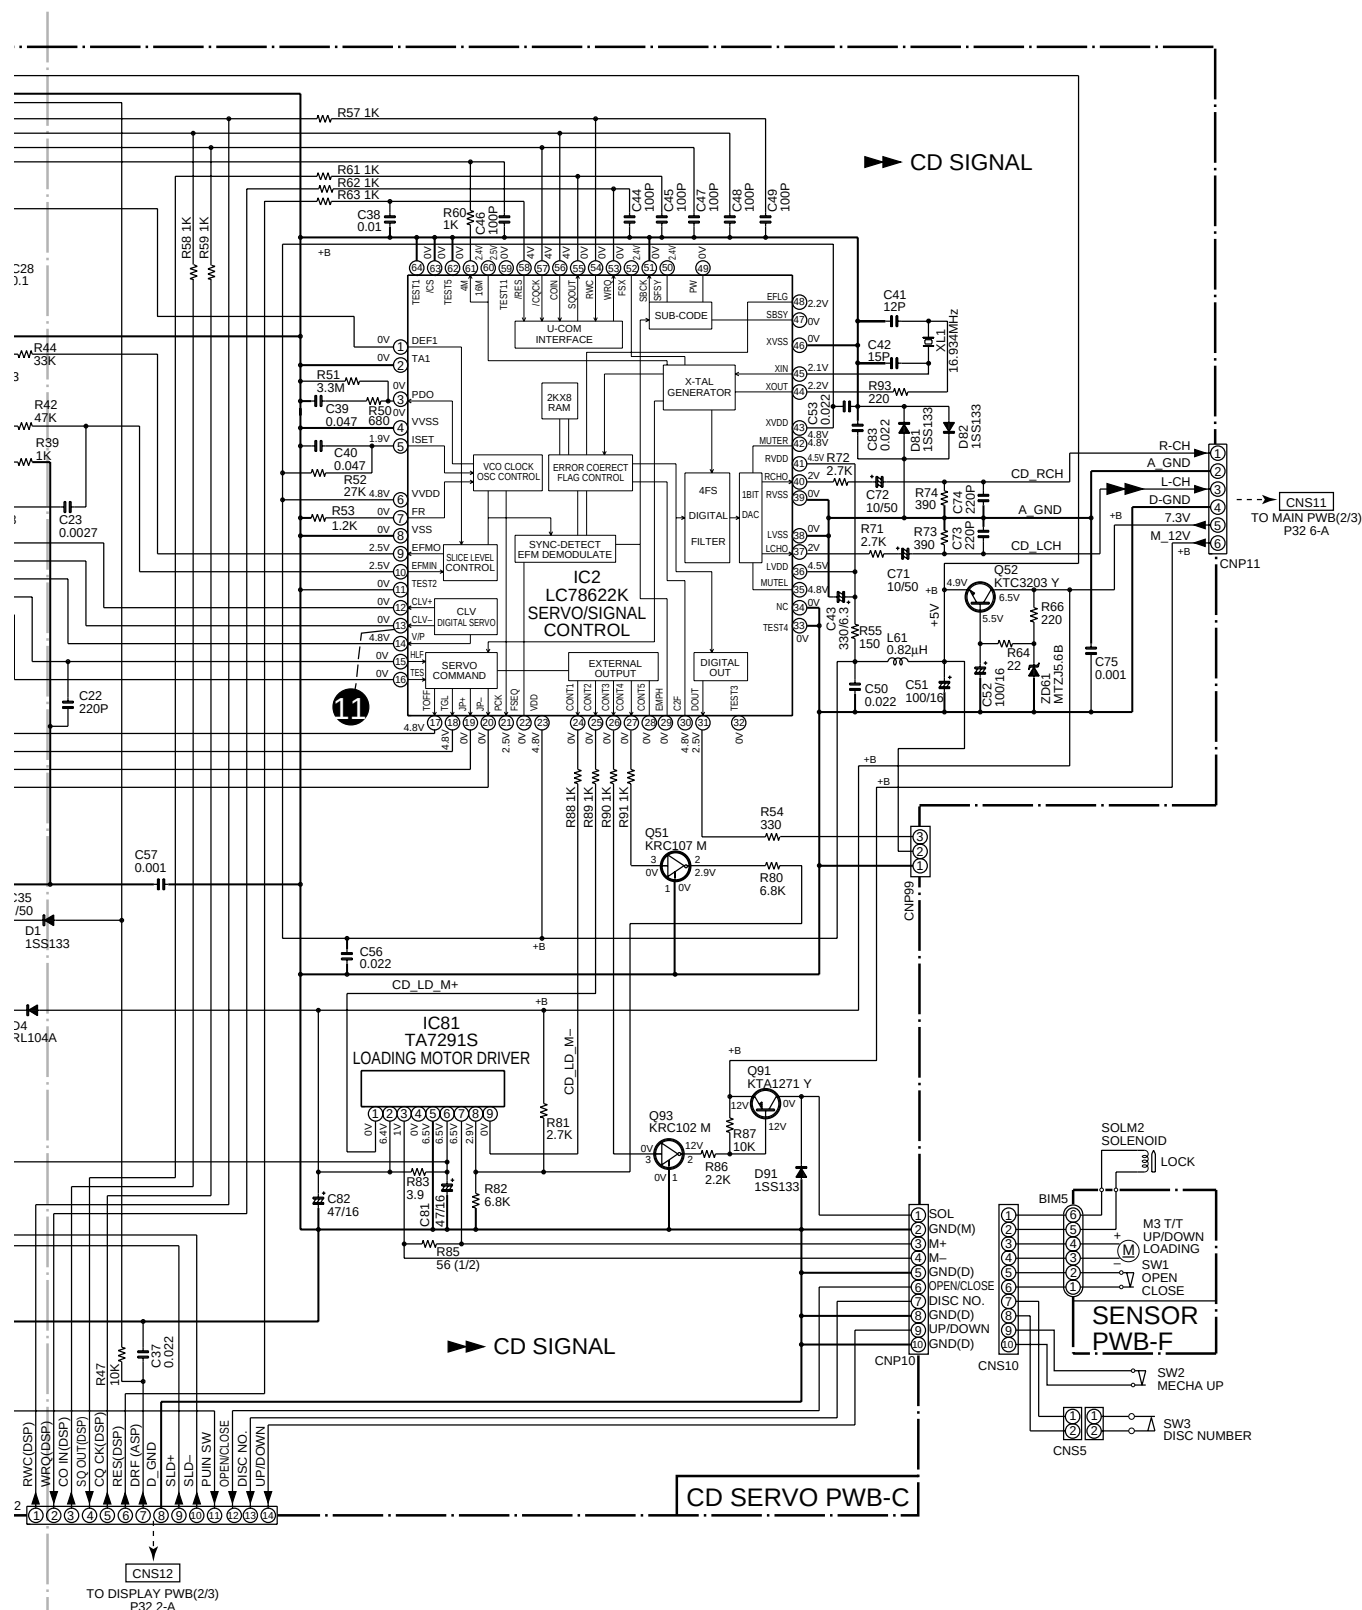

- 24 -


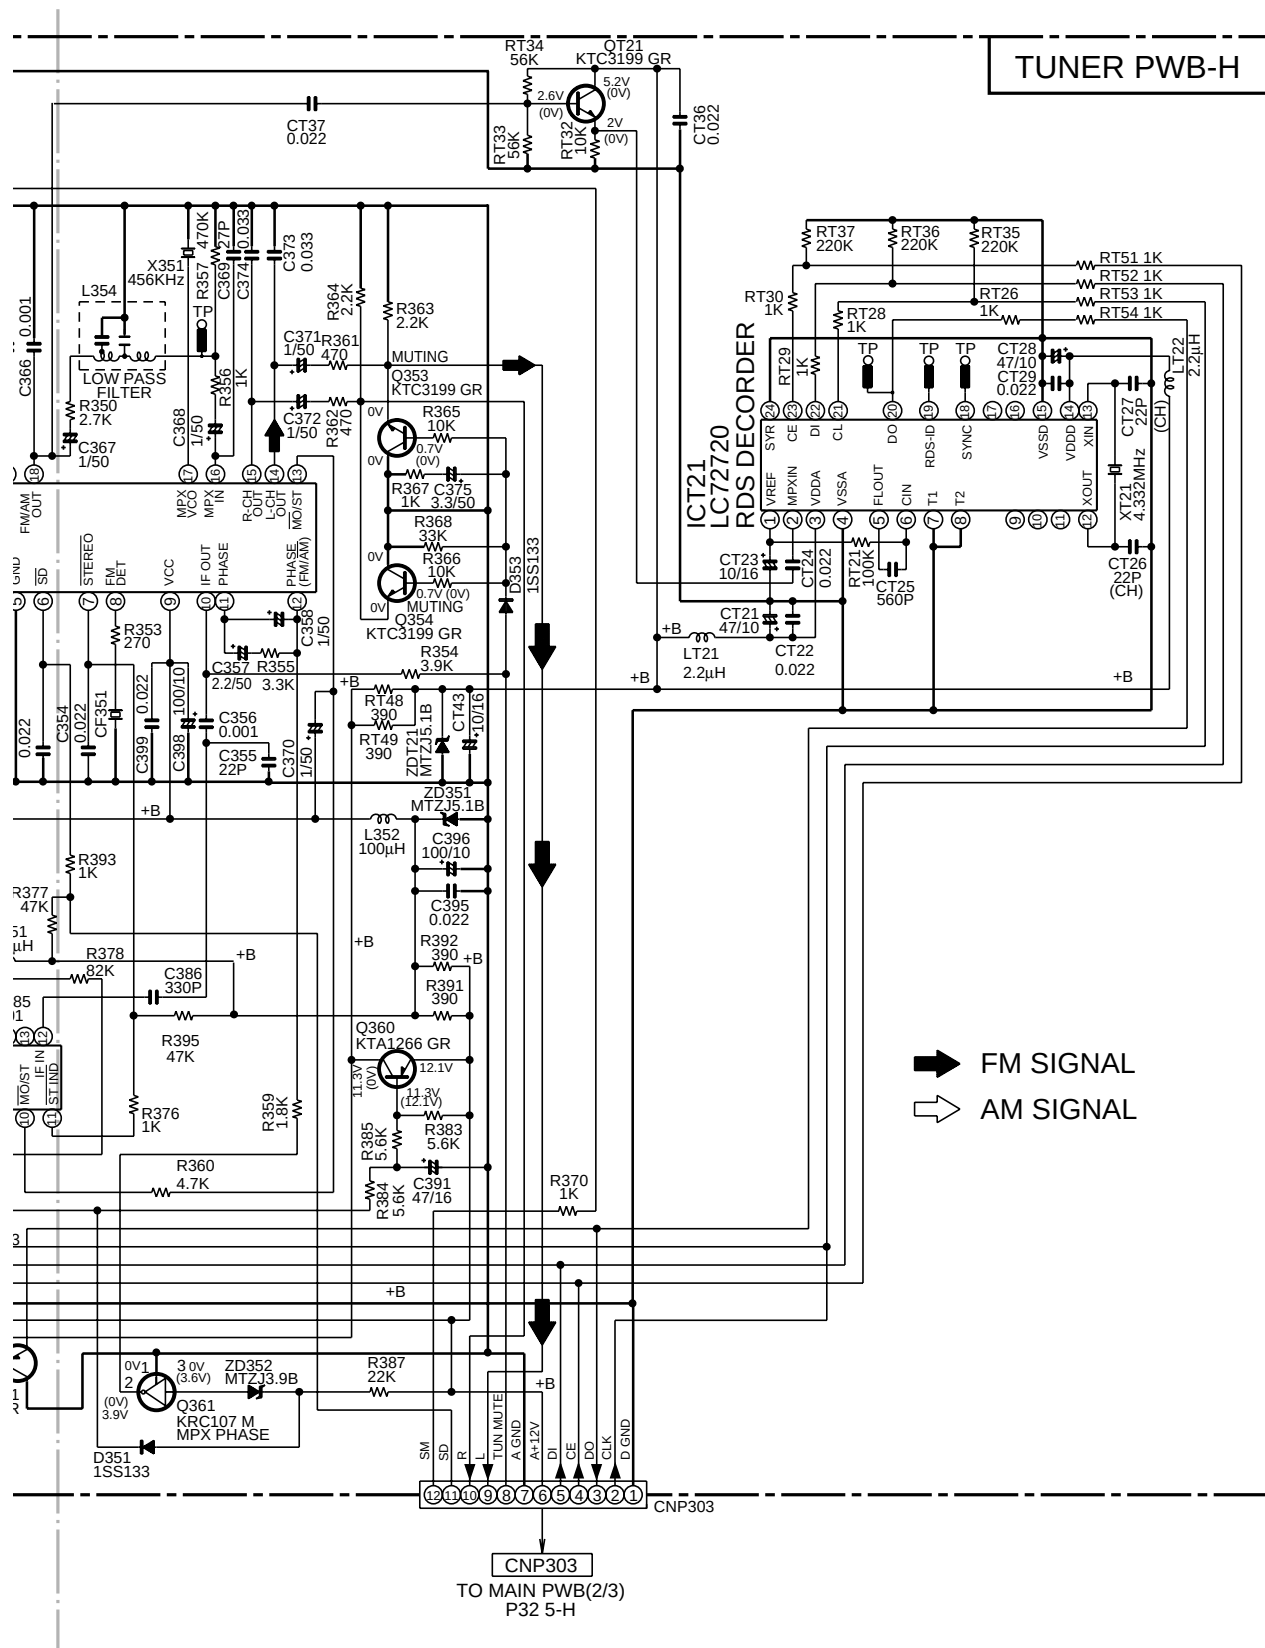


Figure 25 SCHEMATIC DIAGRAM (4/14)



– 26 –

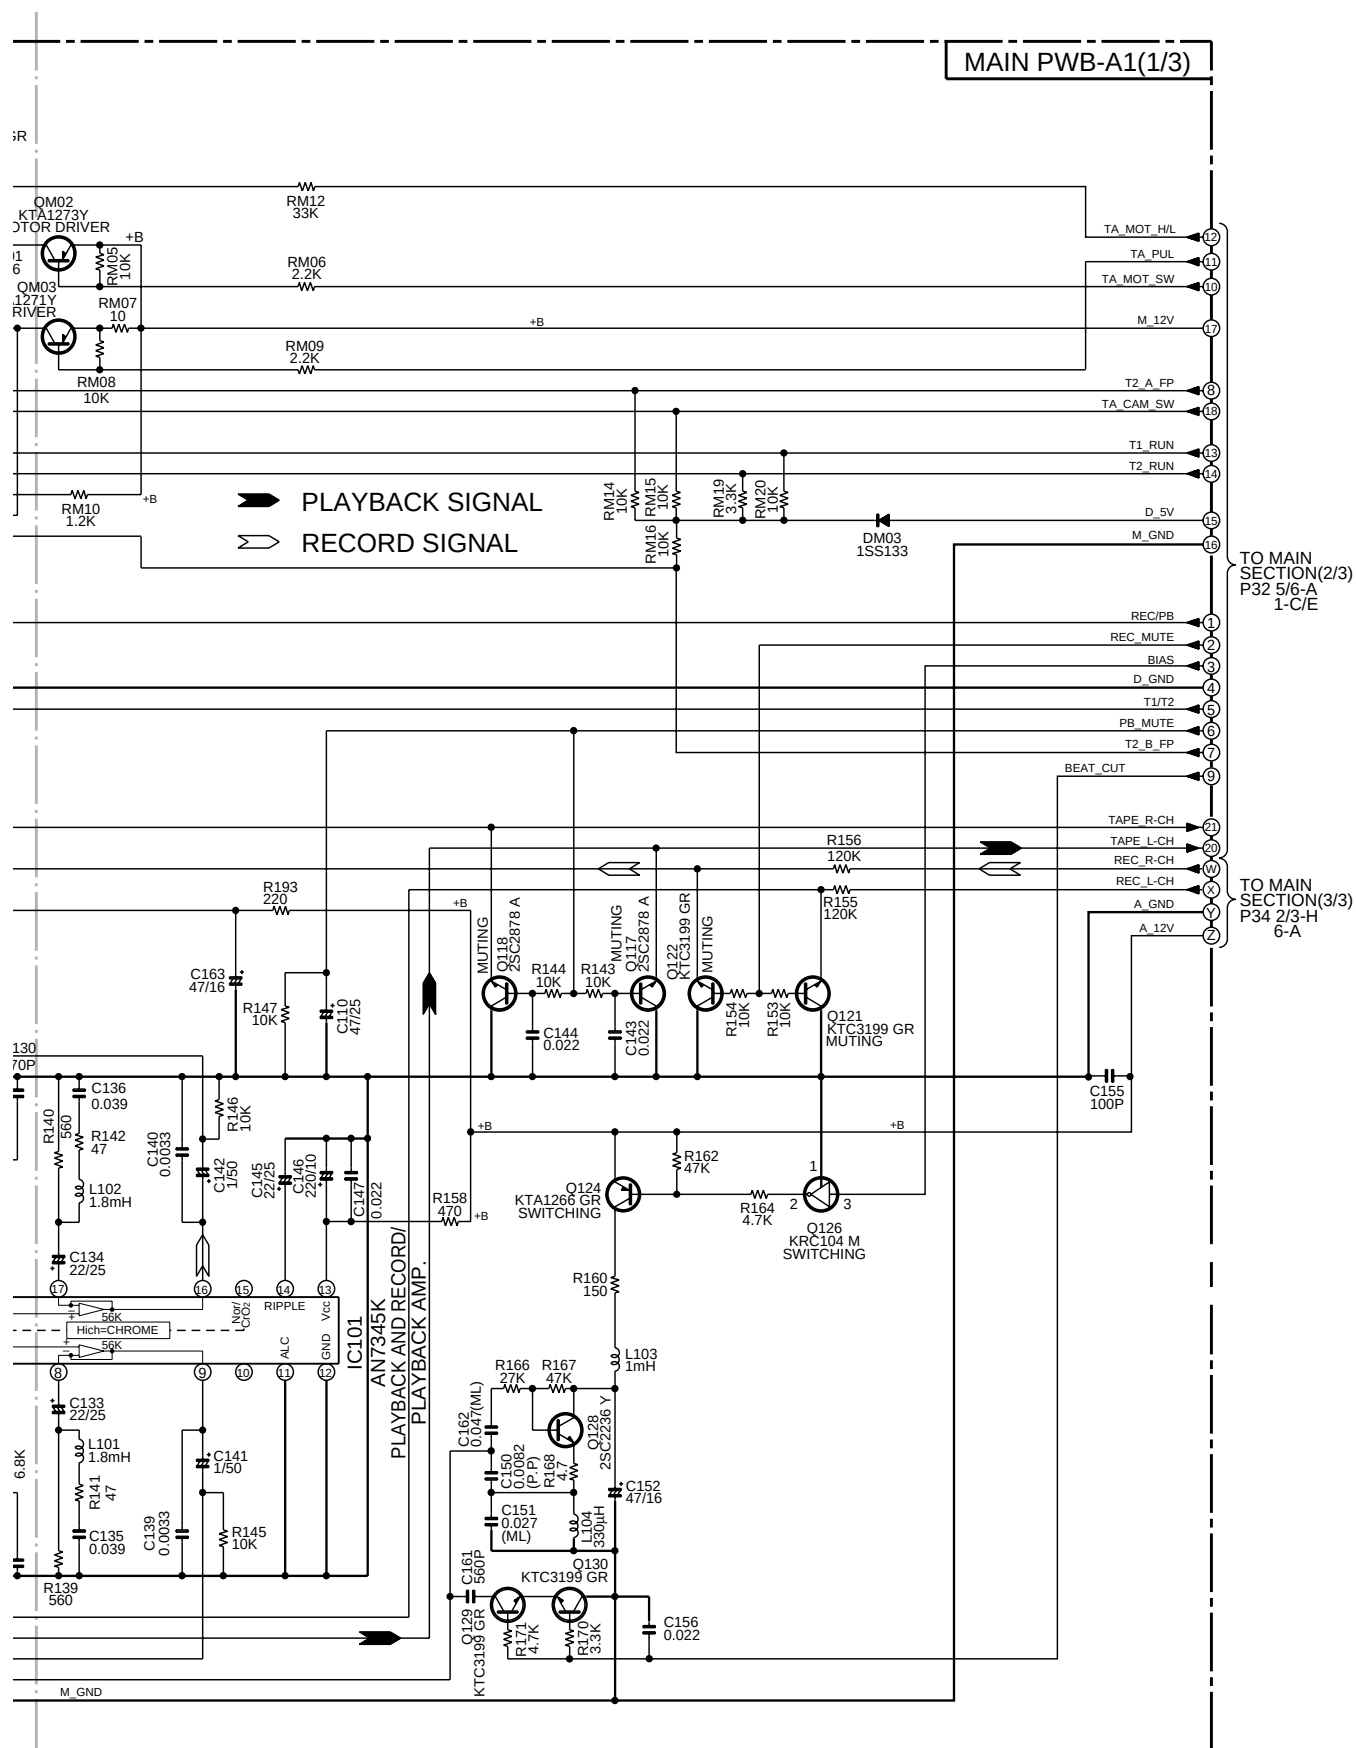

- 27 -

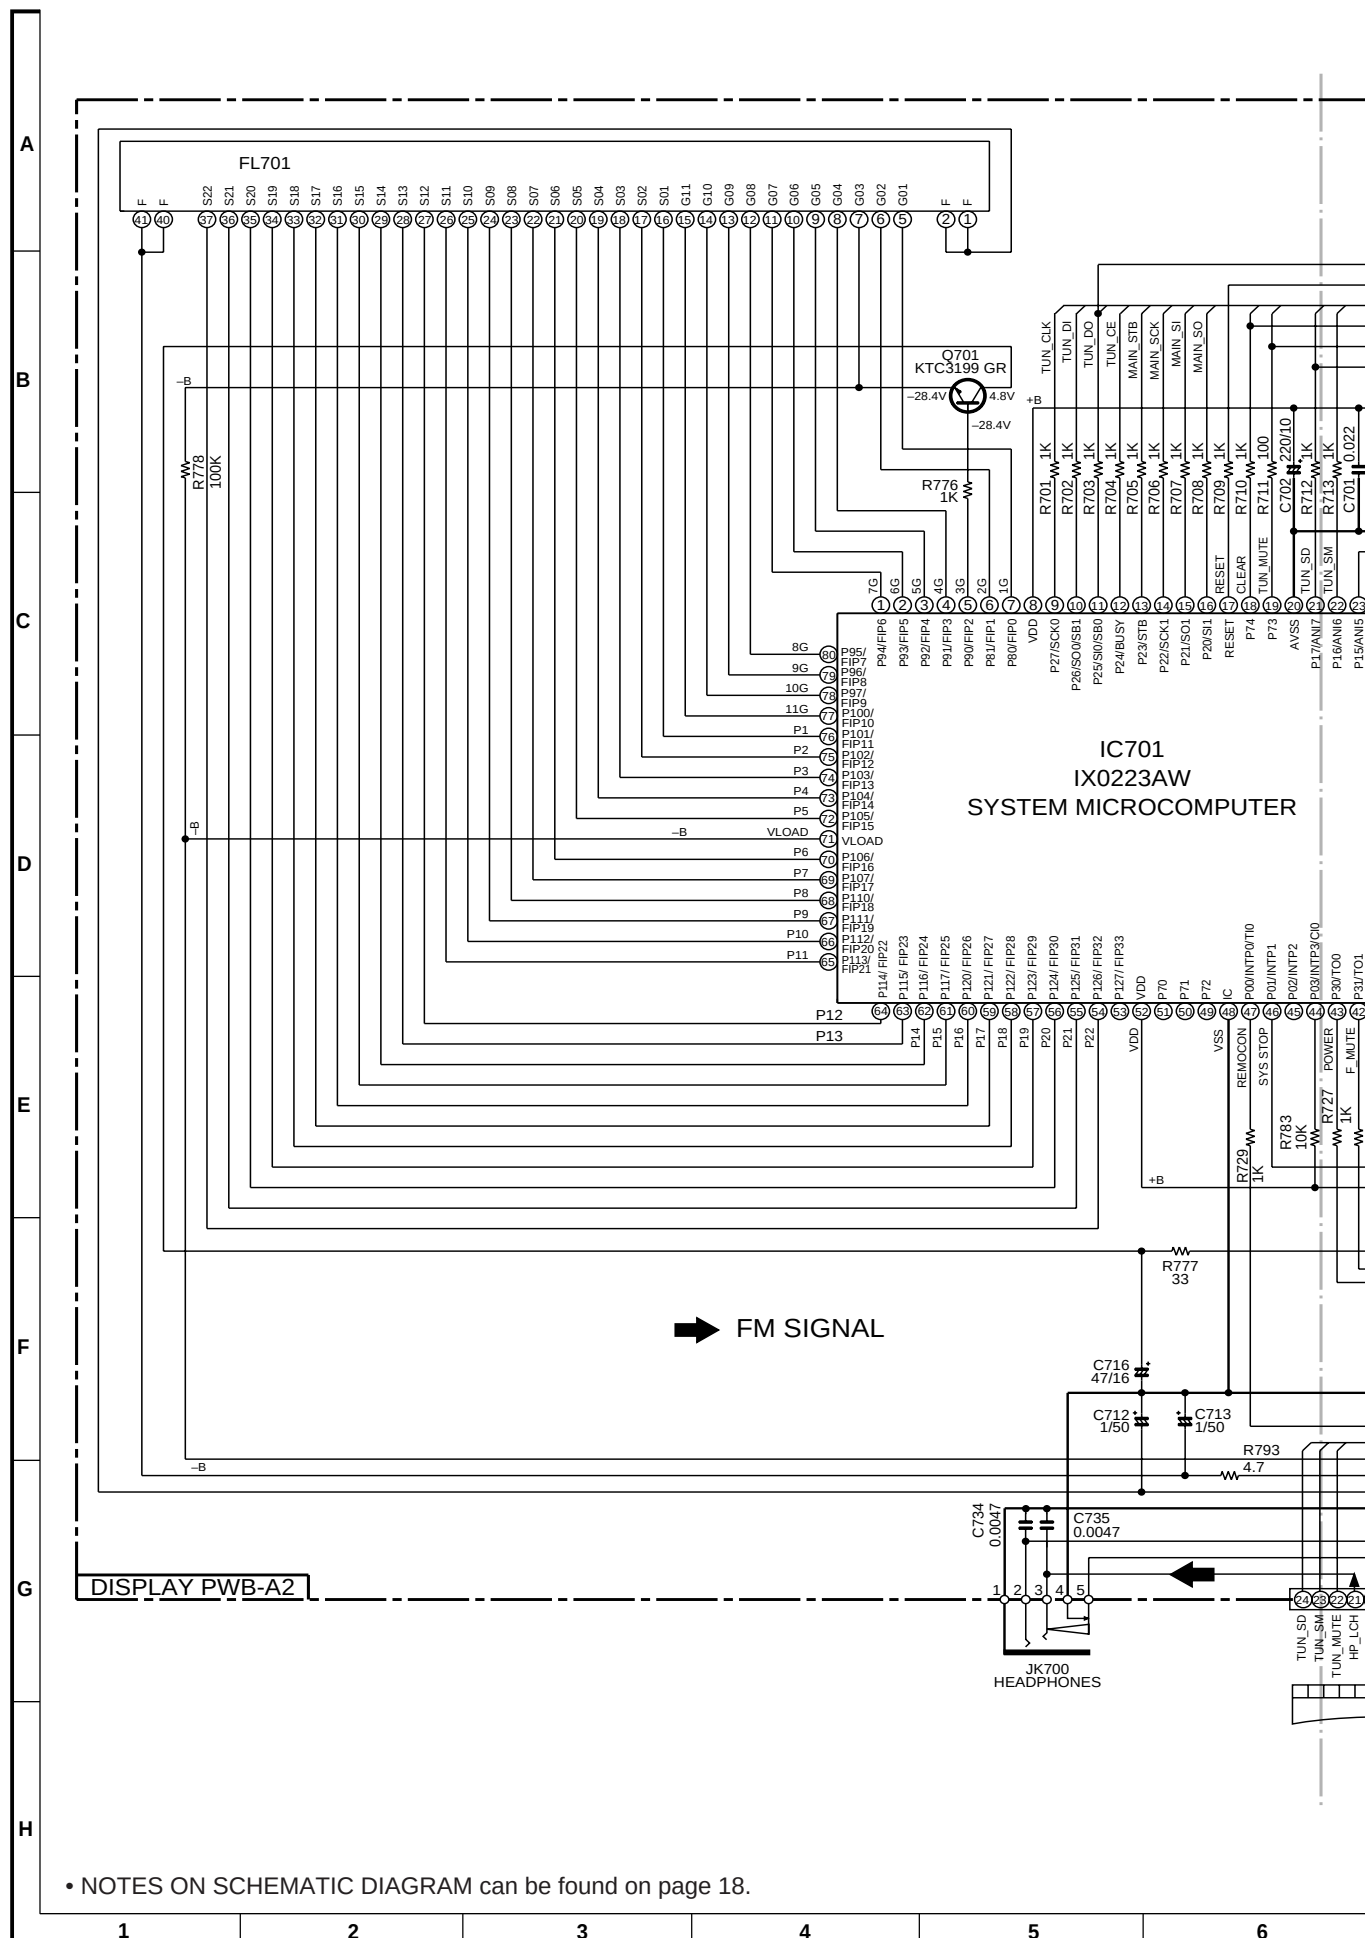


Figure 28 SCHEMATIC DIAGRAM (7/14)

- 29 -



– 30 –

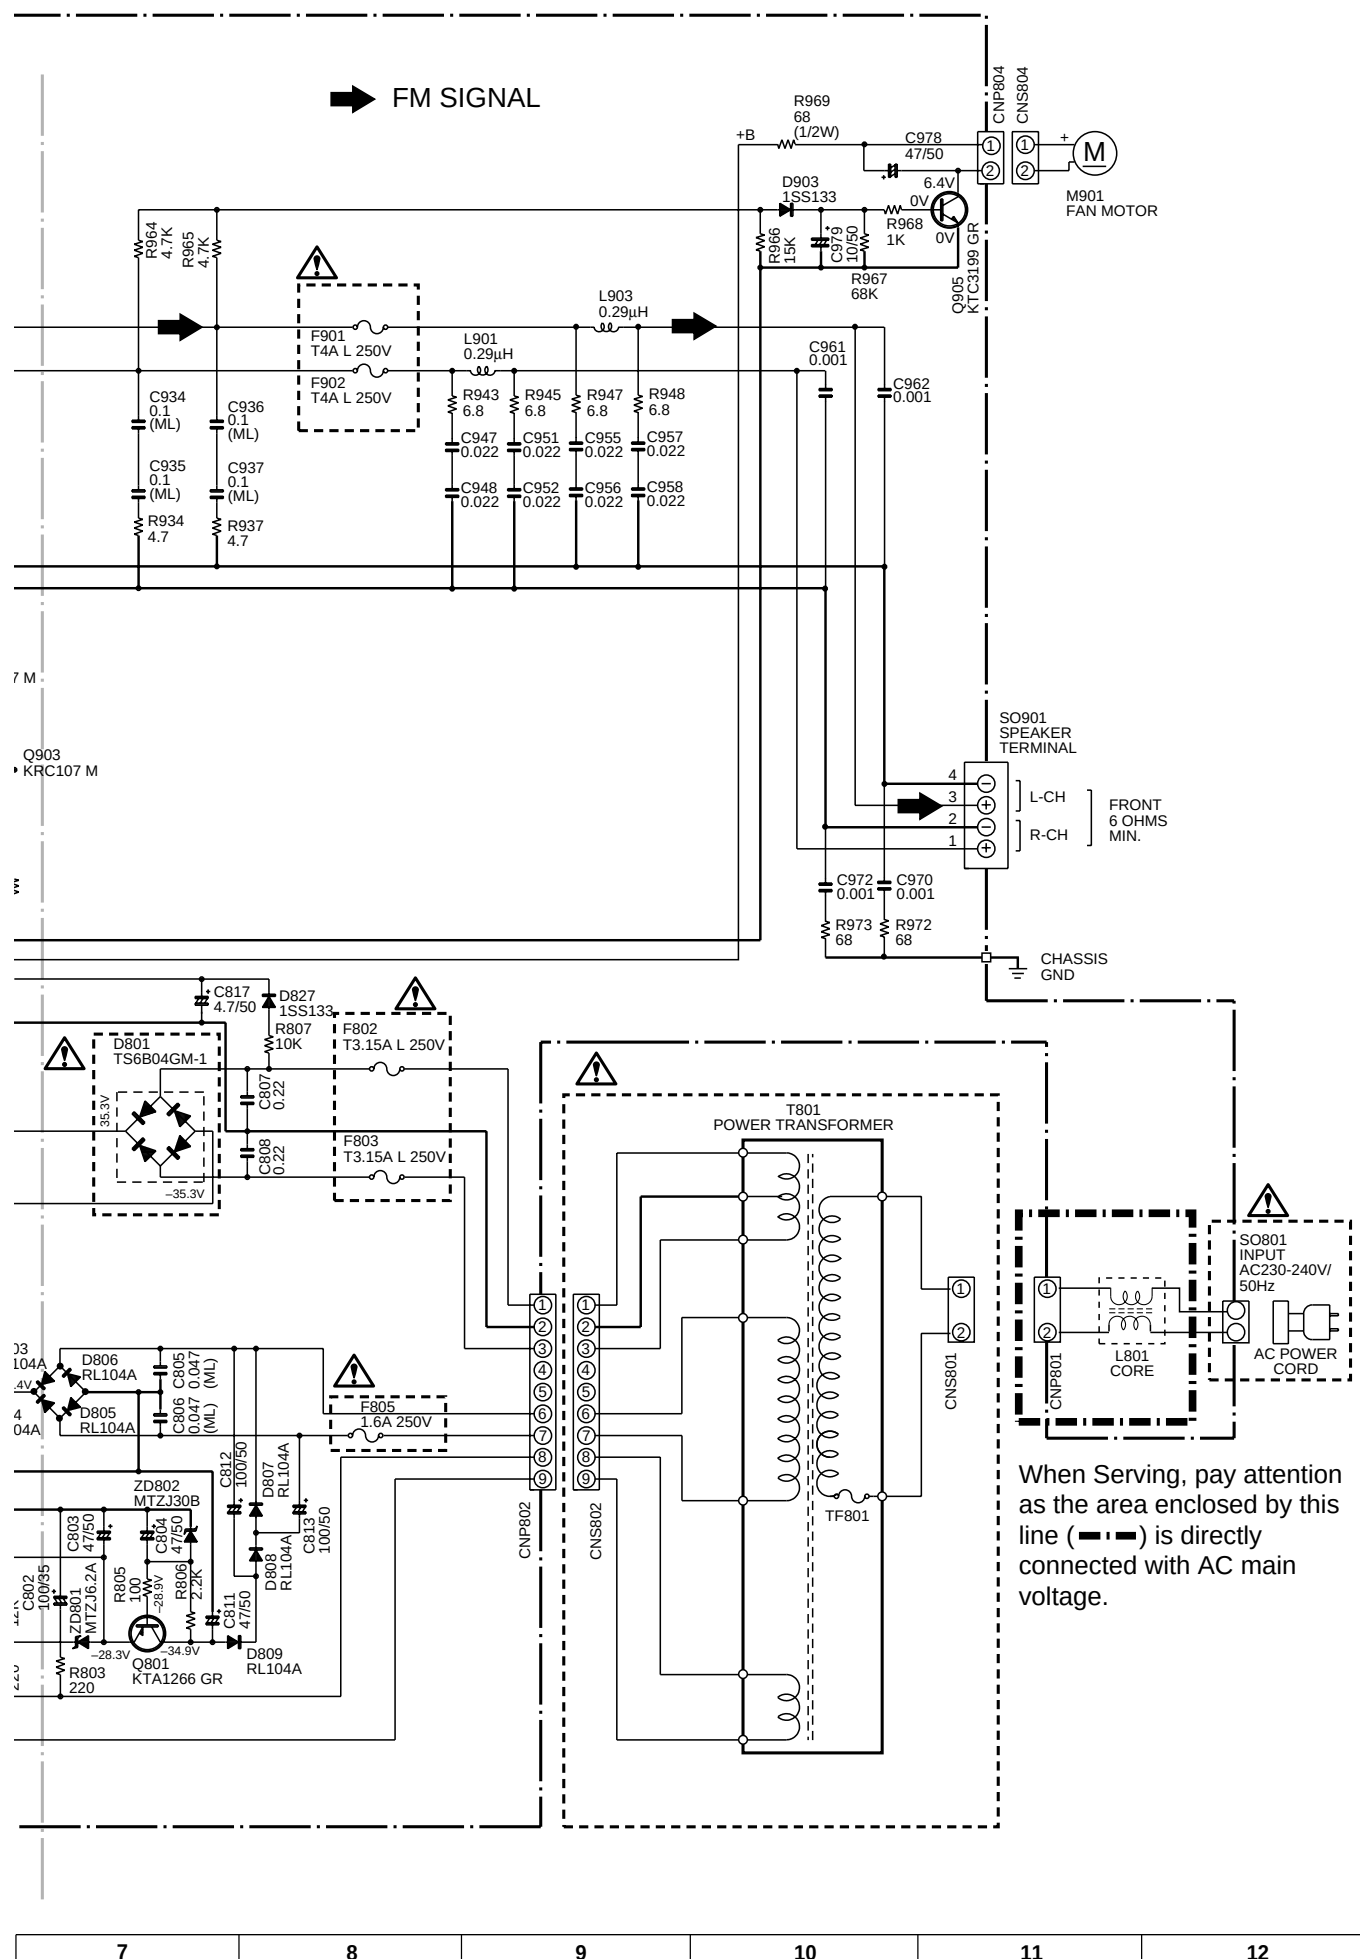


Figure 31 SCHEMATIC DIAGRAM (10/14)

- 32 -

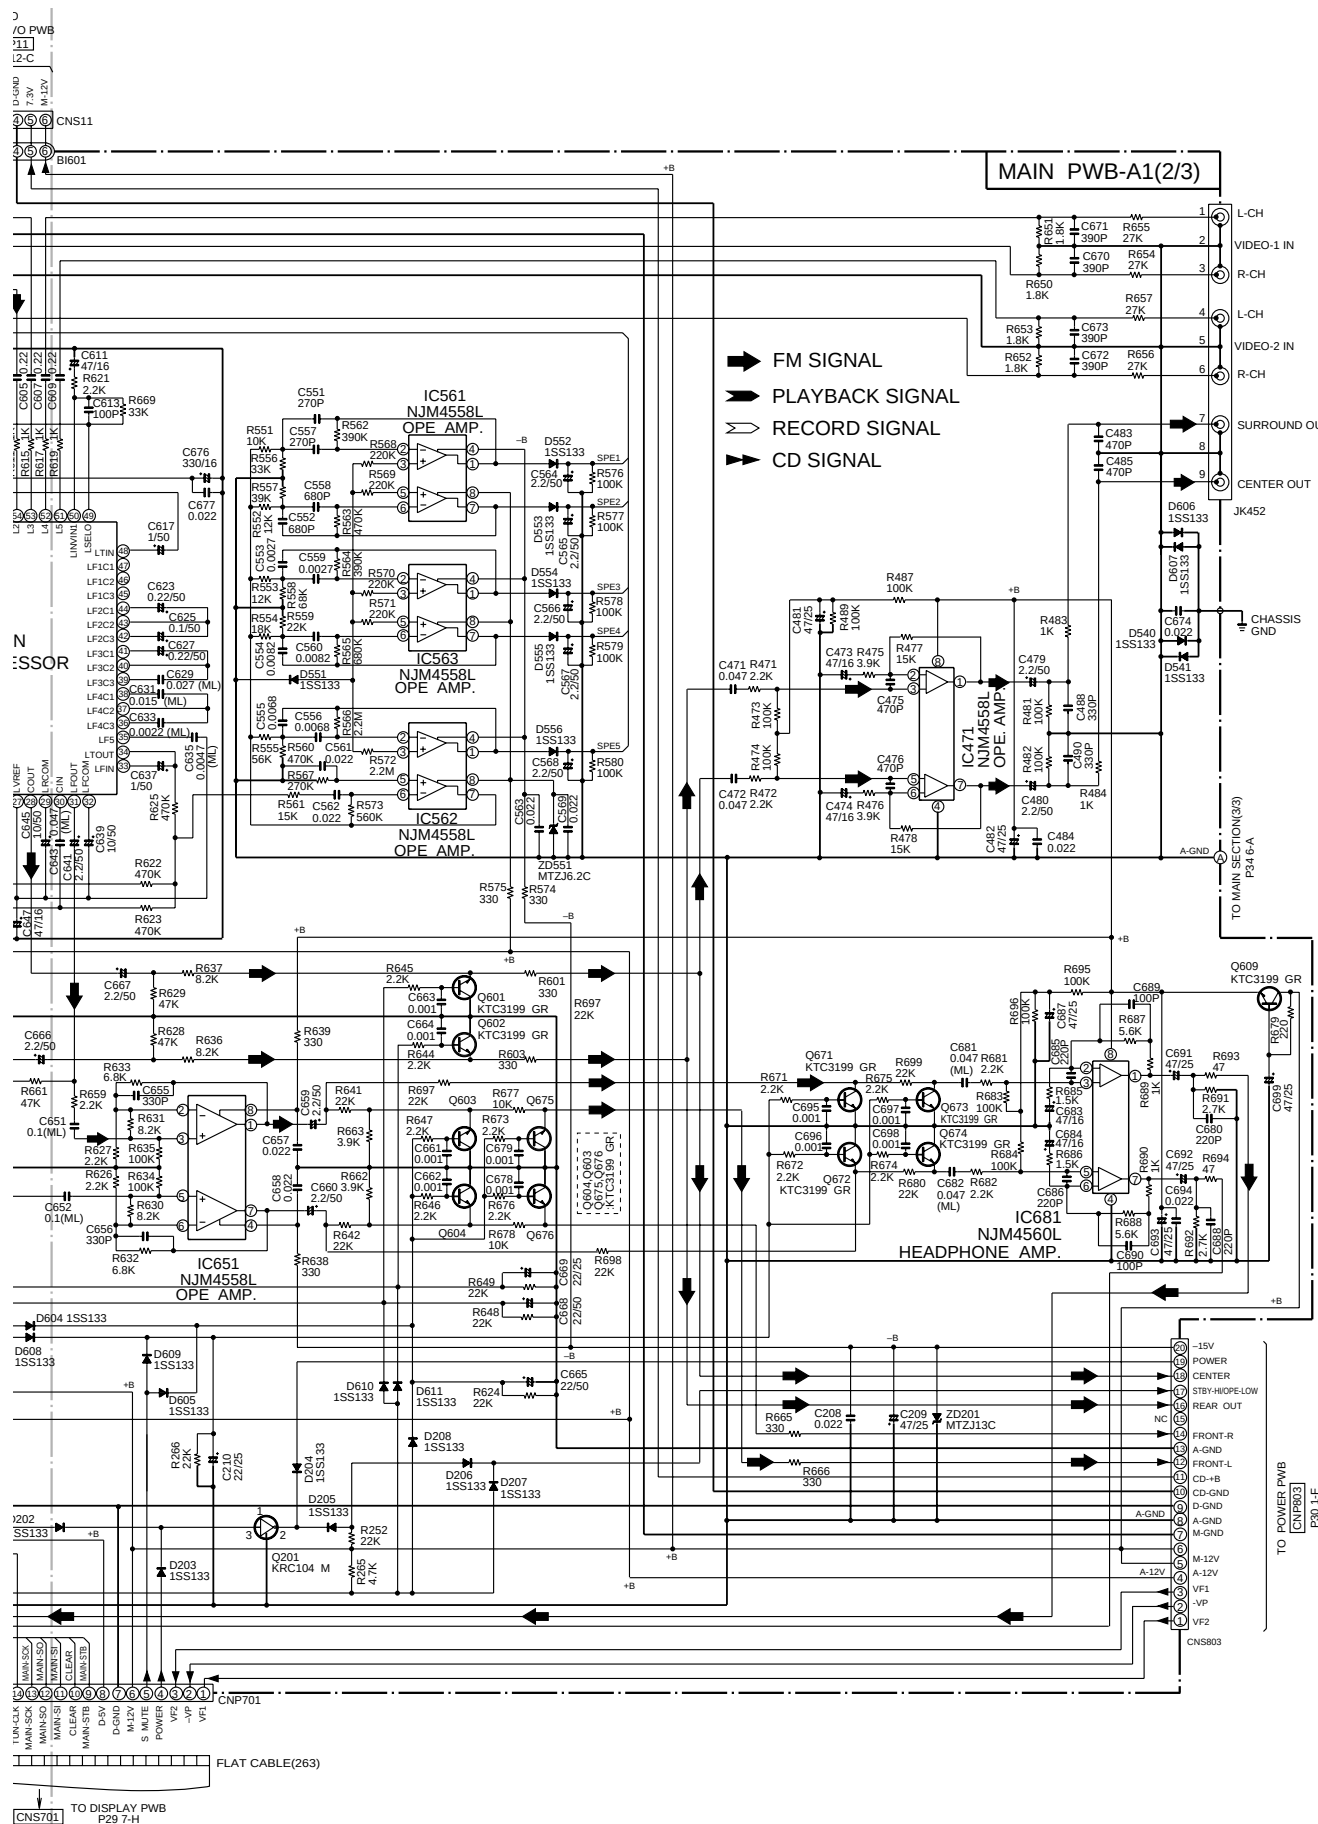


Figure 33 SCHEMATIC DIAGRAM (12/14)

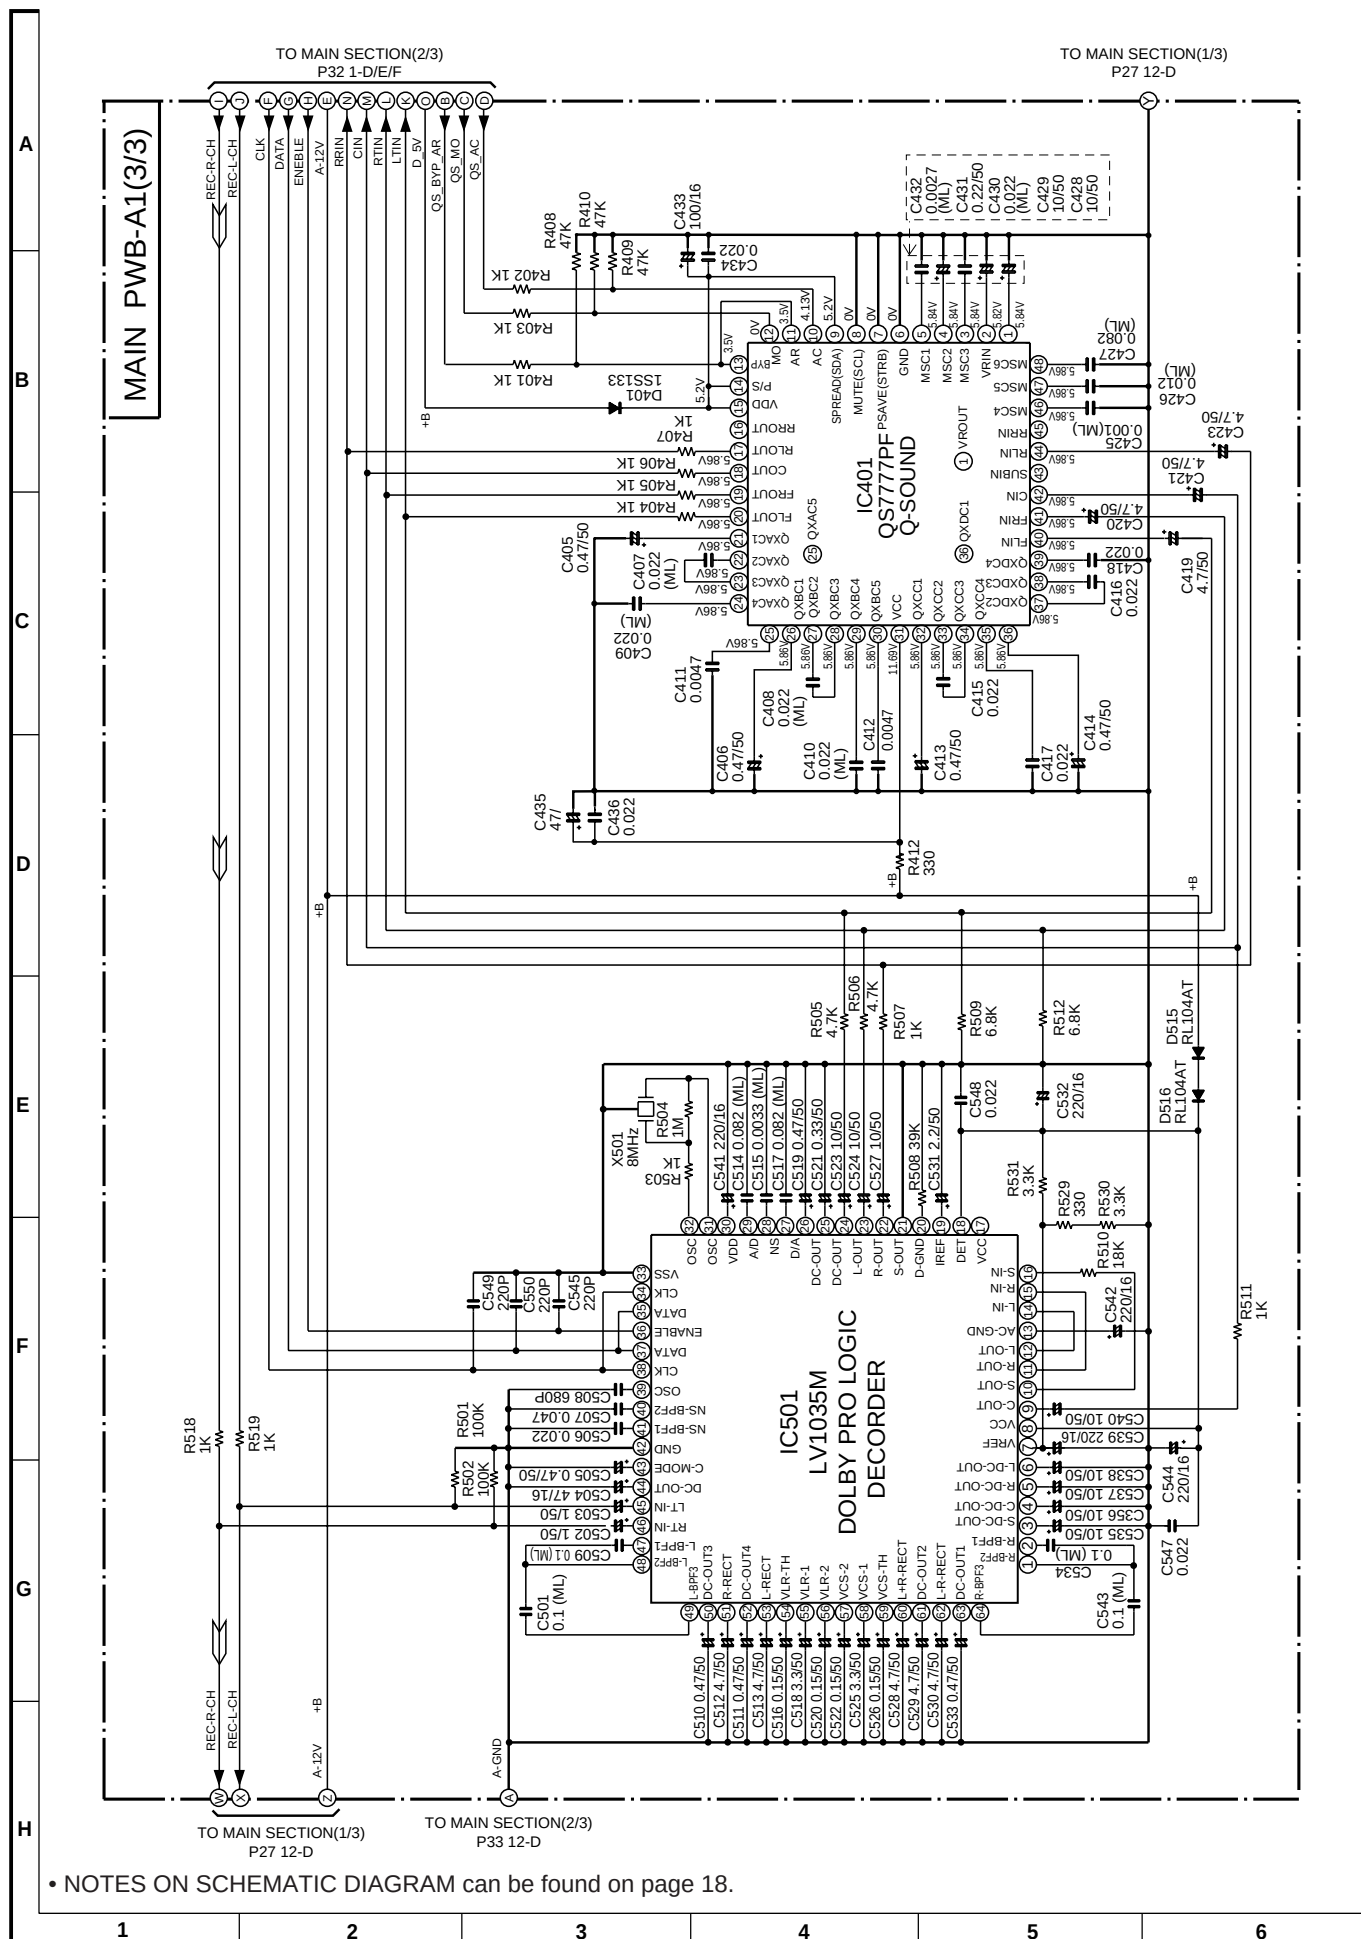


Figure 34 SCHEMATIC DIAGRAM (13/14)

IC1		IC2		IC3		IC201				IC501		IC601		IC701			
PIN NO.	VOLTAGE	PIN NO.	VOLTAGE	PIN NO.	VOLTAGE	PIN NO.	VOLTAGE	PIN NO.	VOLTAGE	PIN NO.	VOLTAGE	PIN NO.	VOLTAGE	PIN NO.	VOLTAGE	PIN NO.	VOLTAGE
1	2.4V	1	0V	1	2.5V	1	0V	41	4.9V	1	4.7V	1	5V	1	-28.4V	41	0V
2	2.4V	2	0V	2	2.5V	2	4.9V	42	4.9V	2	4.7V	2	5V	2	-28.4V	42	0V
3	2.5V	3	0V	3	0V	3	0V	43	5.4V	3	4.7V	3	4.9V	3	-28.4V	43	4.9V
4	2.5V	4	0V	4	2.5V	4	4.9V	44	4.9V	4	4.7V	4	4.8V	4	-28.4V	44	0V
5	2.4V	5	1.9V	5	2.5V	5	4.9V	45	4.9V	5	4.7V	5	5V	5	-28.4V	45	0V
6	2.5V	6	4.8V	6	2V	6	0V	46	4.9V	6	4.7V	6	4.9V	6	-28.4V	46	4.8V
7	2.5V	7	0V	7	2V	7	0V	47	4.8V	7	4.7V	7	4.8V	7	-28.4V	47	4.7V
8	2.5V	8	0V	8	0V	8	4.9V	48	0V	8	9.4V	8	5V	8	4.85V	48	0V
9	2.5V	9	2.5V	9	0V	9	4.9V	49	0V	9	4.7V	9	4.8V	9	4.85V	49	0V
10	2.4V	10	2.5V	10	0V	10	4.9V	50	12.3V	10	4.7V	10	4.8V	10	0V	50	0V
11	2.5V	11	0V	11	0V	11	0V	51	12.3V	11	4.7V	11	5V	11	4.75V	51	0V
12	2.5V	12	0V	12	2V	12	0V	52	4.9V	12	4.7V	12	4.9V	12	0V	52	4.9V
13	2.5V	13	0V	13	2V	13	0V	53	0V	13	4.7V	13	4.8V	13	3.3V	53	4.9V
14	2.5V	14	4.8V	14	2.5V	14	4.8V	54	4.9V	14	4.7V	14	5V	14	4.7V	54	-22V
15	2.5V	15	0V	15	2.5V	15	0V	55	0V	15	4.7V	15	4.9V	15	0V	55	-28.2V
16	2.5V	16	0V	16	0V	16	0V	56	5.2V	16	4.7V	16	5V	16	0V	56	-18.9V
17	2.5V	17	4.8V	17	4.7V	17	4.8V	57	0V	17	0V	17	5V	17	5.0V	57	-31.3V
18	2.5V	18	4.8V	18	0V	18	3.5V	58	0V	18	9.4V	18	4.9V	18	4.8V	58	-31.3V
19	2.5V	19	0V	19	0.7V	19	0V	59	0V	19	2.5V	19	5V	19	4.8V	59	-31.3V
20	2.4V	20	0V	20	4.7V	20	0V	60	0V	20	0.6V	20	5V	20	0V	60	-25.1V
21	2.5V	21	2.5V	21	2.5V	21	0V	61	4.9V	21	-0.1V	21	5V	21	4.8V	61	-15.9V
22	0V	22	0V	22	2.5V	22	5.2V	62	4.9V	22	4.7V	22	5V	22	4.8V	62	-22.2V
23	2.5V	23	4.8V	23	2.5V	23	5.2V	63	4.9V	23	4.7V	23	4V	23	4.8V	63	-22.2V
24	2.5V	24	0V	24	2V	24	0V	64	4.9V	24	4.7V	24	-0.1V	24	4.8V	64	-18.9V
25	2.5V	25	0V	25	2V	25	0V	65	4.9V	25	4.7V	25	-0.1V	25	4.8V	65	-13.0V
26	2.5V	26	0V	26	0V	26	0V	66	4.9V	26	4.7V	26	0V	26	4.8V	66	-31.3V
27	2.5V	27	0V	27	0V	27	0V	67	5.2V	27	4.7V	27	5V	27	4.8V	67	-28.2V
28	2.5V	28	0V	28	0V	28	0V	68	5.2V	28	4.7V	28	5V	28	3.1V	68	-31.3V
29	2.5V	29	0V	29	0V	29	4.9V	69	4.9V	29	4.7V	29	5V	29	4.9V	69	-19.0V
30	2.2V	30	4.8V	30	1.8V	30	4.9V	70	4.9V	30	4.7V	30	4.9V	30	4.8V	70	-31.3V
31	2.2V	31	2.5V	31	1.8V	31	5.2V	71	0V	31	5V	31	5V	31	0V	71	-31.4V
32	0V	32	0V	32	2.5V	32	0V	72	0V	32	2.3V	32	5V	32	4.8V	72	-31.3V
33	0V	33	0V	33	2.5V	33	0V	73	0V	33	-0.1V	33	4.9V	33	0V	73	-31.3V
34	4.8V	34	0V	34	0V	34	2.3V	74	0V	34	4V	34	5V	34	2.3V	74	-31.3V
35	4.8V	35	4.8V	35	0V	35	2.3V	75	0V	35	-0.1V	35	4.8V	35	2.1V	75	-31.3V
36	0V	36	4.5V	36	0V	36	4.9V	76	4.9V	36	3.6V	36	4.9V	36	0V	76	-22.1V
37	0V	37	2V	37	0V	37	4.9V	77	0V	37	-0.1V	37	5V	37	0V	77	-28.4V
38	4.8V	38	0V	38	0V	38	4.9V	78	0V	38	4V	38	4.8V	38	0V	78	-28.4V
39	0V	39	0V	39	0V	39	4.9V	79	0V	39	0V	39	4.9V	39	0V	79	-28.4V
40	0V	40	2V	40	0V	40	0V	80	4.9V	40	4.7V	40	5V	40	0V	80	-28.4V

IC81	
PIN NO.	VOLTAGE
1	0V
2	6.4V
3	1V
4	0V
5	6.5V
6	6.5V
7	6.5V
8	2.9V
9	0V

IC401			
PIN NO.	VOLTAGE	PIN NO.	VOLTAGE
1	5.84V	25	5.86V
2	5.82V	26	5.86V
3	5.84V	27	5.86V
4	5.84V	28	5.86V
5	5.84V	29	5.86V
6	0V	30	5.86V
7	0V	31	11.69V
8	0V	32	5.86V
9	5.20V	33	5.86V
10	4.13V	34	5.86V
11	3.50V	35	5.86V
12	0V	36	5.86V
13	3.50V	37	5.86V
14	5.20V	38	5.86V
15	5.20V	39	5.86V
16	5.87V	40	5.86V
17	5.86V	41	5.86V
18	5.86V	42	5.86V
19	5.86V	43	5.73V
20	5.86V	44	5.86V
21	5.86V	45	5.74V
22	5.86V	46	5.86V
23	5.86V	47	5.86V
24	5.86V	48	5.86V

IC702	
PIN NO.	VOLTAGE
1	0V
2	1.0V
3	1.0V
4	1.0V
5	0V
6	1.8V
7	1.8V
8	1.8V
9	10.6V
10	9.1V
11	1.8V
12	9.1V
13	1.8V
14	9.4V
15	9.3V
16	10.8V
17	0V
18	4.8V

IC561	
PIN NO.	VOLTAGE
1	0V
2	0V
3	0V
4	-11.7V
5	0V
6	0V
7	0V
8	6.4V

IC651	
PIN NO.	VOLTAGE
1	0V
2	0V
3	0V
4	-13.2V
5	0V
6	0V
7	0V
8	11.0V

IC901	
PIN NO.	VOLTAGE
1	-35.4V
2	-35.4V
3	35.4V
4	0V
5	0V
6	0V
7	0V
8	-33V
9	33.6V
10	-0.1V
11	-0.1V
12	-32V
13	-0.1V
14	-0.1V
15	0V

IC562	
PIN NO.	VOLTAGE
1	0V
2	0V
3	0V
4	-11.7V
5	0V
6	0V
7	0V
8	6.4V

IC681	
PIN NO.	VOLTAGE
1	5.6V
2	5.6V
3	5.6V
4	0V
5	5.5V
6	5.6V
7	5.6V
8	11.1V

IC563	
PIN NO.	VOLTAGE
1	0V
2	0V
3	0V
4	-11.7V
5	0V
6	0V
7	0V
8	6.4V

():AM
OTHER:FM(ST)

IC302	
PIN NO.	VOLTAGE
1	2.6V
2	0V
3	0V
4	0V
5	4.8V
6	0.5V(5V)
7	0.3V(12.3V)
8	12V(0V)
9	0.4V(0V)
10	4V(0V)
11	5.1V(5.1V)
12	0V
13	0V
14	0V
15	0V(2.5V)
16	2.5V(0V)
17	5.1V
18	0.9V
19	0.9V
20	1.9V(1.1V)
21	0V
22	2.6V

IC303	
PIN NO.	VOLTAGE
1	2.2V
2	5.1V
3	2.2V
4	2.2V
5	0V
6	5.0V
7	5.1V
8	2.9V(3.6V)
9	5.1V
10	3.5V(0.3V)
11	3.9V(1.9V)
12	3.9V(1.2V)
13	4.0V
14	1.4V
15	1.4V
16	2.2V
17	2.4V(0V)
18	2.4V(0.9V)
19	0V(1.9V)
20	0.9V(0.9V)
21	2.5V(2.1V)
22	2.5V(2.1V)
23	5.1V(5.1V)
24	3.6V(3.6V)

IC21	
PIN NO.	VOLTAGE
1	2.6V(0.2V)
2	2.6V(0V)
3	5.2V(0V)
4	0V(0V)
5	2.6V(0V)
6	2.6V(0V)
7	0V(0V)
8	0V(0V)
9	0V
10	0V
11	0V
12	2.6V(0V)
13	2.7V(0V)
14	5.2V(0V)
15	0V(0V)
16	0V
17	0V
18	0V
19	0V(0.6V)
20	0V(5V)
21	4.8V(4.8V)
22	0V(0V)
23	0V(0V)
24	0V(0V)

():CD NORMAL REC
OTHER:CD NORMAL PLAY

IC101	
PIN NO.	VOLTAGE
1	0V
2	0V
3	0.6V
4	2.8V
5	0V
6	0V(1.3V)
7	0V
8	0.6V
9	2.8V
10	2.8V
11	0V
12	0V
13	5.8V
14	3.6V
15	0V
16	2.8V
17	0.6V
18	0V
19	0V
20	0V
21	2.8V
22	0.6V
23	0V
24	0V

Figure 35 SCHEMATIC DIAGRAM (14/14)

– 36 –


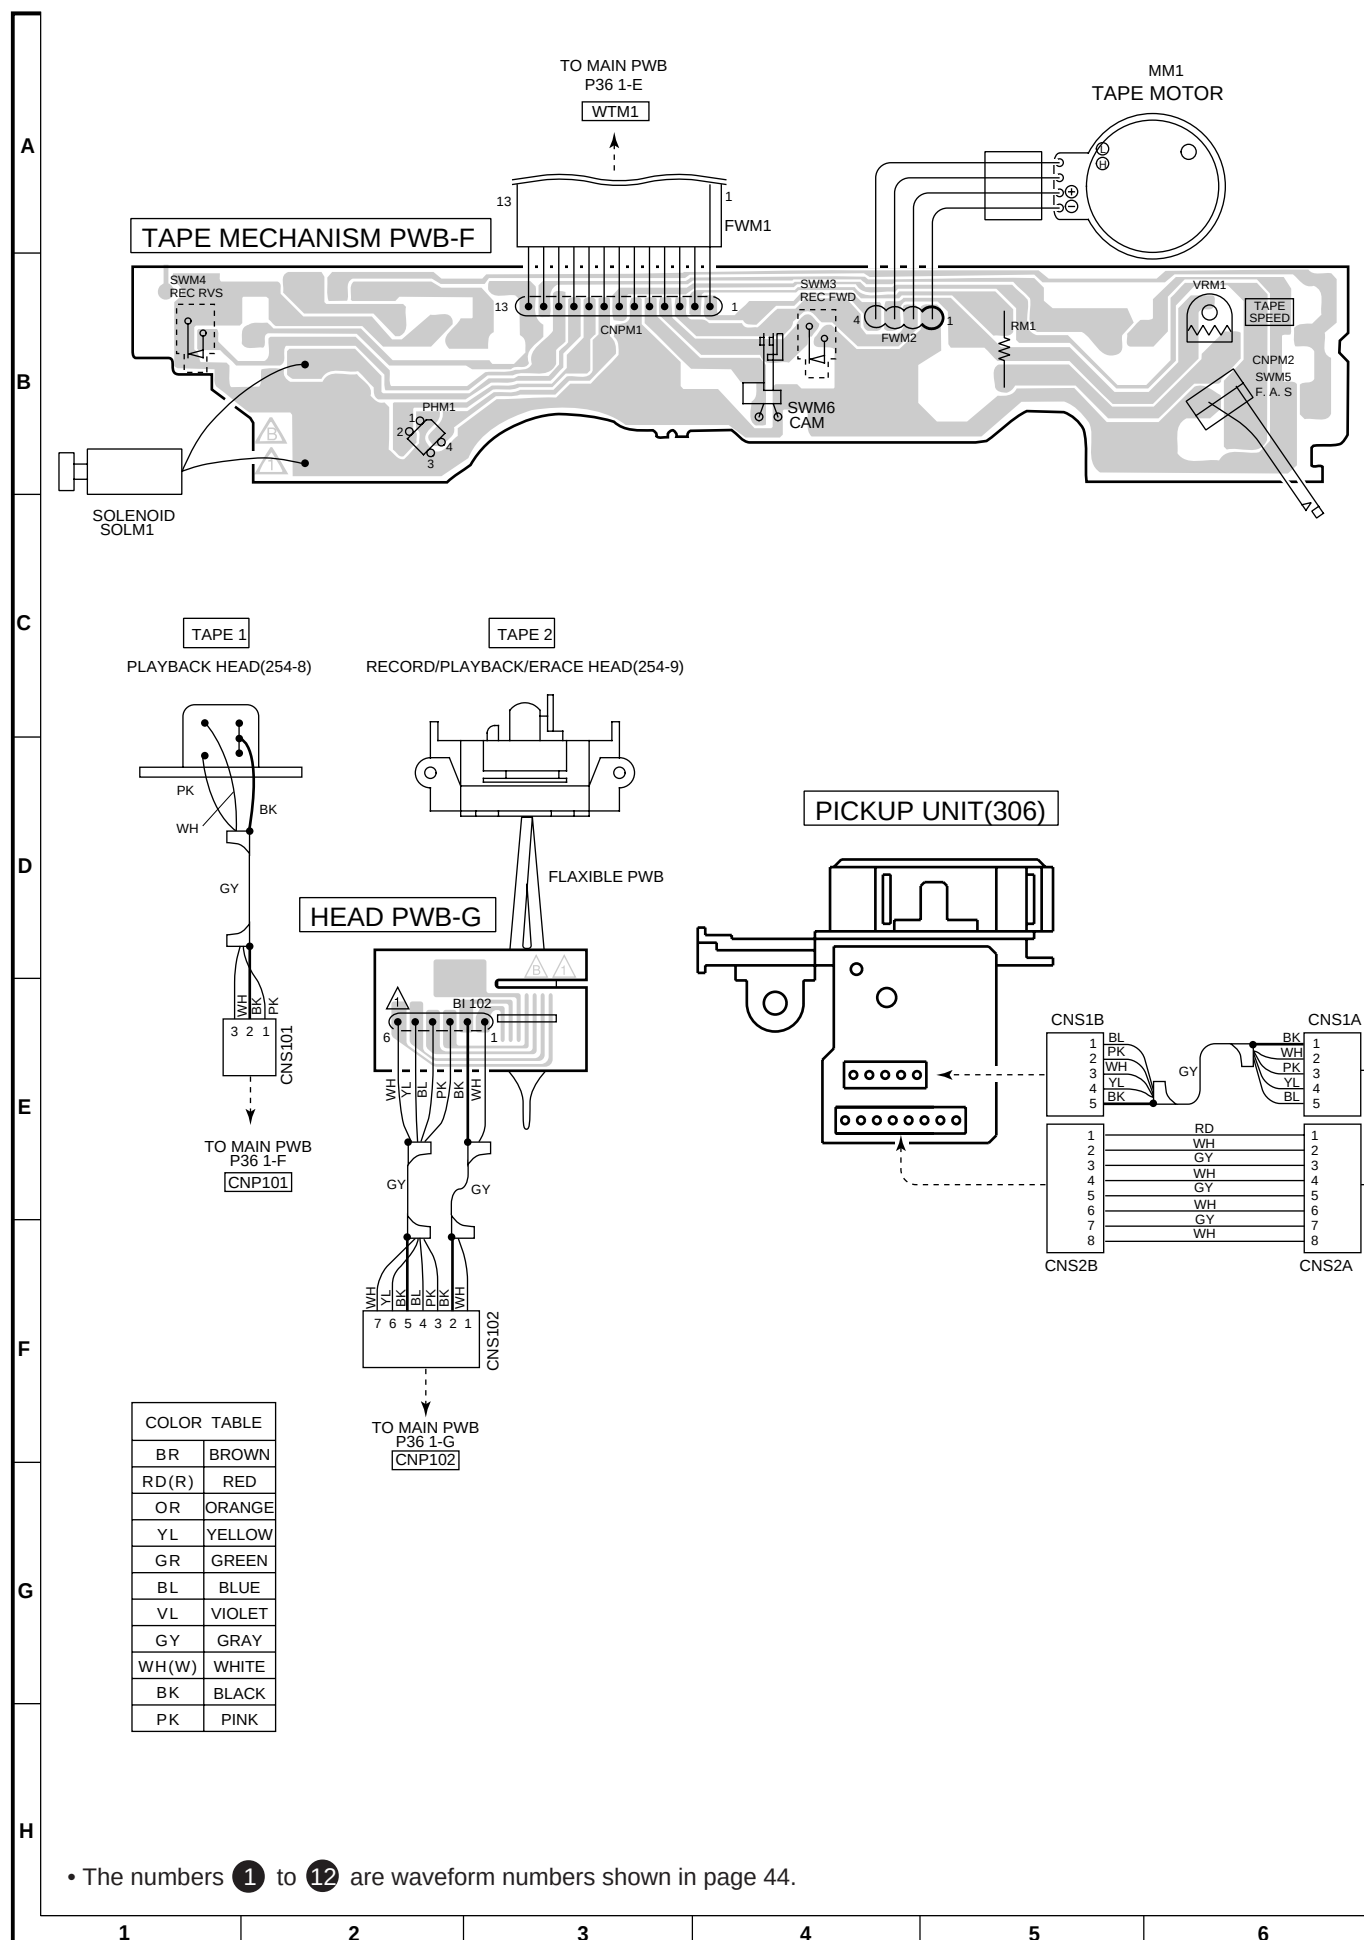


Figure 38 WIRING SIDE OF P.W.BOARD (3/8)

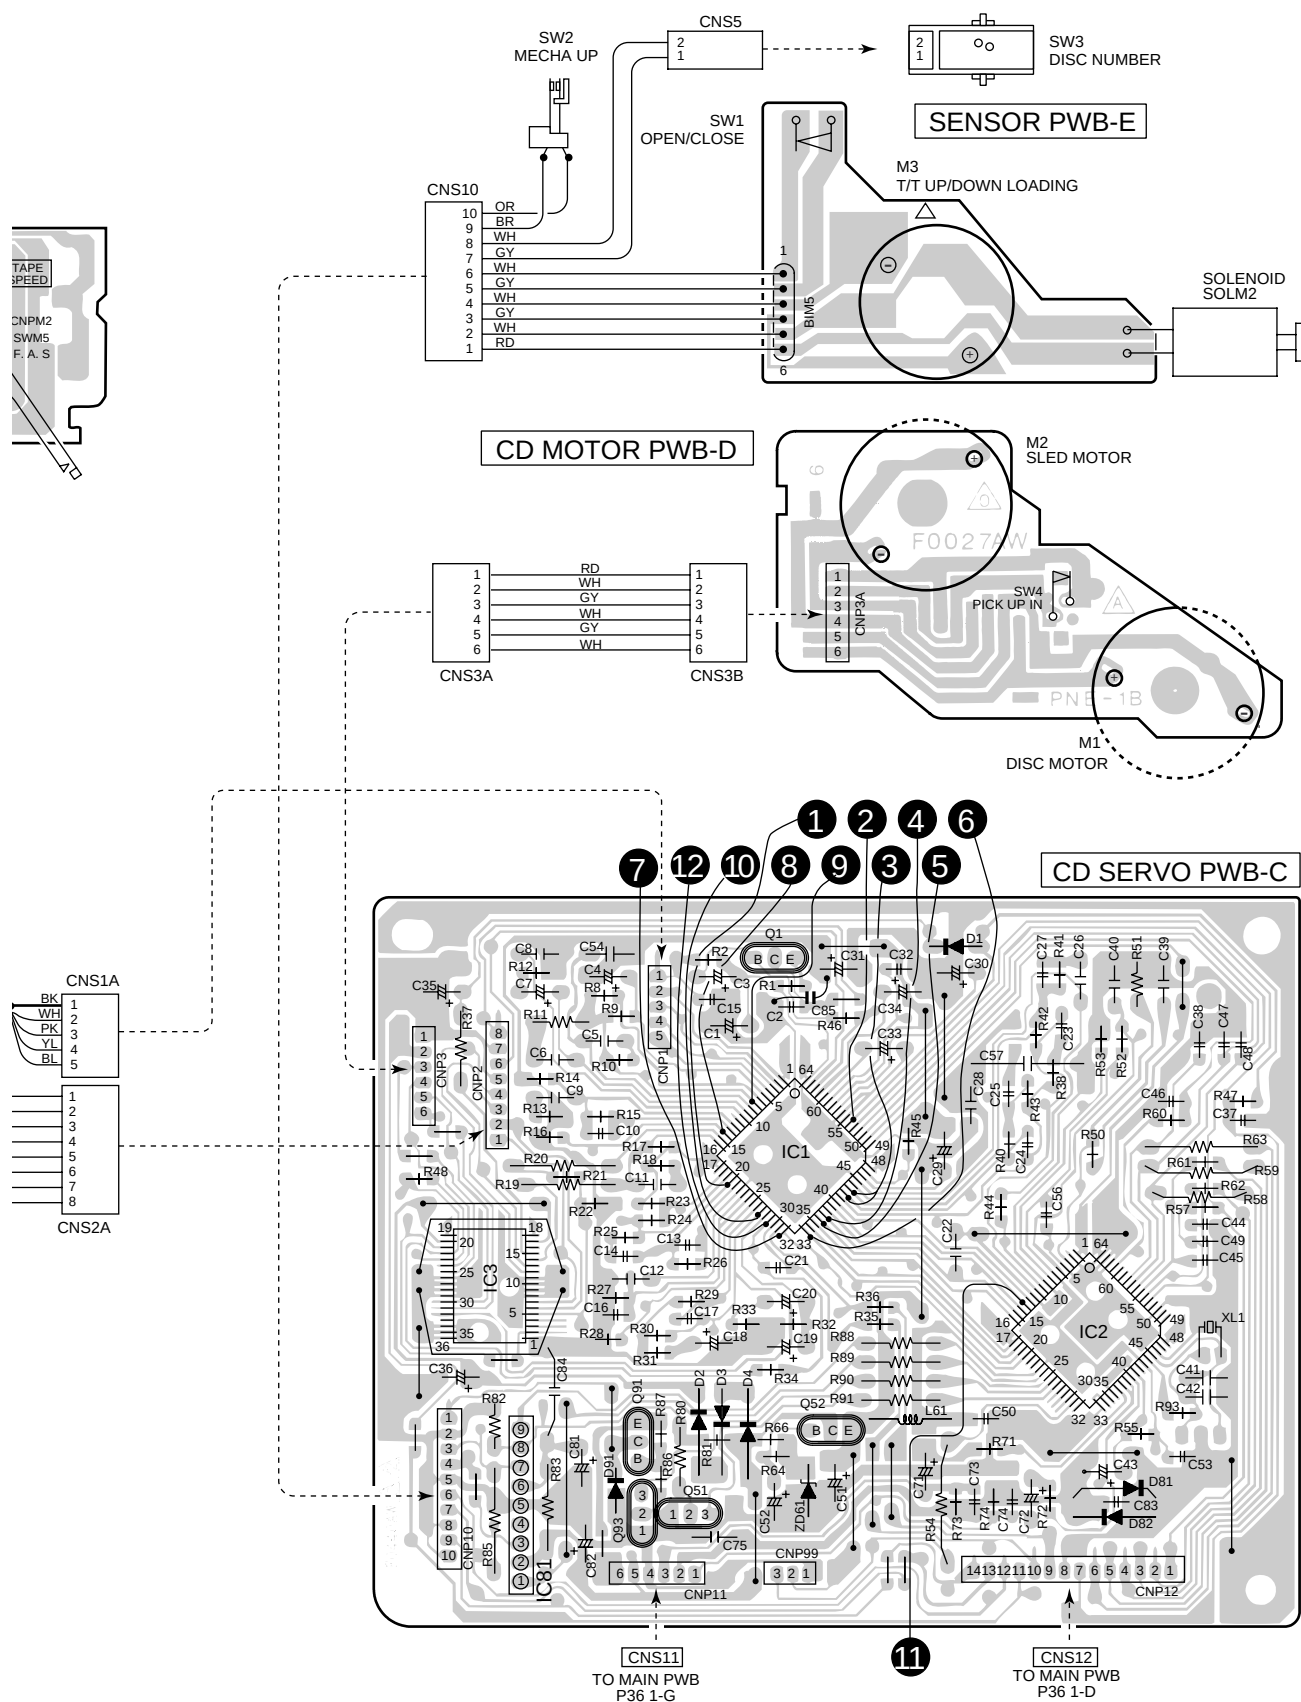

7	8	9	10	11	12
---	---	---	----	----	----

Figure 39 WIRING SIDE OF P.W.BOARD (4/8)


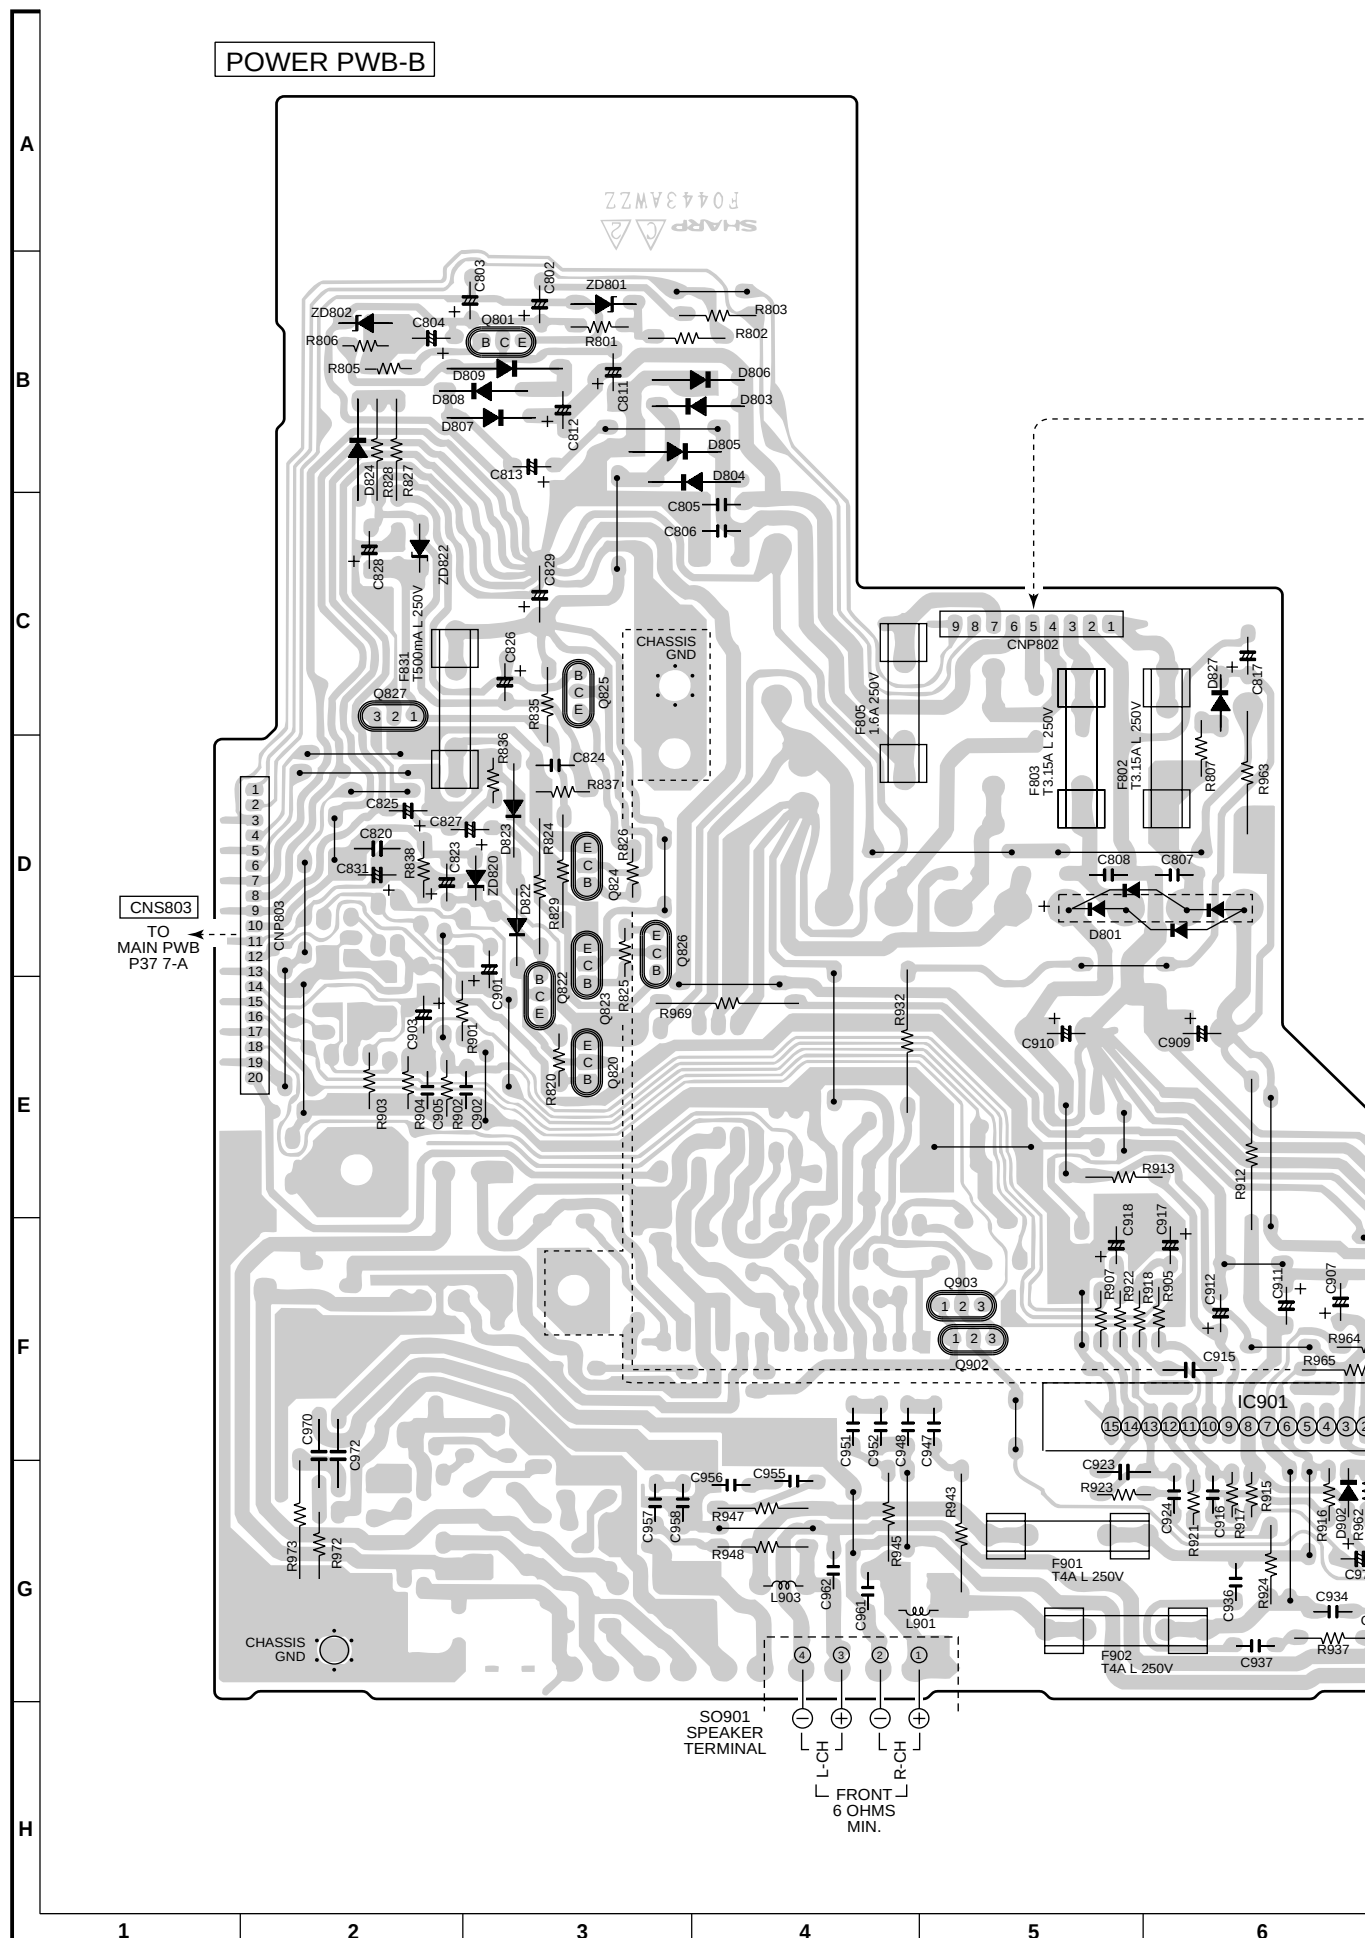


Figure 40 WIRING SIDE OF P.W.BOARD (5/8)

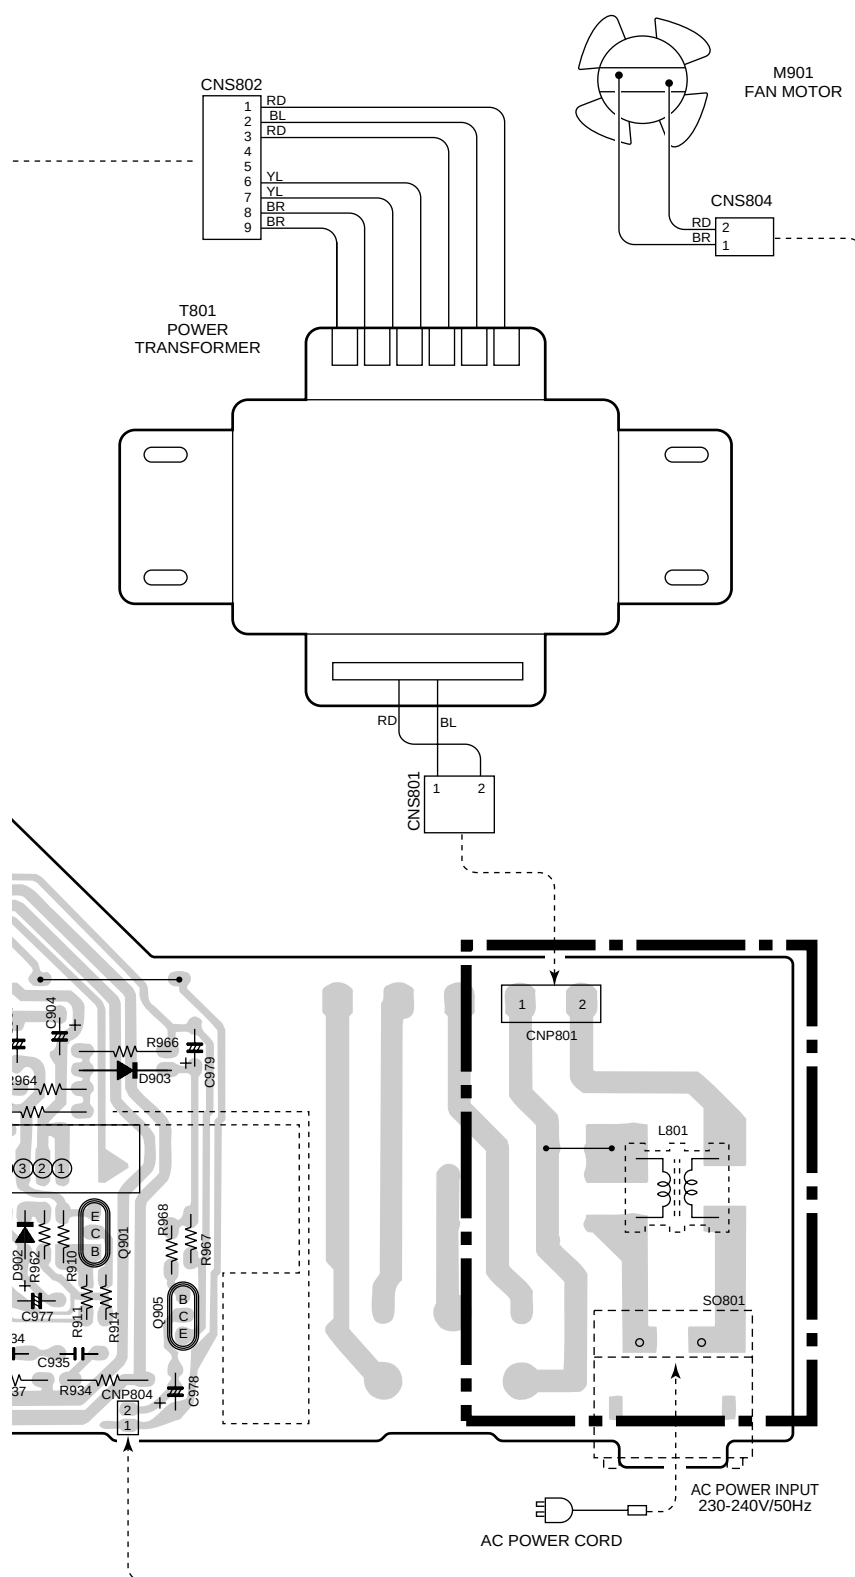

COLOR TABLE	
BR	BROWN
RD(R)	RED
OR	ORANGE
YL	YELLOW
GR	GREEN
BL	BLUE
VL	VIOLET
GY	GRAY
WH(W)	WHITE
BK	BLACK
PK	PINK

When Serving, pay attention as the area enclosed by this line (— — —) is directly connected with AC main voltage.













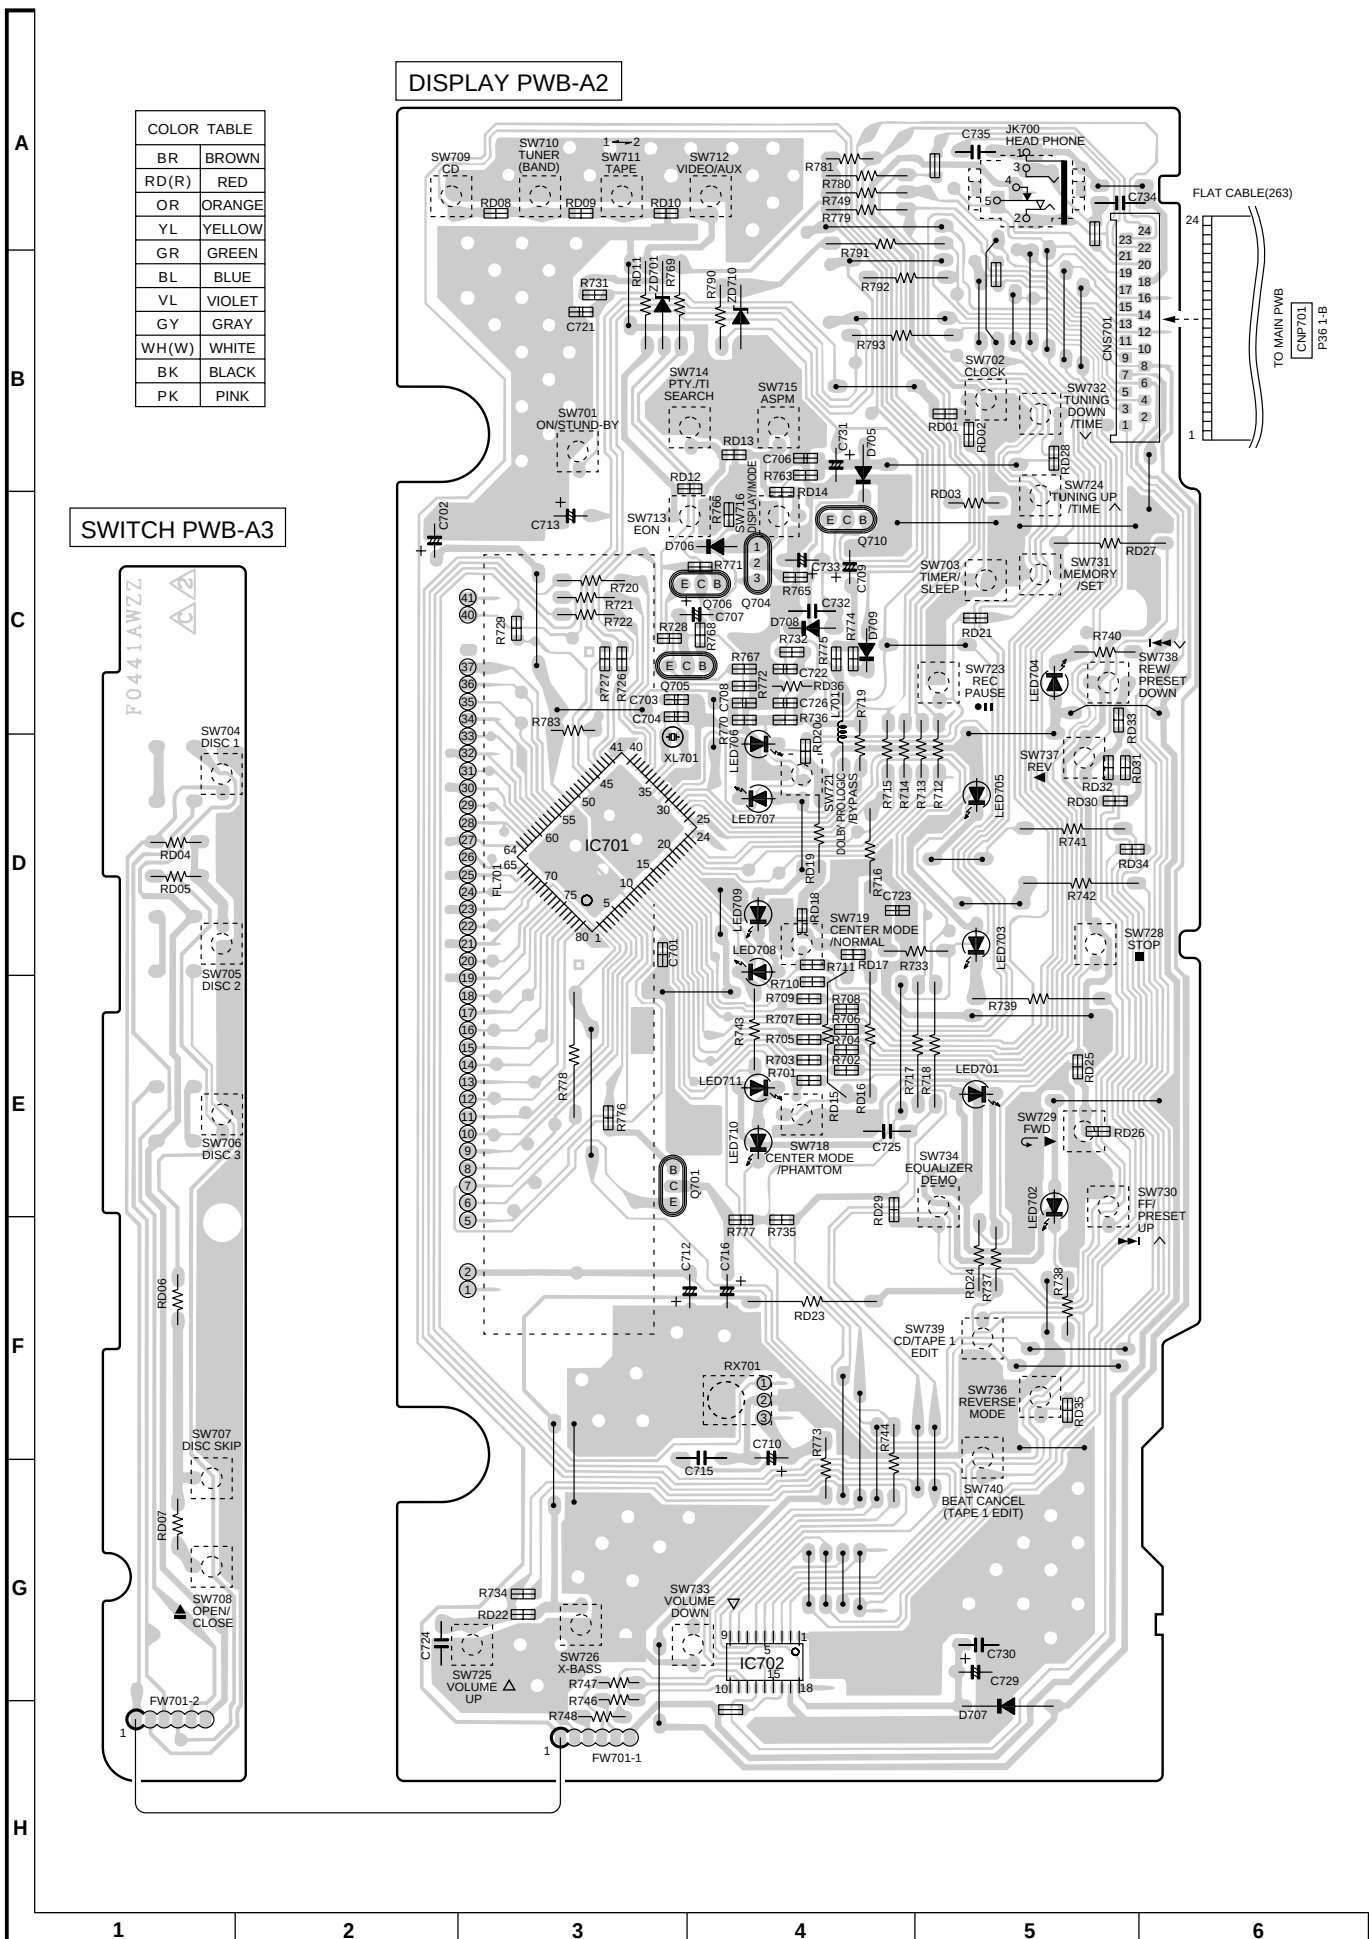


Figure 42 WIRING SIDE OF P.W.BOARD (7/8)

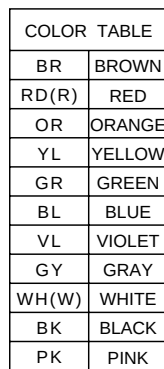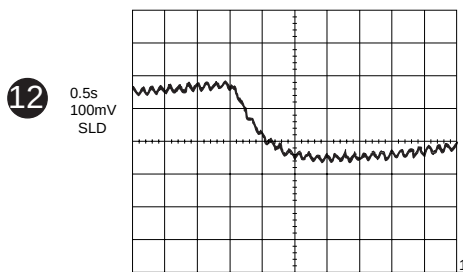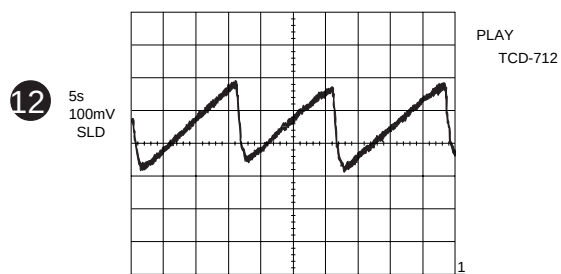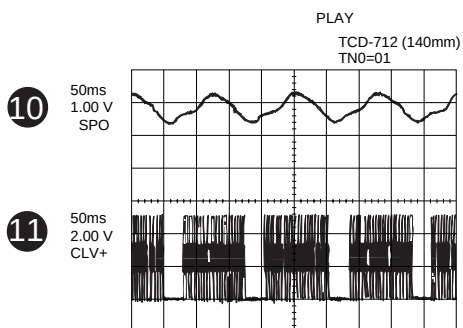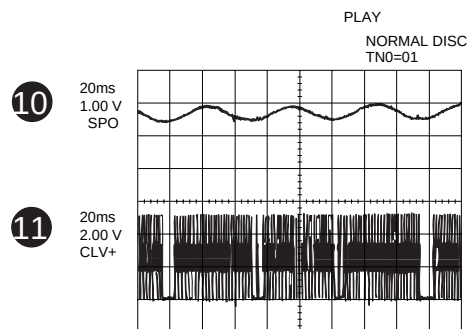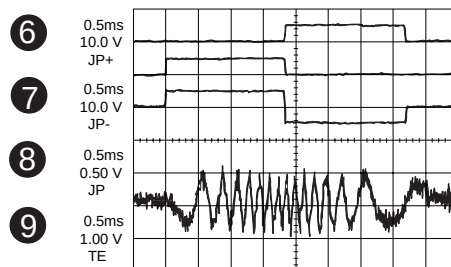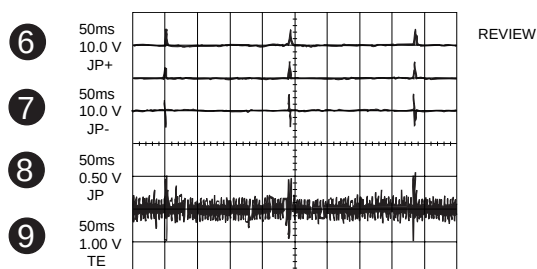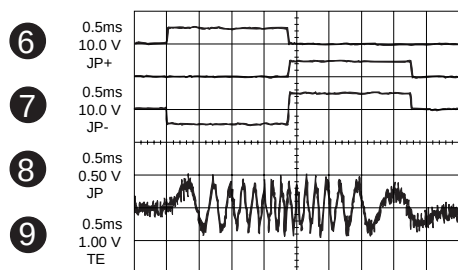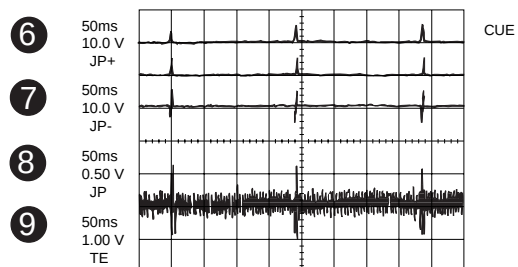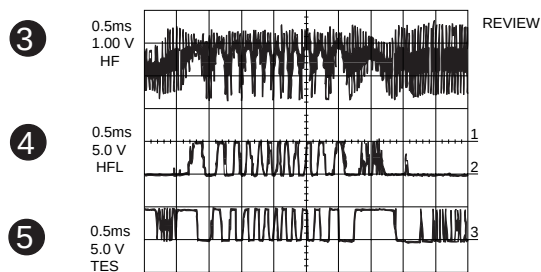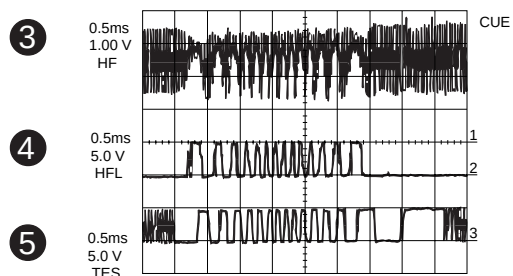

- 43 -

WAVEFORMS OF CD CIRCUIT

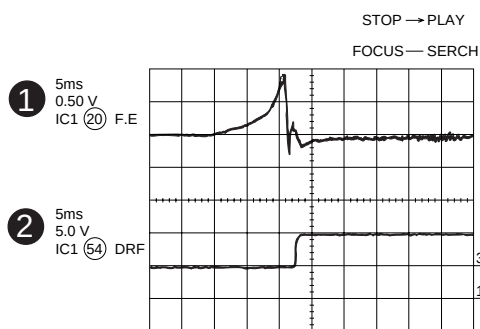

TROUBLESHOOTING (CD SECTION)

When the CD does not function

When the CD section does not operate When the objective lens of the optical pickup is dirty, this section may not operate. Clean the objective lens, and check the playback operation. When this section does not operate even after the above step is taken, check the following items.

Remove the cabinet and follow the troubleshooting instructions.


"Track skipping and/or no TOC (Table Of Contents) may be caused by build up of dust or other foreign matter on the laser pickup lens. Before attempting any adjustment make certain that the lens is clean. If not, clean it as mentioned below."

Turn the power off.


Gently clean the lens with a lens cleaning tissue and a small amount of isopropyl alcohol.

Do not touch the lens with the bare hand.

• When the turntable fails to stop.

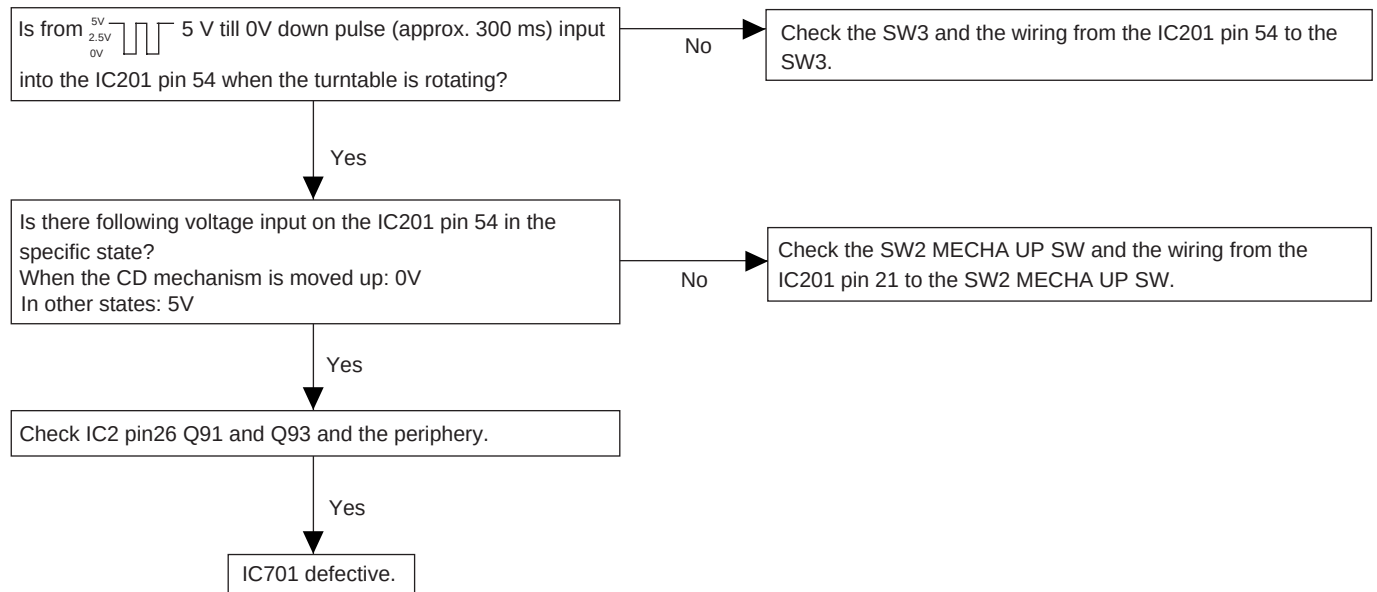


• When turntable fails to move.

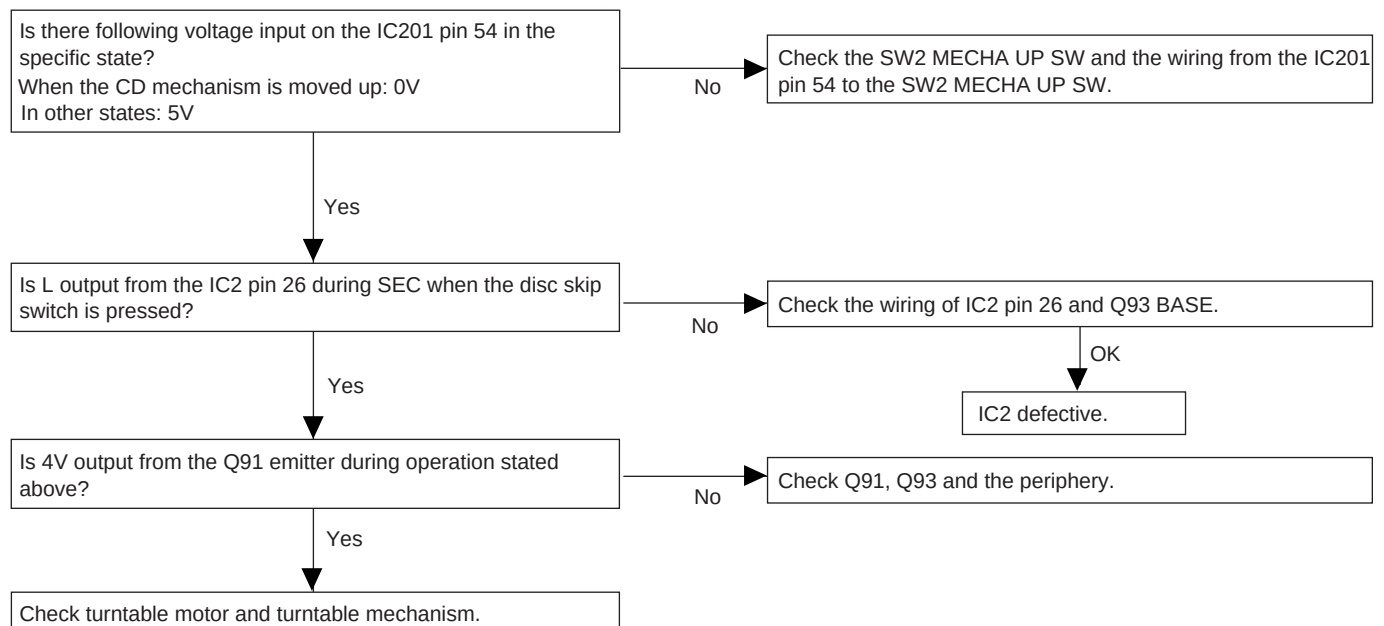


CD-C451H

• When the CD tray fails to open or close.

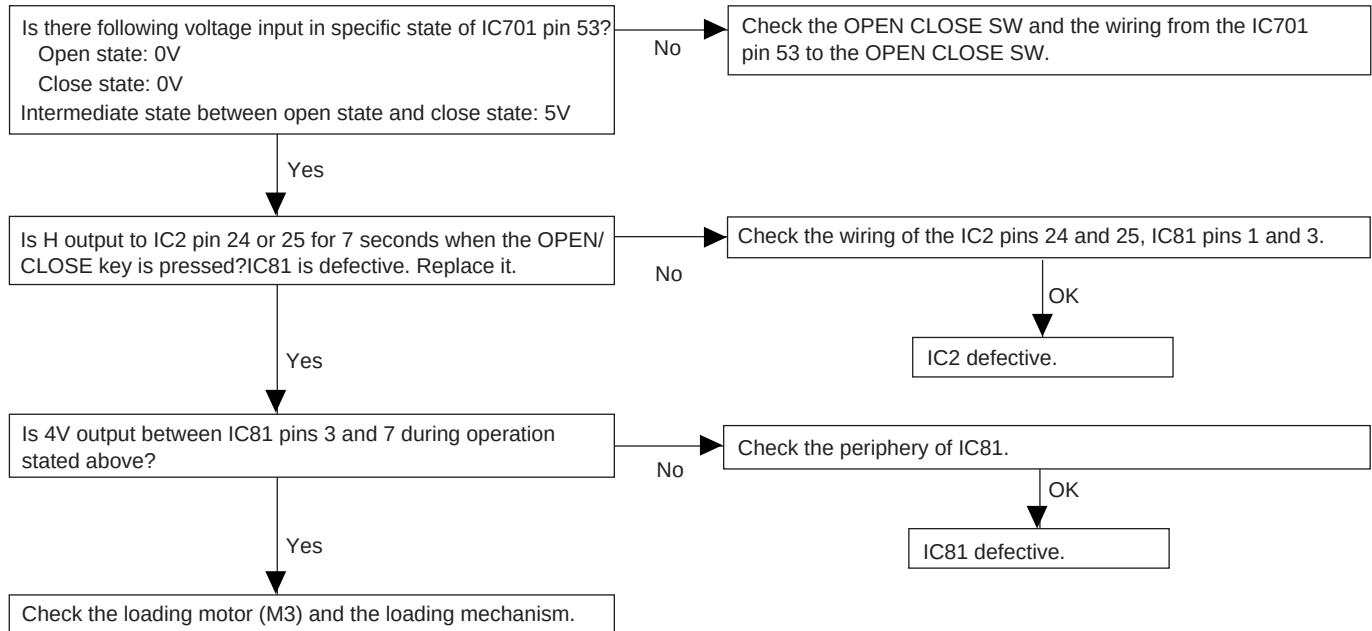

• The CD function will not work.

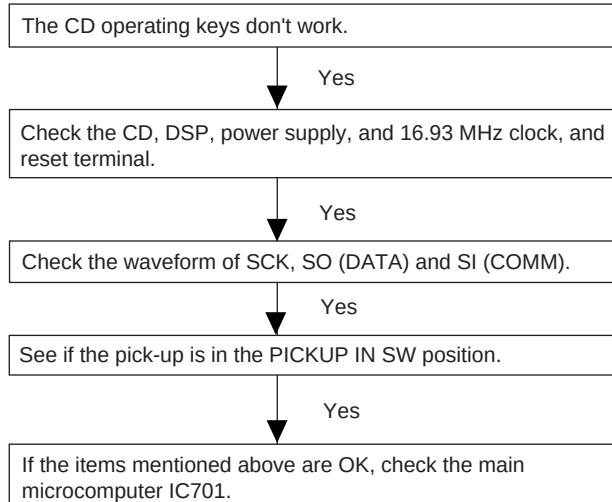

• The CD operating keys work.



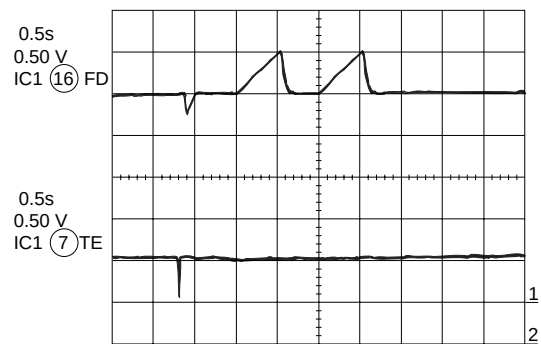


Figure 46

- Playback can only be performed when a disc is loaded.

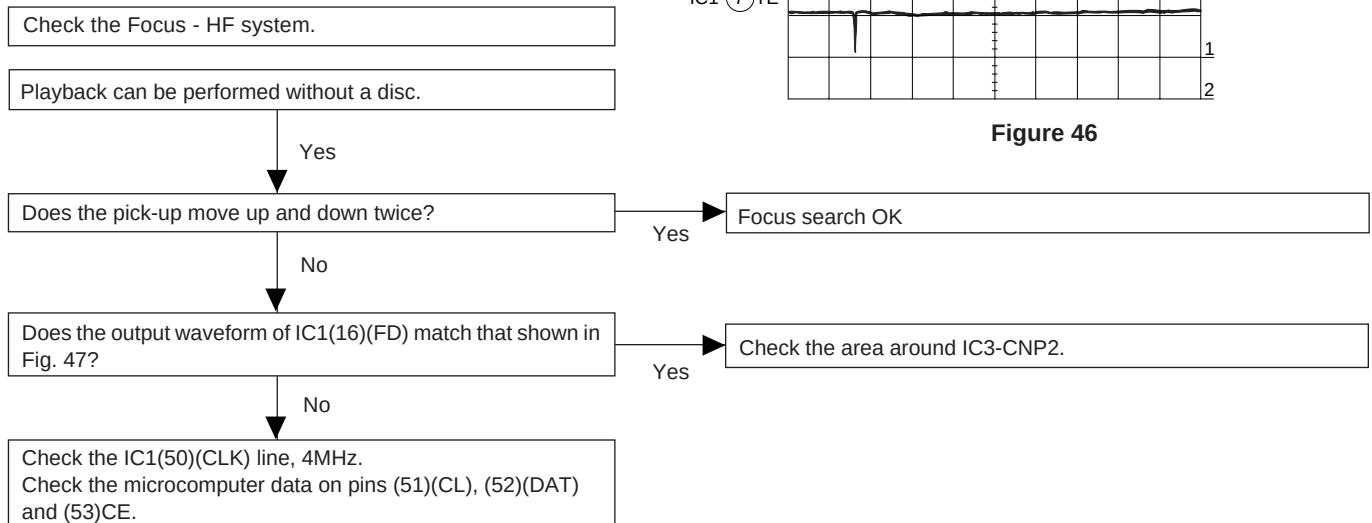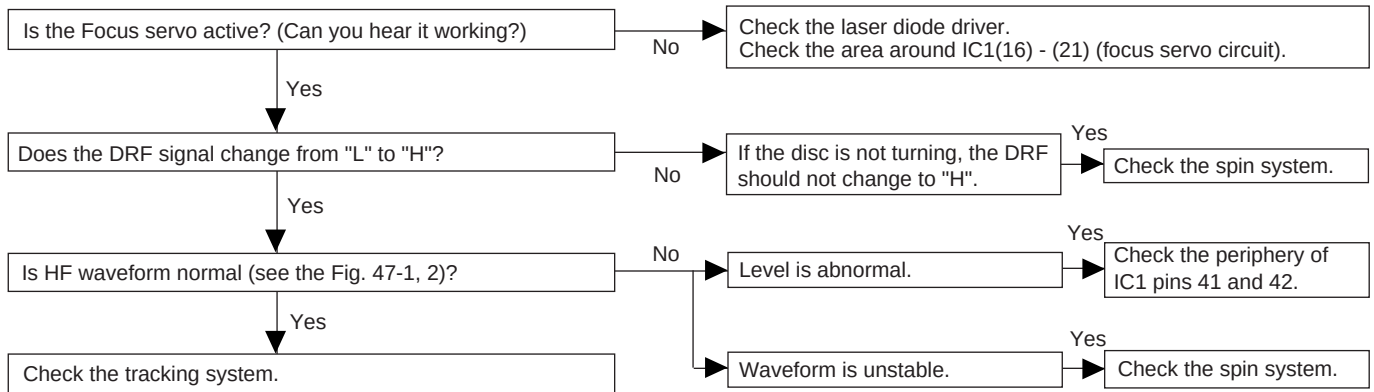

HF
1.0V/DIV
0.5μsec/DIV(DC)
(When playing
back the disc)

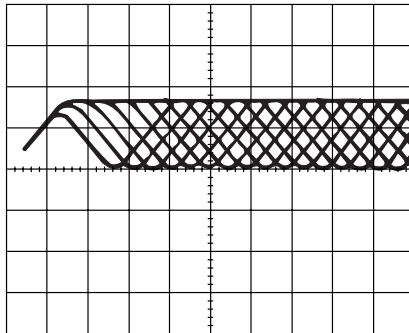



Figure 47-1

0.5s
1.00 V
IC1 (16) FD

0.5s
10.0 V
IC2 (13) CLV+

0.5s
10.0 V
IC1 (54) DRF


0.5s
2.00 V
IC1 (7) TE

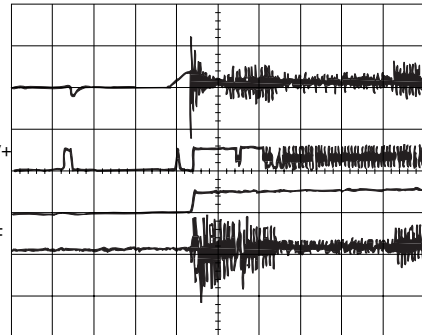

Waveform in case of
normal play-back

Figure 47-2

- Check the tracking system.

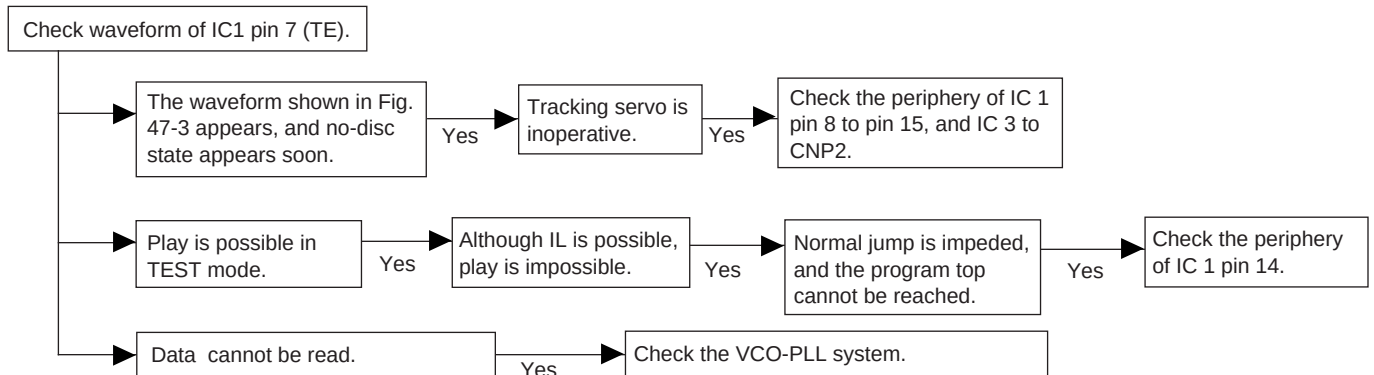

5ms
1.00 V
IC1 (7) TE

5 ms
5.0 V
IC1 (54) DRF

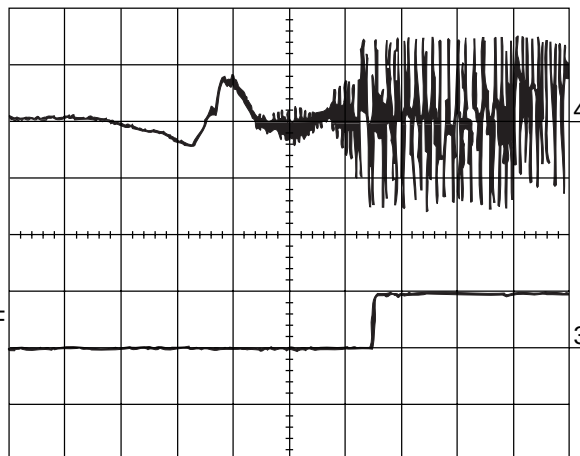


Figure 47-3

• Checking the spin system.

Play operation is performed without disc.

Yes

The turntable rotates a little.

Yes

The spin driver circuit is normal.

No

The turntable fails to rotate or rotates at high speed.

Yes

Check the periphery of IC1 pins 23 to 27, pin 39, and pin 40, IC2 pin 12 and pin 13, IC3 to CNP3.

• Checking the VCO-PLL system

Play operation is performed when disc exits.

Yes

Although HF waveform is normal, TOC data cannot be read.

Yes

Check PDO waveform (Fig. 48).

Abnormal

Check the IC1 pins 43 and 44, IC2 pins 3, 5, 7, 10, and 11.

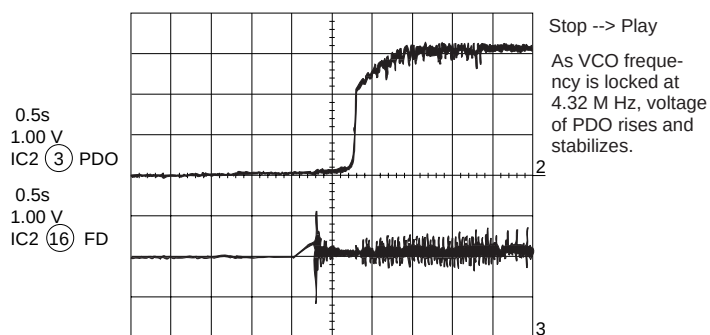


Figure 48

• Although HF waveform is normal and the time indication is normal, no sound is emitted.

Check IC 2 pin 48 (EFLG).

No

Usually, the number of pulses of flawless disc is 100 pulses/sec or less.

Yes

Check IC2 pins 37, 40.

Abnormal

Check IC 601 and POWER AMP IC 901.

FUNCTION TABLE OF IC

IC2 VHiLC78622K-1: Servo/Signal Control(LC78622K) (1/2)

Pin No.	Terminal Name	Input/Output	Function	
1	DEFI	Input	Input terminal of defect detection signal (DEF). (Connected to OV when not used.)	
2	TAI	Input	For PLL	Input terminal for test. Pull-down resistor is integrated. Surely connected to OV.
3	PDO	Output		Output terminal of phase comparison for external VCO control.
4	VVSS	—		Ground terminal for integrated VCO. Surely connected to OV.
5	ISET	Input		Resistance connection terminal for current adjustment of PDO output.
6	VVDD	—		Power terminal for integrated VCO.
7	FR	Input		VCO frequency range adjustment.
8	VSS	—	Ground terminal of digital system. Surely connected to OV.	
9	EFMO	Output	For slice level control	EFM signal output terminal.
10	EFMIN	Input		EFM signal input terminal.
11	TEST2	Input	Input terminal for test. Pull-down resistor is integrated. Surely connected to OV.	
12	CLV+	Outout	Output for disk motor control. 3 values can be output with the commands.	
13	CLV-	Output	Output for disk motor control. 3 values can be output with the commands.	
14	V/P	Output	Monitor output terminal for automatic switch of rough servo/phase control. "H" for rough servo, and "L" for phase servo.	
15	HLF	Intput	Input terminal of track detection signal. Schmit input.	
16	TES	Input	Input terminal of tracking error signal. Schmit input.	
17	TOFF	Output	Tracking OFF output terminal.	
18	TGL	Output	Output terminal for switch of tracking gain "L" increases the gain.	
19	JP+	Output	Output for track jump control. 3 values can be output with the commands.	
20	JP-	Output	Output for track jump control. 3 values can be output with the commands.	
21*	PCK	Output	Clock monitor terminal for EFM data replay. 4,3218MHz as the phase clock.	
22*	FSEQ	Output	Output terminal synchronous signal detection. "H" is output when synchronous signal detected by EFM signal matches synchronous signal internally generated.	
23	VDD	—	Power terminal of digital system.	
24	CONT1	Input/Output	General purpose input/output terminal 1	Controlled with serial data command from micro computer. When not used, set it as the input terminal and open it by connecting to OV, or set it as the output terminal and open it.
25	CONT2	Input/Output	General purpose input/output terminal 2	
26	CONT3	Input/Output	General purpose input/output terminal 3	
27	CONT4	Input/Output	General purpose input/output terminal 4	
28*	CONT5	Input/Output	General purpose input/output terminal 5	
29*	EMPH	Output	Difference monitor terminal At "H", deemphasis disk is being replayed.	
30*	C2F	Output	C2 flag output terminal.	
31	DOUT	Output	Output terminal of digital OUTPUT. (EIAJ format)	
32*	TEST3	Input	Input terminal for test. Pull-down resistor is integrated. Surely connected to OV.	
33	TEST4	Input	Input terminal for test. Pull-down resistor is integrated. Surely connected to OV.	
34	N.C.	—	Terminal not used. Open during operation.	
35*	MUTEL	Output	L channel 1 bit DAC	Mute output terminal for L channel.
36	LVDD	—		Power terminal for L channel.
37	LCHO	Output		L channel output terminal.
38	LVSS	—		Ground terminal for L channel Surely connected to OV.
39	RVSS	—	R channel 1 bit DAC	Ground terminal for R channel Surely connected to OV.
40	RCHO	Output		R channel output terminal.
41	RVDD	—		Power terminal for R channel.
42*	MUTER	Output		Mute output terminal for R channel.
43	XVDD	—	Power terminal for quartz oscillation.	
44	XOUT	Output	Ground terminal of 16.9344 MHz quartz oscillator.	
45	XIN	Input	Ground terminal of 16.9344 MHz quartz oscillator.	
46	XVSS	—	Ground terminal for quartz oscillation. Surely connected to OV.	
47*	SBSY	Output	Output terminal of synchronous signal of subcode block.	
48*	EFLG	Output	Correction monitor terminal of C1, C2, single and double.	

In this unit, the terminal with asterisk mark (*) is (open) terminal which is not connected to the outside.

IC2 VHiLC78622K-1: Servo/Signal Control(LC78622K) (1/2)

Pin No.	Terminal Name	Input/Output	Function
49*	PW	Output	Output terminal of subcodes P, A, R, S, T, U and W.
50*	SFSY	Output	Output terminal of synchronous signal of subcode frame. It drops when subcode stands by.
51	SBCK	Input	Clock input terminal to read subcode. Schmit input (Connected to 0V when not used.)
52*	FSX	Output	Output terminal of synchronous signal of 7.35kHz divided from quartz oscillation.
53	WRQ	Output	Output terminal to stand by output of subcode Q.
54	RWC	Input	Input terminal of read/write. Schmit input.
55	SQOUT	Output	Output terminal of subcode Q.
56	COIN	Input	Command input terminal from microcomputer.
57	CQCK	Input	Clock input terminal to fetch command input, or pick up subcode from SQOUT. Schmit input
58	$\overline{\text{RES}}$	Input	Reset input terminal of LC78622. When turning on power, set it at "L".
59*	TST11	Output	Output terminal for test. Used in the open state ("L" output as ordinary).
60*	16M	Output	Output terminal of 16.9344Hz.
61	4.2M	Output	Output terminal of 4.2336MHz.
62	TEST5	Input	Input terminal for test Pull-down resistor is integrated. Surely connected to 0V.
63	$\overline{\text{CS}}$	Input	Chip selection input terminal. Pull-down resistor is integrated. Connected to 0 when not controlled.
64	TEST1	Input	Input terminal for test Pull-down resistor is integrated. Surely connected to 0V.

Note: The same potential must be supplied to the power terminals (VDD, VVDD, LVDD, RVDD, XVDD).

In this unit, the terminal with asterisk mark (*) is (open) terminal which is not connected to the outside.

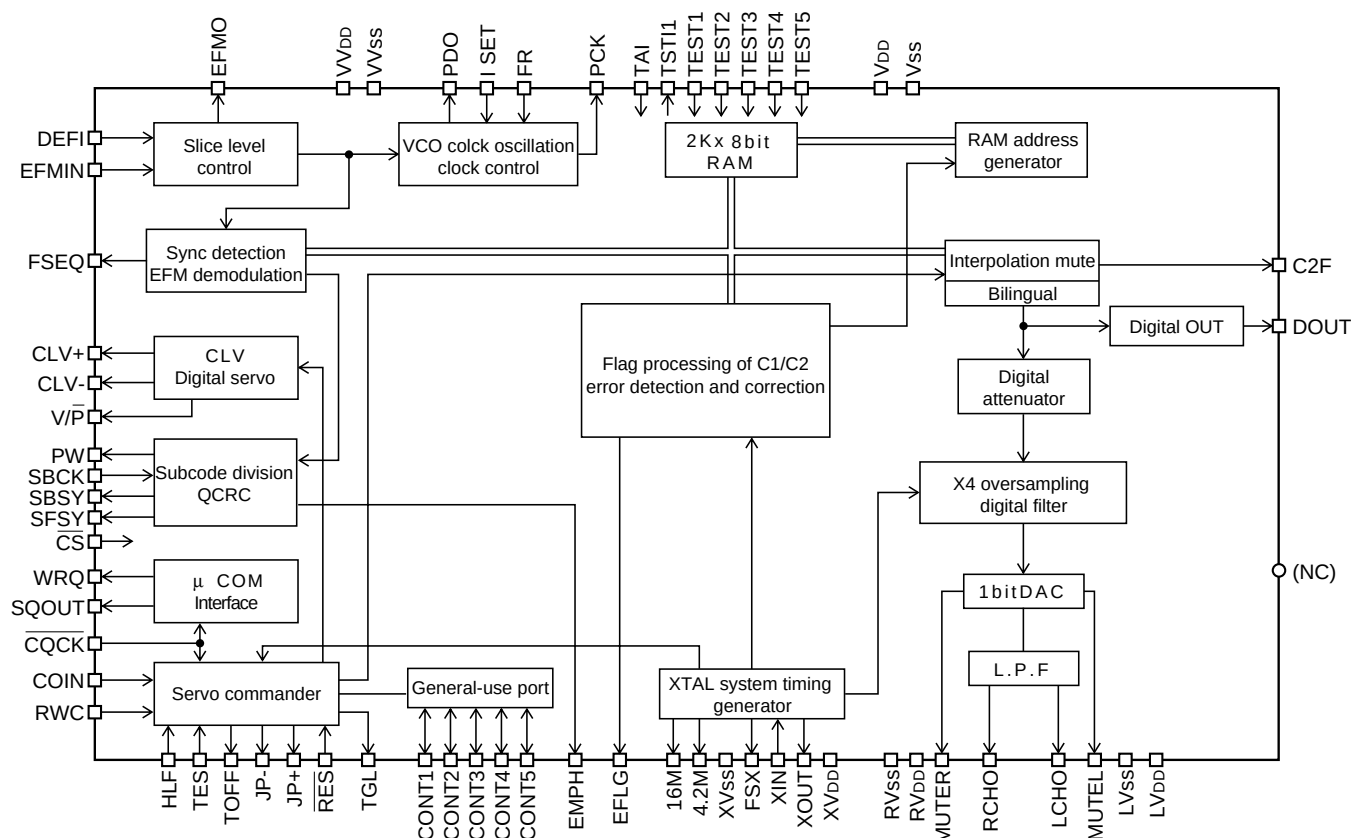


Figure 50 BLOCK DIAGRAM OF IC

IC1 VHiLA9241M/-1:Servo Amp.,(LA9241M) (1/2)

Pin No.	Port Name	Function
1	FIN2	Connection pin for photodiode of pickup. RF signal is generated through addition with FIN pin, and FE signal is generated through subtraction.
2	FIN1	Connection pin for photodiode of pickup.
3	E	Connection pin for photodiode of pickup. TE signal is generated through subtraction with F pin.
4	F	Connection pin for photodiode of pickup.
5	TB	Pin for input of DC component of TE signal.
6	TE-	Pin to connect gain setting resistor of TE signal to TE signal.
7	TE	TE signal output pin.
8	TESI	TES (Track error sense) comparator input pin. TE signal is band-passed and input.
9	SCI	Input pin for shock detection.
10	TH	Pin to set time constant of tracking gain.
11*	TA	TA amplifier output pin.
12	TD-	Pin to compose tracking phase compensation constant between TD and VR pins.
13	TD	Pin to set tracking phase compensation.
14	JP	Pin to set amplitude of tracking jump signal (kick pulse).
15	TO	Tracking control signal output pin.
16	FD	Focusing control signal output pin.
17	FD-	Pin to compose focusing phase compensation constant between FD and FA pins.
18	FA	Pin to compose focusing phase compensation constant between FD-/FA-pins.
19	FA-	Pin to compose focusing phase compensation constant between FA and FE pins.
20	FE	Output pin of FE signal.
21	FE-	Pin to connect gain setting resistor of FE signal across TE pin.
22	AGND	GND for analog signal.
23	SP	Single end output for CV+ and CV- pin input.
24	SPI	Spindle amplifier input.
25	SPG	Pin to connect gain setting resistor in the 12cm mode of spindle.
26	SP-	Pin to connect spindle phase compensation constant together with SPD pin.
27	SPD	Spindle control signal output pin.
28	SLEQ	Pin to connect thread phase compensation constant.
29	SLD	Thread control signal output pin.
30	SL-	Input pin of thread feed signal from micro computer.
31	SL+	Input pin of thread feed signal from micro computer.
32	JP-	Input pin of tracking jump signal from DSP.
33	JP+	Input pin of tracking jump signal from DSP.
34	TGL	Input pin of tracking gain control signal from DSP. TGL = Gain low at "H"
35	TOFF	Input pin of tracking off control signal from DSP. TOFF = Off at "H"
36	TES	Output pin of TES signal to DSP.
37	HFL	(HIGH FREQUENCY LEVEL) is used to judge whether main beam is positioned on the bit or on the mirror.
38	SLOF	Thread servo off control input pin.
39	CV-	Pin to input CLV error signal from DSP.
40	CV+	Pin to input CLV error signal from DSP.
41	RFSM	RF output pin.
42	RFS-	Pin to set gain of RF and set 3T compensation constant together with RFSM pin.
43	SLC	(SLICE LEVEL CONTROL) is the output pin to control of the level of the data slice with RF waveform DSP.
44	SLI	Input pin to control the level of data slice with DSP.
45	DGND	GND pin in the digital system.
46	FSC	Output pin for focus search smoothening capacitor.
47	TBC	(Tracking Balance Control) Pin to set EF balance variable range.
48*	NC	—————
49	DEF	Defect detection output pin of disk.
50	CLK	Reference clock input pin. 4.23MHz of DSP is input.

In this unit, the terminal with asterisk mark (*) is (open) terminal which is not connected to the outside.

IC1 VHiLA9241M/-1: Servo Amp.,(LA9241M) (2/2)

Pin No.	Port Name	Function
51	CL	Micro computer command clock input pin.
52	DAT	Micro computer command data input pin.
53	CE	Micro computer command chip enable input pin.
54	DRF	(DETECT RF) RF level detection output.
55	FSS	(Focus Serch Select) Pin to switch focus search mode. ($\pm$ search/+ search for reference voltage)
56	VCC2	VCC pin for servo system and digital system.
57	REFI	Pin to connect pass control for reference voltage.
58	VR	Reference voltage output pin.
59	LF2	Pin to set defect detection time constant of disk.
60	PH1	Pin to connect capacitor for peak hold of RF signal.
61	BH1	Pin to connect capacitor for bottom hold of RF signal.
62	LDD	APC circuit output pin.
63	LDS	APC circuit output pin.
64	VCC1	RF system VCC pin.

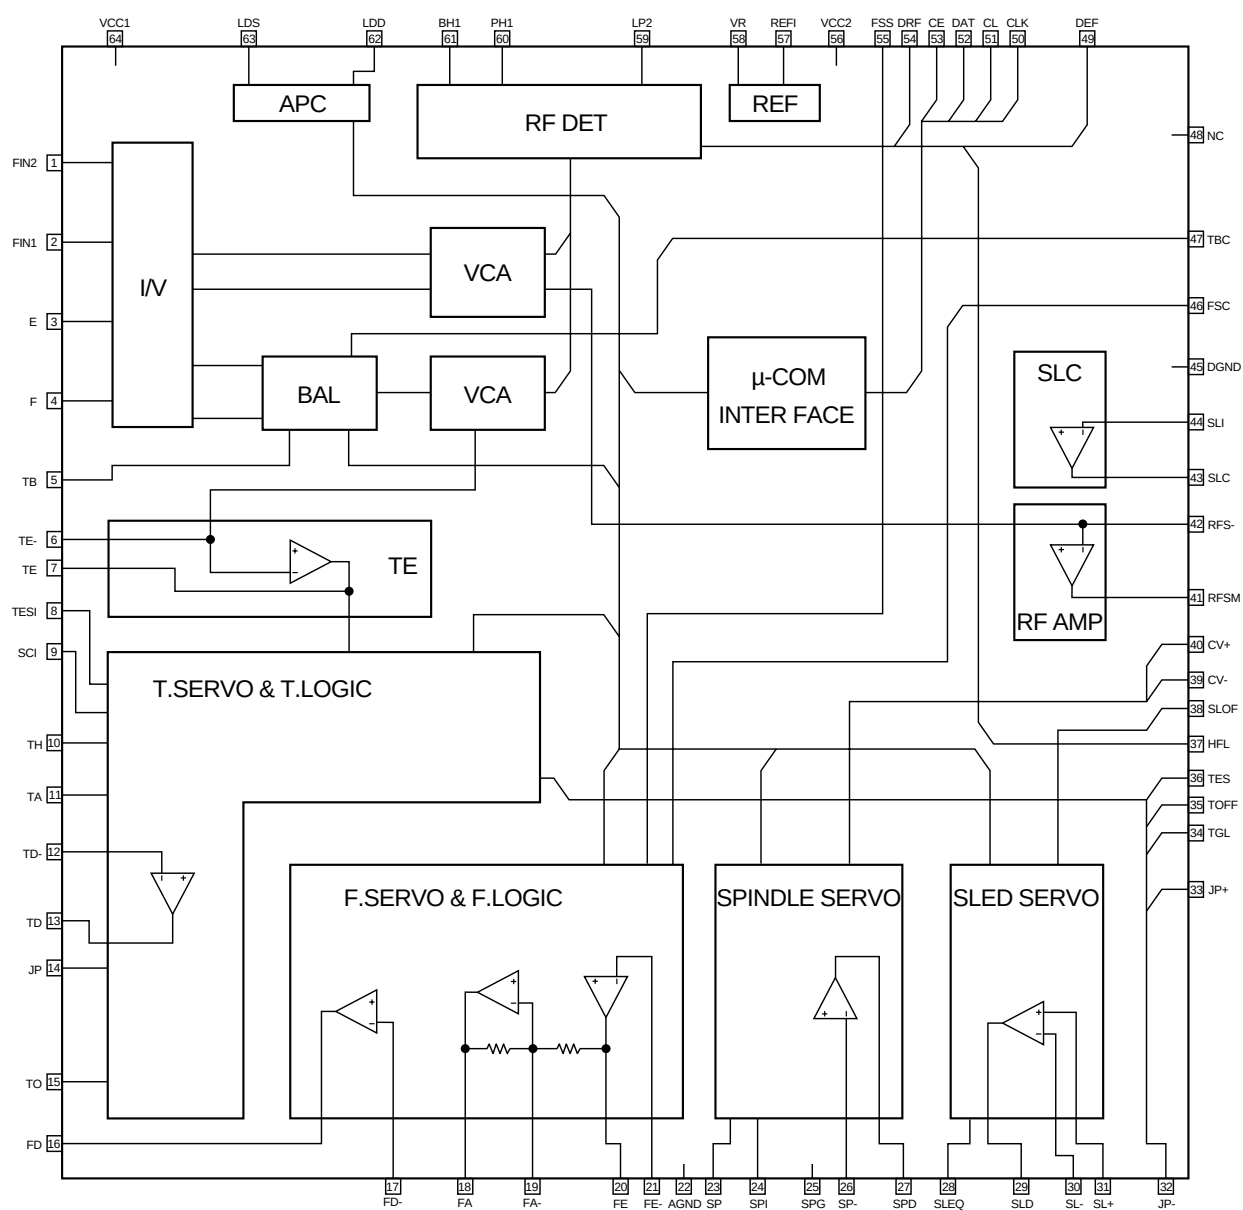


Figure 52 BLOCK DIAGRAM OF IC

IC201 RH-iX0222AWZZ: System Microcomputer (IX0222AW) (1/2)

Pin No.	Terminal Name	Input/Output	Function
1*	—	Output	—
2	REC/PB	—	Record/Playback selection signal
3*	—	Output	—
4*	CD MUT	Output	CD MUT signal
5	CD RES	Output	CD DSP RESET signal
6	CD SL-	Output	Slide return signal
7	CD SL+	Output	Slide feed signal
8	VDD	—	Power connection terminal
9	CD CQCK	Output	CD IC control signal
10	CD COIN	Output	CD IC control signal
11	CD SQOUT	Input	CD IC control signal
12	CD WRQ	Input	CD IC control signal
13	CD RWC	Output	CD IC control signal
14	SCK	Input	Main μ COM (RH-iX0223AWZZ) control signal
15	SO	Output	Main μ COM (RH-iX0223AWZZ) control signal
16	SI	Input	Main μ COM (RH-iX0223AWZZ) control signal
17	RESET	Input	Main μ COM (RH-iX0223AWZZ) control signal
18	STROBE	Input	Main μ COM (RH-iX0223AWZZ) control signal
19	CD PU-IN SW	Input	Pickup position detection
20	AVSS	—	To be connected to GND
21	CD DRF	Input	CD RF level detection input H: When RF level is H
22	T1 RUN	Input	Tape 1: Rotation pulse input
23	T2 RUN	Input	Tape 2: Rotation pulse input
24	SPEANA 5	Input	63Hz BPF spectrum analyzer input
25	SPEANA 4	Input	250Hz BPF spectrum analyzer input
26	SPEANA 3	Input	1kHz BPF spectrum analyzer input
27	SPEANA 2	Input	4kHz BPF spectrum analyzer input
28	SPEANA 1	Input	16kHz BPF spectrum analyzer input
29	AVDD	—	A/D converter analog positive power
30	AVREF	—	A/D converter reference power
31	TAPE CUM SW	Input	Tape mechanism cam SW input terminal
32*	—	—	No connected
33	VSS	—	To be connected to GND
34	X1	—	Main clock terminal, not used
35	X2	—	Main clock terminal, not used
36*	LINE MUT	Output	Line mute output, not used
37	SURROUND MUT	Output	Surround mute output
38	CENTER MUT	Output	Center SP output mute output
39	SYSTEM MUT	Output	System mute output
40	MIC	Input	Mic input terminal (for detection)
41	EN	Output	DOLBY PRO logic IC control signal
42	DATA	Output	DOLBY PRO logic IC control signal
43	CLK	Output	DOLBY PRO logic IC control signal
44	SP DET	Input	Speaker output error detection input Occurrence of error: L
45	POWER	Output	Set power control output Power ON: H
46*	RELAY	Output	Speaker output relay control output Relay ON: H
47	TAPE TS CrO SW	Input	Tape mechanism 2 CrO ₂ detection input CrO ₂ : H
48	VSS	Input	Digital GND terminal
49	TAPE F/R SPEED	Output	Tape feed/return
50	TAPE SOL	Output	Tape mechanism solenoid control output Attraction: L
51	TAPE MOTOR	Output	Tape mechanism motor control output

In this unit, the terminal with asterisk mark (*) is (open) terminal which is not connected to the outside.

IC201 RH-iX0222AWZZ: System Microcomputer (IX0222AW) (2/2)

Pin No.	Terminal Name	Input/Output	Function
52	VDD	—	Positive power supply
53	CD O/C SW	Input	CD open-close switch input
54	DISC No. SW	Input	CD turntable position detection input
55	CD U/D SW	Input	CD mechanism UP/DOWN chucking detection input
56	T1 CrO SW	Input	Tape 1 CrO ₂ detection SW input
57	QS-AC	Output	Q-SOUND position selection output
58	QS-MO	Output	Q-SOUND position selection output
59	QS-BYPASS-AR	Output	Q-SOUND position selection output
60*	—	—	—
61	QS-PASS	Input	Q-SOUND Detection input, not applied in this machine
62	SPAN 9K/10K	Input	Tuner span selector 9 kHz/10 kHz selection input
63	DOLBY	Input	DOLBY detection input, not applied in this machine
64	SRS	Input	SRS detection input, not applied in this machine
65	BALANCE	Input	BALANCE detection input, not applied in this machine
66	4SP	Input	4SP detection input, not applied in this machine
67	TAPE A-FP SW	Input	Tape A side miserase preventing SW input
68	TAPE B-FP SW	Input	Tape B side miserase preventing SW input
69	TAPE PB MUT	Output	Tape playback mute output
70	TAPE T1/T2	Output	Tape 1/2 selection
71	VLOAD	—	To be connected to GND
72	TAPE BIAS	Output	Tape bias circuit selection
73*	SRS ON/OFF	Output	SRS Control
74*	SRS 1/2	Output	SRS Control
75	TAPE BEET CUT	Output	Beat cancel signal control output
76*	TAPE HI SPEED	Output	Tape mechanism High-Low speed selection
77*	—	—	Not used
78*	—	—	Not used
79*	TAPE PB EQ	Output	Tape circuit playback Eq selection
80	TAPE REC MUT	Output	Tape circuit record muting output

In this unit, the terminal with asterisk mark (*) is (open) terminal which is not connected to the outside.

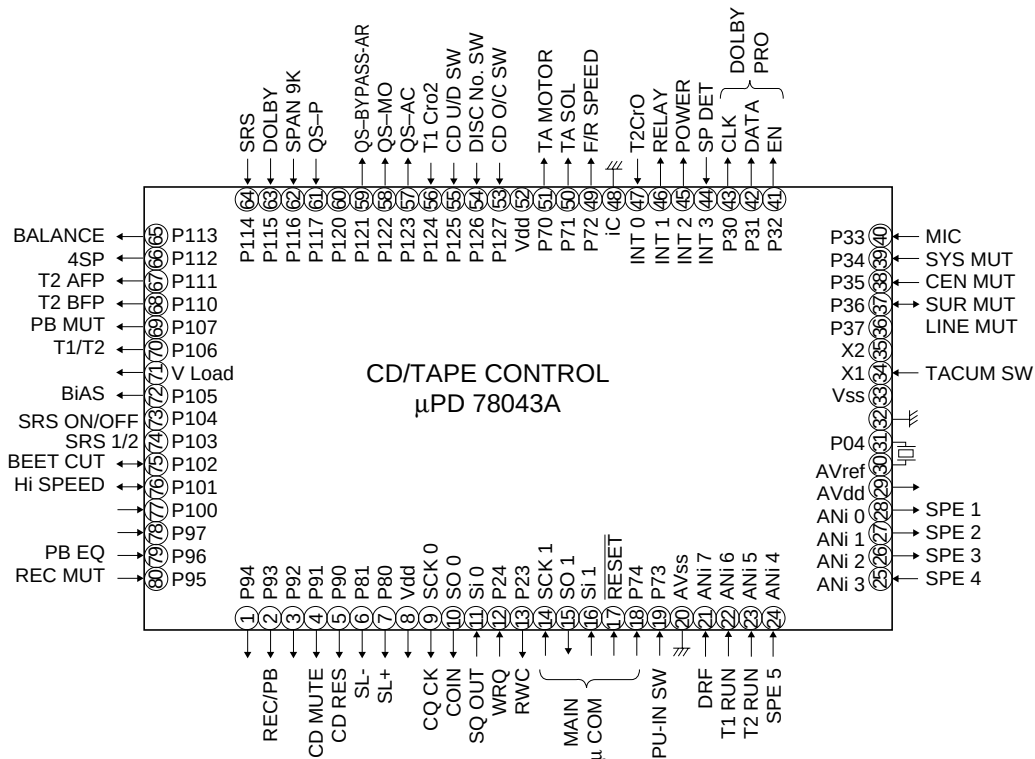


Figure 54 BLOCK DIAGRAM OF IC

IC701 RH-iX0223AWZZ: System Microcomputer (IX0223AW) (1/2)

Pin No.	Port Name	Terminal Name	Input/Output	Function
1-5	P94/FIP6-P90/FIP2	G06-G02	Output	FL display tube grid drive
6,7	P81/FIP1,P80/FIP0	G01,G00	Output	FL display tube grid drive
8	VDD	VDD	—	Positive power supply
9	P27/SCK0	C ² B CLK	Output	C ² B serial clock output
10	P26/SO0/SB1	C ² B DO	Output	C ² B serial data output
11	P25/SI0/SB0	C ² B DI	Input	C ² B serial data input
12	P24/BUSY	C ² B CE	Output	C ² B serial CE output
13	P23/STB	SUB STB	Output	Serial strobe output for CD/TAPE microcomputer
14	P22/SCK1	SUB SCK	Output	Serial clock output for CD/TAPE microcomputer
15	P21/SO1	SUB SO	Output	Serial data output for CD/TAPE microcomputer
16	P20/SI1	SUB SI	Input	Serial strobe input for CD/TAPE microcomputer
17	RESET	RESET	Input	Reset input
18	P74	SUB RES	Output	Reset output for CD/TAPE microcomputer
19	P73	TUN MUTE	Output	Tuner TUN MUT output
20	AVSS	AVSS	—	Analog power supply for A/D converter
21	P17/ANI7	TUN SD	Input	Tuner station detection input
22	P16/ANI6	TUN SM	Input	Tuner signal meter input
23	P15/ANI5	KEY IN5	Input	Key input 37-45
24	P14/ANI4	KEY IN4	Input	Key input 28-36
25	P13/ANI3	KEY IN3	Input	Key input 19-27
26	P12/ANI2	KEY IN2	Input	Key input 10-18
27	P11/ANI1	KEY IN1	Input	Key input 1-9
28	P10/ANI0	ENF IN	Input	Tuner initial setting input
29	AVDD	AVDD	—	Analog positive power supply for A/D converter
30	AVREF	AVREF	—	Reference power supply for A/D converter
31	P04/XT1	VSS	Input	Sub-clock input To be connected to Vss
32*	XT2	N.C	—	Sub-clock output OPEN
33	VSS	VSS	—	GND power
34	X1	X1	Input	Main clock 4.194304 MHz
35	X2	X2	Output	Main clock 4.194304 MHz
36	P37	LED LCK	Output	LED IC serial clock output BU2092 LCK
37	P36/BUZ	LED DATA	Output	LED IC serial data output BU2092 DATA
38	P35/PCL	LED CLK	Output	LED IC serial clock output BU2092CLK
39*	—	—	Input	—
40*	—	—	Input	—
41*	—	—	Output	—
42	P31/TO1	SYS MUTE	Output	System mute output
43	P30/TO0	POWER	Output	POWER output
44	AP-P		Input	Connect VDD
45*	P02/INTP2		Output	
46	P01/INTP1	SYS STOP	Input	Power failure input
47	P00/INTP0/TI0	REM IN	Input	Remote Control Input
48	IC	VSS	—	Connect with GND
49*	P72		Output	No use
50*	P71		Output	No use
51*	P70		Output	No use
52	VDD	VDD	—	Positive power supply
53*	P127/FIP33		—	No use
54-60	P126/FIP32-P120/FIP26	S21-S15	Output	FL display tube segment drive
61-68	P117/FIP25-P110/FIP18	S14-S07	Output	FL display tube segment drive
69,70	P107/FIP17,P106/FIP16	S06,S05	Output	FL display tube segment drive

In this unit, the terminal with asterisk mark (*) is (open) terminal which is not connected to the outside.

IC701 RH-iX0223AWZZ: System Microcomputer (IX0223AW) (2/2)

Pin No.	Port Name	Terminal Name	Input/Output	Function
71	VLOAD	VLOAD	—	Negative power supply for FL drive To be connected to -30V
72-76	P105/FIP15-P101/FIP11	S04-S00	Output	FL display tube segment drive
77	P100/FIP10	G10	Output	FL display tube grid drive
78-80	P97/FIP9-P95/FIP7	G09-G07	Output	FL display tube grid drive

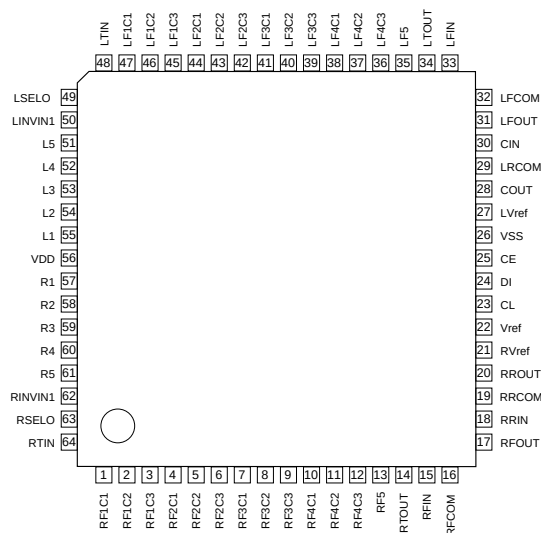
IC601 VHiLC75396N-1: Audio Processor (LC75396N)

Figure 56-1 BLOCK DIAGRAM OF IC

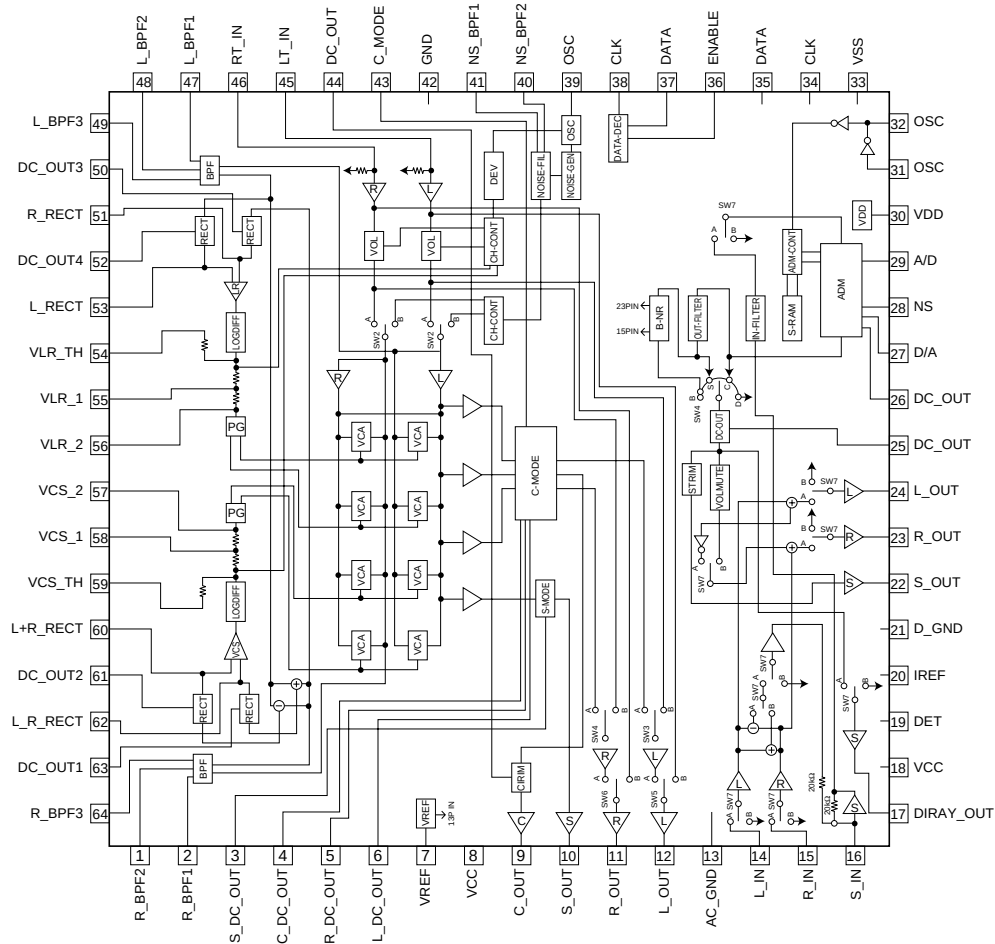
IC501 VHiLV1035M/-1: Dolby Pro Logic Decoder (LV1035M)

Figure 56-2 BLOCK DIAGRAM OF IC

IC601 VHiLC75396N-1:Audio Processor (LC75396N)

Pin No.	Terminal Name	Function
1-3*	RF1C1-RF1C3	Terminal to connect capacitor of filter configuration for equalizer F1 band Connect the capacitor between LF1C1(RF1C1) and LF1C2(RF1C2) between LF1C2 (RF1C2) and LF1C3(RF1C3).
4-6	RF2C1-RF2C3	Terminal to connect capacitor of filter configuration for equalizer F2 band Connect the capacitor between LF2C1(RF2C1) and LF2C2(RF2C2) between LF2C2 (RF2C2) and LF2C3(RF2C3).
7-9	RF3C1-RF3C3	Terminal to connect capacitor of filter configuration for equalizer F3 band Connect the capacitor between LF3C1(RF3C1) and LF3C2(RF3C2) between LF3C2 (RF3C2) and LF3C3(RF3C3).
10-12	RF4C1-RF4C3	Terminal to connect capacitor of filter configuration for equalizer F4 band Connect the capacitor between LF4C1(RF4C1) and LF4C2(RF4C2) between LF4C2 (RF4C2) and LF4C3(RF4C3).
13	RF5	Terminal to connect capacitor of filter configuration for equalizer F5 band Terminal to connect the externally provided capacitor
14	RTOUT	Equalizer output terminal
15	RFIN	Input terminal of Rch front side 4dB step control
16	RFCOM	Common terminal of Rch front side 1dB step control
17	RFOUT	Output terminal of Rch front side control
18	RRIN	Input terminal of Rch rear side 4dB step control
19	RRCOM	Common terminal of Rch rear side 1dB step control
20	RROUT	Output terminal of Rch rear side control
21	RVREF	Internal analog ground terminal
22	VREF	Connect the capacitor of about several 10 uF between Vref and AVSS (VSS) so as to prevent power supply ripple in the VDD/2 voltage generating section.
23	CL	Terminal to input serial data and clock for control
24	DI	Terminal to input serial data and clock for control
25	CE	Chip enable terminal. Data is written in the internal latch with a timing of changing H to L, and the specific analog switch is actuated. Data transfer is enabled on the H level.
26	VSS	GND
27	LVREF	Internal analog ground terminal
28	COUT	Output terminal of Lch rear side control
29	LRCOM	Common terminal of Lch rear side 1dB step control
30	CIN	Input terminal of Lch rear side 4dB step control
31	LFOUT	Output terminal of Lch front side control
32	LFCOM	Common terminal of Lch front side 1dB step control
33	LFIN	Input terminal of Lch front side 4dB step control
34	LTOUT	Equalizer output terminal
35	LF5	Terminal to connect capacitor of filter configuration for equalizer F5 band Terminal to connect the externally provided capacitor
36-38	LF4C3-LF4C1	Terminal to connect capacitor of filter configuration for equalizer F4 band Connect the capacitor between LF4C1(RF4C1) and LF4C2(RF4C2) between LF4C2 (RF4C2) and LF4C3(RF4C3).
39-41	LF3C3-LF3C1	Terminal to connect capacitor of filter configuration for equalizer F3 band Connect the capacitor between LF3C1(RF3C1) and LF3C2(RF3C2) between LF3C2 (RF3C2) and LF3C3(RF3C3).
42-44	LF2C3-LF2C1	Terminal to connect capacitor of filter configuration for equalizer F2 band Connect the capacitor between LF2C1(RF2C1) and LF2C2(RF2C2) between LF2C2 (RF2C2) and LF2C3(RF2C3).
45-47*	LF1C3-LF1C1	Terminal to connect capacitor of filter configuration for equalizer F1 band Connect the capacitor between LF1C1(RF1C1) and LF1C2(RF1C2) between LF1C2 (RF1C2) and LF1C3(RF1C3).
48	LTIN	Equalizer input terminal
49	LSELO	Input selector output terminal
50	LINVIN1	Operational amplifier reverse input terminal for input gain setting
51-55	L5-L1	Input signal terminal
56	VDD	Power terminal
57-61	R1-R5	Input signal terminal
62	RINVIN1	Operational amplifier reverse input terminal for input gain setting
63	RSELO	Input selector output terminal
64	RTIN	Equalizer input terminal

ICT21 VHiLC72720/-1:RDS Decoder (LC72720)

Pin No.	Terminal Name	Input/Output	Function
1	VREF	Output	Reference voltage output ($V_{dda}/2$)
2	MPXIN	Input	Base band (multiplex) signal input
3	Vdda	—	Analog system power supply (+5V)
4	Vssa	—	Analog system ground
5	FLOUT	Output	Sub-carrier input (comparator input)
6	CIN	Input	Sub-carrier output (filter output)
7	T1	Input	Test input (to be always connected to ground)
8	T2	Input	Test input (standby control) 0: Normal operation/1: Standby state (crystal oscillation stop)
9*	T3 (RDCL)	Input/Output	Test I/O (RDS clock output)
10*	T4 (RDDA)	Input/Output	Test I/O (RDS data output)
11 *	T5 (RSFT)	Input/Output	Test I/O (Soft judgment control data output)
12	XOUT	Output	Crystal oscillation output
13	XIN	Input	Crystal oscillation input (external reference signal input)
14	Vddd	—	Digital system power supply
15	Vssd	—	Digital system ground
16*	T6 (ERROR/57K/BE1)	Input/Output	Test I/O (Error existence/nonexistence output/playback carrier output/error block number output)
17*	T7 (CORREC/ARI-ID/BE0)	Input/Output	Test I/O (Error existence/nonexistence output/SK detection output/error block number output)
18*	SYNC	Input/Output	Block sync detection output
19*	RDS-ID	Output	RDS detection output
20	DO	Output	Serial data interface (CCB)
21	CL	Input	
22	DI	Input	
23	CE	Input	
24	SYR	Input	Sync and RAM address reset (positive logic)

In this unit, the terminal with asterisk mark (*) is (open) terminal which is not connected to the outside.

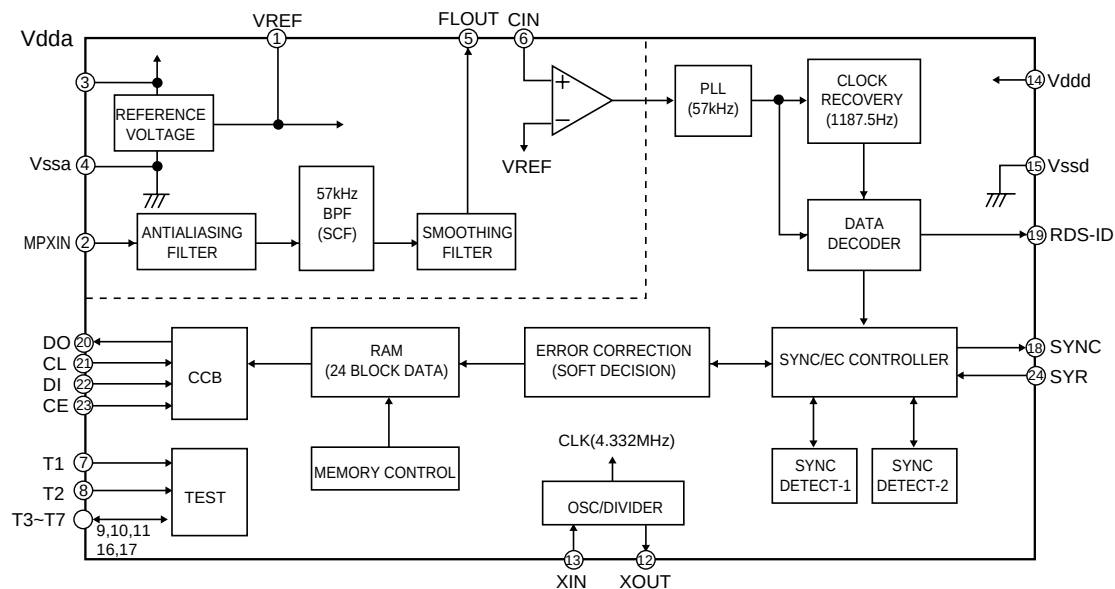


Figure 58 BLOCK DIAGRAM OF IC

IC3 VHiM56748FP-1: Focus/Tracking/Spin/Slide Driver (M56748FP)

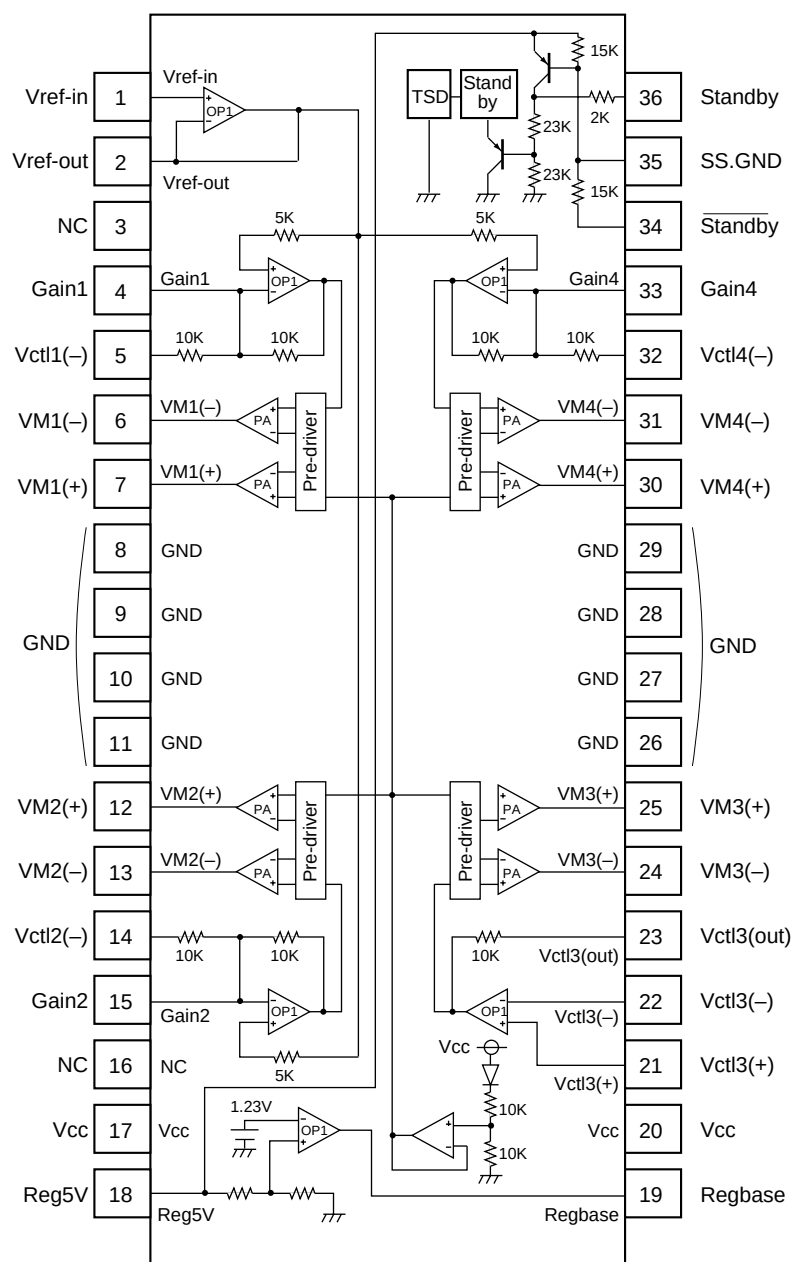


Figure 59-1 BLOCK DIAGRAM OF IC

FL701 : VVKBJ549GK/-1 FL Display

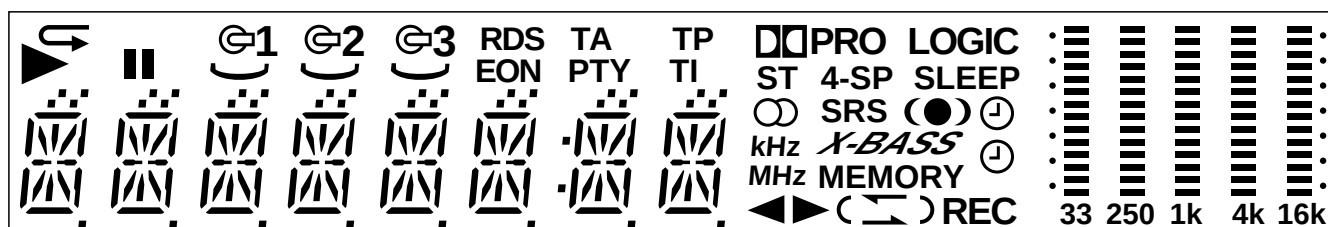


Figure 59-2 FL DISPLAY

CD-C451H

MEMO

SHARP PARTS GUIDE

MODEL CD-C451H

CD-C451H mini component system consisting of
CD-C451H mini component system and
CP-C451H Speaker System.

“HOW TO ORDER REPLACEMENT PARTS”

To have your order filled promptly and correctly, please furnish the following information.

1. MODEL NUMBER
2. REF. No.
3. PART NO.
4. DESCRIPTION

For U.S.A. only

Contact your nearest SHARP Parts Distributor to order.

For location of SHARP Parts Distributor,
Please call Toll-Free;
1-800-BE-SHARP

★ MARK: SPARE PARTS-DELIVERY SECTION

Explanation of capacitors/resistors parts codes

Capacitors

- VCC Ceramic type
- VCK Ceramic type
- VCT Semiconductor type
- VC •• MF Cylindrical type (without lead wire)
- VC •• MN Cylindrical type (without lead wire)
- VC •• TV Square type (without lead wire)
- VC •• TQ Square type (without lead wire)
- VC •• CY Square type (without lead wire)
- VC •• CZ Square type (without lead wire)
- VC ••••• J .. The 13th character represents capacity difference.
("J" ±5%, "K" ±10%, "M" ±20%, "N" ±30%,
"C" ±0.25 pF, "D" ±0.5 pF, "Z" +80-20%.)

If there are no indications for the electrolytic capacitors, error is ±20%.

Resistors

- VRD Carbon-film type
- VRS Carbon-film type
- VRN Metal-film type
- VR •• MF Cylindrical type (without lead wire)
- VR •• MN Cylindrical type (without lead wire)
- VR •• TV Square type (without lead wire)
- VR •• TQ Square type (without lead wire)
- VR •• CY Square type (without lead wire)
- VR •• CZ Square type (without lead wire)
- ★VR ••••• J .. The 13th character represents error.
("J" ±5%, "F" ±1%, "D" ±0.5%.)

If there are no indications for other parts, the resistors are ±5% carbon-film type.

NOTE:

Parts marked with “” are important for maintaining the safety of the set.
Be sure to replace parts with specified ones for maintaining the safety and performance of the set.

CD-C451H

NO.	PART CODE	★	PRICE RANK	DESCRIPTION
INTEGRATED CIRCUITS				
IC1	VHILA9241M/-1	J	AS	Servo Amp.,LA9241M
IC2	VHILC78622K-1	J	AY	Servo/Signal Control,LC78622K
IC3	VHIM56748FP-1	J	AR	Focus/Tracking/Spin/Slide Driver,M56748FP
IC81	VHITA7291S/-1	J	AH	Loading Motor Driver, TA7291S
IC101	VHIAN7345K/-1	J	AM	Playback and Record/ Playback Amp.,AN7345K
IC201	RH-IX0222AWZZ	J	AZ	System Microcomputer IX0222AW
IC302	VHILC72131/-1	J	AP	PLL (Tuner) LC72131
IC303	VHILA1832/-1	J	AR	FM IF Det./FM Mpx./ AM IF, LA1832
IC401	VHIQS7777PF-1	J	BC	Q-Sound,QS7777PF
IC471	VHINJM4558L-1	J	AC	Ope Amp.,NJM4558L
IC501	VHILV1035M/-1	J	BC	Dolby Pro Logic Decoder, LV1035M
IC561~563	VHINJM4558L-1	J	AC	Ope Amp.,NJM4558L
IC601	VHILC75396N-1	J	AX	Audio Processor LC75396N
IC651	VHINJM4558L-1	J	AC	Ope Amp.,NJM4558L
IC681	VHINJM4560L-1	J	AC	Headphone Amp.,NJM4560L
IC701	RH-IX0223AWZZ	J	BC	System Microcomputer IX0223AW
IC702	VHIBU2092F/-1	J	AM	Input/Output Expander, BU2092F
IC901	VHISTK40704-1	J	AZ	Power Amp.,STK40704
ICT21	VHILC72720/-1	J	AW	RDS Decoder,LC72720

TRANSISTORS

Q1	VSKTA1266GR-1	J	AB	Silicon,PNP,KTA1266 GR
Q51	VSKRC107M/-1	J	AC	Digital,NPN,KRC107 M
Q52	VSKTC3203Y/-1	J	AC	Silicon,NPN,KTC3203 Y
Q91	VSKTA1271Y/-1	J	AC	Silicon,PNP,KTA1271 Y
Q93	VSKRC102M/-1	J	AC	Digital,NPN,KRC102 M
Q103~106	VS2SC1845F/-1	J	AC	Silicon,NPN,2SC1845 F
Q107,108	VSKTC3199GR-1	J	AB	Silicon,NPN,KTC3199 GR
Q109	VSKTA1266GR-1	J	AB	Silicon,PNP,KTA1266 GR
Q110,111	VSKRC104M/-1	J	AC	Digital,NPN,KRC104 M
Q117,118	VS2SC2878A/-1	J	AE	Silicon,NPN,2SC2878 A
Q121,122	VSKTC3199GR-1	J	AB	Silicon,NPN,KTC3199 GR
Q124	VSKTA1266GR-1	J	AB	Silicon,PNP,KTA1266 GR
Q126	VSKRC104M/-1	J	AC	Digital,NPN,KRC104 M
Q128	VS2SC2236-Y-1	J	AB	Silicon,NPN,2SC2236 Y
Q129,130	VSKTC3199GR-1	J	AB	Silicon,NPN,KTC3199 GR
Q201	VSKRC104M/-1	J	AC	Digital,NPN,KRC104 M
Q301	VS2SC380-O/-1	J	AC	Silicon,NPN,2SC380 O
Q302~304	VSKTC3199GR-1	J	AB	Silicon,NPN,KTC3199 GR
Q353,354	VSKTC3199GR-1	J	AB	Silicon,NPN,KTC3199 GR
Q360	VSKTA1266GR-1	J	AB	Silicon,PNP,KTA1266 GR
Q361	VSKRC107M/-1	J	AC	Digital,NPN,KRC107 M
Q362	VSKRA107M/-1	J	AE	Digital,PNP,KRA107 M
Q371	VSKTA1266GR-1	J	AB	Silicon,PNP,KTA1266 GR
Q601~604	VSKTC3199GR-1	J	AB	Silicon,NPN,KTC3199 GR
Q609	VSKTC3199GR-1	J	AB	Silicon,NPN,KTC3199 GR
Q671~676	VSKTC3199GR-1	J	AB	Silicon,NPN,KTC3199 GR
Q701	VSKTC3199GR-1	J	AB	Silicon,NPN,KTC3199 GR
Q704	VSKRC102M/-1	J	AC	Digital,NPN,KRC102 M
Q705,706	VSKTC3199GR-1	J	AB	Silicon,NPN,KTC3199 GR
Q710	VS2SD468-C/-1	J	AD	Silicon,NPN,2SD468 C
Q801	VSKTA1266GR-1	J	AB	Silicon,PNP,KTA1266 GR
Q820	VS2SD2012/-1	J	AD	Silicon,NPN,2SD2012
Q822	VSKTC3199GR-1	J	AB	Silicon,NPN,KTC3199 GR
Q823,824	VS2SD2012/-1	J	AD	Silicon,NPN,2SD2012
Q825,826	VSKTC3199GR-1	J	AB	Silicon,NPN,KTC3199 GR
Q827	VSKRA107M/-1	J	AE	Digital,PNP,KRA107 M
Q901	VSKTA1268GR-1	J	AC	Silicon,PNP,KTA1268 GR
Q902,903	VSKRC107M/-1	J	AC	Digital,NPN,KRC107 M
Q905	VSKTC3199GR-1	J	AB	Silicon,NPN,KTC3199 GR
QM02	VSKTA1273Y/-1	J	AE	Silicon,PNP,KTA1273 Y
QM03	VSKTA1271Y/-1	J	AC	Silicon,PNP,KTA1271 Y
QM05	VSKTA1266GR-1	J	AB	Silicon,PNP,KTA1266 GR
QT21	VSKTC3199GR-1	J	AB	Silicon,NPN,KTC3199 GR

DIODES

D1	VHD1SS133/-1	J	AA	Silicon,1SS133
D2~4	VHDRL104A/-1	J	AB	Silicon,RL104A
D81,82	VHD1SS133/-1	J	AA	Silicon,1SS133
D91	VHD1SS133/-1	J	AA	Silicon,1SS133
D201~210	VHD1SS133/-1	J	AA	Silicon,1SS133

NO.	PARTS CODE	★	PRICE RANK	DESCRIPTION
D301~304	VHD1SS133/-1	J	AA	Silicon,1SS133
D351~353	VHD1SS133/-1	J	AA	Silicon,1SS133
D401	VHD1SS133/-1	J	AA	Silicon,1SS133
D515,516	VHDRL104A/-1	J	AB	Silicon,RL104A
D540,541	VHD1SS133/-1	J	AA	Silicon,1SS133
D551~558	VHD1SS133/-1	J	AA	Silicon,1SS133
D601	VHD1SS133/-1	J	AA	Silicon,1SS133
D604~611	VHD1SS133/-1	J	AA	Silicon,1SS133
D705~709	VHD1SS133/-1	J	AA	Silicon,1SS133
△D801	VHDS6B04GM-1	J	AP	Silicon,TS6B04GM-1
D803~809	VHDRL104A/-1	J	AB	Silicon,RL104A
D820	VHD1SS133/-1	J	AA	Silicon,1SS133
D822,823	VHDRL104A/-1	J	AB	Silicon,RL104A
D824	VHD1SS133/-1	J	AA	Silicon,1SS133
D827	VHD1SS133/-1	J	AA	Silicon,1SS133
D902,903	VHD1SS133/-1	J	AA	Silicon,1SS133
DM02,03	VHD1SS133/-1	J	AA	Silicon,1SS133
LED701~705	VHP333GTH2/-1	J	AD	LED,Green,333GTH2
LED706~711	VHP333GTH2/-1	J	AD	LED,Green,333GTH2
VD301	VHCKV1236Z23F	J	AS	Variable Capacitance, KV1236Z23F
ZD61	VHEMTZJ5R6B-1	J	AD	Zener,5.6V,MTZJ5.6B
ZD201	VHEMTZJ130C-1	J	AB	Zener,13V,MTZJ13C
ZD351	VHEMTZJ5R1B-1	J	AC	Zener,5.1V,MTZJ5.1B
ZD352	VHEMTZJ3R9B-1	J	AC	Zener,3.9V,MTZJ3.9B
ZD551	VHEMTZJ6R2C-1	J	AC	Zener,6.2V,MTZJ6.2C
ZD701	VHEMTZJ3R9B-1	J	AC	Zener,3.9V,MTZJ3.9B
ZD710	VHEMTZJ6R2C-1	J	AC	Zener,6.2V,MTZJ6.2C
ZD801	VHEMTZJ6R2A-1	J	AA	Zener,6.2V,MTZJ6.2A
ZD802	VHEMTZJ300B-1	J	AB	Zener,MTZJ300B
ZD820	VHEMTZJ8R2C-1	J	AB	Zener,8.2V,MTZJ8.2C
ZD822	VHEMTZJ130C-1	J	AB	Zener,13V,MTZJ13C
ZDT21	VHEMTZJ5R1B-1	J	AC	Zener,5.1V,MTZJ5.1B

FILTERS

CF301,302	RFILF0072AFZZ	J	AG	FM IF
CF351	RFILF0003AWZZ	J	AK	FM IF
CF352	RFILA0009AWZZ	J	AE	AM IF

TRANSFORMERS

T301	RCILA1074AFZZ	J	AD	LW Antenna
T302	RCILA1064AFZZ	J	AD	MW Antenna
T305	RCILB1073AFZZ	J	AC	OSC,LW
T306	RCILB1074AFZZ	J	AC	OSC,MW
T351	RCILI0011AWZZ	J	AD	AM IF
△T801	RTRNP0201AWZZ	J	BC	Power

COILS

L61	VP-XHR82K0000	J	AC	0.82 μH
L101,102	VP-MK182K0000	J	AC	1.8 mH,Choke
L103	VP-MK102K0000	J	AB	1 mH,Choke
L104	VP-MK331K0000	J	AB	330 μH,Choke
L107,108	VP-XH2R2K0000	J	AB	2.2 μH,Choke
L201	VP-DH101K0000	J	AB	100 μH,Choke
L341	RBLN-0001AWZZ	J	AD	Balun
L342	VP-DH2R2K0000	J	AB	2.2 mmH,Peaking
L351,352	VP-DH101K0000	J	AB	100 μH,Choke
L353	VP-DH102K0000	J	AB	1 mH,Choke
L354	RFILL0001AWZZ	J	AE	Low Pass Filter
L701	VP-DH101K0000	J	AB	100 μH,Choke
L801	RCILZ0008AWZZ	J	AH	Core
L901	RCILZ0137AFZZ	J	AA	0.29 μH
L903	RCILZ0137AFZZ	J	AA	0.29 μH
LT21,22	VP-XH2R2K0000	J	AB	2.2 μH,Choke

VARIABLE RESISTORS

VR351	RVR-M0999AFZZ	J	AB	10 kohm (B),Semi-VR [VCO]
VRM1	RVR-M0556AFZZ	J	AB	3,3 kohms (B),Semi-VR [TAPE]

VIBRATORS

X351	92LCRSTL1425A	J	AF	Crystal,456 kHz
X352	RCRSP0002AWZZ	J	AH	Crystal,4.5 MHz
X501	RCRM-0173AFZZ	J	AE	Ceramic,8 MHz
XL1	RCRSP0005AWZZ	J	AF	Crystal,16.934 MHz
XL201	RCRM-0147AFZZ	J	AD	Ceramic,4.19 MHz
XL701	RCRSP0003AWZZ	J	AH	Crystal,4.19 MHz
XT21	RCRSB0030AWZZ	J	AH	Crystal,4.332 MHz

NO.	PART CODE	★ PRICE RANK	DESCRIPTION	NO.	PARTS CODE	★ PRICE RANK	DESCRIPTION
CAPACITORS				C163	VCEAZA1CW476M	J AB	47 μF,16V,Electrolytic
C1	VCEAZA1CW476M	J AB	47 μF,16V,Electrolytic	C199	VCKYBT1HB101K	J AA	100 pF,50V
C2	VCTYMN1CY103N	J AA	0.01 μF,16V	C201	VCEAZA1AW227M	J AC	220 μF,10V,Electrolytic
C3	VCEAZA1HW105M	J AB	1 μF,50V,Electrolytic	C202	VCKZPA1HF223Z	J AA	0.022 μF,50V
C4	VCEAZA1HW104M	J AB	0.1 μF,50V,Electrolytic	C203~205	VCKYMN1HB151K	J AA	150 pF,50V
C5,6	VCTYPA1CX333K	J AA	0.033 μF,16V	C206	VCKYMN1HB102K	J AA	0.001 μF,50V
C7	VCEAZA1HW104M	J AB	0.1 μF,50V,Electrolytic	C207	VCKYMN1HB151K	J AA	150 pF,50V
C8	VCTYPA1CX683K	J AA	0.068 μF,16V	C208	VCKZPA1HF223Z	J AA	0.022 μF,50V
C9	VCTYPA1CX473K	J AA	0.047 μF,16V	C209	VCEAZA1EW476M	J AB	47 μF,25V,Electrolytic
C10	VCKYMN1HB181K	J AA	180 pF,50V	C210	VCEAZA1EW226M	J AB	22 μF,25V,Electrolytic
C11,12	VCTYPA1CX104K	J AB	0.1 μF,16V	C250~252	VCCSPA1HL221J	J AA	220 pF,50V
C13	VCKYMN1HB331K	J AA	330 pF,50V	C301	VCKYMN1HB102K	J AA	0.001 μF,50V
C14,15	VCTYMN1CY103N	J AA	0.01 μF,16V	C302	VCKYBT1HB102K	J AA	0.001 μF,50V
C16	VCTYMN1CX472K	J AA	0.0047 μF,16V	C321	RC-GZA107AF1C	J AB	100 μF,16V,Electrolytic
C17	VCKYMN1HB102K	J AA	0.001 μF,50V	C322	VCCCMN1HH6R8D	J AA	6.8 pF (CH),50V
C18	VCEAZA1HW474M	J AB	0.47 μF,50V,Electrolytic	C323	VCTYMN1EF223Z	J AA	0.022 μF,25V
C19	VCEAZA1HW105M	J AB	1 μF,50V,Electrolytic	C324	VCCUMN1HJ270J	J AA	27 pF (UJ),50V
C20	VCEAZA1CW476M	J AB	47 μF,16V,Electrolytic	C325	VCKYMN1HB221K	J AA	220 pF,50V
C21	VCTYMN1CX332K	J AA	0.0033 μF,16V	C326	VCCCMN1HH180J	J AA	18 pF (CH),50V
C22	VCCSPA1HL221J	J AA	220 pF,50V	C327	VCKYMN1HB681K	J AA	680 pF,50V
C23	VCTYMN1CX272K	J AA	0.0027 μF,16V	C328	VCTYMN1EF223Z	J AA	0.022 μF,25V
C24	VCCSMN1HL2R2C	J AB	2.2 pF,50V	C329	VCCSPA1HL330J	J AA	33 pF,50V
C25	VCCSMN1HL270J	J AA	27 pF,50V	C330	VCCUMN1HJ100J	J AA	10 pF (UJ),50V
C26	VCTYPA1CX333K	J AA	0.033 μF,16V	C331	VCKYPA1HF473Z	J AB	0.047 μF,50V
C27	VCKYMN1HB102K	J AA	0.001 μF,50V	C332	VCTYMN1EF223Z	J AA	0.022 μF,25V
C28	VCTYPA1CX104K	J AB	0.1 μF,16V	C333	VCCCMN1HH220J	J AA	22 pF (CH),50V
C29	VCEAZA1HW475M	J AB	4.7 μF,50V,Electrolytic	C334	VCCUMN1HJ180J	J AA	18 pF (UJ),50V
C30	VCEAZA1HW104M	J AB	0.1 μF,50V,Electrolytic	C335	VCCCMN1HH180J	J AA	18 pF (CH),50V
C31	VCEAZA0JW227M	J AC	220 μF,6.3V,Electrolytic	C336	VCKYMN1HB471K	J AA	470 pF,50V
C32	VCTYMN1CY103N	J AA	0.01 μF,16V	C337	VCTYMN1EF223Z	J AA	0.022 μF,25V
C33	VCEAZA1HW474M	J AB	0.47 μF,50V,Electrolytic	C338	VCKYMN1HB102K	J AA	0.001 μF,50V
C34	VCEAZA1HW334M	J AB	0.33 μF,50V,Electrolytic	C339	VCCCMN1HH220J	J AA	22 pF (CH),50V
C35	VCEAZA1HW105M	J AB	1 μF,50V,Electrolytic	C341,342	VCTYMN1EF223Z	J AA	0.022 μF,25V
C36	VCEAZA1CW107M	J AC	100 μF,16V,Electrolytic	C343	VCCSMN1HL330J	J AA	33 pF,50V
C37	VCTYMN1EF223Z	J AA	0.022 μF,25V	C345~347	VCTYMN1EF223Z	J AA	0.022 μF,25V
C38	VCTYMN1CY103N	J AA	0.01 μF,16V	C350,351	VCTYMN1EF223Z	J AA	0.022 μF,25V
C39,40	VCKZPA1HF473Z	J AA	0.047 μF,50V	C352	RC-GZA106AF1C	J AB	10 μF,16V,Electrolytic
C41	VCCSPA1HL120J	J AA	12 pF,50V	C353,354	VCTYMN1EF223Z	J AA	0.022 μF,25V
C42	VCCSPA1HL150J	J AA	15 pF,50V	C355	VCCSMN1HL220J	J AA	22 pF,50V
C43	VCEAZA0JW337M	J AC	330 μF,6.3V,Electrolytic	C356	VCKYMN1HB102K	J AA	0.001 μF,50V
C44~49	VCKYMN1HB101K	J AA	100 pF,50V	C357	RC-GZA225AF1H	J AB	2.2 μF,50V,Electrolytic
C50	VCTYMN1EF223Z	J AA	0.022 μF,25V	C358	RC-GZA105AF1H	J AB	1 μF,50V,Electrolytic
C51,52	VCEAZA1CW107M	J AC	100 μF,16V,Electrolytic	C361	VCTYMN1EF223Z	J AA	0.022 μF,25V
C53	VCTYMN1EF223Z	J AA	0.022 μF,25V	C362	RC-GZA335AF1H	J AB	3.3 μF,50V,Electrolytic
C54	VCKYBT1HB102K	J AA	0.001 μF,50V	C363	VCTYMN1EF223Z	J AA	0.022 μF,25V
C56	VCTYMN1EF223Z	J AA	0.022 μF,25V	C364	RC-GZA106AF1C	J AB	10 μF,16V,Electrolytic
C57	VCKYBT1HB102K	J AA	0.001 μF,50V	C365	VCTYPA1CX223K	J AA	0.022 μF,16V
C71,72	VCEAZA1HW106M	J AB	10 μF,50V,Electrolytic	C366	VCKYMN1HB102K	J AA	0.001 μF,50V
C73,74	VCKYMN1HB221K	J AA	220 pF,50V	C367,368	RC-GZA105AF1H	J AB	1 μF,50V,Electrolytic
C75	VCKYBT1HB102K	J AA	0.001 μF,50V	C369	VCCSBT1HL270J	J AA	27 pF,50V
C81,82	VCEAZA1CW476M	J AB	47 μF,16V,Electrolytic	C370~372	RC-GZA105AF1H	J AB	1 μF,50V,Electrolytic
C83	VCTYMN1EF223Z	J AA	0.022 μF,25V	C373,374	VCTYPA1CX333K	J AA	0.033 μF,16V
C84,85	VCKYBT1HB102K	J AA	0.001 μF,50V	C375	RC-GZA335AF1H	J AB	3.3 μF,50V,Electrolytic
C101,102	VCKYMN1HB681K	J AA	680 pF,50V	C380	RC-GZA106AF1C	J AB	10 μF,16V,Electrolytic
C105,106	VCKYMN1HB331K	J AA	330 pF,50V	C381	VCCCMN1HH120J	J AA	12 pF (CH),50V
C107,108	VCKYMN1HB681K	J AA	680 pF,50V	C382	VCCCMN1HH150J	J AA	15 pF (CH),50V
C109	VCKZPA1HF223Z	J AA	0.022 μF,50V	C384	VCKYMN1HB102K	J AA	0.001 μF,50V
C110	VCEAZA1EW476M	J AB	47 μF,25V,Electrolytic	C385	VCTYMN1CY103K	J AA	0.01 μF,16V
C111~114	VCKYMN1HB331K	J AA	330 pF,50V	C386	VCKYMN1HB331K	J AA	330 pF,50V
C115,116	VCEAZA1CW476M	J AB	47 μF,16V,Electrolytic	C387	VCTYMN1EF223Z	J AA	0.022 μF,25V
C117,118	VCTYPA1EX333K	J AA	0.033 μF,25V	C391	RC-GZA476AF1C	J AB	47 μF,16V,Electrolytic
C119,120	VCKYMN1HB561K	J AA	560 pF,50V	C392	VCKYMN1HB102K	J AA	0.001 μF,50V
C121,122	VCEAZA1HW105M	J AB	1 μF,50V,Electrolytic	C393	RC-GZA105AF1H	J AB	1 μF,50V,Electrolytic
C127	VCTYMN1EF223Z	J AA	0.022 μF,25V	C394	RC-GZA476AF1C	J AB	47 μF,16V,Electrolytic
C128	VCEAZA1HW335M	J AB	3.3 μF,50V,Electrolytic	C395	VCTYMN1EF223Z	J AA	0.022 μF,25V
C129,130	VCKYMN1HB471K	J AA	470 pF,50V	C396	RC-GZA107AF1A	J AB	100 μF,10V,Electrolytic
C133,134	VCEAZA1EW226M	J AB	22 μF,25V,Electrolytic	C397	VCTYMN1EF223Z	J AA	0.022 μF,25V
C135,136	VCTYPA1CX393K	J AB	0.039 μF,16V	C398	RC-GZA107AF1A	J AB	100 μF,10V,Electrolytic
C139,140	VCTYMN1CX332K	J AA	0.0033 μF,16V	C399	VCTYMN1EF223Z	J AA	0.022 μF,25V
C141,142	VCEAZA1HW105M	J AB	1 μF,50V,Electrolytic	C405,406	VCEAZA1HW474M	J AB	0.47 μF,50V,Electrolytic
C143,144	VCTYMN1EF223Z	J AA	0.022 μF,25V	C407~410	VCQYKA1HM223K	J AB	0.022 μF,50V,Mylar
C145	VCEAZA1EW226M	J AB	22 μF,25V,Electrolytic	C411,412	VCQYKA1HM472K	J AB	0.0047 μF,50V,Mylar
C146	VCEAZA1AW227M	J AC	220 μF,10V,Electrolytic	C413,414	VCEAZA1HW474M	J AB	0.47 μF,50V,Electrolytic
C147	VCKZPA1HF223Z	J AA	0.022 μF,50V	C415~418	VCQYKA1HM223K	J AB	0.022 μF,50V,Mylar
C150	VCCPKA2AA822J	J AA	0.0082 μF,100V,Polypropylene	C419~421	VCEAZA1HW475M	J AB	4.7 μF,50V,Electrolytic
C151	VCQYKA1HM273K	J AB	0.027 μF,50V,Mylar	C423	VCEAZA1HW475M	J AB	4.7 μF,50V,Electrolytic
C152	VCEAZA1CW476M	J AB	47 μF,16V,Electrolytic	C425	VCQYKA1HM102K	J AA	0.001 μF,50V,Mylar
C155	VCKYMN1HB101K	J AA	100 pF,50V	C426	VCQYKA1HM123K	J AA	0.012 μF,50V,Mylar
C156	VCTYBT1EF223Z	J AA	0.022 μF,25V	C427	VCQYKA1HM823K	J AC	0.082 μF,50V,Mylar
C161	VCCSPA1HL561J	J AA	560 pF,50V	C428,429	VCEAZA1HW106M	J AB	10 μF,50V,Electrolytic
C162	VCQYKA1HM473K	J AB	0.047 μF,50V,Mylar	C430	VCQYKA1HM223K	J AB	0.022 μF,50V,Mylar
				C431	VCEAZA1HW224M	J AB	0.22 μF,50V,Electrolytic

CD-C451H

NO.	PART CODE	★	PRICE RANK	DESCRIPTION	NO.	PARTS CODE	★	PRICE RANK	DESCRIPTION
C432	VCQYKA1HM272K	J	AA	0.0027 μF,50V,Mylar	C639,640	VCEAZA1HW106M	J	AB	10 μF,50V,Electrolytic
C433	VCEAZA1CW107M	J	AC	100 μF,16V,Electrolytic	C641,642	VCEAZA1HW225M	J	AB	2.2 μF,50V,Electrolytic
C434	VCKZPA1HF223Z	J	AA	0.022 μF,50V	C643,644	VCQYKA1HM473K	J	AB	0.047 μF,50V,Mylar
C435	VCEAZA1CW476M	J	AB	47 μF,16V,Electrolytic	C645,646	VCEAZA1HW106M	J	AB	10 μF,50V,Electrolytic
C436	VCKZPA1HF223Z	J	AA	0.022 μF,50V	C647~649	VCEAZA1CW476M	J	AB	47 μF,16V,Electrolytic
C471,472	VCQYKA1HM473K	J	AB	0.047 μF,50V,Mylar	C651,652	VCQYKA1HM104K	J	AB	0.1 μF,50V,Mylar
C473,474	VCEAZA1CW476M	J	AB	47 μF,16V,Electrolytic	C655,656	VCKYMN1HB331K	J	AA	330 pF,50V
C475,476	VCCSPA1HL471J	J	AA	470 pF,50V	C657,658	VCTYMN1EF223Z	J	AA	0.022 μF,25V
C479,480	VCEAZA1HW225M	J	AB	2.2 μF,50V,Electrolytic	C659,660	VCEAZA1HW225M	J	AB	2.2 μF,50V,Electrolytic
C481,482	VCEAZA1EW476M	J	AB	47 μF,25V,Electrolytic	C661~664	VCKYMN1HB102K	J	AA	0.001 μF,50V
C483	VCCSPA1HL471J	J	AA	470 pF,50V	C665	VCEAZA1HW226M	J	AB	22 μF,50V,Electrolytic
C484	VCKZPA1HF223Z	J	AA	0.022 μF,50V	C666,667	VCEAZA1HW225M	J	AB	2.2 μF,50V,Electrolytic
C485	VCCSPA1HL471J	J	AA	470 pF,50V	C668	VCEAZA1HW226M	J	AB	22 μF,50V,Electrolytic
C488	VCCSPA1HL331J	J	AA	330 pF,50V	C669	VCEAZA1EW226M	J	AB	22 μF,25V,Electrolytic
C490	VCCSPA1HL331J	J	AA	330 pF,50V	C670~673	VCKYMN1HB391K	J	AA	390 pF,50V
C501	VCQYKA1HM104K	J	AB	0.1 μF,50V,Mylar	C674	VCTYMN1EF223Z	J	AA	0.022 μF,25V
C502,503	VCEAZA1HW105M	J	AB	1 μF,50V,Electrolytic	C676	VCEAZA1CW337M	J		330 μF,16V,Electrolytic
C504	VCEAZA1CW476M	J	AB	47 μF,16V,Electrolytic	C677	VCTYMN1EF223Z	J	AA	0.022 μF,25V
C505	VCEAZA1HW474M	J	AB	0.47 μF,50V,Electrolytic	C678,679	VCKYMN1HB102K	J	AA	0.001 μF,50V
C506	VCKZPA1HF223Z	J	AA	0.022 μF,50V	C680	VCKYBT1HB221K	J	AA	220 pF,50V
C507	VCKZPA1HF473Z	J	AA	0.047 μF,50V	C681,682	VCQYKA1HM473K	J	AB	0.047 μF,50V,Mylar
C508	VCCSPA1HL681J	J	AA	680 pF,50V	C683,684	VCEAZA1CW476M	J	AB	47 μF,16V,Electrolytic
C509	VCQYKA1HM104K	J	AB	0.1 μF,50V,Mylar	C685,686	VCKYMN1HB221K	J	AA	220 pF,50V
C510,511	VCEAZA1HW474M	J	AB	0.47 μF,50V,Electrolytic	C687	VCEAZA1EW476M	J	AB	47 μF,25V,Electrolytic
C512,513	VCEAZA1HW475M	J	AB	4.7 μF,50V,Electrolytic	C688	VCKYBT1HB221K	J	AA	220 pF,50V
C514	VCQYKA1HM823K	J	AC	0.082 μF,50V,Mylar	C689,690	VCKYMN1HB101K	J	AA	100 pF,50V
C515	VCQYKA1HM332K	J	AA	0.0033 μF,50V,Mylar	C691~693	VCEAZA1EW476M	J	AB	47 μF,25V,Electrolytic
C516	VCEAZA1HW154M	J	AB	0.15 μF,50V,Electrolytic	C694	VCTYMN1EF223Z	J	AA	0.022 μF,25V
C517	VCQYKA1HM823K	J	AC	0.082 μF,50V,Mylar	C695~698	VCKYMN1HB102K	J	AA	0.001 μF,50V
C518	VCEAZA1HW335M	J	AB	3.3 μF,50V,Electrolytic	C699	VCEAZA1EW476M	J	AB	47 μF,25V,Electrolytic
C519	VCEAZA1HW474M	J	AB	0.47 μF,50V,Electrolytic	C701	VCTYMN1EF223Z	J	AA	0.022 μF,25V
C520	VCEAZA1HW154M	J	AB	0.15 μF,50V,Electrolytic	C702	VCEAZA1AW227M	J	AC	220 μF,10V,Electrolytic
C521	VCEAZA1HW334M	J	AB	0.33 μF,50V,Electrolytic	C703	VCCSMN1HL150J	J	AA	15 pF,50V
C522	VCEAZA1HW154M	J	AB	0.15 μF,50V,Electrolytic	C704	VCCSMN1HL180J	J	AA	18 pF,50V
C523,524	VCEAZA1HW106M	J	AB	10 μF,50V,Electrolytic	C706	VCTYMN1CY103N	J	AA	0.01 μF,16V
C525	VCEAZA1HW335M	J	AB	3.3 μF,50V,Electrolytic	C707	VCEAZA1HW335M	J	AB	3.3 μF,50V,Electrolytic
C526	VCEAZA1HW154M	J	AB	0.15 μF,50V,Electrolytic	C708	VCTYMN1CY103N	J	AA	0.01 μF,16V
C527	VCEAZA1HW106M	J	AB	10 μF,50V,Electrolytic	C709	VCEAZA1AW107M	J	AB	100 μF,10V,Electrolytic
C528~530	VCEAZA1HW475M	J	AB	4.7 μF,50V,Electrolytic	C710	VCEAZA1AW227M	J	AC	220 μF,10V,Electrolytic
C531	VCEAZA1HW225M	J	AB	2.2 μF,50V,Electrolytic	C712,713	VCEAZA1HW105M	J	AB	1 μF,50V,Electrolytic
C532	VCEAZA1CW227M	J	AC	220 μF,16V,Electrolytic	C715	VCTYBT1EF223Z	J	AA	0.022 μF,25V
C533	VCEAZA1HW474M	J	AB	0.47 μF,50V,Electrolytic	C716	VCEAZA1CW476M	J	AB	47 μF,16V,Electrolytic
C534	VCQYKA1HM104K	J	AB	0.1 μF,50V,Mylar	C721~723	VCKYMN1HB151K	J	AA	150 pF,50V
C535	VCEAZA1HW106M	J	AB	10 μF,50V,Electrolytic	C724,725	VCKYBT1HB151K	J	AA	150 pF,50V
C536	VCEAZA1HW106M	J	AB	10 μF,50V,Electrolytic	C726	VCKYMN1HB151K	J	AA	150 pF,50V
C537	VCEAZA1HW106M	J	AB	10 μF,50V,Electrolytic	C729	VCEAZA1CW476M	J	AB	47 μF,16V,Electrolytic
C538	VCEAZA1HW106M	J	AB	10 μF,50V,Electrolytic	C730	VCTYBT1EF223Z	J	AA	0.022 μF,25V
C539	VCEAZA1CW227M	J	AC	220 μF,16V,Electrolytic	C731	VCEAZA1EW476M	J	AB	47 μF,25V,Electrolytic
C540	VCEAZA1HW106M	J	AB	10 μF,50V,Electrolytic	C732	VCTYBT1EF223Z	J	AA	0.022 μF,25V
C541,542	VCEAZA1CW227M	J	AC	220 μF,16V,Electrolytic	C733	VCEAZA1CW106M	J	AC	10 μF,16V,Electrolytic
C543	VCQYKA1HM104K	J	AB	0.1 μF,50V,Mylar	C734,735	VCTYBT1CX472M	J	AA	0.0047 μF,16V
C544	VCEAZA1CW227M	J	AC	220 μF,16V,Electrolytic	C802	VCEAZA1VW107M	J	AC	100 μF,35V,Electrolytic
C545	VCCSPA1HL221J	J	AA	220 pF,50V	C803,804	VCEAZA1HW476M	J	AB	47 μF,50V,Electrolytic
C547,548	VCKZPA1HF223Z	J	AA	0.022 μF,50V	C805,806	VCQYKA1HM473K	J	AB	0.047 μF,50V,Mylar
C549,550	VCCSPA1HL221J	J	AA	220 pF,50V	C807,808	VCFYHA1HA224J	J	AC	0.22 μF,50V,Thin Film
C551	VCKYMN1HB271K	J	AA	270 pF,50V	C811	VCEAZA1HW476M	J	AB	47 μF,50V,Electrolytic
C552	VCKYMN1HB681K	J	AA	680 pF,50V	C812,813	VCEAZA1HW107M	J	AC	100 μF,50V,Electrolytic
C553	VCTYMN1CX272K	J	AA	0.0027 μF,16V	C817	VCEAZA1HW475M	J	AB	4.7 μF,50V,Electrolytic
C554	VCTYMN1CX822K	J	AA	0.0082 μF,16V	C820	VCTYBT1EF223Z	J	AA	0.022 μF,25V
C555,556	VCTYMN1CX682K	J	AA	0.0068 μF,16V	C823	VCEAZA1EW476M	J	AB	47 μF,25V,Electrolytic
C557	VCKYMN1HB271K	J	AA	270 pF,50V	C824	VCKZPA1HF223Z	J	AA	0.022 μF,50V
C558	VCKYMN1HB681K	J	AA	680 pF,50V	C825	VCEAZA1EW226M	J	AB	22 μF,25V,Electrolytic
C559	VCTYMN1CX272K	J	AA	0.0027 μF,16V	C826~828	VCEAZA1EW476M	J	AB	47 μF,25V,Electrolytic
C560	VCTYMN1CX822K	J	AA	0.0082 μF,16V	C829	VCEAZW1EW478M	J	AK	4700 μF,25V,Electrolytic
C561	VCTYMN1EF223Z	J	AA	0.022 μF,25V	C831	VCEAZA1HW106M	J	AB	10 μF,50V,Electrolytic
C562	VCKZPA1HF223Z	J	AA	0.022 μF,50V	C901	VCEAZA1HW105M	J	AB	1 μF,50V,Electrolytic
C563	VCTYMN1EF223Z	J	AA	0.022 μF,25V	C902	VCCSPA1HL221J	J	AA	220 pF,50V
C564~568	VCEAZA1HW225M	J	AB	2.2 μF,50V,Electrolytic	C903	VCEAZA1HW105M	J	AB	1 μF,50V,Electrolytic
C569	VCTYMN1EF223Z	J	AA	0.022 μF,25V	C904	VCEAZA1HW106M	J	AB	10 μF,50V,Electrolytic
C570	VCKYMN1HB102K	J	AA	0.001 μF,50V	C905	VCCSPA1HL221J	J	AA	220 pF,50V
C601~610	VCFYHA1HA224J	J	AC	0.22 μF,50V,Thin Film	C907	VCEAZA1HW106M	J	AB	10 μF,50V,Electrolytic
C611,612	VCEAZA1CW476M	J	AB	47 μF,16V,Electrolytic	C909,910	VCEAZW1HW228M	J	AH	2200 μF,50V,Electrolytic
C613,614	VCKYMN1HB101K	J	AA	100 pF,50V	C911,912	VCEAZA1HW107M	J	AC	100 μF,50V,Electrolytic
C615~618	VCEAZA1HW105M	J	AB	1 μF,50V,Electrolytic	C915	VCKYBT1HB121K	J	AA	120 pF,50V
C623,624	VCEAZA1HW224M	J	AB	0.22 μF,50V,Electrolytic	C916	VCCSPA1HL150J	J	AA	15 pF,50V
C625,626	VCEAZA1HW104M	J	AB	0.1 μF,50V,Electrolytic	C917,918	VCEAZA1HW476M	J	AB	47 μF,50V,Electrolytic
C627,628	VCEAZA1HW224M	J	AB	0.22 μF,50V,Electrolytic	C923	VCCSBT1HL121J	J		120 pF,50V
C629,630	VCQYKA1HM273K	J	AB	0.027 μF,50V,Mylar	C924	VCCSPA1HL150J	J	AA	15 pF,50V
C631,632	VCQYKA1HM153K	J	AB	0.015 μF,50V,Mylar	C934~937	VCQYKA1HM104K	J	AB	0.1 μF,50V,Mylar
C633,634	VCQYKA1HM222K	J	AA	0.0022 μF,50V,Mylar	C947,948	VCKZPA1HF223Z	J	AA	0.022 μF,50V
C635,636	VCQYKA1HM472K	J	AB	0.0047 μF,50V,Mylar	C951,952	VCKZPA1HF223Z	J	AA	0.022 μF,50V
C637,638	VCEAZA1HW105M	J	AB	1 μF,50V,Electrolytic	C955~958	VCKZPA1HF223Z	J	AA	0.022 μF,50V

NO.	PART CODE	★	PRICE RANK	DESCRIPTION	NO.	PARTS CODE	★	PRICE RANK	DESCRIPTION
C961,962	VCKYPA1HB102K	J	AA	0.001 μF,50V	R93	VRD-MN2BD221J	J	AA	220 ohms,1/8W
C970	VCKYBT1HB102K	J	AA	0.001 μF,25V	R101	VRD-MN2BD102J	J	AA	1 kohm,1/8W
C972	VCKYBT1HB102K	J	AA	0.001 μF,25V	R102	VRD-ST2CD102J	J	AA	1 kohm,1/6W
C977	VCEAZA0JW108M	J	AC	1000 μF,6.3V,Electrolytic	R103,104	VRD-MN2BD222J	J	AA	2.2 kohms,1/8W
C978	VCEAZA1HW476M	J	AB	47 μF,50V,Electrolytic	R105,106	VRD-MN2BD332J	J	AA	3.3 kohms,1/8W
C979	VCEAZA1HW106M	J	AB	10 μF,50V,Electrolytic	R107,108	VRD-MN2BD473J	J	AA	47 kohms,1/8W
CM01	VCEAZA1CW476M	J	AB	47 μF,16V,Electrolytic	R109,110	VRD-ST2CD472J	J	AA	4.7 kohms,1/6W
CT21	RC-GZA476AF1A	J	AB	47 μF,10V,Electrolytic	R111,112	VRD-ST2CD153J	J	AA	15 kohms,1/6W
CT22	VCTYMN1EF223Z	J	AA	0.022 μF,25V	R113,114	VRD-MN2BD103J	J	AA	10 kohm,1/8W
CT23	RC-GZA106AF1C	J	AB	10 μF,16V,Electrolytic	R115	VRD-MN2BD472J	J	AA	4.7 kohms,1/8W
CT24	VCTYMN1EF223Z	J	AA	0.022 μF,25V	R117	VRD-MN2BD102J	J	AA	1 kohm,1/8W
CT25	VCKYMN1HB561K	J	AA	560 pF,50V	R118	VRD-ST2CD102J	J	AA	1 kohm,1/6W
CT26,27	VCCCPA1HH220J	J	AA	22 pF (CH),50V	R119,120	VRD-ST2CD560J	J	AA	56 ohms,1/6W
CT28	RC-GZA476AF1A	J	AB	47 μF,10V,Electrolytic	R121,122	VRD-MN2BD104J	J	AA	100 kohm,1/8W
CT29	VCTYMN1EF223Z	J	AA	0.022 μF,25V	R123,124	VRD-MN2BD472J	J	AA	4.7 kohms,1/8W
CT36	VCKYPA1HF223Z	J	AB	0.022 μF,50V	R125,126	VRD-MN2BD562J	J	AA	5.6 kohms,1/8W
CT37	VCTYMN1EF223Z	J	AA	0.022 μF,25V	R131,132	VRD-MN2BD153J	J	AA	15 kohms,1/8W
CT43	RC-GZA106AF1C	J	AB	10 μF,16V,Electrolytic	R134	VRD-MN2BD683J	J	AA	68 kohms,1/8W

RESISTORS

	VRD-MN2BD000C	J	AA	0 ohm,Jumper,ø1.4×3.5mm,Ivory	R135,136	VRD-MN2BD182J	J	AA	1.8 kohms,1/8W
R1	VRD-MN2BD220J	J	AA	22 ohms,1/8W	R137,138	VRD-ST2CD682J	J	AA	6.8 kohms,1/6W
R2	VRD-MN2BD102J	J	AA	1 kohm,1/8W	R139,140	VRD-MN2BD561J	J	AA	560 ohms,1/8W
R8	VRD-MN2BD153J	J	AA	15 kohms,1/8W	R141,142	VRD-MN2BD470J	J	AA	47 ohms,1/8W
R9	VRD-MN2BD104J	J	AA	100 kohm,1/8W	R143~147	VRD-MN2BD103J	J	AA	10 kohm,1/8W
R10	VRD-MN2BD222J	J	AA	2.2 kohms,1/8W	R153,154	VRD-MN2BD103J	J	AA	10 kohm,1/8W
R11	VRD-ST2CD682J	J	AA	6.8 kohms,1/6W	R155,156	VRD-ST2CD124J	J	AA	120 kohms,1/6W
R12	VRD-MN2BD101J	J	AA	100 ohm,1/8W	R158	VRD-ST2EE471J	J	AA	470 ohms,1/4W
R13	VRD-MN2BD102J	J	AA	1 kohm,1/8W	R160	VRD-ST2EE151J	J	AA	150 ohms,1/4W
R14	VRD-MN2BD273J	J	AA	27 kohms,1/8W	R162	VRD-MN2BD473J	J	AA	47 kohms,1/8W
R15	VRD-MN2BD123J	J	AA	12 kohms,1/8W	R164	VRD-ST2CD472J	J	AA	4.7 kohms,1/6W
R16	VRD-MN2BD332J	J	AA	3.3 kohms,1/8W	R166	VRD-MN2BD273J	J	AA	27 kohms,1/8W
R17	VRD-MN2BD333J	J	AA	33 kohms,1/8W	R167	VRD-MN2BD473J	J	AA	47 kohms,1/8W
R18	VRD-MN2BD153J	J	AA	15 kohms,1/8W	R168	VRD-ST2CD47R7J	J	AA	4.7 ohms,1/6W
R19,20	VRD-ST2CD102J	J	AA	1 kohm,1/6W	R170	VRD-ST2CD332J	J	AA	3.3 kohms,1/6W
R21,22	VRD-MN2BD223J	J	AA	22 kohms,1/8W	R171	VRD-ST2CD472J	J	AA	4.7 kohms,1/6W
R23	VRD-MN2BD103J	J	AA	10 kohm,1/8W	R191	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R24	VRD-MN2BD473J	J	AA	47 kohms,1/8W	R192	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R25	VRD-MN2BD152J	J	AA	1.5 kohms,1/8W	R193	VRD-ST2EE221J	J	AA	220 ohms,1/4W
R26	VRD-MN2BD823J	J	AA	82 kohms,1/8W	R202	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R27	VRD-MN2BD393J	J	AA	39 kohms,1/8W	R203	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R28	VRD-MN2BD103J	J	AA	10 kohm,1/8W	R205~212	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R29	VRD-MN2BD563J	J	AA	56 kohms,1/8W	R213~217	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R30	VRD-MN2BD682J	J	AA	6.8 kohms,1/8W	R218	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R31	VRD-MN2BD122J	J	AA	1.2 kohms,1/8W	R219	VRD-MN2BD103J	J	AA	10 kohm,1/8W
R32	VRD-MN2BD103J	J	AA	10 kohm,1/8W	R220~222	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R33	VRD-MN2BD122J	J	AA	1.2 kohms,1/8W	R224~227	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R34	VRD-MN2BD223J	J	AA	22 kohms,1/8W	R228~230	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R35,36	VRD-MN2BD224J	J	AA	220 kohms,1/8W	R232	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R37	VRD-ST2CD823J	J	AA	82 kohms,1/6W	R233	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R38	VRD-MN2BD471J	J	AA	470 ohms,1/8W	R234,235	VRD-MN2BD103J	J	AA	10 kohm,1/8W
R39	VRD-MN2BD102J	J	AA	1 kohm,1/8W	R237	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R40	VRD-MN2BD562J	J	AA	5.6 kohms,1/8W	R238	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R41,42	VRD-MN2BD473J	J	AA	47 kohms,1/8W	R240	VRD-MN2BD103J	J	AA	10 kohm,1/8W
R43	VRD-MN2BD563J	J	AA	56 kohms,1/8W	R241	VRD-ST2CD102J	J	AA	1 kohm,1/8W
R44	VRD-MN2BD333J	J	AA	33 kohms,1/8W	R242~244	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R45	VRD-MN2BD472J	J	AA	4.7 kohms,1/8W	R245~247	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R46	VRD-MN2BD561J	J	AA	560 ohms,1/8W	R249~251	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R47,48	VRD-MN2BD103J	J	AA	10 kohm,1/8W	R252	VRD-MN2BD223J	J	AA	22 kohms,1/8W
R50	VRD-MN2BD681J	J	AA	680 ohms,1/8W	R253,254	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R51	VRD-ST2CD335J	J	AA	3.3 Mohms,1/6W	R256~258	VRD-MN2BD102J	J	AA	1 kohm,1/6W
R52	VRD-MN2BD273J	J	AA	27 kohms,1/8W	R259~261	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R53	VRD-MN2BD122J	J	AA	1.2 kohms,1/8W	R262	VRD-ST2CD123J	J	AA	12 kohms,1/6W
R54	VRD-ST2CD331J	J	AA	330 ohms,1/6W	R263	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R55	VRD-MN2BD151J	J	AA	150 ohms,1/8W	R264	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R57	VRD-MN2BD102J	J	AA	1 kohm,1/8W	R265	VRD-MN2BD472J	J	AA	4.7 kohms,1/8W
R58,59	VRD-ST2CD102J	J	AA	1 kohm,1/6W	R266	VRD-MN2BD223J	J	AA	22 kohms,1/8W
R60~62	VRD-MN2BD102J	J	AA	1 kohm,1/8W	R271	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R63	VRD-ST2CD102J	J	AA	1 kohm,1/6W	R272	VRD-MN2BD103J	J	AA	10 kohm,1/8W
R64	VRD-MN2BD220J	J	AA	22 ohms,1/8W	R274	VRD-MN2BD103J	J	AA	10 kohm,1/8W
R66	VRD-MN2BD221J	J	AA	220 ohms,1/8W	R276	VRD-MN2BD473J	J	AA	47 kohms,1/8W
R71,72	VRD-MN2BD272J	J	AA	2.7 kohms,1/8W	R277	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R73,74	VRD-MN2BD391J	J	AA	390 ohms,1/8W	R279	VRD-ST2CD103J	J	AA	10 kohm,1/6W
R80	VRD-ST2CD682J	J	AA	6.8 kohms,1/6W	R280	VRD-MN2BD103J	J	AA	10 kohm,1/8W
R81	VRD-MN2BD272J	J	AA	2.7 kohms,1/8W	R301	VRD-MN2BD331J	J	AA	330 ohms,1/8W
R82	VRD-ST2CD682J	J	AA	6.8 kohms,1/6W	R319	VRD-MN2BD104J	J	AA	100 kohm,1/8W
R83	VRD-ST2EE3R9J	J	AA	3.9 ohms,1/4W	R323	VRD-MN2BD683J	J	AA	68 kohms,1/8W
R85	VRD-RT2HD560J	J	AA	56 ohms,1/2W	R324	VRD-MN2BD104J	J	AA	100 kohm,1/8W
R86	VRD-MN2BD222J	J	AA	2.2 kohms,1/8W	R331	VRD-MN2BD562J	J	AA	5.6 kohms,1/8W
R87	VRD-MN2BD103J	J	AA	10 kohm,1/8W	R332	VRD-MN2BD104J	J	AA	100 kohm,1/8W
R88~91	VRD-ST2CD102J	J	AA	1 kohm,1/6W	R333	VRD-MN2BD562J	J	AA	5.6 kohms,1/8W
					R334	VRD-ST2CD562J	J	AA	5.6 kohms,1/6W
					R335	VRD-MN2BD104J	J	AA	100 kohm,1/8W
					R336	VRD-ST2CD472J	J	AA	4.7 kohms,1/6W

CD-C451H

NO.	PART CODE	★	PRICE RANK	DESCRIPTION
R337	VRD-ST2CD471J	J	AA	470 ohms,1/6W
R344	VRD-MN2BD471J	J	AA	470 ohms,1/8W
R345	VRD-MN2BD472J	J	AA	4.7 kohms,1/8W
R346	VRD-MN2BD331J	J	AA	330 ohms,1/8W
R347	VRD-MN2BD682J	J	AA	6.8 kohms,1/8W
R348	VRD-MN2BD681J	J	AA	680 ohms,1/8W
R349	VRD-ST2CD330J	J	AA	33 ohms,1/6W
R350	VRD-ST2CD272J	J	AA	2.7 kohms,1/6W
R351	VRD-MN2BD562J	J	AA	5.6 kohms,1/8W
R352	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R353	VRD-MN2BD271J	J	AA	270 ohms,1/8W
R354	VRD-ST2CD392J	J	AA	3.9 kohms,1/6W
R355	VRD-MN2BD332J	J	AA	3.3 kohms,1/8W
R356	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R357	VRD-ST2CD474J	J	AA	470 kohms,1/6W
R358	VRD-MN2BD822J	J	AA	8.2 kohms,1/8W
R359	VRD-MN2BD182J	J	AA	1.8 kohms,1/8W
R360	VRD-MN2BD472J	J	AA	4.7 kohms,1/8W
R361,362	VRD-MN2BD471J	J	AA	470 ohms,1/8W
R363,364	VRD-MN2BD222J	J	AA	2.2 kohms,1/8W
R365,366	VRD-MN2BD103J	J	AA	10 kohm,1/8W
R367	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R368	VRD-ST2CD333J	J	AA	33 kohms,1/6W
R369	VRD-MN2BD820J	J	AA	82 ohms,1/8W
R370~374	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R376	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R377	VRD-ST2CD473J	J	AA	47 kohms,1/6W
R378	VRD-MN2BD823J	J	AA	82 kohms,1/8W
R379	VRD-MN2BD222J	J	AA	2.2 kohms,1/8W
R380	VRD-MN2BD152J	J	AA	1.5 kohms,1/8W
R381	VRD-MN2BD103J	J	AA	10 kohm,1/8W
R382	VRD-ST2EE151J	J	AA	150 ohms,1/4W
R383~385	VRD-MN2BD562J	J	AA	5.6 kohms,1/8W
R387	VRD-MN2BD223J	J	AA	22 kohms,1/8W
R391,392	VRD-ST2EE391J	J	AA	390 ohms,1/4W
R393	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R395	VRD-ST2CD473J	J	AA	47 kohms,1/6W
R397	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R401~407	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R408~410	VRD-ST2CD473J	J	AA	47 kohms,1/6W
R412	VRD-ST2EE331J	J	AA	330 ohms,1/4W
R471,472	VRD-ST2CD222J	J	AA	2.2 kohms,1/6W
R473,474	VRD-ST2CD104J	J	AA	100 kohm,1/6W
R475,476	VRD-ST2CD392J	J	AA	3.9 kohms,1/6W
R477,478	VRD-ST2CD153J	J	AA	15 kohms,1/6W
R481,482	VRD-ST2CD104J	J	AA	100 kohm,1/6W
R483,484	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R487	VRD-ST2CD104J	J	AA	100 kohm,1/6W
R489	VRD-ST2CD104J	J	AA	100 kohm,1/6W
R501,502	VRD-MN2BD104J	J	AA	100 kohm,1/8W
R503	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R504	VRD-MN2BD105J	J	AA	1 Mohm,1/8W
R505,506	VRD-MN2BD472J	J	AA	4.7 kohms,1/8W
R507	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R508	VRD-MN2BD393J	J	AA	39 kohms,1/8W
R509	VRD-MN2BD682J	J	AA	6.8 kohms,1/8W
R510	VRD-MN2BD183J	J	AA	18 kohms,1/8W
R511	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R512	VRD-MN2BD682J	J	AA	6.8 kohms,1/8W
R518,519	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R529	VRD-MN2BD331J	J	AA	330 ohms,1/8W
R530,531	VRD-MN2BD332J	J	AA	3.3 kohms,1/8W
R551	VRD-ST2CD103J	J	AA	10 kohm,1/6W
R552	VRD-MN2BD123J	J	AA	12 kohms,1/8W
R553	VRD-ST2CD123J	J	AA	12 kohms,1/6W
R554	VRD-MN2BD183J	J	AA	18 kohms,1/8W
R555	VRD-ST2CD563J	J	AA	56 kohms,1/6W
R556	VRD-MN2BD333J	J	AA	33 kohms,1/8W
R557	VRD-MN2BD393J	J	AA	39 kohms,1/8W
R558	VRD-MN2BD683J	J	AA	68 kohms,1/8W
R559	VRD-MN2BD223J	J	AA	22 kohms,1/8W
R560	VRD-MN2BD474J	J	AA	470 kohms,1/8W
R561	VRD-ST2CD153J	J	AA	15 kohms,1/6W
R562	VRD-MN2BD394J	J	AA	390 kohms,1/8W
R563	VRD-MN2BD474J	J	AA	470 kohms,1/8W
R564	VRD-MN2BD394J	J	AA	390 kohms,1/8W
R565	VRD-MN2BD684J	J	AA	680 kohms,1/8W
R566	VRD-MN2BD225J	J	AA	2.2 Mohms,1/8W
R567	VRD-MN2BD274J	J	AA	270 kohms,1/8W
R568~571	VRD-MN2BD224J	J	AA	220 kohms,1/8W
R572	VRD-MN2BD225J	J	AA	2.2 Mohms,1/8W
R573	VRD-MN2BD564J	J	AA	560 kohms,1/8W

NO.	PARTS CODE	★	PRICE RANK	DESCRIPTION
R574,575	VRD-ST2EE331J	J	AA	330 ohms,1/4W
R576,577	VRD-ST2CD104J	J	AA	100 kohm,1/6W
R578	VRD-MN2BD104J	J	AA	100 kohm,1/8W
R579,580	VRD-ST2CD104J	J	AA	100 kohm,1/6W
R601	VRD-ST2CD331J	J	AA	330 ohms,1/6W
R602	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R603	VRD-ST2CD331J	J	AA	330 ohms,1/6W
R604	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R606	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R608	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R610	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R611	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R612	VRD-ST2CD333J	J	AA	33 kohms,1/6W
R613~615	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R616	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R617	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R618	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R619	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R620,621	VRD-MN2BD222J	J	AA	2.2 kohms,1/8W
R622,623	VRD-MN2BD474J	J	AA	470 kohms,1/8W
R624	VRD-MN2BD223J	J	AA	22 kohms,1/8W
R625	VRD-ST2CD474J	J	AA	470 kohms,1/6W
R626,627	VRD-MN2BD222J	J	AA	2.2 kohms,1/8W
R628,629	VRD-ST2CD473J	J	AA	47 kohms,1/6W
R630,631	VRD-MN2BD822J	J	AA	8.2 kohms,1/8W
R632,633	VRD-MN2BD682J	J	AA	6.8 kohms,1/8W
R634,635	VRD-MN2BD104J	J	AA	100 kohm,1/8W
R636,637	VRD-ST2CD822J	J	AA	8.2 kohms,1/6W
R638,639	VRD-ST2EE331J	J	AA	330 ohms,1/4W
R641	VRD-MN2BD103J	J	AA	10 kohm,1/8W
R642	VRD-ST2CD103J	J	AA	10 kohm,1/6W
R644,645	VRD-MN2BD222J	J	AA	2.2 kohms,1/8W
R646,647	VRD-ST2CD222J	J	AA	2.2 kohms,1/6W
R648,649	VRD-MN2BD223J	J	AA	22 kohms,1/8W
R650~653	VRD-MN2BD182J	J	AA	1.8 kohms,1/8W
R654~657	VRD-MN2BD273J	J	AA	27 kohms,1/8W
R658,659	VRD-ST2CD222J	J	AA	2.2 kohms,1/6W
R660	VRD-ST2CD473J	J	AA	47 kohms,1/6W
R661	VRD-MN2BD473J	J	AA	47 kohms,1/8W
R662,663	VRD-MN2BD392J	J	AA	3.9 kohms,1/8W
R665	VRD-MN2BD331J	J	AA	330 ohms,1/8W
R666	VRD-ST2CD331J	J	AA	330 ohms,1/6W
R669	VRD-ST2CD333J	J	AA	33 kohms,1/6W
R671,672	VRD-MN2BD222J	J	AA	2.2 kohms,1/8W
R673	VRD-ST2CD222J	J	AA	2.2 kohms,1/6W
R674,675	VRD-MN2BD222J	J	AA	2.2 kohms,1/8W
R676	VRD-ST2CD222J	J	AA	2.2 kohms,1/6W
R677,678	VRD-MN2BD103J	J	AA	10 kohm,1/8W
R679	VRD-ST2CD221J	J	AA	220 ohms,1/6W
R680	VRD-MN2BD223J	J	AA	22 kohms,1/8W
R681,682	VRD-MN2BD222J	J	AA	2.2 kohms,1/8W
R683	VRD-MN2BD104J	J	AA	100 kohm,1/8W
R684	VRD-ST2CD104J	J	AA	100 kohm,1/6W
R685,686	VRD-MN2BD152J	J	AA	1.5 kohms,1/8W
R687,688	VRD-MN2BD562J	J	AA	5.6 kohms,1/8W
R689,690	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R691,692	VRD-MN2BD272J	J	AA	2.7 kohms,1/8W
R693,694	VRD-ST2CD470J	J	AA	47 ohms,1/6W
R695	VRD-MN2BD104J	J	AA	100 kohm,1/8W
R696	VRD-ST2CD104J	J	AA	100 kohm,1/6W
R697	VRD-MN2BD223J	J	AA	22 kohms,1/8W
R698,699	VRD-ST2CD223J	J	AA	22 kohms,1/6W
R701~710	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R711	VRD-MN2BD101J	J	AA	100 ohm,1/8W
R712~722	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R726~729	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R731,732	VRD-MN2BD822J	J	AA	8.2 kohms,1/8W
R733	VRD-ST2CD822J	J	AA	8.2 kohms,1/6W
R734~736	VRD-MN2BD822J	J	AA	8.2 kohms,1/8W
R737~741	VRD-ST2CD102J	J	AA	1 kohm,1/6W
R742~744	VRD-ST2CD821J	J	AA	820 ohms,1/6W
R749	VRD-ST2CD103J	J	AA	10 kohm,1/6W
R763	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R765	VRD-MN2BD332J	J	AA	3.3 kohms,1/8W
R766	VRD-MN2BD104J	J	AA	100 kohm,1/8W
R767	VRD-MN2BD820J	J	AA	82 ohms,1/8W
R768	VRD-MN2BD103J	J	AA	10 kohm,1/8W
R769	VRD-ST2CD103J	J	AA	10 kohm,1/6W
R770	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R771	VRD-MN2BD101J	J	AA	100 ohm,1/8W
R772	VRD-MN2BD102J	J	AA	1 kohm,1/8W
R773	VRD-ST2CD101J	J	AA	100 ohm,1/6W

CD-C451H

NO.	PART CODE	★	PRICE RANK	DESCRIPTION	NO.	PARTS CODE	★	PRICE RANK	DESCRIPTION
M3	92LMTR2037AS1	J	AL	Motor with Worm Gear Pulley [T/T Up/Down Loading]	304	NSFTM0002AWFW	J	AE	Shaft,Guide
M901	92LMTR1810A	J	AK	Motor,Air Cooling Fan	305	92LM-CUSN1524A	J	AC	Cushion
MM1	92LMTR2512AASY	J	AT	Motor with Pulley [Tape]	△ 306	92LHPC1MASY	J	BG	Pickup Unit Ass'y
PHM1	VHPI31535CD-1	J	AG	Photo Interrupter	306- 1	—	—	—	Pickup Unit (Not Replacement Item)
RX701	VHLN63H380A-1	J	AK	Remote Sensor,N63H380A	306- 2	NGERR0043AFZZ	J	AC	Gear,Rack
SO301	QTANC0101AWZZ	J	AF	Terminal,Antenna	306- 3	MSPRC0961AFZZ	J	AA	Spring,Rack
SO801	QSOCA0204AWZZ	J	AF	Socket,AC Power Input	701	XBSSD26P06000	J	AA	Screw,ø2.6×6mm
SO901	QTANA0410AWZZ	J	AG	Terminal,Speaker	702	XHBSD20P05000	J	AA	Screw,ø2×5mm
SOLM1	92LM-SOL1676A	J	AK	Solenoid Ass'y. [Tape]	703	XBBSD20P03000	J	AA	Screw,ø2×3mm
SOLM2	RPLU-0002AWZZ	J	AH	Solenoid Ass'y. [CD]	704	LX-WZ1070AFZZ	J	AA	Washer,ø1.5×ø3.8×0.25mm
SW1	QSW-P0004AWZZ	J	AE	Switch,Push Type [OPEN/CLOSE]	M1	92LMTR1858CASY	J	AS	Motor with Chassis [Disc]
SW2	QSW-F0001AWZZ	J	AD	Switch,Leaf/Skeleton Type [MECHA UP]	M2	92LMTR1854BASY	J	AP	Motor with Gear [Sled]
SW3	QSW-P0005AWZZ	J	AD	Switch,Push Type [Disc Number]	SW4	QSW-F9001AW01	J	AD	Switch,Leaf Type [Pickup In]
SW4	QSW-F9001AW01	J	AD	Switch,Leaf Type [Pickup In]	CABINET PARTS				
SW701	92LSWICH1401AT	J	AC	Switch,Key Type [ON/STAND-BY]	201	GCAB-1044AWSA	J	AM	Cabinet,CD Player Base
SW702	92LSWICH1401AT	J	AC	Switch,Key Type [CLOCK]	202	GCAB-1050AWSA	J	AP	Top Cabinet
SW703	92LSWICH1401AT	J	AC	Switch,Key Type [TIMER/SLEEP]	203	GITAR0361AWSA	J	AS	Back Board for U.K./Australia/ Newzealand
SW704	92LSWICH1401AT	J	AC	Switch,Key Type [DISC 1]	203	GITAR0362AWSA	J	AP	Back Board for Except For U.K./ Australia/Newzealand
SW705	92LSWICH1401AT	J	AC	Switch,Key Type [DISC 2]	204	JKNBZ0532AWSA	J		Button [R.D.S]
SW706	92LSWICH1401AT	J	AC	Switch,Key Type [DISC 3]	206	LANGF0039AWFW1	J		Support,Power Transformer
SW707	92LSWICH1401AT	J	AC	Switch,Key Type [DISC SKIP]	207	LANGF0032AWZZ	J	AC	Support,T/T Lock Lever
SW708	92LSWICH1401AT	J	AC	Switch,Key Type [OPEN/CLOSE]	208	LANGK0114AWFW	J	AF	Bracket,Fan
SW709	92LSWICH1401AT	J	AC	Switch,Key Type [CD]	209	LCHSM0068AWFW1J	J		Main Chassis
SW710	92LSWICH1401AT	J	AC	Switch,Key Type [TUNER,BAND]	210	LCHSZ0010AWZZ	J	AM	Chassis,Loading
SW711	92LSWICH1401AT	J	AC	Switch,Key Type [TAPE]	211	LCHSZ0011AWZZ	J	AG	Chassis,CD Mechanism
SW712	92LSWICH1401AT	J	AC	Switch,Key Type [VIDEO/AUX]	212	LHLDZ1139AWSA	J	AD	Support,Stabilizer
SW713	92LSWICH1401AT	J	AC	Switch,Key Type [EON]	213	LHLDZ1140AWZZ	J	AB	Guide
SW714	92LSWICH1401AT	J	AC	Switch,Key Type [PTY.TI SEARCH]	214	LHLDZ1141AWZZ	J	AB	Support,Pitch
SW715	92LSWICH1401AT	J	AC	Switch,Key Type [ASPM]	215	LHLDZ1183AWZZ	J	AE	Holder,FL Display
SW716	92LSWICH1401AT	J	AC	Switch,Key Type [DISPLAY MODE]	216	MLEVP0066AWZZ	J	AE	Lever,Shift
SW718	92LSWICH1401AT	J	AC	Switch,Key Type [CENTER MODE/PHANTOM]	217	MLEVP0067AWZZ	J	AC	Lever,Lock
SW719	92LSWICH1401AT	J	AC	Switch,Key Type [CENTER MODE/NORMAL]	218	MLEVP0068AWZZ	J	AB	Lever,Change
SW721	92LSWICH1401AT	J	AC	Switch,Key Type [DOLBY PRO LOGIC/BYPASS]	219	MLEVP0070AWZZ	J	AB	Lever,T/T Lock
SW723	92LSWICH1401AT	J	AC	Switch,Key Type [REC PAUSE]	220	MLIFP0003AWZZ	J	AE	Damper
SW724	92LSWICH1401AT	J	AC	Switch,Key Type [TUNING UP/TIME]	221	MSPRC0020AWFJ	J	AB	Spring,T/T Lock Lever
SW725	92LSWICH1401AT	J	AC	Switch,Key Type [VOLUME UP]	222	MSPRC0024AWFW	J	AB	Spring,Solenoid
SW726	92LSWICH1401AT	J	AC	Switch,Key Type [X-BASS]	223	MSPRD0044AWFJ	J	AB	Spring,Lock Lever
SW728	92LSWICH1401AT	J	AC	Switch,Key Type [STOP]	224	MSPRD0092AWFJ	J	AB	Spring,Cassette,Tape 1
SW729	92LSWICH1401AT	J	AC	Switch,Key Type [FWD]	225	MSPRD0093AWFJ	J	AB	Spring,Cassette,Tape 2
SW730	92LSWICH1401AT	J	AC	Switch,Key Type [FF,PRESET UP]	226	NBLTK0029AWZZ	J	AB	Belt,Drive
SW731	92LSWICH1401AT	J	AC	Switch,Key Type [MEMORY/SET]	227	NFANP0001AWZZ	J	AD	Rotary Fan
SW732	92LSWICH1401AT	J	AC	Switch,Key Type [TUNING DOWN/TIME]	228	NGERH0064AWZZ	J	AD	Gear,Cam
SW733	92LSWICH1401AT	J	AC	Switch,Key Type [VOLUME DOWN]	229	NGERH0065AWZZ	J	AB	Gear,Turntable
SW734	92LSWICH1401AT	J	AC	Switch,Key Type [EQUALIZER,DEMO]	230	NGERK0003AWZZ	J	AC	Gear,Drive
SW736	92LSWICH1401AT	J	AC	Switch,Key Type [REVERSE MODE]	231	NGERK0004AWZZ	J	AB	Gear,Bevel
SW737	92LSWICH1401AT	J	AC	Switch,Key Type [REV]	232	NGERK0005AWZZ	J	AB	Gear,Loading
SW738	92LSWICH1401AT	J	AC	Switch,Key Type [REW/PRESET DOWN]	234	NGERW0006AWZZ	J	AC	Gear,Worm Wheel
SW739	92LSWICH1401AT	J	AC	Switch,Key Type [CD/TAPE 1 EDIT]	235	NPLYD0001AWZZ	J	AB	Pulley
SW740	92LSWICH1401AT	J	AC	Switch,Key Type [BEAT CANCEL,TAPE 1 EDIT]	236	NROLP0009AWZZ	J	AB	Roller
SWM3	92LM-SW1676A	J	AC	Switch,Leaf Type [REC FWD]	237	NTNT-0018AWSA	J	AK	Turntable
SWM4	92LM-SW1676A	J	AC	Switch,Leaf Type [REC RVS]	238	PCUSG0038AWZZ	J		Cushion
SWM5	QSW-F9003AWZZ	J	AG	Switch,Leaf Type [F.A.S.]	239	PRDAR0120AWFW	J	AU	Heat Sink A
SWM6	92LM-SW1676B	J	AD	Switch,Leaf Type [CAM]	240	PRDAR0107AWFW	J	AP	Heat Sink B
WTM1	QCNCW012NAWZZ	J	AE	Socket,Wire Trap,13Pin	242	PSLDM3049AWFW	J	AE	Shield Plate
					243	PCUSG0022AWZZ	J	AB	Cushion
					244	92LCAB2915AS1	J	BB	Front Panel Ass'y
					244- 1	—	—	—	Front Panel (Not Replacement Item)
					244- 2	HDECQ0299AWSA	J	AG	CD Top Panel
					244- 3	92LBADGE1671A	J	AC	Badge,SHARP
					244- 4	JKNBZ0472AWSA	J	AF	Button [CD DISC NUMBER]
					244- 5	JKNBZ0473AWSA	J	AD	Button [OPEN/CLOSE]
					244- 6	JKNBZ0474AWSB	J	AG	Button [FUNCTION]
					244- 7	JKNBZ0533AWSA	J	AG	Button [PRO LOGIC/VIRTUAL/ QSOUND]
					244- 8	JKNBZ0477AWSA	J	AD	Button [CLOCK/TIMER/SLEEP]
					244- 9	JKNBZ0478AWSA	J	AE	Button [TUNING/TIME/MEMORY/SET]
					244-10	JKNBZ0479AWSA	J	AD	Button [CLEAR/RANDOM]
					244-11	JKNBZ0480AWSA	J	AE	Button [CD PAUSE]
					244-12	JKNBZ0481AWSA	J	AE	Button [OPERATION A]
					244-13	JKNBZ0482AWSB	J	AK	Button [OPERATION B]
					244-14	JKNBZ0483AWSB	J	AN	Button [OPERATION C]
					244-15	PCUSG0022AWZZ	J	AB	Cushion,Leg
					244-16	HDECQ0372AWSA	J	AF	Display Panel
					244-17	JKNBZ0475AWSB	J	AF	Button,X-Bass

CD MECHANISM PARTS

301	NGERH0011AWZZ	J	AC	Gear,Middle
302	NGERH0012AWZZ	J	AC	Gear,Drive
303	MLEVP0010AWZZ	J	AC	Rail,Guide

NO.	PART CODE	★	PRICE RANK	DESCRIPTION
245	QCNWN0769AWZZ	J	AD	Wire Lug
246	QLUGP0001AWZZ	J	AC	Lug [LG901]
247	QLUGP0002AWZZ	J	AB	LugTerminal [Lug 1]
△ 248	QFSHD0001AWZZ	J	AB	Holder,Fuse
249	92LCAB274BS1	J	AP	Side Panel Ass'y,Left
249- 1	8i	—	—	Side Panel,Left (Not Replacement Item)
249- 2	PCUSG0022AWZZ	J	AB	Cushion,Leg
250	92LCAB274CS1	J	AP	Side Panel Ass'y,Right
250- 1	8i	—	—	Side Panel,Right (Not Replacement Item)
250- 2	PCUSG0022AWZZ	J	AB	Cushion,Leg
251	92LCOV2891AS1	J	AK	Cover Ass'y.,CD Tray
251- 1	—	—	—	Cover,CD Tray
251- 2	GCOVA1186AWSA	J	AE	Cover,CD Tray Panel Left
251- 3	GCOVA1187AWSB	J	AF	Cover,CD Tray Panel Right
252	92LCSPR1431C	J	AA	Ring,Spring
254	92LMECHA2512A	J	BL	Cassette Mechanism Ass'y
254- 1(MM1)	92LMTR2512AASY	J	AT	Motor with Pulley [Tape]
254- 2	NBLTH0003AWZZ	J	AC	Belt,Main [Tape1]
254- 3	NBLTH0004AWZZ	J	AC	Belt,Main [Tape2]
254- 4	NBLTK0021AWZZ	J	AB	Belt,Sub
254- 5	NROLY0003AWM1	J	AF	Pinch Roller Forward Ass'y.
254- 6	NROLY0004AWM1	J	AF	Pinch Roller Reverse Ass'y.
254- 7(SWM5)	QSW-F9003AWZZ	J	AG	Switch,Leaf Type [F.A.S]
254- 8	92LMRP1746A	J	AM	Head,Record/Playback/Erase [TAPE2]
254- 9	RHEDK0002AWZZ	J	—	Head,Playback [TAPE1]
255	92LMEC2744CTS1	J	AM	Cassette Holder Ass'y.,Tape 1
255	92LMEC2891CTS1	J	AN	Cassette Holder Ass'y.,Tape 1
255- 1	—	—	—	Cassette Holder,Tape 1 (Not Replacement Item)
255- 2	HDECQ0346AWSA	J	AH	Panel,Cassette,Tape 1
256	92LMEC2744CTS2	J	AM	Cassette Holder Ass'y,Tape 2
256- 1	—	—	—	Cassette Holder,Tape 2 (Not Replacement Item)
256- 2	HDECQ0347AWSA	J	AH	Panel,Cassette,Tape 2
257	92LHOLD2037AS1	J	AK	Stabilizer Ass'y
257- 1	—	—	—	Stabilizer (Not Replacement Item)
257- 2	PMAGF0001AWZZ	J	AF	Magnet
257- 3	92LSUPT1749D	J	AA	Support,Magnet
258	92LN-BAND1318A	J	AA	Nylon Band,80mm
260	LANGT0047AWFW	J	AE	Bracket,Tuner PWB
261	LANGT0048AWFW	J	AD	Bracket,Tuner PWB
262	LHLDZ1187AWZZ	J	AC	Holder,LED
263	QCNWN1260AWZZ	J	AL	Flat Cable,24Pin
264	92LCAUT1706A1	J	AC	Label,CD Laser Caution
265	92LCAUT1706B	J	AA	Label,CD Laser Caution Mark
266	LANGF0039AWFW1	J	—	Support Power Transfomer
601	LX-EZ0005AWFD	J	AA	Screw,Special
602	LX-HZ0082AFZZ	J	AA	Screw,ø4×8mm
603	LX-JZ0002AWFD	J	AA	Screw,ø3×10mm
604	LX-JZ0010AFFD	J	AA	Screw,ø3×10mm
605	LX-JZ0039AFFD	J	AA	Screw,ø3×12mm
606	LX-LZ0006AWZZ	J	AC	Push Rivet
607	LX-TZ0019AFZZ	J	AB	Screw,Special
608	XBBSD20P04000	J	AA	Screw,ø2×4mm
609	XBPSD26P05JS0	J	AA	Screw,ø2.6×5mm
610	XEBSD26P12000	J	AA	Screw,ø2.6×12mm
611	XEBSD30P10000	J	AA	Screw,ø3×10mm
612	XEBSD30P12000	J	AA	Screw,ø3×12mm
613	XEBSF30P10000	J	AA	Screw,ø3×10mm
614	XEBSF30P12000	J	AA	Screw,ø3×12mm
615	XESSD30P10000	J	AA	Screw,ø3×10mm
616	XJBSD30P08000	J	AA	Screw,ø3×8mm
617	XJBSD30P10000	J	AA	Screw,ø3×10mm
618	XJBSD30P14000	J	AA	Screw,ø3×14mm
619	XJBSF30P08000	J	AA	Screw,ø3×8mm
620	XJSSF30P10000	J	AA	Screw,ø3×10mm
621	XWHJZ62-09510	J	AB	Washer,ø6.2×ø10×0.9mm

ACCESSORIES/PACKING PARTS

1	SPAKP0013AWZZ1	J	AC	Polyethylene Bag,Unit
2	SPAKA0192AWZZ	J	AP	Packing Add.,Unit
3	SPAKC0673AWZZ	J	AX	Packing Case for Except For U.K./Australia/Newzealand
3	SPAKC0696AWZZ	J	—	Packing Case for U.K.
3	SPAKC0697AWZZ	J	—	Packing Case for Australia/ Newzealand

NO.	PARTS CODE	★	PRICE RANK	DESCRIPTION
4	92LBAG1460C1	J	AB	Polyethylene Bag,Accessories
5	TGAN-3170UMZZ	J	AE	Warranty Card Except For U.K./ Australia/Newzealand
5	92LGCARD1266E1	J	AC	Warranty Card for Australia/ Newzealand
6	TINSE0222AWZZ	J	AF	Operation Manual for U.K./ Australia/Newzealand
6	TINSZ0325AWZZ	J	AS	Operation Manual for Except For U.K./Australia/Newzealand
6	TINSZ0374AWZZ	J	—	Operation Manual for Russia
7	92LBAG1770A	J	AB	Polyethylene Bag,AC Cord
△ 8	QACCB0004AW00	J	BB	AC Power Supply Cord for U.K.
△ 8	QACCE0007AW00	J	AH	AC Power Supply Cord for Except For U.K./Australia/ Newzealand
△ 8	QACCL0002AW00	J	AN	AC Power Supply Cord for Australia/Newzealand
9	QANTL0005AWZZ	J	AG	AM Loop Antenna
10	92LF-ANT1535A	J	AF	FM Antena
11	UBATU0001AWZZ	J	AE	Battery,UM/SUM-3 [Germany Only]
12	RRMCG0146AWSA	J	AU	Remote Control
12- 1	92LLID1782A	J	AQ	Battery Lid,Remote Control
13	SPAKZ0483AWZZ	J	—	Bottom Pad
14	TLABE0251AWZZ	J	AB	Label,Barcode
15	92L70032001600	J	AC	Polyethylene Bag,Speaker
16	92L71525003200	J	AC	Sheet,Speaker
17	92L720BPC46200	J	AM	Packing Add.,Bottom,Speaker
18	92L720TPC46200	J	AM	Packing Add.,Top,Speaker
19	92L74231121000	J	AD	Shield Pad,Speaker
20	92L6100C451H00	J	—	Label,Feature,Speaker

SPEAKER BOX PARTS

900	100200L0C4621	J	BC	Wood Box Cabinet Ass'y.,Left
900	100200R0C4621	J	BC	Wood Box Cabinet Ass'y.,Right
901	92L201L0C46210	J	AV	Net Frame Ass'y.,Left
901	92L201R0C46210	J	AV	Net Frame Ass'y.,Right
902	92L20200C46200	J	AR	Front Panel
903	92L23056121000	J	AD	Holder,Catcher
904	92L303R0300110	J	AN	SuperTweeter Ass'y
905	92L3121PC46200	J	AL	Speaker Cord Ass'y
906	92L411B840140B	J	AC	Screw,ø4×14mm
907	92L411B930100P	J	AC	Screw,ø3×10mm
908	92L44010213300	J	AH	Port Cushion
909	92L44210310100	J	AD	Wire Cushion
910	92L6000C451H00	J	—	Label,Specifications
SP1,2	VSP0013WBK96F	J	—	Woofer
SP3,4	VSP0050TB256F	J	—	Tweeter

P.W.B. ASSEMBLY (Not Replacement Item)
Except For Germany

PWB-A1~3	92LPWB2915MANS	J	—	Main/Display/Switch (Com- bined Ass'y)
△ PWB-B	92LPWB2915PWRS	J	—	Power
PWB-C	92LPWB2744CDUS	J	—	CD Servo
PWB-D	QPWBF0106AWZZ	J	AF	Tape Mechanism (PWB Only)
PWB-E	QPWBF0027AWZZ	J	AD	CD Motor (PWB Only)
PWB-F	QPWBF0341AWZZ	J	AB	Sensor (PWB Only)

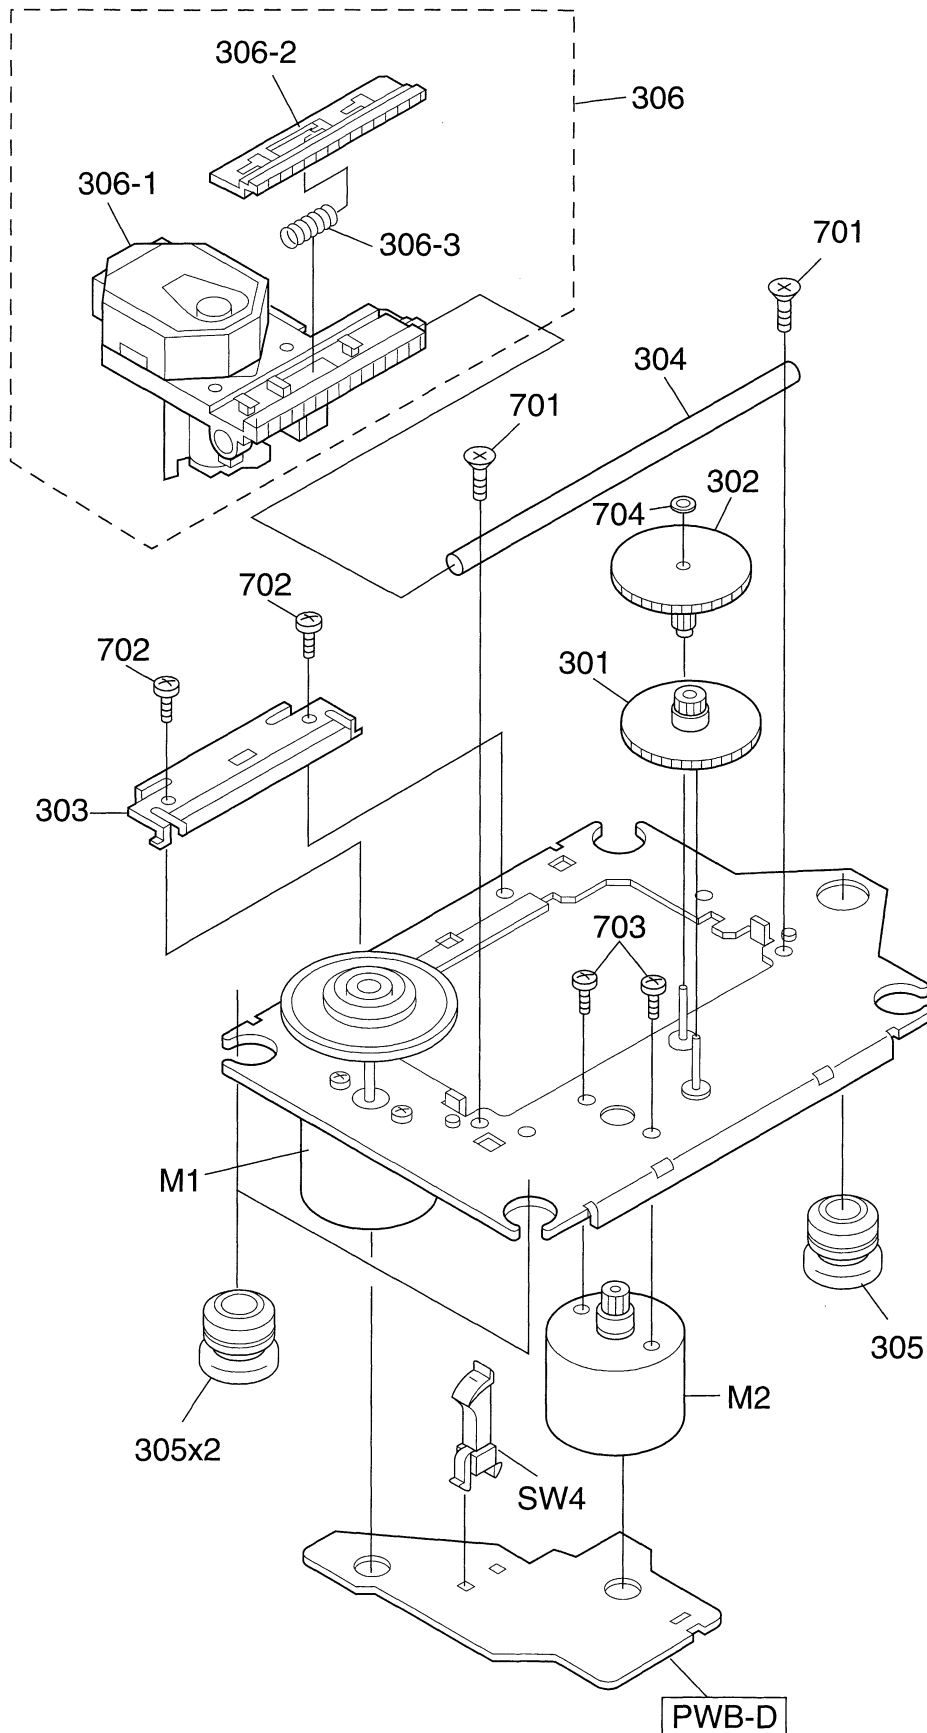


Figure 9 CD MECHANISM EXPLODED VIEW

CD-C451H

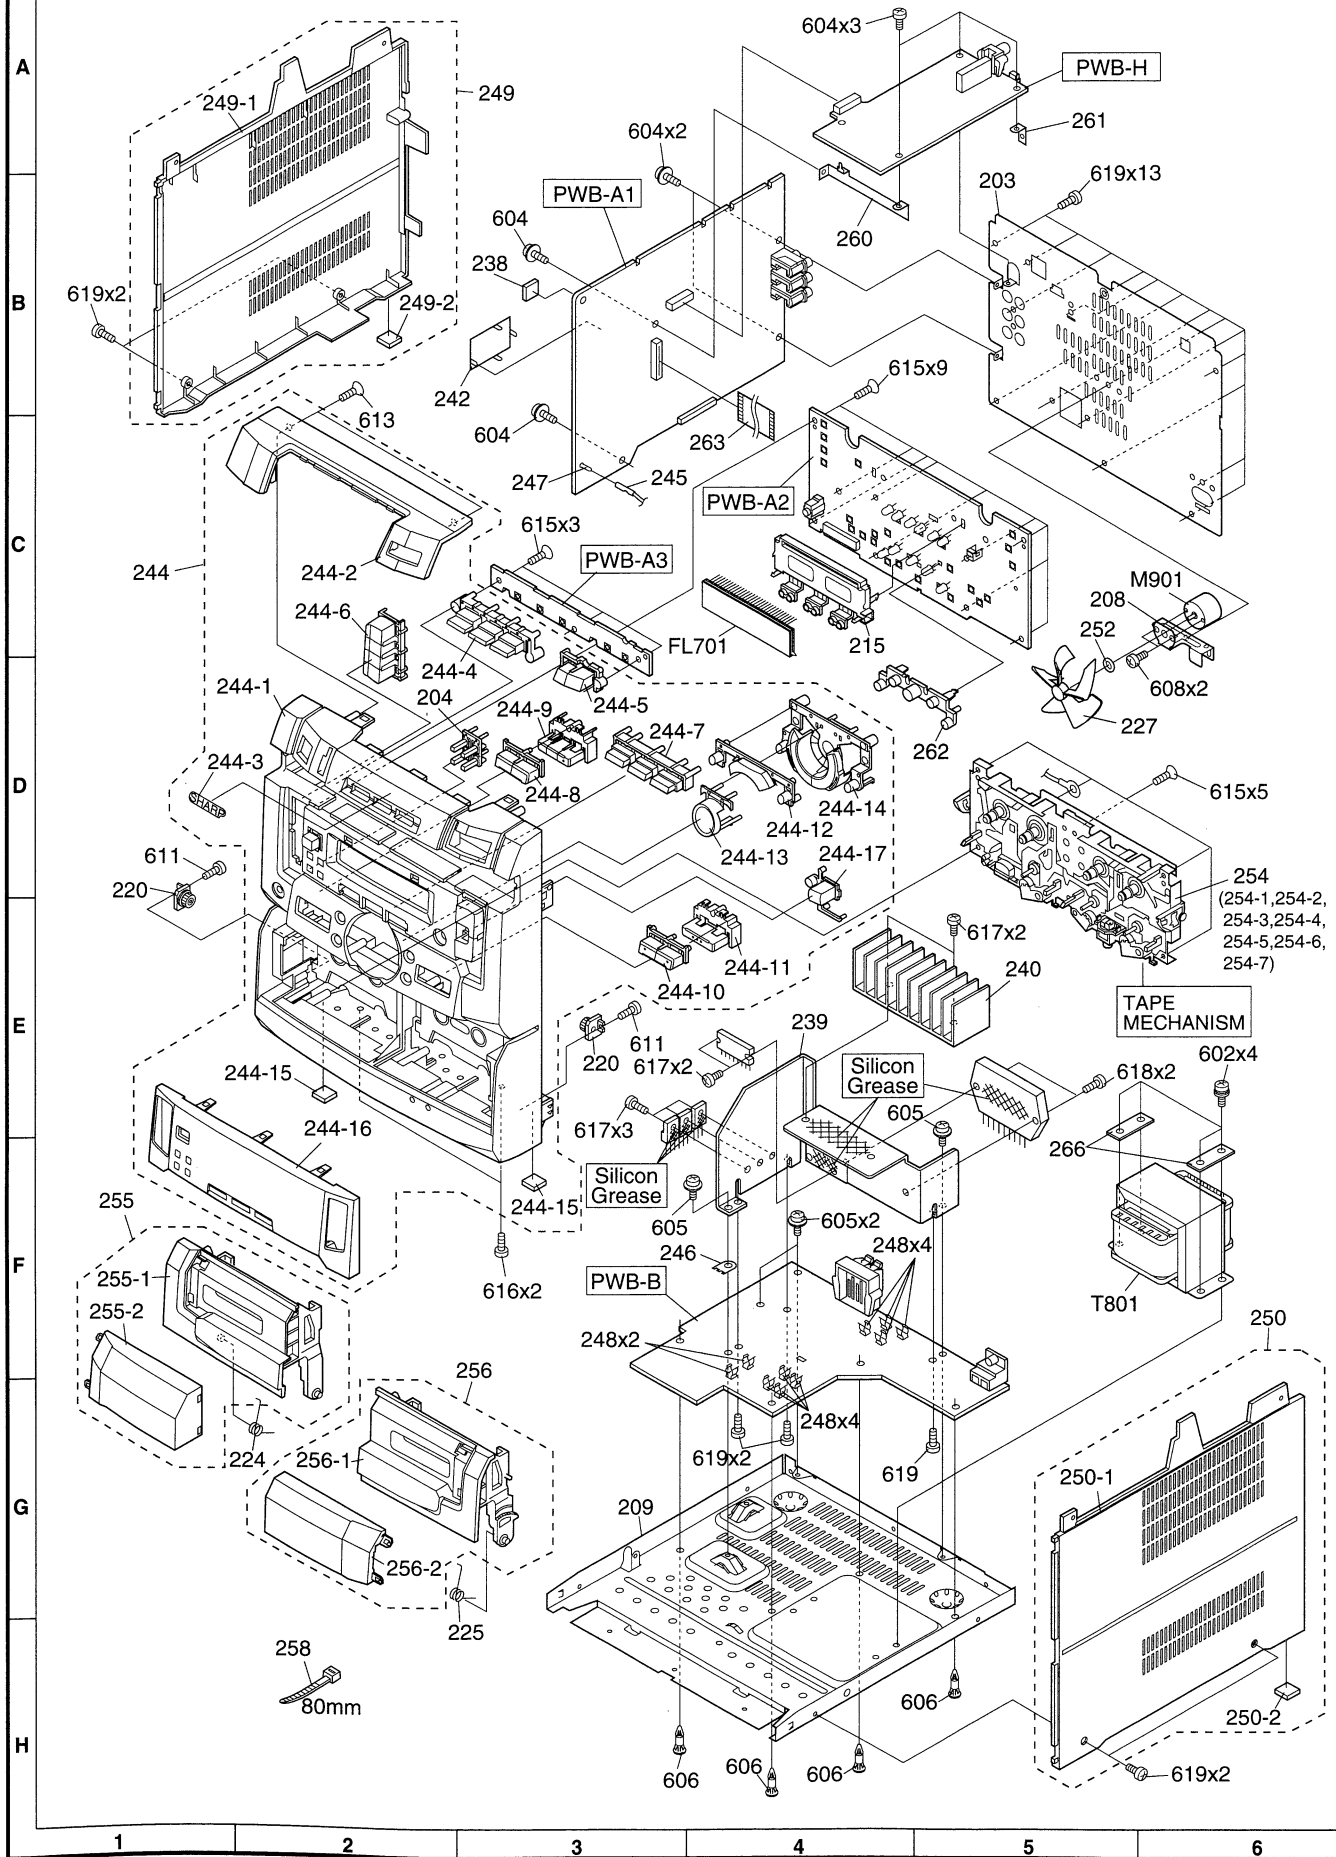


Figure 10 CABINET EXPLODED VIEW (1/2)

A

B

C

D

E

F

G

H

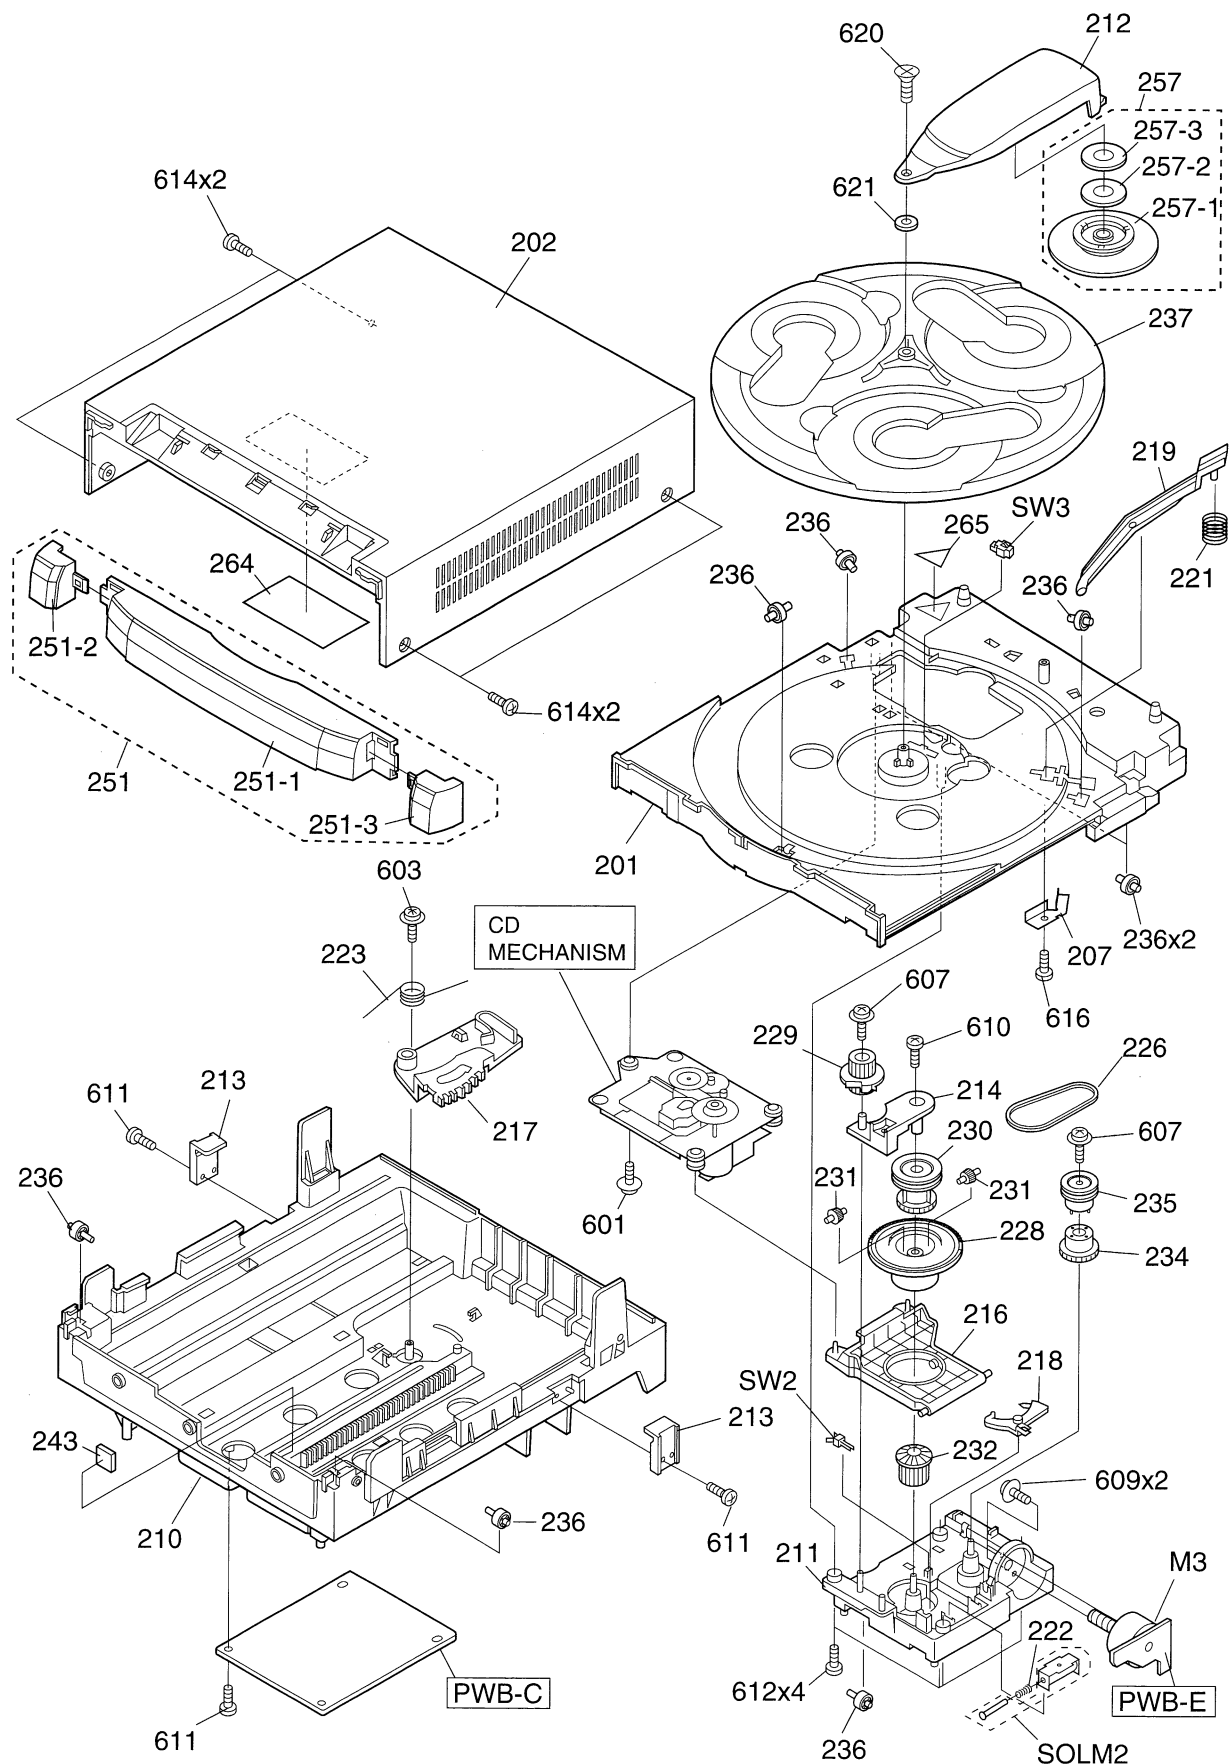


Figure 11 CABINET EXPLODED VIEW (2/2)

CP-C451H

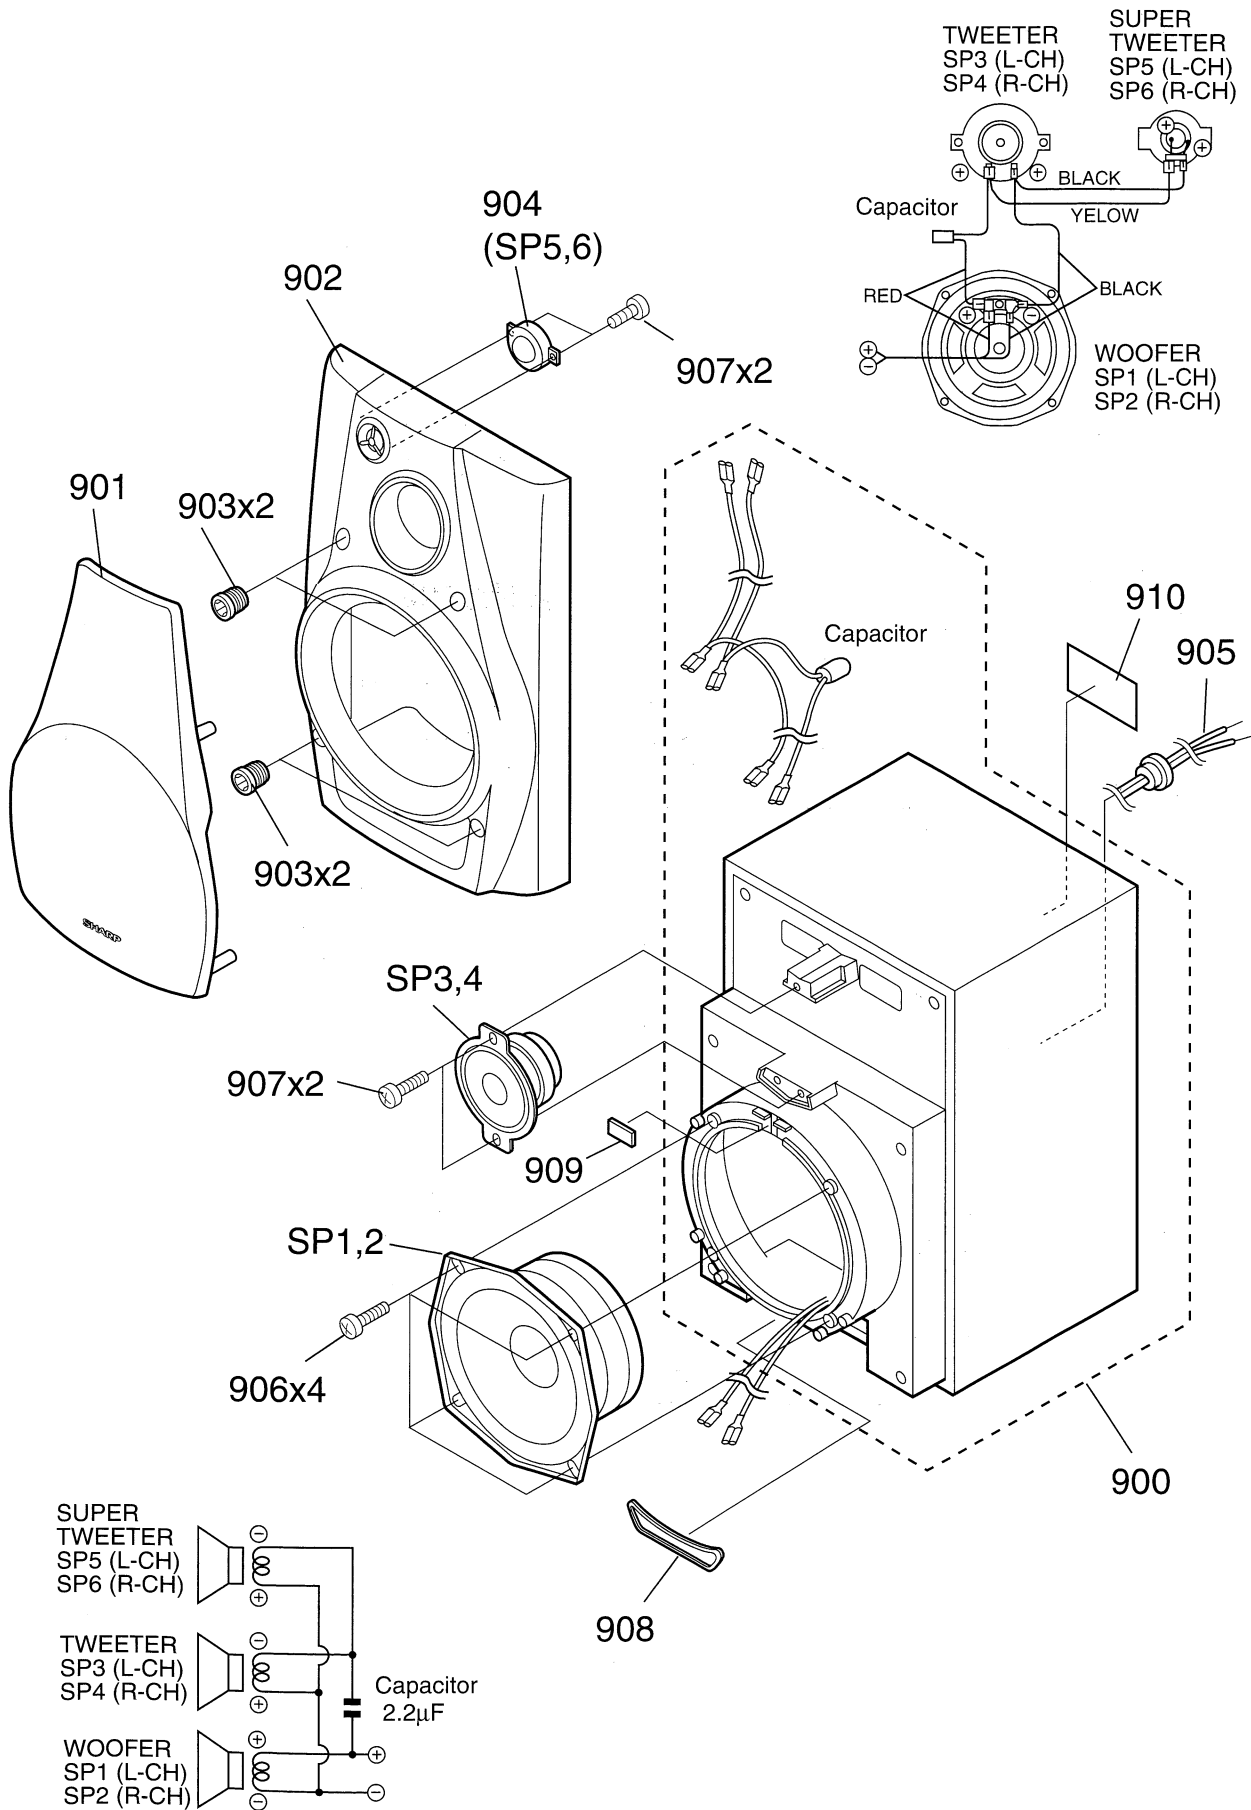


Figure 12 SPEAKER EXPLODED VIEW (1/2)


PACKING OF METHOD (FOR U.K. ONLY)

Setting position of switches and knobs


Tape Mechanism

STOP

Unit

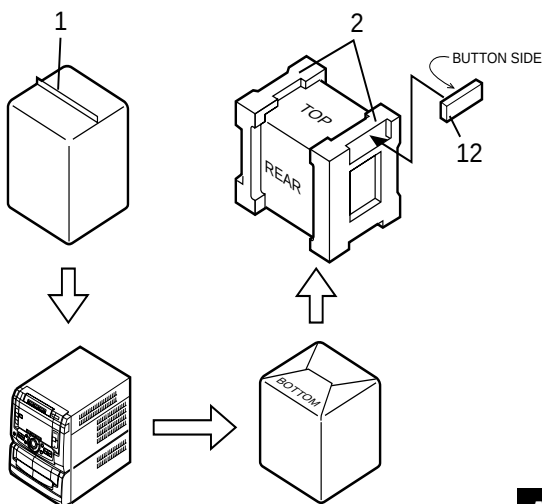**A**

Front Speaker(L/R)

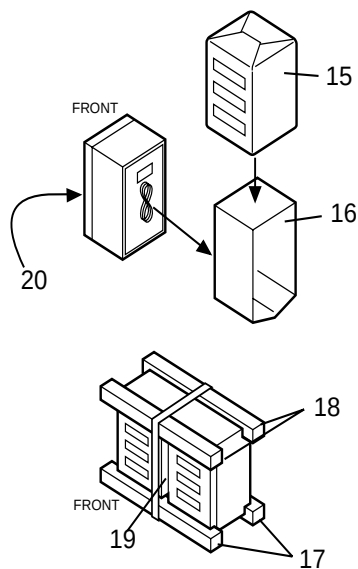
**B**

CD-C451H

- | | |
|----------------------------------|----------------|
| 1. Polyethylene Bag, Unit | SPAKP0013AWZZ1 |
| 2. Packing Add., Unit | SPAKA0192AWZZ |
| 3. Packing Case | SPAKC0696AWZZ |
| 4. Polyethylene Bag, Accessories | 92LBAG1460C1 |
| 5. Warranty Card | TGAN-3170UMZZ |
| 6. Operator Manual | TINSE0222AWZZ |
| 7. Polyethylene Bag, AC Cord | 92LBAG1770A |
| 8. AC Power Supply Cord | QACCB0004AW00 |
| 9. AM Loop Antenna | QANTL0005AWZZ |
| 10. FM Antenna | 92LF-ANT1535A |
| 12. Remote Control | RRMCG0146AWSA |
| 13. Bottom Pad | SPAKZ0438AWZZ |
| 14. Bar Code Label | TLABE0251AWZZ |

CP-C451H

- | | |
|--------------------------|----------------|
| 15. Polyethylene Bag | 92L70032001600 |
| 16. Sheet | 92L71525003200 |
| 17. Packing Add., Bottom | 92L720BPC46200 |
| 18. Packing Add., Top | 92L720TPC46200 |
| 19. Shield Pad | 92L74231121000 |
| 20. Label, Feature | 92L6100C451H00 |

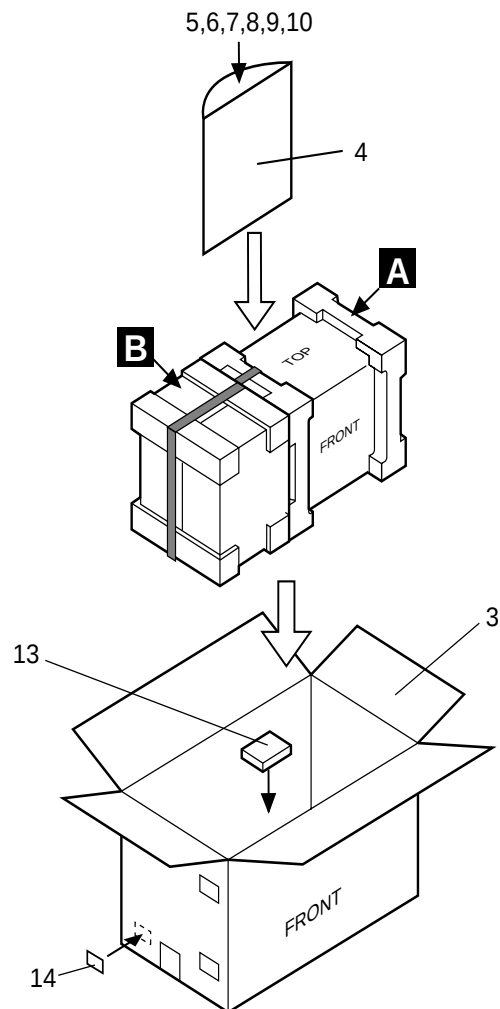

MEMO

SHARP

COPYRIGHT © 1998 BY SHARP CORPORATION

ALL RIGHTS RESERVED.

No part of this publication may be reproduced,
stored in a retrieval system, or transmitted in
any form or by any means, electronic, mechanical,
photocopying, recording, or otherwise, without
prior written permission of the publisher.

SHARP CORPORATION
Communication Systems Group
Quality & Reliability Control Center
Higashihiroshima, Hiroshima 739-0192, Japan
Printed in Japan

A9806-3363SS•IS•M

SG•SK•RUS•SA•SZ